

Ref.

NAT'L INST. OF STAND & TECH R.I.C.



A11104 937940

NIST
PUBLICATIONS

DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

**SAFETY RULES FOR THE
INSTALLATION
AND MAINTENANCE
OF ELECTRIC SUPPLY AND
COMMUNICATION LINES**

Comprising Part 2, the Definitions, and the
Grounding Rules of the Sixth Edition of
the National Electrical Safety Code

National Bureau of Standards Handbook 81
(Supersedes H32, and amends in part Pt. 2, Definitions
and the Grounding Rules of H36 and H43)

QC
1
.U51
1961
c.2







**U.S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

SUPPLEMENT 1 TO NBS HANDBOOK 81

**Safety Rules For The Installation And Maintenance
Of Electric Supply And Communication Lines**

**Approved by American Standards Association July 29, 1965 as American Standards
C2.2a-1965 (UDC 621.316.9)**

**This supplement revises some of the provisions of Part 2 of the
National Electrical Safety Code. Part 2 of this Code is entitled
"Safety Rules for the Installation and Maintenance of Electric
Supply and Communication Lines."**



Issued December 15, 1965

**Additional copies of the Supplement are available from:
National Bureau of Standards
Office of Technical Information and Publications
Washington, D.C. 20234**

ASA SECTIONAL COMMITTEE ON NATIONAL ELECTRICAL SAFETY
CODE, C2

There have been considerable changes in the personnel of this Sectional Committee since the issuance of NBS Handbook 81. Organizations represented on the Committee at the time of approval of this supplement and the names of their representatives are listed below:

Chairman—W. J. Meese

Secretary—C. K. Poarch

Nat. Bur. of Stds. U.S. Dept. of Commerce (sponsor)—W. J. Meese—
W. H. Hall (alt.)

Accident Prev. Dept. of the Assoc. of Casualty and Surety Cos.—
W. T. Standish—E. F. Steinman (alt.)

Amer. Mutual Ins. Alliance—D. K. Auck—A. Stevens (alt.)

Amer. Public Power Assoc.—H. I. Blinder

Amer. Transit Assoc.—G. J. Tzougros—V. C. Lucas (alt.)

Assoc. of Amer. Railroads—E. M. Hastings, Jr.—F. R. Cummings
(alt.)

Assoc. of Edison Illum. Cos.—H. F. Hoebel

Edison Electric Inst.—T. J. Brosnan—C. K. Poarch (alt.)

Electronic Ind. Assoc.—J. H. Trout—R. T. Ellis (alt.)

Inst. for Electrical and Electronics Engrs.—A. E. Hill—V. F. Dowden
(alt.)

Int. Assoc. of Govt. Labor Officials—T. A. Oravec—E. C. Lawry
(alt.)

Int. Brotherhood of Electrical Workers—R. Rapattoni

Int. Municipal Signal Assoc., Inc.—E. P. Grim

Nat. Assoc. of Rail. and Util. Commissioners—R. E. Purucker

Nat. Electrical Contr. Assoc.—C. R. Bohn—C. J. Hart (alt.)

Nat. Electrical Mfgs. Assoc.—B. K. Sturgis—R. P. Thompson (alt.)

Nat. Safety Council—A. L. Dowden—P. E. Sheppard (alt.)

Pub. Service Commission of Wis.—R. E. Purucker

Rural Electrification Admin.—J. E. O'Brien—J. H. Rixse (alt.)

The Telephone Group—F. Woodland, Jr.—E. W. Glancy (alt.) C. D.
Hansell (alt.)

Western Union Telegraph Co.—R. G. Wilcox—L. B. Blum (alt.)

Canadian Standards Association—M. Fraresso (liaison)

REVISIONS

This supplement revises the following provisions of Part 2 of the National Electrical Safety Code:

- (1) Add new footnote number 10 to Table 9 on page 75 of NBS Handbook 81 as shown on page 4 of this supplement.
- (2) Revise 261.A.4(c) on page 122 of NBS Handbook 81 as follows:

(c) **ULTIMATE FIBER STRESS.** "Various species of wood poles are considered as having the ultimate fiber stresses approved as standard by the American Standards Association under conditions specified in Section 4 of ASA 05.1-1963."

(The "Note" following this paragraph remains unchanged.)

- (3) Revise 282.E. on page 161 of NBS Handbook 81 as follows:

"E. GUY GUARDS. The ground end of all guys attached to ground anchors exposed to traffic shall be provided with a substantial and conspicuous guard not less than 8 feet long."

(The "Recommendation" following this paragraph remains unchanged.)

REVISED TABLE 9

235. Separations and Clearances

75

235. A. Separation Between Conductors on Pole Lines—Con.

TABLE 9.—Minimum clearance in any direction from line conductors to supports, and to vertical or lateral conductors, span or guy wires attached to the same support

[All voltages are between conductors]

Clearance of line conductors from—	Communication lines—		Supply lines		
	In general	On jointly used poles	0 to 8,700 volts		Exceeding 8,700 volts. add for each 1,000 volts of excess
			In general	On jointly used poles	
	Inches	Inches	Inches	Inches	Inches
Vertical and lateral conductors:					
Of same circuit.....	3	3	3	3	0.25
Of other circuits.....	3	3	6 6	6 6	.4
Span and guy wires attached to same pole:					
General.....	8 3	18 6	6	6	10.4
When parallel to line.....	8 3	18 6	1 12	1 12	10.4
Lightning-protection wires parallel to line.....	(2 5)	(2 5)	(2 5)	(2 5)	.4
Surfaces of crossarms.....	3 3	3 3	3	3	.2
Surfaces of poles.....	3 3	3 5	7 9 3	4 7 5	.2

¹ For guy wires, if practicable. For clearances between span wires and communication conductors, see rule 238, E, 3.

On jointly used poles, guys which pass within 12 inches of supply conductors, and also pass within 12 inches of communication cables, shall be protected with a suitable insulating covering where the guy passes the supply conductors, unless the guy is effectively grounded or insulated with a strain insulator at a point below the lowest supply conductor and above the highest communication cable.

² Clearance shall not be less than the separation required by table 6 or rule 235, A, 2, (a), (2) between two line conductors of the voltage concerned.

³ Communication conductors may be attached to supports on the sides or bottoms of crossarms or surfaces of poles with less clearances, if at least 40 inches from any supply line conductor of less than 8,700 volts to ground and at least 60 inches from any supply line conductor of more than 8,700 volts to ground carried on the same pole.

⁴ This clearance applies only to supply conductors carried on crossarms below communication conductors, on joint poles.

Where supply conductors are above communication conductors this clearance may be reduced to 3 inches except for supply conductors of 0 to 750 volts whose clearance may be reduced to one inch.

⁵ For the purpose of applying the above table, the voltage of lightning-protection wires shall be considered as being the voltage to ground of the associated supply conductors.

⁶ For supply circuits of 0 to 750 volts, this clearance may be reduced to 3 inches.

⁷ A neutral conductor which is effectively grounded throughout its length and is associated with a circuit of 0 to 22,000 volts, may be attached directly to the pole surface.

⁸ Guys and messengers may be attached to the same strain plates or to the same through-bolts.

⁹ For supply circuits of 0 to 750 volts this clearance may be reduced to one inch.

¹⁰ May be reduced to .25 for anchor guys.

U.S. DEPARTMENT OF COMMERCE

Luther H. Hodges, Secretary

U.S. **NATIONAL BUREAU OF STANDARDS**

... **A. V. Astin, Director**

t. = Handbooks

**SAFETY RULES FOR THE
INSTALLATION AND MAINTENANCE
OF ELECTRIC SUPPLY AND
COMMUNICATION LINES**

**Comprising Part 2, the Definitions and the Grounding Rules
of the Sixth Edition of the National Electrical Safety Code**

**Approved by American Standards Association
June 8, 1960 as American Standard C2.2-1960
(UDC 621.316.9)**



National Bureau of Standards Handbook 81

**Supersedes Handbook H32 and amends in part Pt. 2, Definitions
and the Grounding Rules of Handbooks H30 and H43)**

Issued November 1, 1961

For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington 25, D.C. - Price \$1.75

JAN 17 1963

115,615

Ref.

QCI

.U51

1961

ABSTRACT

This Handbook consists of definitions, grounding rules, and Part 2 of the sixth edition of the National Electrical Safety Code, dealing with the construction and maintenance of overhead and underground lines, previously published as National Bureau of Standards Handbook H32. The present edition of these rules is the result of a revision which has been carried out by the Sectional Committee in accordance with the procedure of the American Standards Association, and the text has been recognized as an American Standard. This revision serves to align the rules with new developments and current practice in the industry. It represents the work of five technical subcommittees over a period of about eight years. Changes were made in approximately one hundred and fifty rules and definitions.

**U.S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

SUPPLEMENT 2 TO NBS HANDBOOK 81

**Safety Rules for the Installation and Maintenance
of Electric Supply and Communication Lines**

Approved by United States of America Standards Institute November 29, 1967 as
USA Standard C2.2b-1967 (UDC 621.316.9)

This supplement revises some of the provisions of Part 2 of the National Electrical Safety Code. Part 2 of this Code is entitled "Safety Rules for the Installation and Maintenance of Electric Supply and Communication Lines."



Issued March 1968

For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington, D.C. 20402 - Price 5 cents

REVISION OF SUBSECTION 294—PART 2 OF THE NATIONAL
ELECTRICAL SAFETY CODE

294. PROTECTION AND SEPARATION OF CONDUCTORS BURIED IN
EARTH

A. Separation

Add the following exception:

Exception 2: This separation is not required for supply and communication conductors meeting the requirements of Subsection 294D.

B. Protection at Crossings of Cable

Add the following exception:

Exception 2: This protection is not required for supply and communication conductors meeting the requirements of Subsection 294D.

C. Protection of Cables Installed Parallel

Add the following exception:

Exception 2: This separation and protection is not required for supply and communication conductors meeting the requirements of Subsection 294D.

Add the following Subsection:

D. Random Separation Between Supply and Communication Conductors

Communication and supply conductors or cable may be buried together at the same depth with no deliberate separation between facilities, provided the following conditions and requirements are met:

1. Voltage

- (a) Grounded wye supply systems shall be operated at voltages not in excess of 22,000 volts to ground.
- (b) Delta supply systems shall be operated at voltages not in excess of 5,300 volts phase to phase.

2. Bare Grounded Conductor

- (a) A supply facility operating above 300 volts to ground must include a bare grounded conductor in continuous contact with the earth. This conductor, adequate for the magnitude and duration of the fault current imposed, shall be one of the following:
- (1) a sheath or shield
 - (2) multiple concentric conductors closely spaced circumferentially
 - (3) a separate bare conductor in contact with the earth and in close proximity to the cable when such cable(s) have a grounded sheath or shield, which shall also be adequate for the magnitude and duration of the fault currents imposed, but not necessarily in contact with earth.

Note: This is applicable when "cable in nonmetallic duct" is considered as a direct buried cable installation and random separation is desired.

Exception: Where a buried system passes through a short section of conduit, such as under a roadway, the contact with earth of the grounded conductor can be omitted, provided the ground conductor is continuous through the conduit.

- (b) The bare conductor(s) in contact with the earth shall be of suitable corrosion resistant material.

3. Delta Supply Cables

Delta supply cables operating above 300 volts to ground shall be of a duplex or triplex concentric shield construction or single conductor concentric cables maintained in close proximity to each other.

4. Protection

- (a) Supply circuits operating above 300 volts to ground shall be so constructed, operated and maintained that, when faulted, they will be promptly deenergized initially or following subsequent protective device operations. (Phase-to-

ground faults for wye circuits, phase-to-phase faults for delta circuits.)

- (b) Communication protective devices shall be adequate for the voltages and currents impressed on them in event of contact with the supply conductors.
- (c) An adequate bond shall be provided between the grounded supply conductor(s) and the communications cable shield or sheath. (Preferable intervals not to exceed 1000 feet.)
- (d) Ungrounded delta supply circuits operating above 300 volts to ground shall be equipped with a ground indication system.

5. Depth of Burial

- (a) For supply cables operating above 300 volts to ground, a buried depth of 30 inches is considered adequate.
- (b) For supply cables operating below 300 volts to ground, a buried depth of 24 inches is considered adequate.
- (c) Lesser depths may be used in special cases by agreement of the supply and communication parties concerned.

As a result of the previous revision, the following modification is necessary:

291. CONSTRUCTION OF DUCT AND CABLE SYSTEMS

E. Separation Between Supply and Communication Duct Systems

Add the following exception:

Exception 3: This separation and protection is not required for supply and communication conductors meeting the requirements of Subsection 294D.

FOREWORD

This Handbook contains definitions, grounding rules, and Part 2 of the sixth edition of the National Electrical Safety Code, dealing with the construction and maintenance of overhead and underground lines, previously published as National Bureau of Standards Handbook H32.

The present edition of these rules is the result of a revision which has been carried out according to the procedure of the American Standards Association. The revised text has had the approval of the Sectional Committee, organized in conformity with this procedure, and has been recognized as an American Standard.

Criticism of the rules and suggestions for their improvement are invited, especially from those who have experience in their practical application. In future editions every effort will be made to perfect the rules, both in the development of detail and in the modification of any requirements which it is found can be improved.

A. V. Astin, *Director*.

PREFACE

In preparation of the first few editions of the code, the Bureau held meetings in many parts of the country and welcomed suggestions from everyone concerned. It, however, reserved to itself the final decision on all contested points. The procedure followed in later revisions subsequent to the establishment of the American Standards Association differs essentially from the former practice in that final decisions as to all details are made by the sectional committees formally approved by the American Standards Association and operating under their rules of procedure. The Bureau, as sponsor for the work under this procedure, has given up its prerogative of determining details in return for the implied understanding that the many parties concerned will accept such a code as they can agree upon among themselves. All such codes of practice necessarily include compromises between conflicting aims. The Bureau has felt that decisions made by practically unanimous agreement among the interests affected would, in general, be wiser than those at which it might arrive after weighing the arguments of advocates for different views. It has, therefore, welcomed this procedure in spite of the fact that this involves the acceptance of some details of which it might not itself approve.

Rules in this code which are to be regarded as mandatory are characterized by the use of the word "shall." Where a rule is of an advisory nature it is indicated by the use of the word "should." Other practices which are considered desirable and not intended to be mandatory are stated as recommendations. It is realized that conditions may exist which necessitate departures from such recommendations.

A representative Committee on Interpretations has been set up to prepare replies to requests for interpretation of these rules. Requests for interpretation should state the rule in question as well as the conditions under which it is being

applied. Interpretations are intended to clarify the intent of specific rules and are not intended to supply consulting information on the application of the code. Requests for interpretation addressed to the National Bureau of Standards, if suitable for processing, will be sent to the Interpretations Committee. After due consideration by the Committee, which may involve many exchanges of correspondence, the inquirer will be notified of its decision.

AMERICAN STANDARDS ASSOCIATION

SECTIONAL COMMITTEE

On National Electrical Safety Code, C2

Chairman, R. L. LLOYD*

Secretary, C. K. POARCH

<i>Organization represented</i>	<i>Name and business affiliation</i>
National Bureau of Standards, U.S. Department of Commerce (sponsor).	RICHARD L. LLOYD,* National Bureau of Standards.
Accident Prevention Department of the Association of Casualty and Surety Cos.	WILLIAM T. STANDISH, U.S. Fidel- ity and Guaranty Co. EDWARD F. STEINMAN (alternate), U.S. Fidelity and Guaranty Co.
American Institute of Electrical Engineers.	E. L. KANOUSE, Department of Water and Power, City of Los Angeles. E. R. COULBOURN (alternate), Alabama Power Co. A. B. CAMPBELL (alternate), Na- tional Association of Corrosion Engineers.
American Mutual Alliance Federa- tion of Mutual Fire Insurance Cos.	DALE K. AUCK, Federation of Mutual Fire Insurance Cos. ALAN STEVENS (alternate), Liber- ty Mutual Fire Insurance Co.
American Transit Assoc.	ALVIN C. DEBEAR, New York City Transit Authority. VAN COURT LUCAS (alternate), American Transit Assoc.
Association of American Railroads	K. H. GORDON**, Pennsylvania Railroad. J. I. KIRSCH (alternate), Pennsyl- vania Railroad.
Association of Edison Illumi- nating Cos.	B. C. SHERWOOD, Commonwealth Edison Co.
Edison Electric Institute.	T. J. BROSNAN, Niagara Mohawk Power Corp. C. K. POARCH (alternate), Edison Electric Institute.
International Association of Elec- trical Inspectors.	C. L. SMITH***, International As- sociation of Electrical Inspec- tors. J. D. LYNETT (alternate), New York Board of Fire Under- writers.

*Mr. R. L. Lloyd replaced Mr. John A. Dickinson, who retired on September 30, 1959.

**Retired.

***Deceased.

<i>Organization represented</i>	<i>Name and business affiliation</i>
International Association of Governmental Labor Officials.	GEORGE P. KEOGH, New York Department of Labor. THOMAS A. ORAVECZ (alternate), Department of Labor and Industry, Commonwealth of Pennsylvania.
International Brotherhood of Electrical Workers.	GORDON M. FREEMAN, International Brotherhood of Electrical Workers. ROBERT E. NOONAN (alternate), International Brotherhood of Electrical Workers.
International Municipal Signal Association, Inc.	EDGAR P. GRIM, Electrical Bureau, Philadelphia, Pa.
National Association of Railroad and Utilities Commissioners.	R. E. PURUCKER, Public Service Commission of Wisconsin.
National Electrical Contractors Assoc.	G. W. MOSELEY, R. H. Bouligny, Inc.
National Electrical Manufacturers Assoc.	H. H. WATSON, General Electric Co.
National Safety Council	A. L. Dowden, Liberty Mutual Insurance Co.
Public Service Commission of Wisconsin	R. E. PURUCKER, Public Service Commission of Wisconsin.
Rural Electrification Administration, U.S. Department of Agriculture.	J. E. O'BRIEN, Rural Electrification Administration. JOHN H. RIXSE, JR. (alternate), Rural Electrification Administration.
The Telephone Group	F. WOODLAND, JR., American Telephone and Telegraph Co. H. E. COREY (alternate), American Telephone and Telegraph Co. E. W. GLANCY (alternate), American Telephone and Telegraph Co. B. J. LOVITT (alternate), General Telephone Service Corp.
The Western Union Telegraph Co.	H. H. WHEELER**, Western Union Telegraph Co. H. A. HAENSELER (alternate), Western Union Telegraph Co.



CONTENTS

[A more detailed table of contents is given at the beginning of each part]

	Page
Preface.....	IV
Sec. 1. Definitions.....	1
Sec. 9. Rules covering methods of protective grounding.....	13
Part 2. Rules for the installation and maintenance of electric supply and communication lines.....	27
Index.....	185



SEC. 1. DEFINITIONS OF SPECIAL TERMS

The following definitions are for use with the National Electrical Safety Code. For other use and for definitions not contained herein, see Definitions of Electrical Terms ASA-C42.

Alphabetical List of Defined Terms

Terms	Definition No.	Page	Terms	Definition No.	Page
Alive or live.....	1	2	Low-voltage protection.....	45	8
Appliance.....	2	2	Low-voltage release.....	46	8
Automatic.....	3	2	Manhole.....	47	8
Cable vault.....	4	2	Manual.....	48	8
Circuit.....	5	2	Minor tracks.....	49	8
Circuit-breaker.....	6	2	Open wire.....	50	9
Climbing space.....	7	2	Panelboard.....	51	9
Common use.....	8	2	Qualified.....	52	9
Conductor.....	9	2	Raceway.....	53	9
Grounding conductor.....	10	2	Reconstruction.....	54	9
Lateral conductor.....	11	2	Rural districts.....	55	9
Line conductor.....	12	2	Sag:		
Vertical conductor.....	13	2	Apparent sag at any point.....	56	9
Conflict:			Apparent sag of a span.....	57	9
Antenna conflict.....	14	3	Final unloaded sag.....	58	9
Conductor conflict.....	15	3	Initial unloaded sag.....	59	9
Structure conflict.....	16	4	Maximum total sag.....	60	10
Current-carrying part.....	17	5	Total sag.....	61	10
Dead.....	18	5	Unloaded sag of a conductor.....	62	10
Device.....	19	5	Service.....	63	10
Disconnecter.....	20	5	Span length.....	64	10
Duct.....	21	5	Splicing chamber.....	65	10
Electrical supply station.....	22	5	Substantial.....	66	10
Equipment.....	23	5	Switch.....	67	10
Electric-supply equipment.....	24	5	Switchboard.....	68	10
Utilization equipment.....	25	5	Tags.....	69	10
Explosion proof.....	26	6	Tension:		
Exposed:			Final unloaded conductor		
Applied to circuits or lines.....	27	6	tension.....	70	10
Applied to equipment.....	28	6	Initial conductor tension.....	71	11
Externally operable.....	29	6	Transformer vault.....	72	11
Grounded.....	30	6	Urban districts.....	73	11
Effectively grounded.....	31	6	Voltage:		
Grounded system.....	32	6	Voltage of a grounded circuit.....	74	11
Guarded.....	33	6	Voltage of an ungrounded circuit.....	75	11
Handhole.....	34	6	Voltage to ground of:		
Inclosed.....	35	6	A grounded circuit.....	76	11
Insulated.....	36	7	An ungrounded circuit.....	77	11
Insulating.....	37	7	Voltage to ground of a conductor:		
Isolated.....	38	7	Of a grounded circuit.....	78	11
Isolation by elevation.....	39	7	Of an ungrounded circuit.....	79	11
Joint use.....	40	7	Wire gages.....	80	12
Lateral working space.....	41	7			
Lightning arrester.....	42	7			
Lines:					
Communication lines.....	43	7			
Electric-supply lines.....	44	8			

1. **Alive** or **live** means electrically connected to a source of potential difference, or electrically charged so as to have a potential different from that of the earth. The term "live" is sometimes used in place of the term "current-carrying," where the intent is clear, to avoid repetitions of the longer term.

2. **Appliance** means current-consuming equipment, fixed or portable; for example, heating, cooking, and small motor-operated equipment.

3. **Automatic** means self-acting, operating by its own mechanism when actuated by some impersonal influence—as, for example, a change in current strength; not manual, without personal intervention. Remote control that requires personal intervention is not automatic, but manual.

4. **Cable vault.** (See definition of "Manhole.")

5. **Circuit** means a conductor or system of conductors through which an electric current is intended to flow.

6. **Circuit-breaker** means a device designed to open under abnormal conditions a current-carrying circuit without injury to itself. The term as used in this code applies only to the automatic type designed to trip on a predetermined overload of current.

7. **Climbing space** means the vertical space reserved along the side of a pole or structure to permit ready access for linemen to equipment and conductors located on the pole structure.

8. **Common use** means simultaneous use by two or more utilities of the same kind.

9. **Conductor** means a metallic conducting material, usually in the form of a wire or cable, suitable for carrying an electric current. Does not include bus bars.

10. **Grounding conductor** means a conductor which is used to connect the equipment or the wiring system with a grounding electrode or electrodes.

11. **Lateral conductor** means, in pole wiring work, a wire or cable extending in a general horizontal direction approximately at right angles to the general direction of the line conductors.

12. **Line conductor** means one of the wires or cables carrying electric current, supported by poles, towers, or other structures, but not including vertical or lateral connecting wires.

13. **Vertical conductor** means, in pole wiring work, a wire or cable extending in an approximately vertical direction.

Conflict:

14. **Antenna conflict** means that an antenna or its guy wire is at a higher level than a supply or communication conductor and approximately parallel thereto, provided the breaking of the antenna or its support will be likely to result in contact between the antenna or guy wire and the supply or communication conductor.

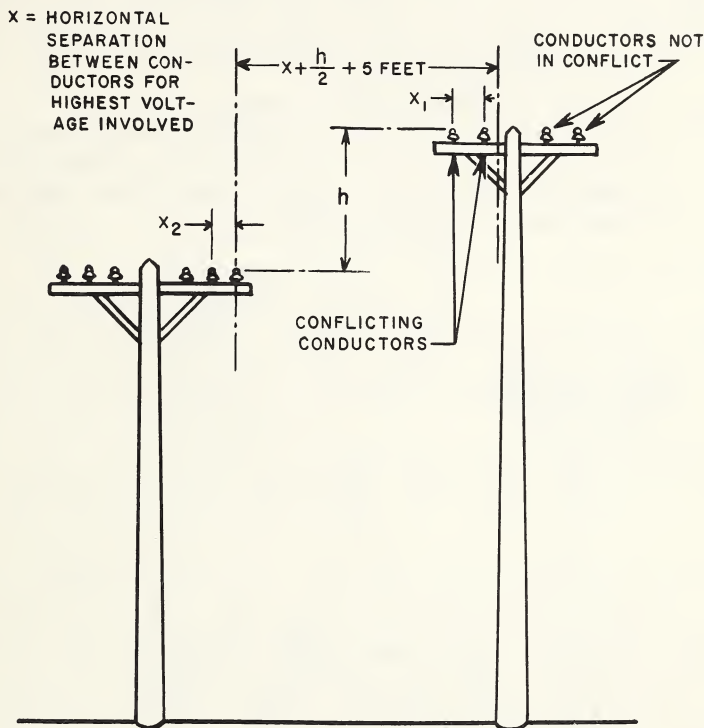


FIGURE 1. *Conductor conflict.*

15. **Conductor conflict** means that a conductor is so situated with respect to a conductor of another line at a lower level that the horizontal distance between them is less than the sum of the following values:

- (a) Five feet.
- (b) One-half the difference of level between the conductors concerned.
- (c) The value required in tables 6, 7, or 8 for horizontal separation between conductors on the

same support for the highest voltage carried by either conductor concerned. (See illustration.)

16. **Structure conflict** (as applied to a pole line) means that the line is so situated with respect to a second line that the overturning (at the ground line) of the first line will result in contact between its poles or conductors and the conductors of the second line, assuming that no conductors are broken in either line. (See illustration.)

Exceptions: Lines are not considered as conflicting under the following conditions:

- (1) Where one line crosses another.
- (2) Where two lines are on opposite sides of a highway, street, or alley and are separated by a distance not less than 60 percent of the height of the taller pole line and not less than 20 feet.

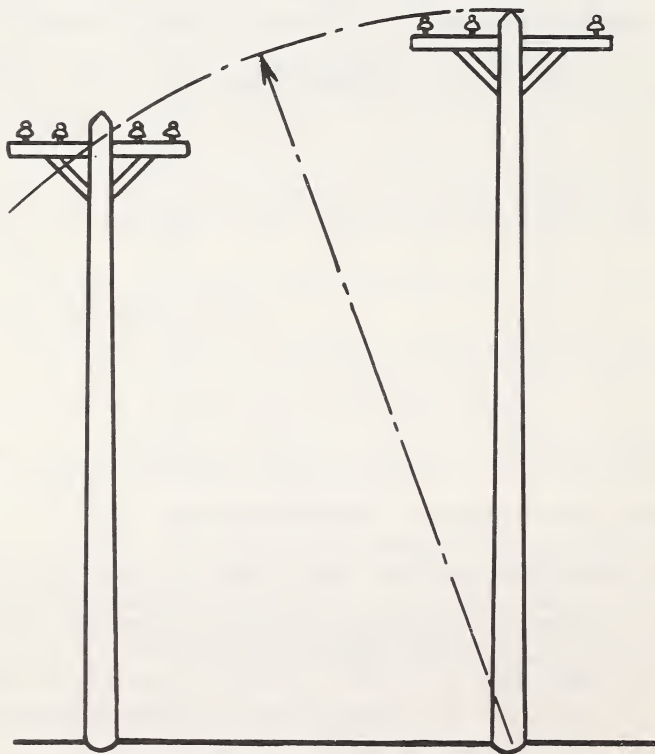


FIGURE 2. *Structure conflict.*

17. **Current-carrying part** means a conducting part intended to be connected in an electric circuit to a source of voltage. Noncurrent-carrying parts are those not intended to be so connected.

18. **Dead** means free from any electric connection to a source of potential difference and from electric charge; not having a potential different from that of the earth. The term is used only with reference to current-carrying parts which are sometimes alive.

19. **Device** means a unit of an electric wiring system which is intended to carry but not consume electric energy.

20. **Disconnecter** means a switch which is intended to open a circuit only after the load has been thrown off by some other means.

Note: Manual switches designed for opening loaded circuits are usually installed in circuit with disconnectors, to provide a safe means for opening the circuit under load.

21. **Duct** means (in underground work) a single tubular runway for underground cables.

22. **Electrical supply station** means any building, room, or separate space within which electric-supply equipment is located and the interior of which is accessible, as a rule, only to properly qualified persons.

Note: This includes generating stations and substations and generator, storage-battery, and transformer rooms, but excludes manholes and isolated-transformer vaults on private premises. (See definition of "transformer vault".)

23. **Equipment** means a general term including fittings, devices, appliances, fixtures, apparatus, and the like, used as a part of, or in connection with, an electric installation.

24. **Electric-supply equipment** means equipment which produces, modifies, regulates, controls, or safeguards a supply of electric energy. Similar equipment, however, is not included where used in connection with signaling systems under the following conditions:

(a) Where the voltage does not exceed 150.

(b) Where the voltage is between 150 and 400 and the power transmitted does not exceed 3 kilowatts.

25. **Utilization equipment** means equipment, devices, and connected wiring which utilize electric energy for mechanical, chemical, heating, lighting, testing, or similar purposes and are not a part of supply equipment, supply lines, or communication lines.

26. **Explosion-proof** means capable of withstanding without injury and without transmitting flame to the outside any explosion of gas which may occur within.

Exposed:

27. **Applied to circuits or lines** means in such a position that in case of failure of supports or insulation contact with another circuit or line may result.

28. **Applied to equipment** means that an object or device can be inadvertently touched or approached nearer than a safe distance by any person. It is applied to objects not suitably guarded or isolated.

29. **Externally operable** means capable of being operated without exposing the operator to contact with live parts.

Note: This term is applied to equipment, such as a switch, that is inclosed in a case or cabinet.

30. **Grounded** means connected to earth or to some extended conducting body which serves instead of the earth whether the connection is intentional or accidental.

31. **Effectively grounded** means permanently connected to earth through a ground connection or connections of sufficiently low impedance and having sufficient current-carrying capacity to prevent the building up of voltages which may result in undue hazard to connected equipment or to persons.

32. **Grounded system** means a system of conductors in which at least one conductor or point (usually the middle wire, or neutral point of transformer or generator windings) is intentionally grounded, either solidly or through a current-limiting device.

33. **Guarded** means covered, shielded, fenced, inclosed, or otherwise protected, by means of suitable covers or casings, barrier rails or screens, mats or platforms, to remove the liability of dangerous contact or approach by persons or objects to a point of danger.

Note: Wires which are insulated, but not otherwise protected, are not considered as guarded.

34. **Handhole** means an opening in an underground system into which workmen reach, but do not enter.

35. **Inclosed** means surrounded by a case which will prevent accidental contact of a person with live parts. A solid inclosure means one which will neither admit accumulations of flyings or dust, nor transmit sparks or flying particles to the accumulations outside.

36. **Insulated** means separated from other conducting surfaces by a dielectric substance or air space permanently offering a high resistance to the passage of current and to disruptive discharge through the substance or space.

Note: When any object is said to be insulated, it is understood to be insulated in suitable manner for the conditions to which it is subjected. Otherwise, it is, within the purpose of these rules, uninsulated. Insulating covering of conductors is one means for making the conductors insulated.

37. **Insulating** (where applied to the covering of a conductor, or to clothing, guards, rods, and other safety devices) means that a device, when interposed between a person and current-carrying parts, protects the person making use of it against electric shock from the current-carrying parts with which the device is intended to be used; the opposite of conducting.

38. **Isolated** means that an object is not readily accessible to persons unless special means for access are used.

39. **Isolation by elevation** means elevated sufficiently so that persons may safely walk underneath.

40. **Joint use** means simultaneous use by two or more kinds of utilities.

41. **Lateral working space** means the space reserved for working between conductor levels outside the climbing space, and to its right and left.

42. **Lightning arrester** means a device which has the property of reducing the voltage of a surge applied to its terminals, is capable of interrupting follow current if present, and restores itself to its original operating conditions.

Lines:

43. **Communication lines** means the conductors and their supporting or containing structures which are located outside of buildings and are used for public or private signal or communication service, and which operate at not exceeding 400 volts to ground or 750 volts between any two points of the circuit, and the transmitted power of which does not exceed 150 watts. When operating at less than 150 volts no limit is placed on the capacity of the system.

Note: Telephone, telegraph, railroad-signal, messenger-call, clock, fire, police-alarm, community television antenna and other systems conforming with the above are included.

Lines used for signaling purposes, but not included under the above definition, are considered as supply lines of the same voltage and are to be so run.

Exception is made under certain conditions for communication circuits used in the operation of supply lines. (See rule 288, A).

44. Electric-supply lines means those conductors and their necessary supporting or containing structures which are located entirely outside of buildings and are used for transmitting a supply of electric energy.

Does not include open wiring on buildings, in yards or similar locations where spans are less than 20 feet, and all the precautions required for stations or utilization equipment, as the case may be, are observed.

Railway signal lines of more than 400 volts to ground are always supply lines within the meaning of these rules, and those of less than 400 volts may be considered as supply lines, if so run and operated throughout.

45. Low-voltage protection means the effect of a device operative on the reduction or failure of voltage to cause and maintain the interruption of power supply to the equipment protected.

46. Low-voltage release means the effect of a device operative on the reduction or failure of voltage to cause the interruption of power supply to the equipment, but not preventing the reestablishment of the power supply on return of voltage.

47. Manhole (more accurately termed splicing chamber or cable vault) means an opening in an underground system which workmen or others may enter for the purpose of installing cables, transformers, junction boxes, and other devices, and for making connections and tests.

48. Manual means capable of being operated by personal intervention.

49. Minor tracks means railway tracks included in the following list:

- (a) Spurs less than 2,000 feet long and not exceeding two tracks in the same span.
- (b) Branches on which no regular service is maintained or which are not operated during the winter season.
- (c) Narrow-gage tracks or other tracks on which standard rolling stock can not, for physical reasons, be operated.

(d) Tracks used only temporarily for a period not exceeding 1 year.

(e) Tracks not operated as a common carrier, such as industrial railways used in logging, mining, etc.

50. **Open wire** means a conductor or pair of conductors separately supported above the surface of the ground.

51. **Panelboard** means a single panel, or a group of panel units designed for assembly in the form of a single panel, including busses and with or without switches and/or automatic overcurrent-protective devices for the control of light, heat, or power circuits of small individual as well as aggregate capacity; designed to be placed in a cabinet or cut-out box placed in or against a wall or partition, and accessible only from the front. (See definition of "Switchboard.")

52. **Qualified** means familiar with the construction and operation of the apparatus and the hazards involved.

53. **Raceway** means any channel for loosely holding wires or cables in interior work, which is designed expressly and used solely for this purpose. Raceways may be of metal, wood, or insulating material, and the term includes wood and metal moldings consisting of a backing and capping, and also metal ducts into which wires are to be pulled.

54. **Reconstruction** means replacement of any portion of an existing installation by new equipment or construction. Does not include ordinary maintenance replacements.

55. **Rural districts** means all places not urban, usually in the country, but in some cases within city limits.

Sag:

56. **Apparent sag at any point** means the departure of the wire at the particular point in the span from the straight line between the two points of support of the span, at 60° F, with no wind loading.

57. **Apparent sag of a span** means the maximum departure of the wire in a given span from the straight line between the two points of support of the span, at 60° F, with no wind loading.

58. **Final unloaded sag** means the sag of a conductor after it has been subjected for an appreciable period to the loading prescribed for the loading district in which it is situated, or equivalent loading, and the loading removed.

59. **Initial unloaded sag** means the sag of a conductor prior to the application of any external load.

60. **Maximum total sag** means the total sag at the mid-point of the straight line joining the two points of support of the conductor.

61. **Total sag** means the distance measured vertically from any point of a conductor to the straight line joining its two points of support, under conditions of ice loading equivalent to the total resultant loading for the district in which it is located.

62. **Unloaded sag of a conductor at any point in a span** means the distance measured vertically from the particular point in the conductor to a straight line between its two points of support, without any external load.

63. **Service** means the conductors and equipment for delivering electric energy from the secondary distribution or street main, or other distribution feeder, or from the transformer, to the wiring system of the premises served. For overhead circuits, it includes the conductors from the last line pole to the service switch or fuse. The portion of an overhead service between the pole and building is designated as "service drop."

64. **Span length** means the horizontal distance between two adjacent supporting points of a conductor.

65. **Splicing chamber.** (See definition of "Manhole.")

66. **Substantial** means so constructed and arranged as to be of adequate strength and durability for the service to be performed under the prevailing conditions.

67. **Switch** means a device for opening and closing or for changing the connection of a circuit. In these rules, a switch will always be understood to be manually operated, unless otherwise stated.

68. **Switchboard** when referred to in connection with supply of electricity means a large single panel, frame, or assembly of panels, on which are mounted (on the face, or back, or both) switches, fuses, busses, and usually instruments.

69. **Tags** means "men at work" tags of distinctive appearance, indicating that the equipment or lines so marked are being worked on.

Tension:

70. **Final unloaded conductor tension** means the longitudinal tension in a conductor after the conductor has been stretched by the application for an appreciable period, and subsequent release, of the loadings of ice and wind, and temperature decrease, assumed for the loading

district in which the conductor is strung (or equivalent loading).

71. **Initial conductor tension** means the longitudinal tension in a conductor prior to the application of any external load.

72. **Transformer vault** means an isolated inclosure either above or below ground with fire-resistant walls, ceiling, and floor, in which transformers and related equipment are installed, and which is not continuously attended during operation.

73. **Urban districts** means thickly settled areas (whether in cities or suburbs) or where congested traffic often occurs. A highway, even though in the country, on which the traffic is often very heavy, is considered as urban.

Voltage:

74. **Voltage of an effectively grounded circuit** means the highest effective voltage between any conductor and ground unless otherwise indicated.

75. **Voltage of a circuit not effectively grounded** means the highest effective voltage between any two conductors unless otherwise indicated.

If one circuit is directly connected to another circuit of higher voltage (as in the case of an autotransformer), both are considered as of the higher voltage, unless the circuit of lower voltage is effectively grounded, in which case its voltage is not determined by the circuit of higher voltage. Direct connection implies electric connection as distinguished from connection merely through electromagnetic or electrostatic induction.

Voltage to ground of:

76. **A grounded circuit** means the highest effective voltage between any conductor of the circuit and that point or conductor of the circuit which is grounded.

77. **An ungrounded circuit** means the highest effective voltage between any two conductors of the circuit concerned.

Voltage to ground of a conductor of:

78. **A grounded circuit** means the highest effective voltage between such conductor and that point or conductor of the circuit which is grounded.

79. **An ungrounded circuit** means the highest effective voltage between such conductor and any other conductor of the circuit concerned.

80. **Wire gages:** The American Wire Gage (AWG), otherwise known as Brown & Sharpe (B&S), is the standard gage for copper, aluminum, and other conductors, excepting steel, for which the Steel Wire Gage (Stl. WG) is used throughout these rules.

SEC. 9. RULES COVERING METHODS OF PROTECTIVE GROUNDING OF CIRCUITS, EQUIPMENT, AND LIGHTNING ARRESTERS FOR STATIONS, LINES, AND UTILIZATION EQUIPMENT

CONTENTS

	Page
90. Scope of the rules.....	14
91. Application of the rules.....	14
A. Waiving rules.....	14
B. Application.....	14
C. Temporary installations.....	15
D. Emergency.....	15
92. Point of attachment of grounding conductor.....	15
A. Direct-current distribution systems.....	15
B. Alternating-current distribution systems.....	15
C. Current in grounding conductor.....	16
D. Equipment and wire raceways.....	16
93. Grounding conductor.....	16
A. Material and continuity.....	16
B. Size and capacity.....	17
1. For direct-current circuits.....	17
2. For alternating-current circuits.....	17
3. For instrument transformers.....	17
4. For primary lightning arresters.....	18
5. For raceways and equipment.....	18
6. For portable and pendent equipment.....	18
C. Protection and guarding against contact.....	18
1. Outdoor installation.....	18
2. Indoor installation.....	19
D. Underground.....	20
E. Common grounding conductor for circuits, metal raceways, and equipment.....	20
94. Ground connections.....	20
A. Piping systems.....	20
B. Alternate methods.....	21
C. Made electrodes.....	21
D. Grounds to railway returns.....	22
95. Method.....	22
A. Piping.....	22
B. Ground clamps.....	23
C. Contact surfaces.....	23
D. Made electrode grounds.....	23
96. Ground resistance.....	24
A. Limits.....	24
B. Checking.....	24
97. Separate grounding conductors and grounding electrodes.....	24
A. Grounding conductors.....	24
B. Electrodes.....	25
C. Interconnection of primary arrester and secondary neutral.....	25
1. Solid interconnection.....	25
2. Interconnection through spark gap.....	26

90. SCOPE OF THE RULES.

The following rules apply to the grounding of all lightning arresters except those on communication circuits, and of all circuits, equipment, or wire raceways when the grounding is intended to be a permanent and effective protective measure.

They do not apply to the grounded return of electric railways, nor to the grounding of lightning protection wires which are independent of electric circuits or equipment. These rules do not require that grounding shall be done, but cover the methods for protective grounding. The rules requiring grounding, in accordance with the methods specified below, are included under the various parts of this code.

Other methods of construction and installation than those specified in the rules may be used as experiments to obtain information if done where supervision can be given by the proper administrative authority.

91. APPLICATION OF THE RULES.**A. Waiving Rules.**

The rules are intended to apply to all installations except as modified or waived by the proper administrative authority or its authorized agents. They are intended to be so modified or waived in particular cases wherever any rules are shown for any reason to be impracticable, such as by involving expense not justified by the protection secured; provided equivalent or safer construction is secured in other ways.

B. Application.

The intent of the rules will be realized (1) by applying the rules in full to all new installations, reconstructions, and extensions, except where any rule is shown to be impracticable for special reasons or where the advantage of uniformity with existing construction is greater than the advantage of construction in compliance with the rules, provided the existing construction is reasonably safe; (2) by placing grounds on existing installations or bringing present grounds into compliance with the rules, except where the expense involved is not justifiable. The time allowed for bringing existing installations into compliance with the rules will be determined by the proper administrative authority.

91. APPLICATION OF THE RULES—Continued

C. Temporary Installations.

It will sometimes be necessary to modify or waive certain of the rules for specified limited periods of time in case of temporary installations or installations which are shortly to be dismantled or reconstructed.

D. Emergency.

In cases of emergency or pending decision of the administrator the person responsible for the installation may decide as to modification or waiver of any rule, subject to review by proper authority.

92. POINT OF ATTACHMENT OF GROUNDING CONDUCTOR.

A. Direct-Current Distribution Systems.

Direct-current systems which are to be grounded shall have the grounding connection made at one or more supply stations but not at individual services and not elsewhere on interior wiring. In three-wire direct-current systems the ground connections shall be made on the neutral.

B. Alternating-Current Distribution Systems.

Secondary alternating current circuits which are to be grounded shall have a direct ground connection (through metallic water piping system or made electrode) at each individual service except as provided in Rule 92C. Each secondary distribution system which is grounded shall have at least one additional ground connection at the transformer or elsewhere.

If the secondaries of transformers are supplying a common set of circuits, fuses, if installed, shall be located only at such points as not to cause the loss of the ground connections after any fuses have been blown.

Alternating-current secondary circuits supplied from a transformer outside the building shall not be grounded inside buildings except at the service entrance.

In single-phase, three-wire systems the ground shall be on the neutral conductor. In two-wire single-phase and in two- or three-phase systems the ground shall be made at that point of the system which

92. B. Alternating-Current Distribution Systems—Con.

brings about the lowest voltage to ground. Where one phase of a two- or three-phase system is used for lighting, that phase should be grounded and at the neutral conductor, if one is used.

C. Current in Grounding Conductor.

Grounds shall be so arranged that under normal conditions of service there will be no objectionable flow of current over the grounding conductor.

The temporary currents set up under accidental conditions, while the grounding conductors are performing their intended protective functions, are not to be considered as objectionable.

If an objectionable flow of current occurs over a grounding conductor, due to the use of multiple grounds, (1) one or more of such grounds shall be abandoned, or (2) their location shall be changed, or (3) the continuity of the conductor between the grounding connections shall be suitably interrupted, or (4) other means satisfactory to the administrative authority shall be taken to limit the current.

D. Equipment and Wire Raceways.

Metal boxes, cabinets and fittings, or non-current-carrying metal parts of other fixed equipment, if metallically connected to grounded cable armor or metal raceway, are considered to be grounded by such connection. Conductor enclosures of interior wiring, if metallically connected to grounded service raceways, service cable sheath or armoring need no additional ground connection.

A grounding conductor connection to armored cable or metal raceway shall be as near as practicable to the point where the conductors concerned receive their supply.

Where the metallic enclosures of equipment or wiring are used as part of the protective grounding, the electrical continuity and current-carrying capacity shall be assured as provided in Rule 93B5.

93. GROUNDING CONDUCTOR.**A. Material and Continuity.**

In all cases the grounding conductor shall be of copper or of other metals or combinations of metals which

93. A. Material and Continuity—Continued

will not corrode excessively under the existing conditions and, if practicable, shall be without joint or splice. If joints are unavoidable, they shall be so made and maintained as to not materially increase the resistance of the grounding conductor.

In no case shall a fuse or automatic circuit-breaker be inserted in the grounding conductor or connection except in a ground connection from equipment where its operation will result in the automatic disconnection from all sources of energy of the circuit leads connected to equipment so grounded; no switch shall be so inserted except in plain sight, provided with distinctive marking and effectively isolated from unqualified persons. (See also rule 92, B, par. 2.)

For lightning arresters and ground detectors the grounding conductor shall be as short and straight as practicable and free from sharp bends.

B. Size and Capacity.

The grounding conductor shall conform to the following:

1. FOR DIRECT-CURRENT CIRCUITS.

A grounding conductor for a direct-current supply system shall have a current-carrying capacity not less than that of the largest conductor supplied by the system and in no case less than that of No. 8 copper.

2. FOR ALTERNATING-CURRENT CIRCUITS.

A grounding conductor for an alternating-current system shall have a current-carrying capacity not less than one-fifth that of the conductor to which it is attached. In no case shall the tensile strength of the conductor be less than that of No. 8 copper.

3. FOR INSTRUMENT TRANSFORMERS.

The grounding conductor for instrument cases and secondary circuits of instrument transformers shall not be smaller than No. 12 if of copper or, if of other metal, shall have equivalent current-carrying capacity.

93. B. Size and Capacity—Continued**4. FOR PRIMARY LIGHTNING ARRESTERS.**

The grounding conductor or conductors shall have a current-carrying capacity sufficient to insure continuity and continued effectiveness of the ground connection under conditions of excess current caused by or following discharge of the arrester. No individual grounding conductor shall have less conductance than No. 6 (0.162-inch) copper wire.

5. FOR RACEWAYS AND EQUIPMENT.

The current-carrying capacity of grounding conductors for equipment, raceways, cable armor, and other metal enclosures for wires, when provided with overcurrent protection, shall be sufficient to provide adequate draining of fault current during the time required for the protective device to operate. Where connected to made electrodes, the grounding conductor need not be larger than No. 6 copper wire or its equivalent. If no fuse or automatic circuit-breaker is provided, the capacity of the grounding conductor shall be determined by the design and operating conditions of the circuit, but shall not be smaller than No. 8 copper.

6. FOR PORTABLE AND PENDENT EQUIPMENT.

For grounding portable or pendent equipment, the conductors to which are protected by fuses or circuit-breakers rated or set at not exceeding 20 amperes, No. 18 copper wire may be used. For grounding portable or pendent equipment protected at more than 20 amperes, see preceding paragraph.

C. Protection and Guarding Against Contact.**1. OUTDOOR INSTALLATIONS.**

Where exposed to mechanical injury, grounding conductors shall be protected by guards adequate for the exposure involved. The guards should extend for a distance of not less than 8 feet above the ground, platform, or floor from which the grounding conductors are accessible to the public. Grounding conductors for primary arresters when guarded, shall have guards of non-magnetic mate-

93. C. Protection and Guarding Against Contact—Con.

rial unless the grounding conductor is electrically connected to both ends of the metallic guard.

Where a single grounding conductor is used for grounding a circuit and the resistance of the grounding electrode used is in excess of three ohms, the grounding conductor, except in rural districts, shall be guarded as required for the current-carrying conductors of the circuit, except as follows:

Exception 1: A grounding conductor for a circuit having at least two ground connections, where such conductor is entirely outside buildings and has a tensile strength and current-carrying capacity not less than No. 8 copper wire.

Exception 2: In stations substantial bare ground busses may be used.

2. INDOOR INSTALLATIONS

A system or common grounding conductor, No. 4 or larger, may be attached to the surface on which it is carried without the use of knobs, tubes or insulators. It need not have protection unless exposed to severe mechanical injury. A No. 6 grounding conductor, which is free from exposure to mechanical injury, may be run along the surface of the building construction without metal covering or protection, if it is rigidly stapled to the construction; otherwise, it shall be in conduit, electrical metallic tubing or cable armor. Grounding conductors smaller than No. 6 shall be in conduit, electrical metallic tubing or cable armor. Metallic enclosures for grounding conductors shall be continuous from the point of attachment to cabinets or equipment to the grounding electrode, and shall be securely fastened to the ground clamp or fitting.

A grounding conductor for conductor enclosures and equipment only shall meet the requirements of the preceding paragraph except that where smaller than No. 6, as permitted by Rules 93B5 and 93B6, it need not be armored or installed in a raceway if run through the hollow spaces of a wall or partition or otherwise run so as to be not subject to mechanical injury.

93. GROUNDING CONDUCTOR—Continued

D. Underground.

Wires used for grounding conductors, if laid underground, shall, unless otherwise mechanically protected, be laid slack to prevent their being readily broken, and shall have joints carefully painted or otherwise protected against corrosion.

E. Common Grounding Conductor for Circuits, Metal Raceways, and Equipment.

The grounding conductor of an interior wiring system may be used also as the grounding conductor for equipment, conduit, and other metal raceways or enclosures for conductors, including service conduit or cable sheath and service equipment, provided such grounding conductor meets the current-carrying-capacity requirements for service raceways, as specified in paragraph B above; and provided further, that the secondary distribution circuit supplying the interior wiring system has at least one additional ground at the transformer or elsewhere.

94. GROUND CONNECTIONS

The ground connection shall be permanent and effective, and be made as indicated below, but always to metallic water-piping systems, if available. Where the alternating current system is connected to a grounding electrode in or at a building as specified in Rule 92B, the same electrode shall be used to ground the conductor enclosures and equipment in or on that building.

A. Piping Systems.

For circuits, equipment, and arresters at supply stations, connections shall be made to all available active metallic underground water-piping systems between which no appreciable difference of potential normally exists, if the pipe is of sufficient capacity, and to one such system if appreciable differences of potential do exist between them. At other places connections shall be made to at least one such system, if available.

Note: The protective grounding of electric circuits and equipment to metallic water-pipe systems in accordance with these rules should always be permitted, since such grounding offers the most effective protection to life and property and is not injurious to the piping systems.

94. A. Piping Systems—Continued

Ground connections from circuits should not be made to jointed piping within buildings except metallic water piping.

B. Alternate Methods.

Where underground metallic water piping systems are not available, other methods which will secure the desired permanence and conductance may be permitted. In many cases metal well casings, and similar buried metal structures of considerable extent will be available and may be used in lieu of extended buried metallic water-piping systems.

In some cases ground connection may be made to the steel frame of a building containing the grounded circuits or equipment, to which frames of machines and other noncurrent-carrying surfaces should also then be connected. In such cases the building frame should be itself well grounded by effective connection to the ground. This may require the use of made electrodes for steel-frame buildings supported on masonry or concrete footings.

C. Made Electrodes.

If resort must be had to made (buried or driven) electrodes their number should be determined by the following requirements:

1. Not more than one such ground is required for lightning arresters, except where needed for large current capacity.
2. At least two grounds are required for low-voltage alternating-current distribution circuits at transformers or elsewhere, except as specified in 3.
3. Where no part of the circuit or equipment protected can be reached by persons while they are standing on the ground or damp floors, or by persons while touching any metallic piping to which the grounding conductor is not effectively connected, a single made electrode may be used even if its resistance exceeds that specified in rule 96. In such cases it is desirable to provide guards for the grounding conductor in accordance with Rule 93C wherever it is otherwise accessible.

94. GROUND CONNECTIONS—Continued

D. Grounds to Railway Returns.

Protective ground connections should not be made to railway negative-return circuits when other effective means of grounding are available, except ground connections from electric-railway lightning arresters.

When ground connections are of necessity made to the grounded track return of electric railways, they shall be made in such a manner as not to afford a metallic connection (as indirectly through a grounded neutral with multiple grounds) between the railway return and the other grounded conducting bodies (such as buried piping and cable sheaths).

Note: This rule does not prohibit the making of drainage connections (which are not protective grounds) between piping systems and railway negative-return circuits for the prevention of electrolysis.

Multiple protective ground connections from other circuits to railway returns should be avoided; and where multiple made electrode grounds are used on such other circuits near such railway returns, they should be so arranged as to prevent the flow of any considerable current in and between such connections, which flow would reduce their effectiveness, or otherwise cause damage.

95. METHOD.

A. Piping.

The point of attachment of a grounding conductor to a metallic water-piping system shall be on the street side of the water meter, or on a cold-water pipe of adequate current-carrying capacity, as near as practicable to the water-service entrance to the building or near the equipment to be grounded, and shall be accessible except by special permission. If the point of attachment is not on the street side of the water meter, the metallic water-piping system shall be made electrically continuous by bonding together all parts between the attachment and the pipe entrance which are liable to become disconnected, as at meters and service unions. If water meters are located outside buildings or in concrete pits within buildings where piping connections are imbedded in concrete flooring, the ground connections may be made on the building side of the meters.

95. METHOD—Continued

B. Ground Clamps.

The ground connection to metallic water piping systems shall be made by means of an approved clamp or fitting firmly bolted to the pipe after all rust and scale have been removed, or by means of a brass plug which has been tightly screwed into a pipe fitting or, where the pipe is of sufficient thickness, screwed into a hole in the pipe itself, or by other equivalent means. The grounding conductor shall be attached to the clamp, fitting or plug by means of an approved solderless connector. The point of connection shall be as readily accessible as practicable.

C. Contact Surfaces.

If conduit, couplings, or fittings having protective coating of nonconducting material, such as enamel, are used, such coating shall be thoroughly removed from threads of both couplings and conduit and such surfaces of fittings where the conduit or ground clamp is secured, in order to obtain the requisite good connection.

Conduits, other metal raceways, and the armor of cables shall be securely fastened in outlet boxes, junction boxes, and cabinets, so as to secure good electrical connection.

D. Made Electrode Grounds.

Where made electrodes are used, they shall, as far as practicable, be embedded below permanent moisture level. Made electrodes shall be of materials or combinations of materials which shall not corrode excessively under the existing conditions.

Buried-plate electrodes shall present not less than 2 square feet of surface to exterior soil. Electrodes of plate copper shall be at least 0.06 inch in thickness. Electrodes of iron or steel plates shall be at least $\frac{1}{4}$ inch in thickness.

Electrodes of iron or steel pipe shall be galvanized and not less than $\frac{1}{2}$ inch (nominal size). Electrodes of rods of steel or iron shall be at least $\frac{5}{8}$ inch minimum cross-sectional dimension. Approved rods of nonferrous materials or their approved equivalent used for electrodes shall be not less than $\frac{1}{2}$ inch in

95. D. Made Electrode Grounds—Continued

diameter. Driven electrodes of pipes or rods, if of less than standard commercial length, shall preferably be of one piece, and, except where rock bottom is encountered, shall be driven to a depth of at least 8 feet regardless of size or number of electrodes used. Such pipes or rods shall have clean metal surfaces and shall not be covered with paint, enamel, or other poorly conducting materials.

Made electrodes may be wire attached to the pole previous to the setting of the pole. The wire shall be of copper or of other metals which will not corrode excessively under the existing conditions and shall have a continuous bare or exposed length below ground level of not less than 12 ft., shall extend to the bottom of the pole, and shall be not smaller than No. 6.

96. GROUND RESISTANCE.

A. Limits.

Made electrodes shall, if practicable, have a resistance to ground not to exceed 25 ohms. If the resistance is not as low as 25 ohms, two or more electrodes connected in parallel shall be used.

Note: Continuous metallic underground water-piping systems in general have a resistance to ground of less than 3 ohms. Metal frames of buildings and local metallic underground water-piping systems, metal well casings, and the like, have, in general, a resistance substantially below 25 ohms.

B. Checking.

The resistance of electric supply station grounds should be checked when made.

All ground connections shall be inspected periodically. Ground connections on distribution circuits should, when installed, be tested for resistance unless multiple grounding is used.

97. SEPARATE GROUNDING CONDUCTORS AND GROUNDING ELECTRODES.

A. Grounding Conductors.

Grounding conductors from equipment and circuits of each of the following classes, if required by these rules, shall be run separately to the ground-

97. A. Grounding Conductors—Continued

ing electrode or to a sufficiently heavy grounding bus or system ground cable which is well connected to ground at more than one place, except as provided in paragraph C and in Rule 285C.

1. Primary lightning arresters, except as is provided in Rule 97C.
2. Secondaries connected to low-voltage lighting or power circuits, except that if a secondary distribution system has multiple grounds, utilization equipment and wire enclosures may use the same grounding conductor.
3. Frames of direct-current railway equipment and of equipment operating in excess of 750 volts.
4. Lightning rods.

B. Electrodes.

Where conditions require more than one made electrode ground, separate grounding conductors as well as separate grounding electrodes shall be used except that a single grounding conductor may be connected to a group of electrodes which have been bonded together for the purpose of lowering the resistance to ground of the group. This does not prohibit the bonding together of these separate made electrodes or groups of electrodes near the ground level.

C. Interconnection of Primary Arrester and Secondary Neutral.**1. SOLID INTERCONNECTION.**

The grounding conductor of a lightning arrester protecting a transformer which supplies a secondary distribution system may be interconnected with the grounded conductor of such secondary distribution system provided that either:

- (a) In urban water-pipe areas, there are four metallic water-pipe grounds in each mile of secondary and not less than four such ground connections on any individual secondary, in which case the direct earth grounding connection at the arrester may be omitted, or

97. C. Interconnection of Primary Arrester and Secondary Neutral—Continued

- (b) The secondary has elsewhere a grounding-connection to a continuous metallic underground water-piping system, in addition to the direct earth grounding connection of the arrester, or
- (c) The secondary neutral (which may or may not be common with the primary neutral) has at least four ground connections in each mile of line in addition to a ground connection at each individual service and in addition to the direct earth grounding connection of the arrester, or
- (d) Permission is obtained from the administrative authority for any other condition.

2. INTERCONNECTION THROUGH SPARK GAP.

Where the secondary is not grounded as in item 1, interconnection, if made, shall be through a spark gap having a 60-cycle breakdown voltage of at least twice the primary circuit voltage but not necessarily more than 10 kilovolts, and there shall be at least one other ground on the grounded conductor of the secondary that is at least 20 feet distant from the lightning-arrester grounding electrode.

PART 2. SAFETY RULES FOR THE INSTALLATION AND MAINTENANCE OF ELECTRIC SUPPLY AND COMMUNICATION LINES

C O N T E N T S

	Page
Sec. 20. Scope, nature, and application of rules.....	42
200. Scope of rules.....	42
A. Extent of application.....	42
B. Not complete specifications.....	42
C. Conformity with good practice.....	42
201. Application of the rules and exemptions.....	42
A. Intent, modification.....	42
B. Realization of intent.....	42
C. Temporary installations.....	43
D. Waiver in emergencies.....	43
202. Minimum requirements.....	43
Sec. 21. General requirements applying to overhead and under- ground lines.....	43
210. Design and construction.....	43
211. Installation and maintenance.....	44
212. Accessibility.....	44
213. Inspection and tests of lines and equipment....	44
A. When in service.....	44
1. Initial compliance with rules.....	44
2. Inspection.....	44
3. Tests.....	44
4. Record of defects.....	44
5. Remedying defects.....	44
B. When out of service.....	44
1. Lines infrequently used.....	44
2. Lines temporarily out of service.....	44
3. Lines permanently abandoned.....	45
214. Isolation and guarding.....	45
A. Current-carrying parts.....	45
B. Non-current-carrying parts.....	45
215. Grounding of circuits and equipment.....	45
A. Methods.....	45
B. Parts to be grounded.....	46
C. Use of ground as part of circuit.....	46
216. Arrangement of switches.....	46
A. Accessibility.....	46
B. Indicating open or closed position.....	46
C. Locking.....	46
D. Uniform position.....	47

	Page
Sec. 22. Relations between various classes of lines.....	47
220. Relative levels.....	47
A. Standardization of levels.....	47
B. Relative levels—supply and communica- tion conductors.....	47
1. Preferred levels.....	47
2. Minor extensions.....	48
3. Special construction for supply cir- cuits, the voltage of which is 550 volts or less and carrying power not in excess of 3,200 watts.....	48
C. Relative levels—supply lines of different voltage classifications.....	50
1. At crossings or conflicts.....	50
2. On poles used only by supply con- ductors.....	50
221. Avoidance of conflict.....	51
222. Joint use of poles by supply and communica- tion circuits.....	51
A. Advantages.....	51
B. Cooperative study.....	51
C. Conditions under which joint use is de- sirable.....	52
223. Separate pole lines.....	52
Sec. 23. Clearances.....	52
230. General.....	52
A. Application.....	52
B. Constant-current circuits.....	53
C. Supply cables.....	53
D. Neutral conductors.....	53
E. Maintenance of clearances.....	53
231. Horizontal clearances of supporting structures from other objects.....	53
A. From fire hydrants.....	53
B. From street corners.....	54
C. From curbs.....	54
D. From railroad tracks.....	54
232. Vertical clearance of wires above ground or rails.....	54
A. Basic clearances.....	55
Table 1.....	56
B. Increased clearances.....	58
1. Spans longer than specified in rule 232, A, 2.....	58
2. Voltages exceeding 50,000 volts.....	60
3. Conductors supported by suspension- type insulators at crossings over track rails.....	60
4. Methods of avoiding this increase of clearance.....	61
C. Supply pole wiring at underground risers.....	61
Table 2.....	61

Sec. 23. Clearances—Continued	Page
233. Crossing clearances of wires carried on different supports.....	62
A. Basic clearances.....	62
Table 3.....	63
B. Increased clearances.....	64
1. Crossing spans longer than specified in rule 233, A, 2.....	64
2. Voltages exceeding 50,000 volts.....	66
3. Conductors supported by suspension-type insulators at crossings over communication wires.....	66
4. Methods of avoiding this increase of clearance.....	67
234. Clearances of conductors of one line from other conductors and structures.....	67
A. Clearances from conductors of another line.....	67
B. Clearances from supporting structures of another line.....	67
C. Clearances from buildings.....	68
1. General.....	68
2. Ladder space.....	68
3. Open supply conductors attached to buildings.....	68
4. Conductors passing by or over buildings.....	69
(a) Minimum clearances.....	69
Table 4.....	69
(b) Guarding of supply conductors.....	70
D. Clearance from bridges.....	70
1. Clearances of conductors from bridges.....	70
2. Guarding trolley-contact conductors located under bridges.....	70
(a) Where guarding is required..	70
Table 5.....	71
(b) Nature of guarding.....	71
235. Minimum line-conductor clearances and separations at supports.....	71
A. Separation between conductors on pole lines.....	71
1. Application of rule.....	71
(a) Multiconductor wires or cables.....	71
(b) Conductors supported by messengers or span wires..	72
(c) Measurement of clearances..	72

Sec. 23. Clearances—Continued

235. Minimum line-conductor clearances and separations at supports—Continued

A. Separation between conductors on pole lines—Continued

2. Horizontal separations between line conductors-----

(a) Fixed supports-----

Table 6-----

Table 7-----

Table 8-----

(b) Suspension insulators not restrained from movement--

3. Clearances in any direction from line conductors to supports, and to vertical or lateral conductors, span or guy wires, attached to the same support-----

(a) Fixed supports-----

Table 9-----

(b) Suspension insulators not restrained from movement--

4. Conductor separation — vertical racks-----

5. Separation between supply circuits of different voltage classifications on the same crossarm-----

B. Separation between conductors attached to buildings-----

C. Separation between conductors attached to bridges-----

236. Climbing space-----

A. Location and dimensions-----

B. Portions of supporting structures in climbing space-----

C. Crossarm location relative to climbing space-----

D. Location of supply apparatus relative to climbing space-----

E. Climbing space through conductors on crossarms-----

1. Conductors of same voltage classification on same crossarm-----

2. Conductors of different voltage classification on same crossarm-----

3. Horizontal climbing-space dimensions-----

Table 10-----

F. Climbing space on buckarm construction--

G. Climbing space past longitudinal runs not on crossarms-----

H. Climbing space past vertical conductors--

I. Climbing space near ridge-pin conductors--

Sec. 23. Clearances—Continued	Page
237. Working space.....	82
A. Location of working spaces.....	82
B. Dimensions of working spaces.....	82
1. Along the crossarm.....	82
2. At right angles to the crossarm.....	82
3. Vertically.....	82
C. Location of vertical and lateral conductors relative to working spaces.....	83
D. Location of buckarms relative to working spaces.....	83
1. Standard height of working space....	83
2. Reduced height of working space....	83
238. Vertical separation between line conductors, cables, and equipment located at different levels on the same pole or structure.....	84
A. Vertical separation between horizontal crossarms.....	84
1. Basic separations.....	84
Table 11.....	85
2. Increased separations for voltages exceeding 50,000 volts.....	86
B. Vertical separation between line conductors on horizontal crossarms....	86
1. Where conductors on the crossarm are of the same voltage classification.....	86
2. Where conductors of different voltage classifications are on same crossarm.....	86
3. Conductors of different sags on same support.....	86
C. Separation in any direction.....	87
D. Vertical separation for line conductors not carried on crossarms.....	88
E. Vertical separation between conductors and non-current-carrying metal parts of equipment.....	88
1. Equipment.....	88
2. Separations in general.....	88
3. Separations for span wires and brackets.....	89
Table 12.....	89
4. Separation from drip loops of street light brackets.....	90
239. Clearances of vertical and lateral conductors from other wires and surfaces on the same support.....	90
A. Location of vertical or lateral conductors relative to climbing spaces, working spaces, and pole steps.....	90
B. Conductors not in conduit.....	91
C. Mechanical protection near ground.....	91

Sec. 23. Clearances—Continued

239. Clearances of vertical and lateral conductors from other wires and surfaces on the same support—Continued

	Page
D. Requirements for vertical and lateral supply conductors on supply line poles or within supply space on jointly used poles.....	92
1. General clearances.....	92
Table 13.....	92
2. Special cases.....	92
(a) Side-arm construction.....	92
(b) On insulators.....	93
(c) Conductors to street lamps.....	93
(d) Conductors of less than 300 volts.....	93
(e) Other conditions.....	93
E. Requirements for vertical and lateral communication conductors on communication line poles or within the communication space on jointly used poles.....	94
1. Clearances from wires.....	94
2. Clearances from pole and crossarm surfaces.....	94
F. Requirements for vertical supply conductors passing through communication space on jointly used poles.....	95
1. Metal-sheathed supply cables.....	95
(a) Extent of covering.....	95
(b) Nature of covering.....	95
2. Supply conductors.....	96
(a) In conduit.....	96
(b) On pins and insulators.....	96
(c) Installed on the pole surface.....	96
(d) Suspended from supply cross-arm.....	97
3. Supply grounding wires.....	97
4. Separation from through bolts.....	98
G. Requirements for vertical communication conductors passing through supply space on jointly used poles.....	98
1. Metal-sheathed communication cables.....	98
2. Communication conductors.....	99
3. Communication grounding conductors.....	99
4. Separation from through bolts.....	99
Sec. 24. Grades of construction.....	99
240. General.....	99
241. Application of grades of construction to different situations.....	100
A. Supply cables.....	100
1. Specially installed cables.....	100
2. Other cables.....	100
B. Two or more conditions.....	100
C. Order of grades.....	100

Sec. 24. Grades of construction—Continued	
241. Application of grades of construction to different situations—Continued	Page
D. At crossings.....	100
1. Grade of upper line.....	100
2. Grade of lower line.....	100
3. Multiple crossings.....	101
Table 14.....	102
E. Conflicts.....	102
1. How determined.....	102
2. Conductor conflict.....	102
3. Structure conflict.....	102
242. Grades of construction for conductors.....	102
A. Status of constant-current circuits.....	102
B. Status of railway feeders and trolley-contact conductors.....	103
C. Status of communication circuits used exclusively in the operation of supply lines.....	103
D. Status of fire-alarm conductors.....	103
Table 15.....	104
E. Status of neutral conductors of supply circuits.....	106
Table 16.....	106
243. Grades of supporting structures.....	107
A. Poles or towers.....	107
B. Crossarms.....	107
C. Pins, insulators, and conductor fastenings.....	108
Sec. 25. Loading for grades B, C, and D.....	109
250. General loading map.....	109
Figure 3.....	110
251. Conductor loading.....	111
252. Loads upon line supports.....	112
A. Assumed vertical loading.....	112
B. Assumed transverse loading.....	112
1. Heavy loading (H).....	112
2. Medium loading (M).....	113
3. Light loading (L).....	113
4. Trolley-contact conductors.....	113
5. Flat surfaces.....	113
6. At angles.....	113
C. Assumed longitudinal loading.....	114
1. Change in grade of construction.....	114
2. Jointly used poles at crossings over railroads or communication lines..	114
3. Dead-ends.....	115
4. Communication conductors on unguyed supports at railroad crossings.....	115

Sec. 25. Loading for grades B, C, and D—Continued	
252. Loads upon line supports—Continued	Page
D. Average span lengths.....	115
1. General.....	115
2. Crossings.....	115
E. Simultaneous application of loads.....	116
Sec. 26. Strength requirements.....	116
260. Preliminary assumptions.....	116
261. Grades B and C construction.....	116
A. Poles and towers.....	116
1. Average strength of three poles.....	116
2. Reinforced-concrete poles.....	117
3. Metal supporting structures.....	117
(a) Vertical and transverse strength.....	118
(b) Longitudinal strength.....	118
(c) Minimum strength.....	118
(d) Strength at angles in a line.....	118
Table 17.....	119
(e) Thickness of metal.....	119
Table 18.....	119
(f) Unsupported length of compression members.....	119
(g) General construction features.....	120
Table 19.....	120
(h) Protective covering or treatment.....	120
4. Wood poles.....	120
(a) Transverse strength.....	120
(b) Longitudinal and dead-end strength.....	121
Table 20.....	121
(c) Ultimate fiber stress.....	122
(d) Allowable percentages of ultimate stress.....	122
Table 21.....	123
(e) Freedom from defects.....	123
(f) Minimum pole sizes.....	123
(g) Spliced and stub-reinforced poles.....	123
5. Transverse - strength requirements for structures where side guying is required, but can only be installed at a distance.....	124
6. Longitudinal-strength requirements for sections of higher grade in lines of a lower grade of construction.....	124
7. Strength at angles in a line.....	126
B. Foundations.....	126
1. Use of foundations.....	126

Sec. 26. Strength requirements—Continued

261. Grades B and C construction—Continued

B. Foundations—Continued	Page
2. Strength of foundations.....	127
C. Guys.....	127
1. General.....	127
2. For poles in insecure earth.....	127
3. On metal structures.....	127
4. On wood or concrete poles.....	128
5. Strength of guys.....	128
D. Crossarms.....	129
1. Vertical strength.....	129
2. Bracing.....	129
3. Longitudinal strength.....	129
(a) General.....	129
(b) At dead-ends and at ends of higher-grade construction in line or lower grade.....	129
(c) At ends of transversely weak sections.....	129
(d) Methods of meeting rule 261, D.....	130
4. Dimensions of crossarms of selected yellow pine or fir.....	130
Table 22.....	130
5. Double crossarms or brackets.....	131
6. Location.....	131
E. Pins and conductor fastenings.....	131
1. General.....	131
2. Strength.....	132
3. Double pins and conductor fasten- ings.....	133
4. Single supports used in lieu of double wood pins.....	133
F. Open supply conductors.....	133
1. Material.....	133
2. Minimum sizes of supply conductors. Table 23.....	134
3. Lightning-protection wires.....	134
4. Sags and tensions.....	134
5. Splices and taps.....	135
6. Trolley-contact conductors.....	135
G. Supply cables.....	135
1. Specially installed supply cables.....	135
(a) Messengers.....	136
(b) Grounding of cable sheath and messenger.....	136
(c) Cable splices.....	136
(d) Cable insulation.....	136
2. Other supply cables.....	136
(a) Messenger.....	136
(b) Cable.....	136
H. Open-wire communication conductors....	137

Sec. 26. Strength requirements—Continued	Page
261. Grades B and C construction—Continued	
I. Communication cables.....	137
1. Metal-sheathed communication ca- bles.....	137
2. Messenger.....	137
J. Paired communication conductors.....	137
1. Paired conductors supported on mes- senger.....	137
(a) Use of messenger.....	137
(b) Sag of messenger.....	137
(c) Size and sag of conductors..	138
2. Paired conductors not supported on messenger.....	138
(a) Above supply lines.....	138
(b) Above trolley-contact con- ductors.....	138
K. Short-span crossing construction.....	139
L. Cradles at supply-line crossings.....	139
M. Protective covering or treatment for metal work.....	139
262. Grade D construction.....	139
A. Poles.....	139
1. Strength of unguyed poles.....	139
2. Strength of guyed poles.....	140
3. Strength requirements for poles where guying is required, but can only be installed at a distance....	140
4. Pole locations at crossings.....	140
5. Freedom from defects.....	141
6. Minimum pole size.....	141
7. Spliced and stub-reinforced poles...	141
8. Poles located at crossings over spur tracks.....	141
B. Pole settings.....	142
C. Guys.....	142
1. General.....	142
2. Where used.....	142
Table 24.....	143
3. Guys used for transverse strength..	144
4. Guys used for longitudinal strength..	144
(a) Direction of head guys.....	144
(b) Size and number of head guys.....	144
5. Maintenance.....	144
D. Crossarms.....	144
1. Material.....	144
2. Minimum size.....	144
(a) Wood crossarms.....	144
3. Double crossarms.....	145
E. Brackets and racks.....	145
F. Pins.....	145
1. Material.....	145
2. Strength.....	145

Sec. 26. Strength requirements—Continued	
262. Grade D construction—Continued	
F. Pins—Continued	Page
3. Size	145
G. Insulators	146
H. Attachment of conductor to insulator	146
I. Conductors	146
1. Material	146
2. Size	146
Table 25	146
3. Paired conductors without mes-	
sengers	147
4. Sags	147
Table 26	147
5. Splices and taps	148
J. Messengers	148
1. Minimum size	148
Table 27	149
2. Sags and tensions	149
K. Inspection	149
263. Grade N construction	149
A. Poles and towers	149
B. Guys	150
C. Crossarm strength	150
D. Supply-line conductors	150
1. Material	150
2. Size	150
E. Supply services	151
1. Material	151
2. Size of open-wire services	151
(a) Not over 750 volts	151
Table 28	152
(b) Exceeding 750 volts	152
3. Sag, open-wire services	152
(a) Not over 750 volts	152
Table 29	152
(b) Exceeding 750 volts	153
4. Cabled services	153
(a) Size	153
(b) Sag	153
(c) Insulation	153
F. Lightning-protection wires	153
G. Trolley-contact conductors	153
H. Cradles at supply-line crossings	153
I. Communication conductors	153
Sec. 27. Line insulators	153
270. Application of rule	153
271. Material and marking	154

Sec. 27. Line insulators—Continued	Page
272. Electrical strength of insulators in strain position.....	154
273. Ratio of flash-over to puncture voltage.....	154
274. Test voltages.....	154
Table 30.....	154
275. Factory tests.....	155
276. Selection of insulators.....	155
A. Insulators for constant-current circuits..	155
B. Insulators for single-phase circuits directly connected to three-phase circuits.....	155
C. Insulators for nominal voltages between conductors.....	155
277. Protection against arcing.....	156
278. Compliance with rule 277 at crossings.....	156
Sec. 28. Miscellaneous requirements.....	157
280. Supporting structures for overhead lines.....	157
A. Poles and towers.....	157
1. Rubbish.....	157
2. Guarding poles.....	158
(a) Protection against mechanical injury.....	158
(b) Protection against climbing..	158
3. Warning signs.....	158
(a) On poles or towers.....	158
(b) On bridge fixtures.....	158
4. Grounding metal poles.....	158
5. Pole steps.....	159
(a) Metal steps.....	159
6. Identification of poles.....	159
7. Obstructions.....	159
B. Crossarms.....	159
1. Location.....	159
2. Bracing.....	159
C. Unusual conductor supports.....	160
281. Tree trimming.....	160
A. General.....	160
B. At wire crossings and railroad crossings..	160
282. Guying.....	160
A. Where used.....	160
B. Strength.....	161
C. Point of attachment.....	161
D. Guy fastenings.....	161
E. Guy guards.....	161
F. Insulating guys from metal poles.....	162
G. Anchor rods.....	162
H. Grounding.....	162
283. Insulators in guys attached to poles and towers..	162
A. Properties of guy insulators.....	162
1. Material.....	162
2. Electrical strength.....	162
3. Mechanical strength.....	163
B. Use of guy insulators.....	163
1. One insulator.....	163
2. Two insulators.....	163

Sec. 28. Miscellaneous requirements—Continued

283. Insulators in guys attached to poles and towers—Continued	
B. Use of guy insulators—Continued	Page
3. Relative location of insulators in guys located one above the other	164
4. Insulators not required	164
284. Span-wire insulators	164
A. Mechanical strength	164
B. Use of span-wire insulators	164
285. Overhead conductors	165
A. Identification	165
B. Branch connections	165
1. Accessibility	165
2. Clearance	165
C. Common neutral	165
286. Equipment on poles	166
A. Identification	166
B. Location	166
C. Guarding	166
D. Hand clearance	166
E. Street-lighting equipment	166
1. Clearances from pole surface	166
2. Clearances above grounds	167
3. Horizontal clearance	167
4. Material of suspension	167
5. Insulators in suspension ropes	167
6. Arc-lamp disconnectors	167
7. Grounding lamp posts	168
F. Transformers	168
287. Protection for exposed overhead communication lines	168
A. Open wire	168
B. Metal-sheathed cable	168
288. Circuits of one class used exclusively in the operation of circuits of another class	169
A. Overhead communication circuits used exclusively in the operation of supply circuits	169
1. Choice of method	169
2. Guarding	169
3. Where ordinary communication line construction may be used	169
4. Where supply-line construction must be used	170
B. Supply circuits used exclusively in the operation of communication circuits	170
1. Where run in open wire	170
2. Where run in aerial or underground cable—(See also sec. 29)	171
289. Overhead electric railway construction	171
A. Trolley-contact conductor supports	171
B. High-voltage contact conductors	172
C. Third rails	172

Sec. 28. Miscellaneous requirements—Continued	
289. Overhead electric railway construction—Con.	Page
D. Prevention of loss of contact at railroad crossings.....	172
E. Guards under bridges.....	172
1. Where guarding is required.....	172
2. Nature of guarding.....	173
Sec. 29. Rules for underground lines.—(See also rule 288, B, 2)	173
290. Location.....	173
A. General location.....	173
B. Ducts.....	173
C. Manholes.....	173
291. Construction of duct and cable systems.....	173
A. Material, size, and finish of ducts.....	173
B. Grading of ducts.....	173
C. Settling.....	174
D. Clearance.....	174
1. General.....	174
2. Below base of rail.....	174
3. Iron-pipe conduit.....	175
E. Separations between supply and communication duct systems.....	175
1. General.....	175
2. Entering manholes.....	176
F. Duct entrances into manholes.....	176
G. Sealing laterals.....	176
H. Duct arrangement for dissipation of heat.....	176
292. Construction of manholes.....	176
A. Minimum strength.....	176
B. Dimensions.....	177
1. Width.....	177
2. Working space.....	177
C. Drainage.....	177
D. Ventilation.....	177
E. Manhole openings.....	177
F. Manhole covers.....	178
G. Supports for cables.....	178
H. Manhole location.....	178
293. Location of cables.....	178
A. Accessibility.....	178
B. Cables carrying large currents.....	178
C. Separation between conductors.....	178
1. Cables of different voltages.....	178
2. Cables of different systems.....	178
3. Cables of supply and communication systems.....	179
(a) General.....	179
(b) In the same manhole.....	179
294. Protection and separation of conductors buried in earth.....	179
A. Separation.....	179
B. Protection at crossing of cables.....	180
C. Protection of cables installed parallel....	180

Sec. 29. Rules for underground lines—Continued	Page
295. Protection of conductors in duct systems and manholes.....	181
A. Protection against arcing.....	181
B. Bonding.....	181
296. Guarding of live parts in manholes.....	181
A. Conductor joints or terminals.....	181
B. Apparatus.....	181
297. Construction at risers from underground.....	181
A. Separation between risers of communication and supply systems.....	181
B. Mechanical protection of conductors.....	182
C. Grounding of riser pipes.....	182
D. Conductor terminal construction.....	182
1. Protection against moisture.....	182
2. Insulation of conductors.....	182
E. Clearance above ground for open supply wiring.....	182
298. Identification of conductors.....	183
299. Identification of apparatus connected in multiple.....	183

SEC. 20. SCOPE, NATURE, AND APPLICATION OF RULES

200. SCOPE OF RULES.

A. Extent of Application.

The following rules apply to electric supply and communication lines in overhead and underground construction whether operated in connection with public utilities, privately or municipally owned, with industrial establishments, or otherwise.

B. Not Complete Specifications.

These rules are not complete specifications but are intended to embody the requirements which are most important from the standpoint of safety to employees and the public.

C. Conformity with Good Practice.

Construction should be made according to accepted good practice for the given local conditions in all particulars not specified in the rules.

201. APPLICATION OF THE RULES AND EXEMPTIONS.

A. Intent, Modification.

The rules shall apply to all installations except as modified or waived by the proper administrative authority. They are intended to be so modified or waived whenever they involve expense not justified by the protection secured or for any other reasons are impracticable; or whenever equivalent or safer construction can be more readily provided in other ways.

B. Realization of Intent.

The intent of the rules will be realized:

1. By applying the rules in full to all new installations, reconstructions, and extensions, except where for special reasons any rule is shown to be impracticable or where the advantage of uniformity with existing construction is greater than the advantage of construction in conformity with the rules.

201. B. Realization of Intent—Continued

2. By placing guards on existing installations or otherwise bringing them into compliance with the rules, except where the expense involved is not justifiable.

Note: The time allowed for bringing existing installations into compliance with the rules as specified in 2 will be determined by the proper administrative authority.

C. Temporary Installations.

1. It will sometimes be necessary to modify or waive certain rules in cases of temporary installations or installations which are soon to be discarded or reconstructed.
2. **TEMPORARY DECORATIVE LIGHTING.**
Attachment of temporary decorative lighting on poles shall not be made without the concurrence of the owners and/or occupants.

D. Waiver in Emergencies.

In case of emergency or pending decision of the administrator, the person responsible for the installation may decide as to modification or waiver of any rule, subject to review by proper authority, but shall first notify all parties directly concerned in advance of construction.

202. MINIMUM REQUIREMENTS.

The rules state the minimum requirements for spacings, clearances, and strength of construction. More ample spacings and clearances or greater strength of construction may be provided if other requirements are not neglected in so doing.

Note: Some of these minimum values are exceeded in much existing construction; service requirements frequently call for stronger supports and higher factors of safety than the minimum requirements of these rules.

SEC. 21. GENERAL REQUIREMENTS APPLYING TO OVERHEAD AND UNDERGROUND LINES**210. DESIGN AND CONSTRUCTION.**

All electric supply and communication lines and equipment shall be of suitable design and construction for the service and conditions under which they are to be operated.

211. INSTALLATION AND MAINTENANCE.

All electric supply and communication lines and equipment shall be installed and maintained so as to reduce hazards to life as far as practicable.

212. ACCESSIBILITY.

All parts which must be examined or adjusted during operation shall be arranged so as to be readily accessible to authorized persons by the provision of adequate climbing spaces, working spaces, working facilities, and clearances between conductors.

213. INSPECTION AND TESTS OF LINES AND EQUIPMENT.**A. When in Service.****1. INITIAL COMPLIANCE WITH RULES.**

Lines and equipment shall comply with these safety rules upon being placed in service.

2. INSPECTION.

Lines and equipment shall be systematically inspected from time to time by the person responsible for the installation.

3. TESTS.

Lines and equipment shall be subjected, when necessary, to tests which will determine their fitness for service.

4. RECORD OF DEFECTS.

Any defects revealed by inspection, if not promptly corrected, shall be recorded.

5. REMEDYING DEFECTS.

Defective lines and equipment shall be put in good order or effectively disconnected.

B. When Out of Service.**1. LINES INFREQUENTLY USED.**

Supply lines and equipment infrequently used shall be inspected to see that they are in safe condition for service.

2. LINES TEMPORARILY OUT OF SERVICE.

Lines temporarily out of service shall be maintained in such condition that a hazard will not be created.

213. B. When Out of Service—Continued

3. LINES PERMANENTLY ABANDONED.

Lines permanently abandoned shall be removed or maintained in a safe condition.

Note: Overhead service drops to consumers are often disconnected without removal when the service is discontinued. This is considered good practice when it is undesirable to remove the service drop entirely.

214. ISOLATION AND GUARDING.

A. Current-carrying Parts.

To promote safety to the general public and to employees not authorized to approach conductors and other current-carrying parts of electric supply lines, such parts shall be arranged so as to provide adequate clearance from the ground or other space generally accessible, or shall be provided with guards so as to isolate them effectively from accidental contact by such persons.

B. Noncurrent-carrying Parts.

Ungrounded metal-sheathed service cables, service conduits, metal fixtures, and similar noncurrent-carrying parts, if located in urban districts and where liable to become charged to more than 300 volts to ground, shall be isolated or guarded so as not to be exposed to accidental contact by unauthorized persons.

As an alternative to isolation or guarding, grounding of certain noncurrent-carrying parts is permitted by rule 215, B, and rule 280, A, 4.

215. GROUNDING OF CIRCUITS AND EQUIPMENT.

A. Methods.

The methods to be used for effective grounding for lightning arresters of supply lines, for circuits, for equipment and for wire raceways are given in section 9. The methods to be used for grounding of lightning arresters of communication lines are specified in rule 392, part 3 of this code.

215. GROUNDING OF CIRCUITS AND EQUIPMENT—Continued

B. Parts to be Grounded.

In urban districts metal conduits, cable sheaths, metal lamp posts, and frames, cases, and hangers of equipment shall be effectively grounded.

Exception 1: This rule does not apply when such parts are guarded from accidental contact by unauthorized persons.

Exception 2: This rule does not apply where such parts are 8 feet or more above the ground.

Exception 3: This rule does not apply to metal conduit and cable sheaths inclosing communication conductors, or supply conductors of not more than 300 volts to ground, provided such conduit and sheaths are not exposed to probable contact with circuits of more than 300 volts to ground.

Recommendation: It is recommended that supply cables have the sheath bonded to any conduit extending above the ground surface.

Note: Metal conduit above ground which contains extensions from metal-sheathed underground cable is considered to be sufficiently grounded by the cable sheath, provided such sheath is in good contact with the earth or is connected to a good ground. (For method of grounding see section 9.)

C. Use of Ground as Part of Circuit.

Supply circuits shall not be designed to use the ground normally as the sole conductor for any part of the circuit.

216. ARRANGEMENT OF SWITCHES.

A. Accessibility.

All switches shall be readily accessible to authorized persons.

B. Indicating Open or Closed Position.

All switches shall indicate clearly whether they are open or closed.

C. Locking.

Pole-top switches accessible to unauthorized persons shall have provision for locking in both open and closed positions.

216. ARRANGEMENT OF SWITCHES—Continued

D. Uniform Position.

The handles or control mechanism for all switches throughout any system shall have so far as practicable the same position when open and a uniformly different position when closed, in order to minimize operating errors. Where it is advisable to depart from this practice, the switches should be marked so as to minimize the liability of mistakes in operation.

SEC. 22. RELATIONS BETWEEN VARIOUS CLASSES OF LINES

220. RELATIVE LEVELS.

A. Standardization of Levels.

The levels at which different classes of conductors are to be located should be standardized where practicable for any given community by agreement of the utilities concerned.

Note: This practice facilitates the extension of lines and promotes the safety of the public and workers by permitting the relative levels and required clearances to be readily obtained on jointly or commonly used poles as well as at crossings and conflicts.

B. Relative Levels—Supply and Communication Conductors.

1. PREFERRED LEVELS.

Where supply and communication conductors cross each other or are in conflict, or are located on the same poles or towers, the supply conductors shall preferably be carried at the higher level.

Exception: This does not apply to trolley feeders which may be located for convenience approximately at the level of the trolley contact conductor.

Note: Supply lines generally use larger conductors than communication lines so there is less liability of contact between the two if the supply conductors are located in the upper position. This relative location also avoids the necessity of workmen on communication conductors passing through supply conductors and working above them and avoids the necessity of increasing the grade of construction required for communication conductors.

220. B. Relative Levels—Supply and Communication Conductors—Continued

2. MINOR EXTENSIONS.

In localities where the practice of placing conductors of communication circuits for public use above supply conductors has been generally established, minor extensions may be made in either system, keeping the conductors in the same relative position. These extensions should not continue beyond a location at which it becomes practicable to change to the arrangement standardized by these rules.

3. SPECIAL CONSTRUCTION FOR SUPPLY CIRCUITS, THE VOLTAGE OF WHICH IS 550 VOLTS OR LESS AND CARRYING POWER NOT IN EXCESS OF 3,200 WATTS.

Where all circuits are owned or operated by one party or where cooperative consideration determines that the circumstances warrant and the necessary coordinating methods are employed, single-phase alternating-current or two-wire direct-current circuits carrying a voltage of 550 volts or less between conductors, with transmitted power not in excess of 3,200 watts, when involved in the joint use of poles with communication circuits, may be installed in accordance with footnote 8 (3) of table 1 in rule 232, A and footnote 1 of table 11 in rule 238 A, 1, under the following conditions:

- (a) That such supply circuits are of wire having a good grade of commercial double-braid weatherproof covering not smaller than No. 8 AWG medium hard-drawn copper or its equivalent in strength, and the construction otherwise conforms with the requirements for supply circuits of the same class.
- (b) That the supply circuits be placed on the end and adjacent pins of the lowest through signal crossarm and that a 30-inch climbing space be maintained from the ground up to a point at least 24 inches above the supply circuits. The supply circuits shall be rendered conspicuous by the use of insulators of different form or color from others

220. B. Relative Levels—Supply and Communication Conductors—Continued

on the pole line or by stenciling the voltage on each side of the crossarm between the pins carrying each supply circuit, or by indicating the voltage by means of metal characters.

- (c) That there shall be a vertical clearance of at least 2 feet between the crossarm carrying these supply circuits and the next crossarm above. The other pins on the crossarm carrying the supply circuits may be occupied by communication circuits used in the operation or control of a signal system or other supply system if owned, operated and maintained by the same company operating the supply circuits.
- (d) That such supply circuits shall be equipped with arresters and fuses installed in the supply end of the circuit and where the signal circuit is alternating current, the protection shall be installed on the secondary side of the supply transformer. The arresters shall be designed so as to break down at approximately twice the voltage between the wires of the circuit, but the break-down voltage of the arrester need not be less than 1,000 volts. The fuses shall have a rating not in excess of approximately twice the maximum operating current of the circuit, but their rating need not be less than 10 amperes. The fuses likewise shall in all cases have a rating of at least 600 volts, and where the supply transformer is a step-down transformer, shall be capable of opening the circuit successfully in the event the transformer primary voltage is impressed upon them.
- (e) Such supply circuits when enclosed in effectively grounded metal-sheathed cable, or other cables carried on effectively grounded messenger, may be carried on a pole below communication attachments, with not less than 2 ft vertical separation between the supply cable and the lowest communica-

220. B. Relative Levels—Supply and Communication Conductors—Continued

tion crossarm. Communication circuits other than those used in connection with the operation of the supply circuits shall not be carried in the same cable with such supply circuits.

(f) Where such supply conductors are carried below communication conductors, transformers and other apparatus associated therewith shall be attached only to the sides of the crossarm in the space between and at no higher level than, such supply wires.

(g) Lateral runs of such supply circuits carried in a position below the communication space shall be protected through the climbing space by wood molding or equivalent covering, or shall be carried in multiple-conductor cable having a suitable substantial insulating covering, and such lateral runs shall be placed on the under side of the crossarm.

C. Relative Levels—Supply Lines of Different Voltage Classifications (as classified in table 11).

1. AT CROSSINGS OR CONFLICTS.

Where supply conductors of different voltage classifications cross each other or are in conflict, the higher-voltage lines shall preferably be carried at the higher level.

2. ON POLES USED ONLY BY SUPPLY CONDUCTORS.

Where supply conductors of different voltage classifications are on the same poles, relative levels should be as follows:

(a) Where all circuits are owned by one utility, the conductors of higher voltages should generally be placed above those of lower voltage.

Note: These relative levels will often avoid the necessity of increasing the grade of construction for crossarms, pins, and conductor fastenings of the lower-voltage conductors.

220. C. Relative Levels—Supply Lines of Different Voltage Classifications (as classified in table 11)—Continued

(b) Where different circuits are owned by separate utilities, the circuits of each utility may be grouped together and one group of circuits may be placed above the other group provided that the circuits in each group are located so that those of higher voltage are at the higher levels and that either of the following conditions is met:

- (1) A vertical spacing of not less than 4 feet (or 6 feet where required by table 11, rule 238, A, 1) is maintained between the nearest line conductors of the respective utilities (this space to be identified if necessary as a division space).
- (2) Conductors of a lower voltage classification are at a higher level than those of a higher classification only where on the opposite side of the pole.

221. AVOIDANCE OF CONFLICT.

Two parallel pole lines, either of which carries supply conductors, shall where practicable be so separated from each other that neither conflicts with the other. If this is impracticable, then the conflicting line or lines shall be built of the grade of construction required by section 24 for a conflicting line or the two lines shall be combined in a single pole line.

222. JOINT USE OF POLES BY SUPPLY AND COMMUNICATION CIRCUITS.**A. Advantages.**

Joint use of poles under suitable conditions and with certain types of circuits offers many advantages and promotes safety.

B. Cooperative Study.

Joint use involves contractual relations between utilities, consideration of service requirements, and economies as well as safety. It, therefore, requires cooperative study by the utilities concerned.

222. JOINT USE OF POLES BY SUPPLY AND COMMUNICATION CIRCUITS—Continued

C. Conditions Under Which Joint Use Is Desirable.

In the case of local or distribution circuits along the same highway or similar right-of-way, where, under the provisions of section 24 applying to joint use, grade C construction or less would be required, joint use is generally preferable to separate pole lines (except sometimes in rural districts) unless the number of conductors is very large or the character of the circuits makes joint use undesirable.

Where circuits other than those mentioned above are involved, the choice between joint use of poles and separate pole lines shall be determined through cooperative consideration, by the utilities concerned, of all the factors involved, including the character of circuits, the total number and weight of conductors, tree conditions, number and location of branches and service drops, availability of right-of-way, etc. Where such joint use is mutually agreed upon, it shall be subject to the appropriate grade of construction as specified in section 24. Where such joint use is not employed, separate lines as specified in rule 223 shall be used.

In any event, joint use is preferable to separate lines where it would be impractical to avoid an overbuilt conflict with separate lines.

223. SEPARATE POLE LINES.

Where two separate pole lines are to be used, one of which carries supply conductors and the other communication conductors, they shall be separated, if practicable, so that neither conflicts with the other, but if within conflicting distance, they shall be separated as far as practicable and shall be built of the grade of construction required by section 24.

SEC. 23. CLEARANCES

230. GENERAL.

A. Application.

This section covers all clearances, including separations and climbing spaces, involving poles and wires. Clearances of lamps from pole surfaces, from spaces

230. A. Application—Continued

accessible to the general public, and height above ground are covered in rule 286, E.

B. Constant-Current Circuits.

The clearances for constant-current circuits shall be determined on the basis of their nominal full-load voltage.

C. Supply Cables.

As far as clearances are concerned, supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, of all voltages, are classified the same as guys and messengers.

D. Neutral Conductors.

Neutral conductors of supply circuits shall have the same clearances as the phase wires of the circuit with which they are associated, except that neutral conductors which are effectively grounded throughout their length and associated with circuits of 0 to 22,000 volts, may have the same clearances as guys and messengers, except as provided for conductors over railroads in Note 15 of Table 1, Rule 232A.

E. Maintenance of Clearances.

The clearances required by this section shall be maintained at the specified values.

231. HORIZONTAL CLEARANCES OF SUPPORTING STRUCTURES FROM OTHER OBJECTS.

Poles, towers, and other supporting structures and their guys and braces shall have the following horizontal clearances from other objects. The clearance shall be measured between the nearest parts of the objects concerned.

A. From Fire Hydrants.

Not less than 3 feet.

Recommendation: Where conditions permit, a clearance of not less than 4 feet is recommended.

231. HORIZONTAL CLEARANCES OF SUPPORTING STRUCTURES FROM OTHER OBJECTS—Continued

B. From Street Corners.

Where hydrants are located at street corners, poles and towers should not be set so far from the corners as to make necessary the use of flying taps inaccessible from the poles.

C. From Curbs.

Not less than 6 inches measured to the street side of the curb.

D. From Railroad Tracks.

Where railroad tracks are paralleled or crossed by overhead lines, the poles shall, if practicable, be located not less than 12 feet from the nearest track rail.

Exception 1: At sidings a clearance of not less than 7 feet may be allowed, provided sufficient space for a driveway be left where cars are loaded or unloaded.

Exception 2: Supports for overhead trolley contact conductors may be located as near their own track rail as conditions require. If very close, however, permanent screens on cars will be necessary to protect passengers.

Exception 3: Where necessary to provide safe operating conditions which require an uninterrupted view of signals, signs, etc., along tracks, the parties concerned shall cooperate in locating poles to provide the necessary clearance where practicable.

232. VERTICAL CLEARANCE OF WIRES ABOVE GROUND OR RAILS.

The vertical clearance of all wires above ground in generally accessible places or above rails shall be not less than the following:

232. VERTICAL CLEARANCE OF WIRES ABOVE GROUND OR RAILS—Continued

A. Basic Clearances.

The clearances in table 1 apply under the following conditions:

1. Temperature of 60° F, no wind, with final unloaded sag in the wire, or with initial unloaded sag in cases where wires are maintained approximately at initial unloaded sags.
2. Span lengths not greater than the following:

Loading district	Span lengths
Heavy.....	<i>Feet</i> ^a 175
Medium.....	^a 250
Light.....	350

^a 150 feet in heavy-loading district and 225 feet in medium-loading district for 3-strand conductors, each wire of which is 0.09 inch or less in diameter.

3. Fixed supports for the conductor or wire.
(For other conditions, see rule 232, B.)

232. A. Basic Clearances—Continued

TABLE 1.—Minimum vertical clearance of wires above ground or rails

[Supply wires include trolley feeders]

Nature of ground or rails underneath wires	Guys; messengers; communication, span, and lightning protection wires; communication cable supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, all voltages	Open supply line wires, arc wires and service drops ¹⁴			Trolley contact conductors and associated span or messenger wires ¹	
		0 to 750 volts	750 to 15,000 volts	15,000 to 50,000 volts	0 to 750 volts to ground	Exceeding 750 volts to ground

WHERE WIRES CROSS OVER

Track rails of railroads (except electrified railroads using overhead trolley conductors) handling freight cars on top of which men are permitted ^{2 16} -----	<i>Feet</i> 3 15 27	<i>Feet</i> 3 27	<i>Feet</i> 3 28	<i>Feet</i> 30	<i>Feet</i> 4 22	<i>Feet</i> 4 22
Track rails of railroads (except electrified railroads using overhead trolley conductors) not included above ² -----	18	18	20	22	5 18	5 20
Public streets, alleys or roads in urban or rural districts-----	6 13 18	18	20	22	5 18	5 20
Driveways to residence garages-----	10	10	20	22	5 18	5 20
Spaces or ways accessible to pedestrians only-----	7 15	8 15	15	17	9 16	9 18

WHERE WIRES RUN ALONG, AND WITHIN THE LIMITS OF PUBLIC HIGHWAYS OR OTHER PUBLIC RIGHTS-OF-WAY FOR TRAFFIC

Streets or alleys in urban districts-----	10 11 13 18	10 18	20	22	5 18	5 20
Roads in rural districts-----	10 11 12 14	10 15	18	20	5 18	5 20

Footnotes on following page.

232. A. Basic Clearances—Continued

¹ Where subways, tunnels, or bridges require it, less clearances above ground or rails than required by table 1 may be used locally. The trolley contact conductor should be graded very gradually from the regular construction down to the reduced elevation.

² For wire crossings over railways handling only cars considerably lower than ordinary freight cars, the clearance may be reduced by an amount equal to the difference in height between the highest car handled and the highest ordinary freight car, but the clearance shall not be reduced below that required for street crossings.

³ This clearance may be reduced to 25 feet where paralleled by trolley contact conductor on the same street or highway.

⁴ In communities where 21 feet has been established, this clearance may be continued if carefully maintained. The elevation of the contact conductor should be the same in the crossing and next adjacent spans. (See rule 289, D, 2, for conditions which must be met where uniform height above rail is impracticable.)

⁵ In communities where 16 feet has been established for trolley contact conductors 0 to 750 volts to ground, or 18 feet for trolley contact conductors exceeding 750 volts, or where local conditions make it impracticable to obtain the clearance given in the table, these reduced clearances may be used if carefully maintained.

⁶ If a communication service drop, or a guy which is effectively insulated against the highest voltage to which it is exposed, up to 8,700 volts, crosses a street, alley or road, the clearance may be reduced to 16 feet at the side of the traveled way.

⁷ This clearance may be reduced to the following values:

	Feet
(1) For communication conductors of circuits limited to 160 volts to ground, and communication cables.....	8
(2) For conductors of other communication circuits.....	10
(3) For guys.....	8
(4) For supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, all voltages.....	10

⁸ This clearance may be reduced to the following values:

	Feet
(1) Supply wires (except trolley contact wires) limited to 300 volts to ground....	12
(2) Supply wires (except trolley contact wires) limited to 150 volts to ground and located at entrances to buildings.....	10
Such wires, where the form of the building will not permit 10 feet clearance and where all other clearance requirements are met.....	8
(3) Where supply circuits of 550 volts or less, with transmitted power of 3,200 watts or less, are run along fenced (or otherwise guarded) private rights-of-way in accordance with the provisions specified in rule 220, B, 3.....	10

⁹ Trolley contact conductors for industrial railways when not along or crossing over roadways may be placed at a less height if suitably guarded.

¹⁰ Where a pole line along a road is located relative to fences, ditches, embankments, etc., so that the ground under the line will never be traveled except by pedestrians, this clearance may be reduced to the following values:

	Feet
(1) Communication conductors limited to 160 volts to ground, and communication cables.....	8
(2) Conductors of other communication circuits.....	10
(3) Supply conductors.....	12
(4) Guys.....	8

¹¹ No clearance from ground is required for anchor guys not crossing streets, driveways, roads, or pathways, nor for anchor guys provided with traffic guards and paralleling sidewalk curbs.

¹² This clearance may be reduced to 13 feet for communication conductors where no part of the line overhangs any part of the highway which is ordinarily traveled, and where it is unlikely that loaded vehicles will be crossing under the line into a field.

¹³ Where communication wires or cables cross over or run along alleys, this clearance may be reduced to 15 feet.

¹⁴ A conductor which is effectively grounded throughout its length, and is associated with a supply circuit of 0 to 22,000 volts may have the clearance specified for guys and messengers.

¹⁵ This value may be reduced to 25 feet for guys and for cables carried on messengers. This value may be reduced to 25 feet for conductors effectively grounded throughout their length and associated with supply circuits of 0 to 22,000 volts, only if such conductors are stranded, are of corrosion resistant material, and conform to the strength and tension requirements for messengers given in Rule 261G.

¹⁶ Adjacent to overhead bridges which restrict the practice of permitting men on top of cars, these clearances may be reduced, within the restricted area, by mutual agreement between the parties at interest, but in no case shall the wires or cables be at levels below the under-surface of the bridge. •

232. VERTICAL CLEARANCE OF WIRES ABOVE GROUND OR RAILS—Continued

B. Increased Clearances.

Greater clearances than specified in table 1 (rule 232, A) shall be provided where required by 1, 2, and 3 below. Increases are cumulative where more than one apply.

Exception: Increased clearances are not required for trolley contact conductors, for guys, for cable supported by messenger, or for communication conductors or wires run along, and within the limits of public highway or other public rights-of-way for traffic.

1. SPANS LONGER THAN SPECIFIED IN RULE 232, A, 2. In applying the following rules, the "point of crossing" in the case of roads, streets, alleys and driveways is considered to be the edge of the traveled way farthest from the nearer support of the crossing span. In the case of a railroad crossing, it is the track rail which is farthest from the nearer support of the crossing span. In other situations it is the location under the conductors of any topographical feature which is the determinant of the clearance.

(a) WHERE POINT OF CROSSING OCCURS AT POINT OF MAXIMUM TOTAL SAG OF THE CONDUCTOR.

- (1) GENERAL. For spans exceeding the limits specified in rule 232, A, 2, above, the clearance specified in table 1 shall be increased by 0.1 foot for each 10 feet of the excess of span length over such limits. See (3) below.
- (2) RAILROAD CROSSINGS. For spans exceeding the limits specified in rule 232, A, 2, above, the clearance specified in table 1 shall be increased by the following amounts for each 10 feet by which the

232. B. Increased Clearances—Continued

crossing span length exceeds such limits.
See (3) below.

Loading district	Amount of increase per 10 feet	
	Large conductors	Small ¹ conductors
Heavy and medium-----	<i>Feet</i> 0. 15	<i>Feet</i> 0. 30
Light-----	. 10	. 15

¹ A small conductor is a conductor having an over-all diameter of metallic material equal to or less than the following values:

Material	Outside diameter of conductor	
	Solid	Stranded
All copper-----	<i>Inches</i> 0. 160	<i>Inches</i> 0. 250
Other than all copper-----	. 250	. 275

- (3) LIMITS. The maximum additional clearance need not exceed the following percentages of the "maximum sag increase" for the conductor concerned:

Loading district	Percentage
Heavy-----	75
Medium-----	85
Light-----	75

The "maximum sag increase" to which these percentages apply is the arithmetic difference between final unloaded sag at 60° F, no wind, and the maximum total sag under the entire conductor loading of rule 251 for the loading district concerned or under 120° F, no wind, which-

232. B. Increased Clearances—Continued

ever sag is greater, computed for the span length for which such difference is greatest.

(b) WHERE POINT OF CROSSING IS NOT AT POINT OF MAXIMUM TOTAL SAG OF THE CONDUCTOR.

Under these conditions the required clearance may be obtained by multiplying the clearance determined by rules 232, A and 232, B, 1 (a) by the following factors, but in no case shall the clearance be less than required by table 1:

Distance from nearer support of crossing span to point of crossing in percentage of crossing span length	Factors
5	0.85
10	.88
15	.91
20	.94
25	.96
30	.98
35	.99
40 to 50	1.00
Interpolate for intermediate values	

2. VOLTAGES EXCEEDING 50,000 VOLTS.

For these voltages the clearances given in table 1 (rule 232, A) shall be increased at the rate of 0.4 inch for each 1,000 volts of the excess.

3. CONDUCTORS SUPPORTED BY SUSPENSION-TYPE INSULATORS AT CROSSINGS OVER TRACK RAILS.

The clearance shall be increased by such an amount that the values specified in table 1 (rule 232, A) will be maintained in case of a broken conductor in either adjoining span, if the conductor is supported as follows:

(a) At one support by suspension-type insulators in a suspended position, and at the

232. B. Increased Clearances—Continued

other support by insulators which are not free to swing (including semistrain-type insulators).

- (b) At one support by strain insulators, and at the other support by semistrain-type insulators.

4. METHODS OF AVOIDING THIS INCREASE OF CLEARANCE.

Any of the following construction methods will avoid the necessity for the increase in clearance required by rule 232, B, 3:

- (a) *Suspension-type insulators* in a suspended position at both supports.
 (b) *Semistrain-type insulators* at both supports.
 (c) *Arrangement of insulators* so that they are restrained from displacement toward the crossing.

C. Supply Pole Wiring at Underground Risers.

Supply wires connecting to underground systems shall not be run open closer to the ground than is indicated by table 2:

TABLE 2.—Clearance above ground for open supply wiring

Location on pole	0 to 750 volts	750 to 15,000 volts	More than 15,000 volts
	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>
Side of pole adjacent to vehicular traffic-----	14	16	18
Side of pole not adjacent to vehicular traffic-----	8	11	13

233. CROSSING CLEARANCES OF WIRES CARRIED ON DIFFERENT SUPPORTS.

The clearance between any two wires crossing each other and carried on different supports shall be not less than the following:

Recommendation: Crossings shall be made on a common crossing pole or structure where practicable.

A. Basic Clearances.

The clearances given in table 3 below apply under the following conditions:

1. Temperature of 60° F, no wind, with the upper conductor or wire at its final unloaded sag and the lower conductor or wire at its initial unloaded sag.
2. Span lengths not greater than the following for the upper conductor or wire:

Loading district	Span lengths
	<i>Feet</i>
Heavy.....	¹ 175
Medium.....	¹ 250
Light.....	350

¹ 150 feet in heavy loading district and 225 feet in medium loading district for 3-strand conductors, each wire of which is 0.09 inch or less in diameter.

3. Fixed supports for the upper conductor or wire.
(For other conditions, see Rule 233B.)

233. A. Basic Clearances—Continued

TABLE 3.—*Minimum clearances at crossings of wires carried on different supports*

[Voltages for trolley contact conductors are voltages to ground in all cases]

[The insertion of a given clearance in italics indicates that in general the lines operating at the voltage named above this clearance should not cross over the lines at the voltage to the left of the clearance in italics]

Nature of wires crossed over	Com- muni- cation wires, includ- ing cables and messen- gers	Open supply wires 0 to 750 volts; supply cables having effectively grounded metal sheaths or insulated con- ductors supported on and cabled together with an effectively grounded messenger, all voltages; messengers associated with such cables		Open supply wires and serv- ice drops ⁶		Guys, span wires, light- ning- protec- tion wires
		Line wires	Service drops	750 to 8,700 volts	8,700 to 50,000 volts	
Communication, includ- ing cables and messen- gers-----	<i>Feet</i> 2 2	<i>Feet</i> 3 9 10 4	<i>Feet</i> 9 2	<i>Feet</i> 7 4	<i>Feet</i> 6	<i>Feet</i> 2 2
Supply cables having effectively grounded continuous metal sheath or insulated conductors supported on and cabled together with an effectively grounded messenger, all voltages; messengers associated with such cables-----	10 4	2	2	2	4	2
Open supply wires:						
0 to 750 volts-----	4	2	2	2	4	2
750 to 8,700 volts---	4	2	4	2	4	4
8,700 to 50,000 volts-	6	4	6	4	4	4
Trolley contact conduc- tors-----	4 4	4 5 4	4 4	6	6	4 4
Guys, span wires, light- ning-protection wires, service drops 0 to 750 volts-----	2 8 2	2	2	4	4	1 2 2

Footnotes on following page.

233. CROSSING CLEARANCES OF WIRES CARRIED ON DIFFERENT SUPPORTS—Continued

B. Increased Clearances.

Greater clearances than given in table 3 (rule 233, A) shall be provided under the following conditions. The increases in 1, 2, and 3 below are cumulative where more than one are applicable.

1. CROSSING SPANS LONGER THAN SPECIFIED IN RULE 233, A, 2.

Under these conditions the clearances specified in table 3 shall be increased as follows:

- (a) Where the crossing occurs at the point of maximum total sag in the upper conductor, the clearances of table 3 shall be increased by the following amounts for each 10 feet by which the crossing span

¹ Completely insulated sections of guys attached to supporting structures having no conductor of more than 8,700 volts may have less than this clearance from each other.

² The clearance of communication conductors and their guy, span, and messenger wires from each other in locations where no other classes of conductors are involved may be reduced by mutual consent of the parties concerned, subject to the approval of the regulatory body having jurisdiction, except for fire-alarm wires and wires used in the operation of railroads, or where one set of conductors is for public use and the other used in the operation of supply systems.

³ A clearance of 2 feet may be permitted where the supply conductor is above the communication conductor, provided the crossing is not within 6 feet of any pole concerned in the crossing and the voltage to ground does not exceed 300 volts. (See note 9.)

⁴ Trolley-contact conductors of more than 750 volts should have at least 6 feet clearance. This clearance should also be provided over lower-voltage trolley-contact conductors unless the crossover conductors are beyond reach of a trolley pole leaving the trolley-contact conductor or are suitably protected against damage from trolley poles leaving the trolley-contact conductor.

⁵ Trolley feeders are exempt from this clearance requirement for trolley-contact conductors if they are of the same nominal voltage and of the same system.

⁶ A conductor which is effectively grounded throughout its length and is associated with a circuit of 0 to 22,000 volts may have the clearances specified for guys and messengers.

⁷ This clearance shall be increased to 6 feet where the supply wires cross over a communication line within 6 feet horizontally of a communication pole.

⁸ This clearance shall be increased to 4 feet where communication cables cross over open supply service wires.

⁹ Where a 2-foot clearance is required at 60° F, and where conditions are such that the sag in the upper conductor would increase more than 1.5 feet at the crossing point under the applicable loading of rule 251, the 2-foot clearance shall be increased by the amount of sag increase less 1.5 feet.

¹⁰ Supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, of all voltages, and messengers associated with such cable, may have a clearance of 2 feet except where they cross under communication cables.

233. B. Increased Clearances—Continued

length exceeds the limits specified in rule 233, A, 2:

Loading district	Amount of increase per 10 feet	
	Large conductors	Small conductors ¹
Heavy and medium -----	<i>Feet</i> 0. 15	<i>Feet</i> 0. 30
Light -----	. 10	. 15

¹ A small conductor is a conductor having an over-all diameter of metallic material equal to or less than the following values:

Material	Outside diameter of conductor	
	Solid	Stranded
All copper -----	<i>Inches</i> 0. 160	<i>Inches</i> 0. 250
Other than all copper -----	. 250	. 275

The maximum additional clearance need not exceed the following percentages of the "maximum sag increase" for the conductor concerned:

Loading district	Percentage
Heavy -----	75
Medium -----	85
Light -----	75

The "maximum sag increase" to which these percentages apply is the arithmetic difference between final unloaded sag at 60° F, no wind, and the maximum total sag under the entire conductor loading of rule 251 for the loading district concerned, or under 120° F, no wind, whichever sag is the greater, computed for the span length for which such difference is greatest.

233. B. Increased Clearances—Continued

- (b) If the crossing point is located elsewhere than at the point of maximum total sag in the upper span, the required clearance may be obtained by multiplying the clearance determined in rule 233, A and B, 1(a) by the following factors, but in no case shall the clearance be less than required by table 3:

Distance from nearer support of crossing span to point of crossing, in percentage of crossing span length	Factors for basic clearance of—	
	4 feet	6 feet
5.....	0. 35	0. 47
10.....	. 47	. 58
15.....	. 60	. 68
20.....	. 71	. 78
25.....	. 82	. 85
30.....	. 90	. 92
35.....	. 96	. 98
40 to 50.....	1. 00	1. 00
Interpolate for intermediate values.		

2. VOLTAGES EXCEEDING 50,000 VOLTS.

For these voltages the clearances given in table 3 (rule 233, A) shall be increased at the rate of 0.4 inch for each 1,000 volts of the excess.

3. CONDUCTORS SUPPORTED BY SUSPENSION-TYPE INSULATORS AT CROSSINGS OVER COMMUNICATION WIRES.

For such conductors the clearance shall be increased by such an amount that the values specified in table 3 (rule 233, A) will be maintained in case of a broken conductor in either adjacent span, provided such conductor is supported as follows:

- (a) At one support by suspension-type insulators in a suspended position, and at the other support by insulators not free to swing (including semistrain-type insulators).

233. B. Increased Clearances—Continued

- (b) At one support by a strain insulator, and at the other support by a semistrain-type insulator.

4. METHODS OF AVOIDING THIS INCREASE OF CLEARANCE.

Any of the following construction methods will avoid the necessity for the increase in clearance required by rule 233, B, 3:

- (a) *Suspension-type insulators* in a suspended position at both supports.
(b) *Semistrain-type insulators* at both supports.
(c) *Arrangement of insulators* so that they are restrained from displacement toward the crossing.

234. CLEARANCES OF CONDUCTORS OF ONE LINE FROM OTHER CONDUCTORS AND STRUCTURES.

A. Clearances from Conductors of Another Line.

The clearance in any direction between any conductor of one line and any conductor of a second and conflicting line shall be not less than the largest value required by 1, 2, or 3 below at 60° F, no wind:

1. Four feet.
2. The values required by rule 235, A, 2, (a) (1), or (2) for separation between conductors on the same support.
3. The apparent sag of the conductor having the greater sag, plus 0.2 inch per kilovolt of the highest voltage concerned.

Exception: In situations where supply-line conductors only are involved, the clearance required by 3 above need not be greater than the value required by rule 233, A and B, for a center-span crossing, assuming the conductor having the larger sag swinging through an arc of 45° from the vertical.

B. Clearances from Supporting Structures of Another Line.

Conductors of any line passing near a pole or similar supporting structure of a second line, without being attached thereto, shall have clearances from any part

234. B. Clearances from Supporting Structures of Another Line—Continued

of such structure not less than the larger value required by either 1 or 2 below at 60° F, no wind:

1. Three feet if practicable.
2. The values required by rule 235, A, 2, (a) (1) and (2) for separation between similar conductors on the same support, increased by 1 inch for each 2 feet of the distance from the supporting structure of the second line to the nearest supporting structure of the first line.

The climbing space on the structure of the second line shall in no case be reduced by a conductor of the first line.

C. Clearances from Buildings.

1. GENERAL.

Conductors shall be arranged and maintained so as to hamper and endanger firemen as little as possible in the performance of their duties.

2. LADDER SPACE.

Where buildings exceed three stories (or 50 feet) in height, overhead lines should be arranged where practicable so that a clear space or zone at least 6 feet wide will be left, either adjacent to the building or beginning not over 8 feet from the building, to facilitate the raising of ladders where necessary for fire fighting.

Exception: This requirement does not apply where it is the unvarying rule of the local fire departments to exclude the use of ladders in alleys or other restricted places which are generally occupied by supply lines.

3. OPEN SUPPLY CONDUCTORS ATTACHED TO BUILDINGS.

Where the permanent attachment of open supply conductors of any class to buildings is necessary for an entrance, such conductors shall meet the following requirements:

- (a) Conductors of more than 300 volts to ground shall not be carried along or near the surface of the building unless they are guarded or made inaccessible.

234. C. Clearances from Buildings—Continued

- (b) Clearance of wires from building surface shall be not less than those required in table 9 (rule 235, A, 3, (a)) for clearance of conductors from pole surfaces.

4. CONDUCTORS PASSING BY OR OVER BUILDINGS.

- (a) MINIMUM CLEARANCES. Unguarded or accessible supply conductors carrying voltages in excess of 300 volts may be run either beside or over buildings. The vertical or horizontal clearance to any building or its attachments (balconies, platforms, etc.) shall be as listed below. The horizontal clearance governs above the roof level to the point where the diagonal equals the vertical clearance requirement. From this point the diagonal clearance shall be equal to the vertical clearance requirement. This rule should not be interpreted as restricting the installation of a trolley contact conductor over the approximate center line of the track it serves.

- (1) SPANS 0 TO 150 FEET. For spans of 0 to 150 feet, the clearances shall be as given in table 4.

TABLE 4.—Clearances of supply conductors from buildings

Voltage of supply conductors	Horizontal clearance	Vertical clearance
	<i>Feet</i>	<i>Feet</i>
300 to 8,700.....	3	8
8,700 to 15,000.....	8	8
15,000 to 50,000.....	10	10
Exceeding 50,000.....	10 plus 0.4 inch per kv in excess.	10 plus 0.4 inch per kv in excess.

- (2) SPANS EXCEEDING 150 FEET. Where span lengths exceed 150 feet, the increased clearances required by rule 232, B, 1 shall be provided.

234. C. Clearances from Buildings—Continued

Exception: These increased clearances are not required where the voltage of the supply conductors is from 300 to 8,700 volts.

- (b) **GUARDING OF SUPPLY CONDUCTORS.** Supply conductors of 300 volts or more shall be properly guarded by grounded conduit, barriers, or otherwise, under the following conditions:

- (1) Where the clearances set forth in table 4 (rule 234, C, 4, (a), (1)) cannot be obtained.
- (2) Where such supply conductors are placed near enough to windows, verandas, fire escapes, or other ordinarily accessible places, to be exposed to contact by persons.

Note: Supply conductors in grounded metal-sheathed cable are considered to be guarded within the meaning of this rule.

D. Clearances from Bridges.**1. CLEARANCES OF CONDUCTORS FROM BRIDGES.**

Supply conductors which pass under, over, or near a bridge shall have clearances therefrom not less than given in table 5.

Exception: Grounding conductors, effectively grounded neutrals, conductors installed in grounded conduit, cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger.

2. GUARDING TROLLEY-CONTACT CONDUCTORS LOCATED UNDER BRIDGES.

- (a) **WHERE GUARDING IS REQUIRED.** Guarding is required where the trolley-contact conductor is located so that a trolley pole leaving the conductor can make simultaneous contact between it and the bridge structure.

234. D. Clearances from Bridges—Continued

TABLE 5.—Clearances from bridges

Voltages	Readily accessible portions (other than traveled ways ¹) of any bridge, including wing walls or bridge attachments		From ordinarily inaccessible portions ² of bridges (other than brick, concrete, or masonry) and from abutments	
	For conductors attached to bridge ³	For conductors not attached to bridge	For conductors attached to bridge ^{3 5}	For conductors not attached to bridge ^{4 5}
	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>
0 to 2,500-----	3.0	3.0	0.5	3.0
Over 2,500 to 5,000-----	3.0	3.0	1.0	3.0
Over 5,000 to 8,700-----	3.0	3.0	3.0	3.0
Over 8,700 to 15,000-----	5.0	5.0	5.0	5.0
Over 15,000 to 25,000-----	7.5	7.5	7.5	7.5
Over 25,000 to 35,000-----	7.5	9.0	7.5	9.0
Over 35,000 to 50,000-----	7.5	12.0	7.5	12.0
Exceeding 50,000-----	Add 0.4 inch per kv in excess			

¹ Where over traveled ways on or near bridges, the clearances of rule 232 apply.

² Bridge seats of steel bridges carried on masonry, brick, or concrete abutments which require frequent access for inspection shall be considered as readily accessible portions.

³ Conductors should have clearance not less than given in this column, where practicable.

⁴ Conductors should have the clearances given in this column increased as much as practicable.

⁵ Where conductors passing under bridges are adequately guarded against contact by unauthorized persons and can be deenergized for maintenance of the bridge, clearances of the conductors from the bridge, at any point, may have the clearances specified in table 9 for clearance from surfaces of crossarms plus one-half the final unloaded sag of the conductor at that point.

(b) NATURE OF GUARDING. Guarding shall consist of a substantial inverted trough of non-conducting material located above the contact conductor, or of other suitable means of preventing contact between the trolley pole and the bridge structure.

235. MINIMUM LINE-CONDUCTOR CLEARANCES AND SEPARATIONS AT SUPPORTS.

A. Separation Between Conductors on Pole Lines.

1. APPLICATION OF RULE.

(a) MULTICONDUCTOR WIRES OR CABLES. Cables, and duplex, triple or paired conductors supported on insulators or messengers, whether single or grouped, are for the pur-

235. A. Separation Between Conductors on Pole Lines—Con.

poses of this rule considered single conductors even though they may contain individual conductors not of the same phase or polarity.

- (b) CONDUCTORS SUPPORTED BY MESSENGERS OR SPAN WIRES. Clearances between individual wires or cables supported by the same messenger, or between any group and its supporting messenger, or between a trolley feeder, supply conductor, or communication conductor, and their respective supporting span wires, are not subject to the provisions of this rule.
- (c) MEASUREMENT OF CLEARANCES. The clearances and separations stated may be measured from the center of the supporting insulator instead of from the conductor itself.

2. HORIZONTAL SEPARATIONS BETWEEN LINE CONDUCTORS.

- (a) FIXED SUPPORTS. Line conductors attached to fixed supports shall have horizontal separations from each other not less than the larger value required by either (1) or (2) below for the situation concerned.

Exception 1: The pin spacing at buckarm construction may be reduced as specified in rule 236, F, to provide climbing space.

Exception 2: The pin spacing at bridge fixtures may be reduced as specified in rule 235, C.

Exception 3: Grades D and N need meet only the requirements of (1) below.

Exception 4: These clearances do not apply where conductors have insulating covering adequate for the voltage concerned.

- (1) MINIMUM HORIZONTAL SEPARATION BETWEEN LINE CONDUCTORS OF THE SAME OR DIFFERENT CIRCUITS. Separations shall be not less than given in table 6.

235. A. Separation Between Conductors on Pole Lines—Con.

TABLE 6.—*Minimum horizontal separation at supports between line conductors of the same or different circuits*

[All voltages are between conductors except for railway feeders, which are to ground]

Class of circuit	Separation	Notes
	<i>Inches</i>	
Communication conductors---	6	{ Preferable minimum. Does not apply at conductor transposition points. Permitted where pin spacings less than 6 inches have been in regular use. Does not apply at conductor transposition points.
	3	
Railway feeders:		
0 to 750 volts, No. 4/0 or larger-----	6	} Where 10- to 12-inch separation has already been established by practice, it may be continued, subject to the provisions of rule 235, A, 2, (a), (2), for conductors having apparent sags not over 3 feet and for voltages not exceeding 8,700.
0 to 750 volts, smaller than No. 4/0-----	12	
750 volts to 8,700 volts----	12	
Other supply conductors:		
0 to 8,700 volts-----	12	
For all conductors of more than 8,700 volts add for each 1,000 volts in excess of 8,700 volts-----	0.4	

- (2) SEPARATIONS ACCORDING TO SAGS. The separation at the supports of conductors of the same or different circuits of grades B, or C shall in no case be less than the values given by the following formulas, at 60° F, no wind. The requirements of rule 235, A, 2, (a), (1) apply if they give a greater separation than this rule.

For line conductors smaller than No. 2 AWG:

$$\text{Separation} = 0.3 \text{ inch per kilovolt} + 7\sqrt{(S/3)} - 8.$$

For line conductors of No. 2 AWG or larger:

$$\text{Separation} = 0.3 \text{ inch per kilovolt} + 8\sqrt{S/12}.$$

S is the apparent sag in inches of the conductor having the greater sag, and the separation is in inches.

235. A. Separation Between Conductors on Pole Lines—Con.

TABLE 7.—*Separation in inches required for line conductors smaller than No. 2 AWG*

Voltages between conductors	Sag (in inches)						
	36	48	72	96	120	180	240
2,400-----	14.5	20.5	28.5	35.0	40.5	51.5	60.0
7,200-----	16.0	22.0	30.0	36.5	42.0	52.5	61.5
13,200-----	18.0	24.0	32.0	38.5	43.5	54.5	63.5
23,000-----	21.0	27.0	35.0	41.5	46.5	57.5	66.5
34,500-----	24.5	30.5	38.5	44.5	50.5	61.0	70.0
46,000-----	28.0	34.0	42.0	48.0	53.5	64.5	73.0
69,000-----	-----	40.5	48.5	55.0	60.5	71.0	80.0

TABLE 8.—*Separation in inches required for line conductors No. 2 AWG or larger*

Voltages between conductors	Sag (in inches)						
	36	48	72	96	120	180	240
2,400-----	14.5	16.5	20.5	23.5	26.0	31.5	36.5
7,200-----	16.0	18.0	22.0	25.0	27.5	33.0	38.0
13,200-----	18.0	20.0	23.5	26.5	29.5	35.0	39.5
23,000-----	21.0	23.0	26.5	29.5	32.0	38.0	42.5
34,500-----	24.0	26.5	30.0	33.0	35.5	41.5	46.0
46,000-----	27.5	30.0	33.5	36.5	39.0	45.0	49.5
69,000-----	-----	36.5	40.5	43.5	46.0	51.5	56.5

(b) **SUSPENSION INSULATORS NOT RESTRAINED FROM MOVEMENT.** Where suspension insulators are used and are not restrained from movement, the conductor separation shall be increased so that one string of line insulators may swing transversely through an angle of 30° from a vertical position without reducing the values given in (a) above.

3. **CLEARANCES IN ANY DIRECTION FROM LINE CONDUCTORS TO SUPPORTS, AND TO VERTICAL OR LATERAL CONDUCTORS, SPAN OR GUY WIRES, ATTACHED TO THE SAME SUPPORT.**

(a) **FIXED SUPPORTS.** Clearances shall be not less than given in table 9.

235. A. Separation Between Conductors on Pole Lines—Con.

TABLE 9.—*Minimum clearance in any direction from line conductors to supports, and to vertical or lateral conductors, span or guy wires attached to the same support*

[All voltages are between conductors]

Clearance of line conductors from—	Communication lines—		Supply lines		
	In general	On jointly used poles	0 to 8,700 volts		Exceeding 8,700 volts, add for each 1,000 volts of excess
			In general	On jointly used poles	
Vertical and lateral conductors:	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>
Of same circuit.....	3	3	3	3	0. 25
Of other circuits.....	3	3	6 6	6 6	. 4
Span and guy wires attached to same pole:					
General.....	8 3	1 8 6	6	6	. 4
When parallel to line.....	8 3	1 8 6	1 12	1 12	. 4
Lightning-protection wires parallel to line.....	(2 5)	(2 5)	(2 5)	(2 5)	. 4
Surfaces of crossarms.....	3 3	3 3	3	3	. 2
Surfaces of poles.....	3 3	3 5	7 3	4 7 5	. 2

¹ For guy wires, if practicable. For clearances between span wires and communication conductors, see rule 238, E, 3.

On jointly used poles, guys which pass within 12 inches of supply conductors, and also pass within 12 inches of communication cables, shall be protected with a suitable insulating covering where the guy passes the supply conductors, unless the guy is effectively grounded or insulated with a strain insulator at a point below the lowest supply conductor and above the highest communication cable.

² Clearance shall not be less than the separation required by table 6 or rule 235, A, 2, (a), (2) between two line conductors of the voltage concerned.

³ Communication conductors may be attached to supports on the sides or bottoms of crossarms or surfaces of poles with less clearances, if at least 40 inches from any supply line conductor of less than 8,700 volts to ground and at least 60 inches from any supply line conductor of more than 8,700 volts to ground carried on the same pole.

⁴ This clearance applies only to supply conductors carried on crossarms below communication conductors, on joint poles.

Where supply conductors are above communication conductors this clearance may be reduced to 3 inches except for supply conductors of 0 to 750 volts whose clearance may be reduced to one inch.

⁵ For the purpose of applying the above table, the voltage of lightning-protection wires shall be considered as being the voltage to ground of the associated supply conductors.

⁶ For supply circuits of 0 to 750 volts, this clearance may be reduced to 3 inches.

⁷ A neutral conductor which is effectively grounded throughout its length and is associated with a circuit of 0 to 22,000 volts, may be attached directly to the pole surface.

⁸ Guys and messengers may be attached to the same strain plates or to the same through-bolts.

⁹ For supply circuits of 0 to 750 volts this clearance may be reduced to one inch.

235. A. Separation Between Conductors on Pole Lines—Con.

- (b) **SUSPENSION INSULATORS NOT RESTRAINED FROM MOVEMENT.** Where suspension insulators are used and are not restrained from movement, the conductor clearances from surfaces of supports, from span or guy wires, or from vertical or lateral conductors shall be such that the values of clearances required by (a) above will be maintained with an insulator swing of 30° from the vertical position.

4. CONDUCTOR SEPARATION—VERTICAL RACKS.

Conductors or cables may be carried on vertical racks or separate brackets other than wood placed vertically at one side of the pole and securely attached thereto, if all the following conditions are met:

- (a) The voltage shall not be more than 750 volts, except that cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger may carry any voltage.
- (b) Conductors shall be of the same material or materials, except that different materials may be used if their sag-tension characteristics and arrangement are such that the separations specified in (c) below are maintained under all service conditions.
- (c) Vertical spacing between conductors shall be not less than the following:

Span length	Vertical clearance between conductors
<i>Feet</i>	<i>Inches</i>
0 to 150	4
150 to 200	6
200 to 250	8
250 to 300	12

235. A. Separation Between Conductors on Pole Lines—Con.

(See table 9, rule 235, A, 3, for necessary clearances from pole surfaces and rule 236, G, for method of providing climbing space.)

5. SEPARATION BETWEEN SUPPLY CIRCUITS OF DIFFERENT VOLTAGE CLASSIFICATIONS ON THE SAME CROSSARM.

Supply circuits of any one voltage classification as given in table 11 (rule 238, A, 1) may be maintained on the same crossarm with supply circuits of the next consecutive voltage classification only under the following conditions:

- (a) If they occupy pin positions on opposite sides of the pole.
- (b) If in bridge-arm or side-arm construction they are separated by a distance of not less than the climbing space required for the higher voltage concerned and provided for in rule 236.
- (c) If the higher-voltage conductors occupy the outer pin positions and the lower-voltage conductors the inner pin positions.
- (d) If series lighting or similar supply circuits are ordinarily dead during periods of work on or above the crossarm concerned.
- (e) If the two circuits concerned are communication circuits used in the operation of supply lines, and supply circuits of less than 8,700 volts, and are owned by the same utility, provided they are installed as in (a) or (b) above.

B. Separation Between Conductors Attached to Buildings.

Separation of wires from each other shall be not less than those required in table 6 (rule 235, A, 2, (a) (1)) for separation of conductors from each other at supports.

Exception: Conductors on vertical racks or separate brackets other than wood placed vertically meeting the requirements of rule 235, A, 4 may have the separations specified in that rule.

235. MINIMUM LINE-CONDUCTOR CLEARANCES AND SEPARATIONS AT SUPPORTS—Continued

C. Separation Between Conductors Attached to Bridges.

Supply conductors attached to bridges and supported at frequent intervals may have less separation at supports than required by rule 235, A, 2, (a), (1) and (2). The separation shall be not less than the clearance between supply conductors and the surfaces of poles or crossarms required by rule 235, A, 3, (a), or less than the following:

Span length:	Separation Inches
0 to 20 feet.....	6
20 to 50 feet.....	9

236. CLIMBING SPACE.

A. Location and Dimensions.

1. A climbing space having the horizontal dimensions specified in rule 236, E, shall be provided past any conductors, crossarms, or other parts.
2. The climbing space need be provided on one side or corner of the pole only.
3. The climbing space shall extend vertically past any conductor or other part between levels above and below the conductor as specified in rule 236, E, F, G, and I, but may otherwise be shifted from any side or corner of the pole to any other side or corner.

B. Portions of Supporting Structures in Climbing Space.

Portions of the pole or structure when included in one side or corner of the climbing space are not considered to obstruct the climbing space.

C. Crossarm Location Relative to Climbing Space.

Recommendation: Crossarms should be located on the same side of the pole.

Exception: This recommendation does not apply where double crossarms are used on any pole or where crossarms on any pole are not all parallel.

236. CLIMBING SPACE—Continued

D. Location of Supply Apparatus Relative to Climbing Space.

Transformers, regulators, lightning arresters, and switches when located below conductors or other attachments shall be mounted outside of the climbing space.

E. Climbing Space Through Conductors on Cross-arms.**1. CONDUCTORS OF SAME VOLTAGE CLASSIFICATION ON SAME CROSSARM.**

Climbing space between conductors shall be of the horizontal dimensions specified in table 10 (rule 236, E, 3), and shall be provided both along and across the line, and shall be projected vertically not less than 40 inches above and below the limiting conductors. Where communication conductors are above supply conductors of more than 8,700 volts, the climbing space shall be projected vertically at least 60 inches above the highest supply conductor.

Exception 1: This rule does not apply if it is the unvarying practice of the employers concerned to prohibit employees from ascending beyond the conductors of the given line, unless the line is killed.

Exception 2: For supply conductors carried on a pole in a position below communication facilities in the manner permitted in rule 220, B, 3, the climbing space need not extend more than 2 feet above such supply space.

2. CONDUCTORS OF DIFFERENT VOLTAGE CLASSIFICATIONS ON SAME CROSSARM.

The climbing space shall be that required by table 10 (rule 236, E, 3) for the highest voltage of any conductor bounding the climbing space. The climbing space shall extend vertically to the limits specified in rule 236, E, 1, and the exceptions thereto.

236. E. Climbing Space Through Conductors on Cross-arms—Continued

3. HORIZONTAL CLIMBING-SPACE DIMENSIONS

TABLE 10.—Minimum horizontal dimensions of climbing space

Character of conductors adjacent to climbing space	Voltage of conductors	Horizontal dimensions of climbing space (inches)			
		On poles used solely by—		On jointly used poles	
		Communication conductors	Supply conductors	Supply conductors above communication conductors	Communication conductors above supply conductors ¹
Communication conductors.	0 to 150.....	No requirement.	-----	(2)	No requirement.
	Exceeding 150..	24 recommended.	-----	(2)	24 recommended.
Supply conductors.	Less than 300....	-----	24-----	24-----	30.
	300 to 8,700.....	-----	30-----	30-----	30.
	8,700 to 15,000..	-----	36-----	36-----	36.
	Exceeding 15,000	-----	More than 36. ³	More than 36. ³	More than 36. ³

¹ This relation of levels is not, in general, desirable and should be avoided where practicable.² Climbing space shall be the same as required for the supply conductors immediately above, with a maximum of 30 inches, except that a climbing space of 16 inches across the line may be employed for communication cables or conductors where the only supply conductors at a higher level are secondaries (0 to 750 volts) supplying airport or airway marker lights or crossing over the communication line and attached to the pole top or to a pole-top extension fixture.³ Where practicable. (Attention is called to the operating requirements of rule 422, part 4 of this code.)**F. Climbing Space on Buckarm Construction.**

The full width of climbing space shall be maintained on buckarm construction and shall extend vertically in the same position at least 40 inches (or 60 inches where required by rule 236, E, 1) above and below any limiting conductor.

Method of Providing Climbing Space on Buckarm Construction.

With circuits of less than 8,700 volts and span lengths not exceeding 150 feet and sags not exceeding 15 inches for wires of No. 2 and larger sizes, or 30 inches for wires smaller than No. 2, a six-pin cross-arm having pin spacing of 14½ inches may be used to provide a 30-inch climbing space on one corner of a junction pole by omitting the pole pins on all arms, and inserting pins midway between the remaining

236. F. Climbing Space on Buckarm Construction—Con.

pins so as to give a spacing of $7\frac{1}{4}$ inches, provided that each conductor on the end of every arm is tied to the same side of its insulator, and that the spacing on the next pole is not less than $14\frac{1}{2}$ inches.

G. Climbing Space Past Longitudinal Runs Not on Crossarms.

The full width of climbing space shall be provided past longitudinal runs and shall extend vertically in the same position from 40 inches below the run to a point 40 inches above (or 60 inches where required by rule 236, E, 1). The width of climbing space shall be measured from the longitudinal run concerned. Longitudinal runs on racks, or supply cables on messengers, are not considered as obstructing the climbing space if all wires concerned are covered by rubber protective equipment or otherwise guarded as an unvarying practice before workmen climb past them. This does not apply where communication conductors are above the longitudinal runs concerned.

Exception 1: If a supply longitudinal run is placed on the side or corner of the pole where climbing space is provided, the width of climbing space shall be measured horizontally from the center of the pole to the nearest supply conductors on crossarms, under the following conditions.

Where the longitudinal run consists of open supply conductors carrying not more than 750 volts; or supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, all voltages; and is supported close to the pole as by brackets, racks or pins close to the pole, and

Where the nearest supply conductors on crossarms are parallel to and on the same side of the pole as the longitudinal run and within 4 feet above or below the run.

236. G. Climbing Space Past Longitudinal Runs Not on Crossarms—Continued

Exception 2: For supply conductors carried on a pole in a position below communication facilities in the manner permitted in rule 220, B, 3, the climbing space need not extend more than 2 feet above such supply space.

H. Climbing Space Past Vertical Conductors.

Vertical runs incased in suitable conduit or other protective covering and securely attached to the surface of the pole or structure are not considered to obstruct the climbing space.

I. Climbing Space Near Ridge-Pin Conductors.

The climbing space specified in rule 236, E, 3 shall be provided above the top crossarm to the ridge-pin conductor but need not be carried past it.

237. WORKING SPACE.

A. Location of Working Spaces.

Working spaces shall be provided on the climbing face of the pole at each side of the climbing space.

B. Dimensions of Working Spaces.

1. ALONG THE CROSSARM.

The working space shall extend from the climbing space to the outmost pin position on the crossarm.

2. AT RIGHT ANGLES TO THE CROSSARM.

The working space shall have the same dimension as the climbing space (see rule 236, E). This dimension shall be measured horizontally from the face of the crossarm.

3. VERTICALLY.

The working space shall have a height not less than that required by rule 238 for the vertical separation of line conductors carried at different levels on the same support.

237. WORKING SPACE—Continued

C. Location of Vertical and Lateral Conductors Relative to Working Spaces.

The working spaces shall not be obstructed by vertical or lateral conductors. Such conductors shall be located on the opposite side of the pole from the climbing side or on the climbing side of the pole at a distance from the crossarms at least as great as the width of climbing space required for the highest-voltage conductors concerned. Vertical conductors inclosed in suitable conduit may be attached on the climbing side of the pole.

D. Location of Buckarms Relative to Working Spaces.

Buckarms may be used under any of the following conditions, provided the climbing space is maintained. Climbing space may be obtained as in rule 236, F.

1. STANDARD HEIGHT OF WORKING SPACE.

Lateral working space of the height required by table 11 (rule 238, A, 1) may be provided between the buckarms and adjacent line arms to which conductors on the buckarms are not attached.

Method of meeting requirements. This may be accomplished by increasing the spacing between the line crossarm gains.

2. REDUCED HEIGHT OF WORKING SPACE.

Where no circuits exceeding 8,700 volts are involved, and the clearances of rule 235, A, 2, (a), (1) and (2) are maintained, buckarms may be placed between line arms having normal spacing, even though such buckarms obstruct the normal working space; provided that a working space of not less than 18 inches in height is maintained either above or below each line arm and each buckarm.

237. D. Location of Buckarms Relative to Working Spaces—Continued

Exception: The above working space may be reduced to 12 inches if both of the following conditions exist:

Not more than two sets of line arms and buckarms are involved.

Working conditions are rendered safe by providing rubber protective equipment or other suitable devices to insulate and cover line conductors and equipment which are not being worked upon.

238. VERTICAL SEPARATION BETWEEN LINE CONDUCTORS, CABLES, AND EQUIPMENT LOCATED AT DIFFERENT LEVELS ON THE SAME POLE OR STRUCTURE.

All line conductors, cables, or equipment located at different levels on the same pole or structure shall have the vertical separations set forth below.

A. Vertical Separation Between Horizontal Cross-arms.

Crossarms supporting line conductors shall be spaced in accordance with table 11. Vertical separations between crossarms shall be measured from center to center.

Exception: Where it is established practice to gain poles with lesser crossarm spacings than specified in table 11 such reduced crossarm separations may be employed if all other applicable separations are complied with.

1. BASIC SEPARATIONS.

The separations given in the following table are for crossarms carrying conductors of 0 to 50,000 volts attached to fixed supports.

238. A. Vertical Separation Between Horizontal Cross-arms—Continued

TABLE 11.—Vertical separation of crossarms carrying conductors

Conductors usually at lower levels	Supply conductors; preferably at higher levels ⁶				
	Open wires, 0 to 750 volts; cables, having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, all voltages	750 to 8,700 volts	8,700 to 15,000 volts	15,000 to 50,000 volts	
				Same utility	Different utilities
	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>	<i>Feet</i>
Communication conductors:					
General	1 2 4	4	6		6
Used in operation of supply lines	2	3 2	4	4	6
Supply conductors:					
0 to 750 volts	2	4 2	4	4	6
750 volts to 8,700 volts		4 2	4	4	6
8,700 volts to 15,000 volts:					
If worked on alive with long-handled tools, and adjacent circuits are neither killed nor covered with shields or protectors			4	4	6
If not worked on alive except when adjacent circuits (either above or below) are killed or covered by shields or protectors, or by the use of long-handled tools not requiring linemen to go between live wires			2	5 4	5 4
Exceeding 15,000 volts, but not exceeding 50,000 volts				5 4	5 4

¹ Where supply circuits of 550 volts or less, with transmitted power of 3,200 watts or less, are run below communication circuits in accordance with rule 220, B, 3 the clearance may be reduced to 2 feet.

² In localities where the practice has been established of placing on jointly used poles, cross-arms carrying supply circuits of less than 300 volts to ground and crossarms carrying communication circuits at a vertical separation less than specified in the table, such existing construction may be continued until the said poles are replaced provided that—

The minimum separation between existing crossarms is not less than 2 feet, and that—Extensions to the existing construction shall conform to the clearance requirements specified in table 11.

When communication conductors are all in cable, a supply crossarm carrying only wires of not more than 300 volts to ground may be placed at not less than 2 feet above the point of attachment of the cable to the pole provided that—

The nearest supply wire on such crossarm shall be at least 30 inches horizontally from the center of the pole, and that—

The cable be placed so as not otherwise to obstruct the climbing space.

³ This shall be increased to 4 feet when the communication conductors are carried above supply conductors unless the communication-line-conductor size is that required for grade C supply lines.

⁴ Where conductors are operated by different utilities, a minimum vertical spacing of 4 feet is recommended.

⁵ These values do not apply to adjacent crossarms carrying phases of the same circuit or circuits.

⁶ A conductor which is effectively grounded throughout its length, and is associated with a supply circuit of 0 to 22,000 volts may have the clearances specified for cables having effectively grounded continuous metal sheath or messenger.

238. A. Vertical Separation Between Horizontal Cross-arms—Continued

2. INCREASED SEPARATIONS FOR VOLTAGES EXCEEDING 50,000 VOLTS.

For voltages greater than 50,000 volts the clearances of table 11 shall be increased at the rate of 0.4 inch per 1,000 volts of the excess.

B. Vertical Separation Between Line Conductors on Horizontal Crossarms.

Where line conductors are supported on horizontal crossarms spaced as required in rule 238, A, the vertical separation between such conductors shall be not less than the following:

1. WHERE CONDUCTORS ON THE CROSSARM ARE OF THE SAME VOLTAGE CLASSIFICATION.

Under these conditions, the vertical separation required by table 11 may be reduced as follows:

Where crossarm separation required by table 11 is—	Separation between conductors may be reduced to—
2 feet-----	16 inches.
4 feet-----	40 inches.
6 feet-----	60 inches.

2. WHERE CONDUCTORS OF DIFFERENT VOLTAGE CLASSIFICATIONS ARE ON SAME CROSSARM.

Under these conditions, the vertical separation between conductors on adjacent crossarms shall be that required by Rule 238 B, 1 above for the highest voltage classification concerned.

3. CONDUCTORS OF DIFFERENT SAGS ON SAME SUPPORT.

(a) VARIATION IN CLEARANCE. Line conductors supported at different levels on the same structure and strung to different sags shall have vertical spacings at the supporting structures so adjusted that the minimum spacing at any point in the span, at 60° F, no wind, shall not be reduced more than 25 percent from that required at the supports by rule 235, A, 2, (a), (1) and (2) and this rule.

238. B. Vertical Separation Between Line Conductors on Horizontal Crossarms—Continued

(b) **READJUSTMENT OF SAGS.** Sags should be readjusted when necessary to accomplish the foregoing, but not reduced sufficiently to conflict with the requirements of rule 261, F, 4. In cases where conductors of different sizes are strung to the same sag for the sake of appearance or to maintain unreduced clearance throughout storms, the chosen sag should be such as will keep the smallest conductor involved in compliance with the sag requirements of rule 261, F, 4.

(c) **INCREASED VERTICAL SEPARATION AT SUPPORTS.** For span lengths in excess of 150 feet, vertical separation at the pole between open supply conductors and communication cables or conductors shall be adjusted so that under conditions of 60° F, no wind and final unloaded sag, no supply conductor of 750 volts or less shall be lower in the span than a straight line joining the points of support of the highest communication cable or conductor, and no supply conductor of over 750 volts but less than 50,000 volts shall be lower in the span than 30 inches above such a straight line.

Exception: Effectively grounded supply conductors associated with systems of 50,000 volts or less need meet only the provisions of Rule 238 B 3(a).

C. Separation in Any Direction.

The separation in any direction between conductors of the same or different voltage classification when carried on the same structure, but on crossarms which are not horizontal, or on different types of supports at the two levels (such as a horizontal crossarm and a vertical rack), shall be not less than the values given in Rule 238 B 1, and 238 B 2, for vertical separation.

238. C. Separation in Any Direction—Continued

The separation in any direction shall not in any case be less than the horizontal separation specified in rule 235, A, 2, (a), (1) and (2).

D. Vertical Separation for Line Conductors Not Carried on Crossarms.

The vertical separation between conductors not carried on crossarms shall be the same as required in rule 238, B, 1 for conductors on crossarms.

Exception 1: Conductors on vertical racks or separate brackets other than wood placed vertically and meeting the requirements of rule 235, A, 4 may have separations as specified in that rule.

Exception 2: Where communication service drops cross under supply conductors on a common crossing pole, the separation between the communication conductor and an effectively grounded supply conductor may be reduced to 4 inches, provided the separation between the communication conductor and supply conductors not effectively grounded meet the requirements of Rule 238 B 1, 238 B 2 or 238 D as appropriate.

E. Vertical Separation Between Conductors and Noncurrent-Carrying Metal Parts of Equipment.**1. EQUIPMENT.**

For the purpose of measuring separations under this rule, "equipment" shall be taken to mean noncurrent-carrying metal parts of equipment, including metal supports for cables or conductors, and metal supply-crossarm braces which are attached to metal crossarms or are less than 1 inch from transformer cases or hangers which are not effectively grounded.

2. SEPARATIONS IN GENERAL.

Vertical separations between supply conductors and communication equipment, between communication conductors and supply equipment, and between supply and communication equip-

238. E. Vertical Separation Between Conductors and Non-current-Carrying Metal Parts of Equipment—Con.

ment shall be as follows, except as provided in 3, below:

Supply voltage	Vertical separation
0 to 8,700.....	<i>Inches</i> a 40
Exceeding 8,700.....	a 60

^a Where noncurrent carrying parts of equipment and supply cables are effectively grounded consistently throughout well-defined areas, and where communication is at lower levels, separations may be reduced to 30 inches.

3. SEPARATIONS FOR SPAN WIRES AND BRACKETS

Span wires or brackets carrying lamps or trolley conductors shall have at least the vertical separations in inches from communication equipment set forth in table 12.

TABLE 12. *Span Wires and Brackets.*

	Carrying Lamps		Carrying Trolley Conductors	
	Not Effectively Grounded	Effectively Grounded	Not Effectively Grounded	Effectively Grounded
Above communication crossarms	<i>Inches</i> 1 20	<i>Inches</i> 1 20	<i>Inches</i> 1 20	<i>Inches</i> 1 20
Below communication crossarms	24	24	24	24
From messengers carrying communication cables	1 20	4	12	4
From terminal box of communication cable	1 20	4	² 12	4
From communication brackets, bridle wire rings, or drive hooks	1 16	4	4	4

¹ This may be reduced to 12 inches for either span wires or metal parts of brackets at points 40 inches or more from the pole surface.

² Where it is not practicable to obtain a clearance of 1 foot from terminal boxes of communication cables, all metal parts of terminals shall have the greatest possible separation from fixtures or span wires including all supporting screws and bolts of both attachments.

238. E. Vertical Separation Between Conductors and Non-current-Carrying Metal Parts of Equipment—Con.

4. SEPARATION FROM DRIP LOOPS OF STREET LIGHT BRACKETS.

Drip loops of conductors entering street light brackets from the surface of the pole, shall be at least 12 inches above communication cables or through bolts.

239. CLEARANCES OF VERTICAL AND LATERAL CONDUCTORS FROM OTHER WIRES AND SURFACES ON THE SAME SUPPORT.

Vertical and lateral conductors shall have the clearances and separations required by this rule from other conductors, wires, or surfaces on the same support.

Exception 1: This rule does not prohibit the placing of supply circuits of the same or next voltage classification in the same iron pipe, if each circuit or set of wires be enclosed in a metal sheath.

Exception 2: This rule does not prohibit the placing of paired communication conductors in rings attached directly to the pole or to messenger.

Exception 3: This rule does not prohibit placing grounding conductors, neutral conductors which are effectively grounded throughout their length and associated with supply circuits of 0 to 15,000 volts, metal sheathed supply cables or conductors enclosed in conduit, directly on the pole.

Exception 4: This rule does not prohibit placing supply circuits of 550 volts or less and not exceeding 3,200 watts and properly insulated, in the same cable with control circuits with which they are associated.

A. Location of Vertical or Lateral Conductors Relative to Climbing Spaces, Working Spaces, and Pole Steps.

Vertical or lateral conductors shall be located so that they do not obstruct climbing spaces, or lateral working spaces between line conductors at different levels, or interfere with the safe use of existing pole steps.

239. A. Location of Vertical or Lateral Conductors Relative to Climbing Spaces, Workings Spaces, and Pole Steps—Continued

Exception 1: This rule does not apply to portions of the pole which workmen do not ascend while the conductors in question are alive.

Exception 2: This rule does not apply to vertical runs incased in suitable conduit or other protective covering. (See rule 236, H.)

B. Conductors not in Conduit.

Conductors not incased in conduit shall have the same clearances from conduits as from other surfaces of structures.

C. Mechanical Protection near Ground.

Where within 8 feet of the ground, all vertical conductors, cables, and grounding wires shall be protected by a covering which gives suitable mechanical protection. For grounding wires from lightning arresters, the protective covering specified above shall be of wood molding, or other insulating material giving equivalent protection.

Exception 1: This covering may be omitted from armored cables or cables installed in a grounded metal conduit.

Exception 2: This covering may be omitted from lead-sheathed cables in rural districts.

Exception 3: This covering may be omitted from vertical runs of communication cables or conductors.

Exception 4: This covering may be omitted from grounding wires in rural districts or in any area where the grounding wire is one of a number of grounding wires used to provide multiple grounds.

Exception 5: This covering may be omitted from wires which are used solely to protect poles from lightning.

239. CLEARANCES OF VERTICAL AND LATERAL CONDUCTORS FROM OTHER WIRES AND SURFACES ON THE SAME SUPPORT—Continued

D. Requirements for Vertical and Lateral Supply Conductors on Supply Line Poles or Within Supply Space on Jointly Used Poles.

1. GENERAL CLEARANCES.

In general, clearances shall be not less than the values specified in table 13.

TABLE 13.—General clearances

Clearance of vertical and lateral conductors	Clearances for highest voltage concerned in the clearance	
	0 to 8,700 volts	Exceeding 8,700 volts, add the following for each 1,000 in excess
	<i>Inches</i>	<i>Inches</i>
From surfaces of supports-----	3	0. 25
From span, guy, or messenger wires----	6	. 4
From line conductors rigidly supported on fixed supports, such conductors being of—		
Same circuit-----	3	. 25
Different circuits-----	6	. 4
From line conductors not rigidly supported on fixed supports-----	(1)	(1)

¹ The clearances shall be increased beyond the values given above from line conductors on fixed supports (See rule 235, A, 2, (b), and 3, (b)).

2. SPECIAL CASES.

The following requirements apply only to portions of a pole which workmen ascend while the conductors in question are alive:

- (a) **SIDE-ARM CONSTRUCTION.** Vertical conductors in metal-sheathed cables and grounding wires may be run without insulating protection from supply line conductors on poles used only for supply lines and em-

239. D. Requirements for Vertical and Lateral Supply Conductors on Supply Line Poles or Within Supply Space on Jointly Used Poles—Continued

playing side-arm construction on the side of the pole opposite to the line conductors if climbing space is provided on the line-conductor side of the pole.

- (b) ON INSULATORS. Vertical and lateral conductors of less than 8,700 volts if on poles used only for supply lines may be run in multiple-conductor cables having suitable substantial insulating covering, if such cable is held taut on standard insulators supported on pins or brackets and is arranged so that the cable is held at a distance of approximately 5 inches from the surface of the pole, and from any pole step.
- (c) CONDUCTORS TO STREET LAMPS. On poles used only for supply lines, open wires may be run from the supply line arm directly to the head of a street lamp, provided the clearances of table 13 are obtained and the open wires are substantially supported at both ends.
- (d) CONDUCTORS OF LESS THAN 300 VOLTS. Vertical or lateral secondary supply conductors of not more than 300 volts to ground may be run in multiple-conductor cable attached directly to the pole surface or to cross-arms in such a manner as to avoid abrasion at the point of attachment. Each conductor of such cable which is not effectively grounded, or the entire cable assembly, shall have an insulating covering required for a conductor of at least 1,000 volts.
- (e) OTHER CONDITIONS. If open wire conductors are within 4 feet of the pole, vertical conductors where within a zone of 4 feet above and below such line conductors of not more than 8,700 volts, or where within a zone 6 feet above and below such line

239. D. Requirements for Vertical and Lateral Supply Conductors on Supply Line Poles or Within Supply Space on Jointly Used Poles—Continued

conductors of more than 8,700 volts, shall be run in one of the following ways:

- (1) So as to clear the pole center by not less than 15 inches if the vertical conductors are of 8,700 volts or less, or 20 inches if more than 8,700 volts.
- (2) Enclosed in insulating conduit, or in metal conduit or cable protected by an insulating covering.
- (3) Conductors with triple-braid weather-proof or equivalent covering and covered by wood molding.

Methods (2) and (3) apply also to lateral runs and to grounding conductors, except that conductors for grounding lightning-protection wires are not required to be covered within 6 feet above or below circuits of 15,000 volts or more.

E. Requirements for Vertical and Lateral Communication Line Poles or Within the Communication Space on Jointly Used Poles.

1. CLEARANCES FROM WIRES.

The clearances and separations of vertical and lateral conductors from other conductors (except those in the same ring run) and from guy, span, or messenger wires shall be 3 inches.

2. CLEARANCES FROM POLE AND CROSSARM SURFACES. Vertical and lateral insulated communication conductors may be attached directly to a pole or crossarm. They shall have a vertical clearance of at least 40 inches from any supply conductors (other than vertical runs or lamp leads) of 8,700 volts or less, or 60 inches if more than 8,700 volts.

Exception: These clearances do not apply where the supply circuits involved are those carried in the manner specified in rule 220, B, 3.

239. CLEARANCES OF VERTICAL AND LATERAL CONDUCTORS FROM OTHER WIRES AND SURFACES ON THE SAME SUPPORT—Continued

F. Requirements for Vertical Supply Conductors Passing Through Communication Space on Jointly Used Poles.

Vertical supply conductors, including grounding wires, which pass through communication line space on jointly used poles shall be installed as follows:

1. METAL-SHEATHED SUPPLY CABLES.

Metal-sheathed supply cables shall be covered as follows:

- (a) **EXTENT OF COVERING.** Covering shall extend from the lowest points of such cables up to 40 inches above the highest communication conductors.
- (b) **NATURE OF COVERING.** The covering shall consist of wood molding or other suitable insulating material at points higher than 8 feet above the ground.

Exception 1: Metal pipe may be used throughout, under the following conditions:

On poles where there are no trolley attachments and the metal pipe is effectively grounded, no insulating covering is required.

On poles where there are trolley attachments or where the metal pipe is not effectively grounded, the pipe shall be covered with wood molding or other suitable insulating material from a point six feet below the lowest communication wire or trolley attachment to a point 40 inches above the highest communication wire or trolley attachment.

Exception 2: No insulating covering is required over supply secondary multi-conductor cables attached directly to the pole surface in accordance with the requirements of rule 239, F, 2(c).

239. F. Requirements for Vertical Supply Conductors Passing Through Communication Space on Jointly Used Poles—Continued

Exception 3: Where there are no trolley attachments on the pole, no insulating covering is required over supply cables having effectively grounded lead sheath, or supply cables having effectively grounded metal sheath of other types where mutually agreed to by the parties concerned.

2. SUPPLY CONDUCTORS.

Supply conductors shall be installed in one of the following ways:

- (a) IN CONDUIT. Conductors of all voltages may be inclosed in the same way and to the same extent as required in 1 above for metal-sheathed cables.
- (b) ON PINS AND INSULATORS. Vertical and lateral conductors of street-lighting circuits and service leads of less than 750 volts to ground may be run on the pole in multiple-conductor cable having suitable substantial insulating covering if such cable is held taut on standard insulators supported on pins or brackets and arranged so that the cable shall be held at a distance of approximately 5 inches away from the surface of the pole or from any pole steps.
- (c) INSTALLED ON THE POLE SURFACE. Secondary supply conductors of not more than 300 volts to ground may be run in multiple-conductor cables attached directly to the pole surface in such a manner as to avoid abrasion at the points of attachment. In the case of aerial services, the point where such cables leave the pole shall be at least 40 inches above the highest, or 40 inches below the lowest, communication attachment. Each conductor of such cable which is not effectively grounded shall be insulated for a potential of at least 600 volts.

239. F. Requirements for Vertical Supply Conductors Passing Through Communication Space on Jointly Used Poles—Continued

(d) SUSPENDED FROM SUPPLY CROSSARM. Lamp leads of street lighting circuits may be run from supply crossarms directly to a street lamp bracket or luminaire under the following conditions:

- (1) The vertical run shall consist of paired wires or multiple-conductor cable securely attached at both ends to suitable brackets and insulators.
- (2) The vertical run shall be held taut at least 40 inches from the surface of the pole (through the communication space), at least 12 inches beyond the end of any communication crossarm by which it passes, and at least 6 inches from communication drop wires, and at least 20 inches from any communication cable.
- (3) Insulators attached to lamp brackets for supporting the vertical run shall be capable of meeting, in the position in which they are installed, the same flashover requirements as the luminaire insulators.
- (4) Each conductor of the vertical run shall be No. 10 AWG or larger.

3. SUPPLY GROUNDING WIRES.

Supply grounding wires shall be covered with wood molding or other suitable insulating covering to the extent required for metal-sheathed cables in 1 above.

Exception: If there are no trolley attachments on the pole, insulating covering is not required for a grounding conductor which: (1) is directly (metallically) connected to a conductor which forms part of an effective grounding system, and (2) has no connection to supply transformers or capacitors between the grounding electrode and the effectively grounded conductor unless such transformers

239. F. Requirements for Vertical Supply Conductors Passing Through Communication Space on Jointly Used Poles—Continued

or capacitors have additional connections to the effectively grounded conductor.

4. SEPARATION FROM THROUGH BOLTS.

Vertical runs of supply conductors shall be separated from the ends of through bolts associated with communication line equipment by one-eighth of the circumference of the pole where practicable, but in no case less than 2 inches.

Exception: Vertical runs of effectively grounded supply conductors may have a separation of one inch from the end of communication through bolts.

G. Requirements for Vertical Communication Conductors Passing Through Supply Space on Jointly Used Poles.

All vertical runs of communication conductors passing through supply space shall be installed as follows:

1. METAL-SHEATHED COMMUNICATION CABLES.

Vertical runs of metal-sheath communication cables shall be covered with wood molding, or other suitable insulating material, where they pass trolley feeders or other supply-line conductors. This insulating covering shall extend from a point 40 inches above the highest trolley feeders, or other supply conductors, to a point 6 feet below the lowest trolley feeders or other supply conductors, but need not extend below the top of any mechanical protection which may be provided near the ground.

Exception: Communication cables may be run vertically on the pole through space occupied by railroad-signal supply circuits in the lower position, as permitted in rule 220, B, 3, without insulating covering within the supply space.

239. G. Requirements for Vertical Communication Conductors Passing Through Supply Space on Jointly Used Poles—Continued

2. COMMUNICATION CONDUCTORS.

Vertical runs of insulated communication conductors shall be covered with wood molding, or other suitable insulating material, to the extent required for metal-sheathed communication cables in 1 above, where such conductors pass trolley feeders or other supply conductors.

Exception: Communication conductors may be run vertically on the pole through space occupied by railroad-signal supply circuits in the lower position, as permitted in rule 220, B, 3, without insulating covering within the supply space.

3. COMMUNICATION GROUNDING CONDUCTORS.

Vertical communication grounding conductors shall be covered with wood molding or other insulating material between points at least 6 feet below and 40 inches above any trolley feeders or other supply line conductors by which they pass.

Exception: Communication grounding conductors may be run vertically on the pole through space occupied by railroad-signal supply circuits in the lower position, as permitted in rule 220, B, 3, without insulating covering within the supply space.

4. SEPARATION FROM THROUGH BOLTS.

Vertical runs of communication conductors shall be separated from the ends of through bolts associated with supply-line equipment by one-eighth of the circumference of the pole where practicable, but in no case less than 2 inches.

SEC. 24. GRADES OF CONSTRUCTION

240. GENERAL.

For the purposes of section 26, "Strength requirements", and section 27, "Line insulators", conductors and their supporting structures are classified under the grades specified in this section on the basis of the relative hazard existing.

241. APPLICATION OF GRADES OF CONSTRUCTION TO DIFFERENT SITUATIONS.

A. Supply Cables.

For the purposes of these rules, supply cables are divided into two classes as follows:

1. SPECIALLY INSTALLED CABLES.

In this class are included supply cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger, installed in accordance with rule 261, G, 1.

Note: Such cables are sometimes permitted to have a lower grade of construction than open-wire supply conductors of the same voltage.

2. OTHER CABLES.

In this class are included all other supply cables.

Note: Such cables are required to have the same grade of construction as open-wire supply conductors of the same voltage.

B. Two or More Conditions.

In any case where two or more conditions affecting the grade of construction exist, the grade of construction used shall be the highest one required by any of the conditions.

C. Order of Grades.

For supply and communication conductors and supporting structures, the relative order of grades is B, C, and N, grade B being the highest. Where grades D and N are specified for communication lines, grade D is the higher.

Note: Grade D cannot be directly compared with grades B and C, but rule 241, D, 3, (c) provides for cases where these two conditions are present.

D. At Crossings.

1. GRADE OF UPPER LINE.

Conductors and supporting structures of a line crossing over another line shall have the grade of construction specified in rules 241, D, 3; 242 and 243.

2. GRADE OF LOWER LINE.

Conductors and supporting structures of a line crossing under another line need only have the grades of construction which would be required if the line at the higher level were not there.

241. D. At Crossings—Continued

3. MULTIPLE CROSSINGS.

- (a) WHERE A LINE CROSSES IN ONE SPAN OVER TWO OTHER LINES. The grade of construction of the uppermost line shall be not less than the highest grade which would be required of either one of the lower lines if it crossed the other lower line.

Example: If a 2,300-volt line crosses in the same span over a communication line and a direct-current trolley contact conductor of more than 750 volts, the 2,300-volt line is required to comply with grade B construction at the crossing. This is a double crossing and introduces a greater hazard than where the upper supply line crosses the communication line only.

- (b) WHERE ONE LINE CROSSES OVER A SPAN IN ANOTHER LINE, WHICH SPAN IS IN TURN INVOLVED IN A SECOND CROSSING. The grade of construction for the highest line shall be not less than that required for the next lower line.

Exception: This requirement does not apply when the two upper lines are of such a nature and have such circuit protection that the danger of causing a break in the lower of these two lines by mechanical or electrical contact is eliminated.

- (c) WHERE COMMUNICATION CONDUCTORS CROSS OVER SUPPLY CONDUCTORS AND RAILROAD TRACKS IN THE SAME SPAN. The grades of construction shall be in accordance with table 14.

Recommendation: It is recommended that the placing of communication conductors above supply conductors at crossings, conflicts, or on jointly used poles, be avoided unless the supply conductors are trolley contact conductors and their associated feeders.

241. D. At Crossings—Continued

TABLE 14.—*Grades of construction for communication conductors crossing over railroad tracks and supply lines*

When crossing over—	Communication conductor grades
Railroad tracks and supply lines of 0 to 750 volts to ground, or specially installed supply cables of all voltages.....	D
Railroad tracks and supply lines exceeding 750 volts to ground.....	B

E. Conflicts.

1. HOW DETERMINED.

Where two lines are adjacent (except at crossing spans) the distance between them and the relative heights above ground of poles and of conductors on each line determine whether conflict exists, and, if so, whether the conflict is a structure conflict (see definition) or a conductor conflict (see definition), or both.

2. CONDUCTOR CONFLICT.

At conductor conflicts, the grade of construction of the conflicting conductor shall be as required by rules 241, D, 3, and 242.

3. STRUCTURE CONFLICT.

At structure conflicts, the grade of construction of the conflicting structure shall be as required by rule 243.

242. GRADES OF CONSTRUCTION FOR CONDUCTORS.

The grades of construction required for conductors of all classes in different situations are given in tables 15 and 16. For the purpose of these tables certain classes of circuits are treated as follows:

A. Status of Constant-Current Circuits.

The grade of construction for a constant-current supply circuit involved with a communication circuit and not in specially installed cable shall be

242. A. Status of Constant-Current Circuits—Continued

based on either its current rating or on the open-circuit voltage rating of the transformer supplying such circuit, as set forth in tables 15 and 16. In all other cases the grade of construction for a constant-current circuit shall be based on its nominal full-load voltage.

B. Status of Railway Feeders and Trolley Contact Conductors.

In determining grades of construction where railway feeders and trolley-contact conductors are involved, they shall be considered as other supply conductors of the same voltage.

Exception: Direct-current trolley circuits exceeding 750 volts to ground where crossing over, conflicting with, or on jointly used poles with and above communication circuits, shall have the grades of construction specified in table 15 for direct-current railway feeders.

C. Status of Communication Circuits Used Exclusively in the Operation of Supply Lines.

In determining grades of construction where communication circuits used exclusively in the operation of supply lines are concerned, they shall be considered as ordinary communication circuits when run as such (see rule 288, A, 3) and as supply circuits when run as such (see rule 288, A, 4).

Exception: Communication circuits located below supply circuits with which they are used shall not require such supply circuits to meet any rules for grade of construction other than that the sizes of such supply conductors shall be not less than required for grade C (see rule 261, F. 2).

D. Status of Fire-Alarm Conductors.

In determining grades of construction where fire-alarm conductors are concerned, they shall be considered as other communication circuits.

Exception: Fire-alarm conductors shall always meet grade D where the span length is from 0 to 150 feet, and grade C where the span length exceeds 150 feet.

TABLE 15.—*Grades of construction for supply conductors alone, at crossings, at conflicts, or on same poles with other conductors*
 [All voltages are between wires except as indicated. Corresponding voltages to grounded neutral of grounded circuits are shown in parentheses. In applying the table to two-wire grounded circuits use the "to neutral" voltage. The grade of construction for any particular supply conductors, as indicated across the top of the table according to type, location and voltage, should meet the requirements for all applicable situations at lower levels as to other conductors, tracks and rights-of-way as indicated in the left-hand column]

Supply Conductors at Higher Levels ¹		Constant-potential supply conductors other than direct current railway feeders										Communication-conductors used exclusively in the operation of, and run as, supply lines		
		0 to 750 Volts. (0 to 750 volts to Neutral)		750 to 8700 Volts. (750 to 5000 Volts to Neutral)		Exceeding 8700 Volts (Exceeding 5000 Volt to Neutral)		Constant current supply conductors		Direct current railway feeders				
Conductors, tracks and rights of way at lower levels		Ur- ban	Rural	Urban		Rural		Urban		Rural		Open or Cable		
		Open or cable	Open or cable	Open	Cable	Open	Cable	Open	Cable	Open	Cable			
				N	N	N ²	N	N	N ²	N	N		N	N
				N	N	C	N	N	B ³	C	N		N	N
Exclusive private rights of way		B	B	B	B	B	B	B	B	B	B	C or N See Rule 242-C		
Common or Public rights of way		N	N	N	N	N	N	N	N	N	N			
Railroad tracks—Main or Minor		N	N	C	N	N	N	N	N	N	N	B		
Street-railway tracks having no overhead contact conductor		N	N	N	N	N	N	N	N	N	N			
Constant-potential supply conductors		0-750 Volts (0-750 Volts to Neutral)	Open or cable	N	C	N	N	N	B ³	C	C ⁴	N	B, C or N See Rule 242-B	
			Open	C ⁵	N	C	N	N	N	B ³	C	N		N
		750 to 8700 Volts (750 to 5000 Volts to Neutral)	Cable	N	N	N	N	N	N	B ³	C	N		N
			Open	B ⁵	C ⁵	B	F	N	N	B ³	C	N		N
Exceeding 8700 Volts (Exceeding 5000 Volts to Neutral)		Cable	N	C	N	N	N	B ³	C	N	N			

242. GRADES OF CONSTRUCTION FOR CONDUCTORS—Con.

E. Status of Neutral Conductors of Supply Circuits.

Supply-circuit neutral conductors, which are effectively grounded throughout their length and are not located above supply conductors of more than 750 volts to ground, shall have the same grade of construction as supply conductors of not more than 750 volts to ground, except that they need not meet any insulation requirements. Other neutral conductors shall have the same grade of construction as the phase conductors of the supply circuits with which they are associated.

TABLE 16.—*Grades of construction for communication conductors alone, or in upper position at crossings, at conflicts, or on joint poles*

Communication conductors at higher levels \longrightarrow		Communication conductors, rural or urban, open or cable, includ- ing communication conductors run as such, but used exclusively in the operation of supply lines	
Conductors, tracks and rights-of-way at lower levels \downarrow			
Exclusive private rights-of-way.....		N	
Common or Public rights-of-way.....		N	
Railroad tracks—main or minor.....		D	
Street-railway tracks having no overhead-contact wire.....		N	
Constant - potential sup- ply conductors. ²	{ 0 to 750 volts.....	Open or cable...	N
	{ 750 to 2,900 volts.....	Open or cable...	C
	{ Exceeding 2,900 volts.....	{ Open.....	B
		{ Cable.....	C
Constant-current supply conductors. ²	{ 0 to 7.5 amperes.....	Open ³	C
	{ Exceeding 7.5 amperes ..	Open ³	⁴ B
Direct - current railway feeders. ²	{ 0 to 750 volts.....	Open or cable...	N
	{ Exceeding 750 volts.....	Open or cable...	B
Trolley - contact conduc- tors.	{ 0 to 750 volts.....	ac or dc.....	C
	{ Exceeding 750 volts.....	{ ac.....	⁵ B or C
		{ dc.....	B
Communication conductors, open or cable, used exclusively in the op- eration of supply lines.....		⁶ B, C, or N	
Communication conductors, open or cable, urban or rural.....		N	

¹ It is recommended that the placing of communication conductors above supply conductors at crossings, conflicts, or on jointly used poles be avoided, unless the supply conductors are trolley-contact conductors and their associated feeders.

² The words "open" and "cable" appearing in the headings have the following meaning as applied to supply conductors: "Cable" means the specially installed cables described in rule 241, A. 1. "Open" means open wire and also supply cables not specially installed.

³ Where constant-current circuits are in specially installed cable, they are considered on the basis of the nominal full-load voltage.

⁴ Grade C construction may be used if the open-circuit voltage of the transformer supplying the circuit does not exceed 2,900 volts.

⁵ See rule 242, B.

⁶ See rule 242, C.

243. GRADES OF SUPPORTING STRUCTURES.**A. Poles or Towers.**

The grade of construction shall be that required for the highest grade of conductors supported.

Exception 1: The grade of construction of jointly used poles, or poles used only by communication lines, need not be increased merely because of the fact that communication wires carried on such poles cross over trolley contact conductors of 0 to 750 volts to ground.

Exception 2: Poles carrying grade C or D fire-alarm conductors, where alone, or where concerned only with other communication conductors, need meet only the requirements of grade N.

Exception 3: Poles carrying supply service loops of 0 to 750 volts to ground shall have at least the grade of construction required for supply line conductors of the same voltage.

Exception 4: Where communication lines cross over supply conductors and a railroad in the same span and grade B is required by rule 241, D, 3, (c) for the communication conductors, due to the presence of railroad tracks, the grade of the poles or towers shall be D.

Exception 5: At structure conflicts, even though no conductor conflict exists, the grade of construction which would be required by rule 242, if the conductors were in conflict, shall be applied to the pole or tower.

Note: This requirement may result in a higher grade of construction for the pole or tower than for the conductors carried thereon.

Exception 6: In the case where a structure conflict does not exist, but any conductor is in conductor conflict, the grade of construction of the pole or tower is not required to meet the conductor grade due to the conductor conflict.

B. Crossarms.

The grade of construction shall be that required for the highest grade of conductors carried by the cross-arm concerned.

Exception 1: The grade of construction of crossarms carrying only communication conductors need

243. B. Crossarms—Continued

not be increased merely because of the fact that such conductors cross over trolley-contact conductors of 0 to 750 volts to ground.

Exception 2: Crossarms carrying grade C or D fire-alarm conductors, where alone or where concerned with other communication conductors, need meet only the requirements for grade N.

Exception 3: Crossarms carrying supply service loops of 0 to 750 volts to ground shall have at least the grade of construction required for supply line conductors of the same voltage.

Exception 4: Where communication lines cross over supply conductors and a railroad in the same span and grade B is required by rule 241, D, 3, (c) for the communication conductors due to the presence of railroad tracks, the grade of the crossarm shall be D.

C. Pins, Insulators and Conductor Fastenings.

The grade of construction shall be that required for the conductor concerned.

Exception 1: The grade of construction of pins, insulators, and conductor fastenings carrying only communication conductors need not be increased merely because of the fact that such conductors cross over trolley-contact conductors of 0 to 750 volts to ground.

Exception 2: In the case of grade C or D fire-alarm conductors where alone, or where concerned only with other communication conductors, pins, insulators, and conductor fasteners need meet only the requirements for grade N.

Exception 3: In the case of supply service loops of 0 to 750 volts to ground, pins, insulators, and conductor fastenings shall have at least the same grade of construction as required for supply-line conductors of the same voltage.

243. C. Pins, Insulators and Conductor Fastenings—Con.

Exception 4: Where communication lines cross over supply conductors and a railroad in the same span, and grade B is required by rule 241, D, 3, (c) for the communication conductors due to the presence of railroad tracks, the grade of pins, insulators, and conductor fastenings shall be D.

Exception 5: In case communication conductors are required to meet grade B or C, the insulators need meet only the requirements for mechanical strength for these grades.

SEC. 25. LOADING FOR GRADES B, C, AND D

250. GENERAL LOADING MAP.

Three general degrees of loading due to weather conditions are recognized and are designated as heavy, medium, and light loading. The map in figure 3 shows the districts in the United States in which these loadings are normally applicable. It is recognized that loadings in certain areas in each of the loading districts are greater, and in some cases may be less, than those specified for the districts. It is expected that detailed districting will be carried out by state administrative authorities, which will delineate, as far as practicable, such areas. In the absence of such detailed districting, however, no reduction in the loadings specified in this code shall be made without approval of the administrative authority.

Note: The localities in the different groups are classed according to the relative prevalence of high wind velocity and thickness of ice which accumulates on wires, light loading being, in general, for places where little, if any, ice ever accumulates on wires.

Where high wind velocities are frequent in a given place the loading for that place may be classed as heavy, even though ice does not accumulate to any greater extent than at some other place having less severe winds which has been classed as a medium loading district.

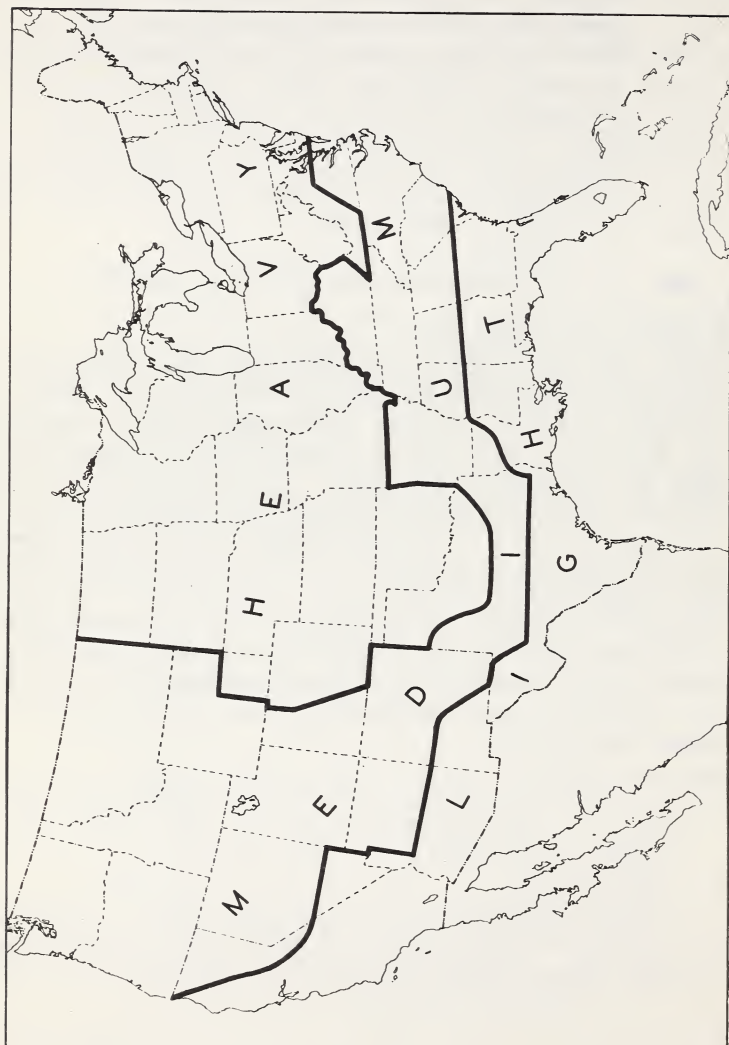


FIGURE 3. General loading map showing territorial division of the United States with respect to loading of overhead lines

251. CONDUCTOR LOADING.

The loading on conductors shall be assumed to be the resultant loading per foot equivalent to the vertical load per foot of the conductor, ice-covered where specified, combined with the transverse loading per foot due to a transverse, horizontal wind pressure upon the projected area of the conductor, ice-covered where specified, to which equivalent resultant shall be added a constant. In the tabulation below are the values for ice, wind, temperature, and constants which shall be used to determine the conductor loading.

	Loading district		
	Heavy	Medium	Light
Radial thickness of ice (in.)-----	0. 50	0. 25	0
Horizontal wind pressure in pounds per square foot-----	4	4	9
Temperature (° F)-----	0	+ 15	+ 30
Constant to be added to the result- ant in pounds per foot:			
For bare conductors of copper, steel, copper alloy, copper- covered steel, and combina- tions thereof-----	0. 29	0. 19	0. 05
For bare conductors of alumi- num (with or without steel reinforcement)-----	. 31	. 22	. 05
For weather-proof and similar covered conductors (all ma- terials)-----	. 31	. 22	. 05

Note: Since heavy ice does not often form on conductors in a heavy wind, the transverse loading assumed is deemed sufficient for the purpose, but is not sufficient to represent the vertical (or combined) load which is imposed on conductors by the heavy deposits of ice which frequently form in comparatively still air. In order to apply a total loading to conductors representing more nearly the conditions encountered in practice, constants have been added to the conductor loading which make no substantial change in the conductor loading specified in the fourth edition of this code.

Where cables are concerned, the specified loadings shall be applied to both cable and messenger.

251. CONDUCTOR LOADING—Continued

In applying loadings to bare stranded conductors, the coating of ice shall be considered as a hollow cylinder touching the outer strands.

252. LOADS UPON LINE SUPPORTS.**A. Assumed Vertical Loading.**

The vertical loads upon poles, towers, foundations, crossarms, pins, insulators, and conductor fastenings shall be their own weight plus the superimposed weight which they support, including all wires and cables, ice-coated in heavy and medium loading districts, together with the effect of any difference in elevation of supports. The radial thickness of ice shall be computed only upon wires, cables, and messengers, and shall be taken as the following:

Heavy loading district (H),	0.50 inch of ice.
Medium loading district (M),	0.25 inch of ice.
Light loading district (L),	no ice.

Ice is assumed to weigh 57 pounds per cubic foot.

Note: The weight of ice upon supports is ignored for the sake of simplicity.

B. Assumed Transverse Loading.

In computing the stresses in poles, towers, and side guys the loading shall be taken as one of the following according to climatic conditions of the locality concerned.

1. HEAVY LOADING (H).

A horizontal wind pressure, at right angles to the direction of the line, of 4 pounds per square foot upon the projected area of cylindrical surfaces of all supported conductors and messengers, when covered with a layer of ice 0.5 inch in radial thickness and on surfaces of the poles and towers without ice covering, shall be called heavy loading. (See 4 and 5 following.)

For supporting structures carrying more than 10 wires, not including cables supported by messengers, where the pin spacing does not exceed 15 inches, the transverse load shall be calculated on two-thirds of the total number of such wires with a minimum of 10 wires.

252. B. Assumed Transverse Loading—Continued

2. MEDIUM LOADING (M).

A horizontal wind pressure at right angles to the direction of the line, of 4 pounds per square foot upon the projected area of cylindrical surfaces of all supported conductors and messengers when covered with a layer of ice 0.25 inch in radial thickness and on the surfaces of the poles and towers without ice covering, shall be called medium loading. (See 4 and 5 following.)

For supporting structures carrying more than 10 wires, not including cables supported by messengers, where the pin spacing does not exceed 15 inches, the transverse load shall be calculated on two-thirds of the total number of such wires with a minimum of 10 wires.

3. LIGHT LOADING (L).

A horizontal wind pressure at right angles to the direction of the line of 9 pounds per square foot upon the projected area of cylindrical surfaces of all supported conductors and messengers, poles and towers without ice covering, shall be called light loading. (See 4 and 5 following.)

4. TROLLEY-CONTACT CONDUCTORS.

When a trolley-contact conductor is supported on a pole it shall be included in the computation of the transverse load on the structure.

5. FLAT SURFACES.

For flat surfaces the assumed unit wind pressure shall be increased by 60 percent. Where latticed structures are concerned, the actual exposed area of one lateral face shall be increased by 50 percent to allow for the pressure on the opposite face; this total, however, need not exceed the pressure which would occur on a solid structure of the same outside dimensions. The results obtained by more exact calculations may be substituted for the values obtained by this simple rule.

6. AT ANGLES.

Where a change in direction of wires occurs, the loading upon the structure, including guys,

252. B. Assumed Transverse Loading—Continued

shall be assumed to be a resultant load equal to the vector sum of the transverse wind load given in 1, 2, or 3 above and the resultant load imposed by the wires due to their change in direction. In obtaining these loadings, a wind direction shall be assumed which will give the maximum resultant load, proper reduction being made in loading to account for the reduced wind pressure on the wires resulting from the angularity of the application of the wind to the wires.

C. Assumed Longitudinal Loading.**1. CHANGE IN GRADE OF CONSTRUCTION.**

The longitudinal loading upon supporting structures, including poles, towers and guys at ends of sections required to be of grade B construction, when located in lines of lower than grade B construction, shall be taken as an unbalanced pull in the direction of the higher grade section equal to the larger of the following values:

- (1) The pull of two-thirds and in no case less than two of the conductors supported thereon which have ultimate strength of 3,000 lbs or less, such two-thirds of the conductors being selected so as to produce the maximum stress in the support; the nearest whole number of conductors to be used, or
- (2) The pull of one conductor when there are eight or less conductors (including overhead ground wires) having ultimate strength of more than 3,000 lbs, and the pull of two conductors when there are more than eight conductors, such conductors being selected so as to produce the maximum stress in the support.

2. JOINTLY USED POLES AT CROSSINGS OVER RAILROADS OR COMMUNICATION LINES.

Where a joint line crosses over a railroad or a communication line and grade B is required for the crossing span, the tension in the communication conductors of the joint line may be considered as limited to one-half their breaking strength, provided they are smaller than No. 8

252. C. Assumed Longitudinal Loading—Continued

Stl. WG, if of steel, or No. 6 AWG, if of copper, regardless of how small the initial sags of the communication conductors at 60° F.

3. DEAD-ENDS.

The longitudinal loading upon supporting structures at dead-ends for line terminations shall be taken as an unbalanced pull equal to the tensions of all conductors and messengers (including overhead ground wires), under the conditions of conductor loading specified in Rule 251; except that with spans in each direction from the dead-end structure the unbalanced pull shall be taken as the difference in tensions plus, if applicable, the tensions with broken wire conditions specified in Rule 252C1.

4. COMMUNICATION CONDUCTORS ON UNGUYED SUPPORTS AT RAILROAD CROSSINGS.

The longitudinal loading shall be assumed equal to an unbalanced pull in the direction of the crossing of all open-wire conductors supported, the pull of each conductor being taken as 50 percent of its ultimate strength in the heavy loading district, 33½ percent in the medium loading district, and 22¼ percent in the light loading district.

D. Average Span Lengths.**1. GENERAL.**

The calculated transverse loads upon poles, towers, and crossarms, except as provided in 2 below, shall be based upon the average span length of a section of line that is reasonably uniform as to height, number of wires, grades, and span length. In no case shall the average value taken be less than 75 percent or more than 125 percent of the actual average of the two spans adjacent to the structure concerned.

2. CROSSINGS.

In the case of crossings over railroads or communication lines the actual lengths of the two spans adjacent to the two structures concerned shall be used.

252. LOADS UPON LINE SUPPORTS—Continued**E. Simultaneous Application of Loads.**

1. When calculating transverse strength, the assumed transverse and vertical loads shall be taken as acting simultaneously.
2. In calculating longitudinal strength, the assumed longitudinal loads shall be taken without consideration of the vertical or transverse loads.

SEC. 26. STRENGTH REQUIREMENTS**260. PRELIMINARY ASSUMPTIONS.**

It is recognized that deformation, deflection, or displacement of parts of the structure will, in some cases, change the effects of the loads assumed. In the calculation of stresses, allowance may be made for such deformation, deflection or displacement of supporting structures including poles, towers, guys, crossarms, pins, conductor fastenings, and suspension insulators when the effects can be accurately evaluated. For crossings or conflicts, the calculations shall be subject to mutual agreement.

261. GRADES B AND C CONSTRUCTION.**A. Poles and Towers.**

The strength requirements for poles and towers may be met by the structures alone or with the aid of guys or braces.

1. AVERAGE STRENGTH OF THREE POLES.

A pole (single-base structure) not individually meeting the transverse strength requirements will be permitted when reinforced by a stronger pole on each side, if the average strength of the three poles meets the transverse strength requirements, and the weak pole has not less than 75 percent of the required strength.

An extra pole inserted in a normal span for the purpose of supporting a service loop may be ignored, if desired, in the calculation of the strength of the line.

261. A. Poles and Towers—Continued

Exception: In the case of crossings over railroads or communication lines, the actual strengths of the crossing poles shall be used.

2. REINFORCED-CONCRETE POLES.

Reinforced-concrete poles shall be of such material and dimensions as to withstand, for vertical and transverse strength, the loads assumed in rules 252, A and B, and for longitudinal strength the loads in rule 252, C, without exceeding the following percentages of their ultimate strength at the ground line for unguyed poles, or at the point of guy attachment for guyed poles. (Where guys are used, see rule 261, C.)

	Percentages of ultimate strength for reinforced-concrete poles	
	Grade B	Grade C
For transverse strength (when installed)-----	25	37.5
For longitudinal strength (at all times):		
In general-----	100	No requirement.
At dead-ends-----	50	75.0

3. METAL SUPPORTING STRUCTURES.

In the design of metal structures, the term "overload capacity factor" referred to in table 17 is to be interpreted in such a manner that the completed structure, if tested, shall support without permanent deflection the maximum loading to which it will be subjected as specified in section 25, multiplied by the factors given in table 17. The absence of permanent set on the structure indicates that no part has been stressed beyond the yield strength. Allowance should be made for bolt slip.

261. A. Poles and Towers—Continued

Metal supports, metal towers, and metal poles shall be designed and constructed so as to meet the following requirements:

- (a) VERTICAL AND TRANSVERSE STRENGTH. The completed structure shall be so designed and of sufficient strength as to provide overload capacity factors specified in table 17 under the vertical and transverse loading specified in rule 252, A and B, 1 to 5, inclusive.
- (b) LONGITUDINAL STRENGTH.
 - Grade B.* The completed structure shall be so designed and of sufficient strength as to provide overload capacity factors specified in table 17 under the longitudinal loading specified in rule 252, C.
 - Grade C.* No longitudinal strength requirements except at dead-ends.
- (c) MINIMUM STRENGTH. Metal structures shall have strength sufficient to withstand, with an overload capacity factor of 1.1, a transverse load on the structures without conductors, equal to six times the specified wind pressure.
- (d) STRENGTH AT ANGLES IN A LINE. At an angle in a line having supports of metal poles or towers, the strength of the support shall be sufficient to withstand the total transverse loadings specified in Rule 252B6. Before combining the two loads, the transverse wind load shall be multiplied by the appropriate overload capacity factor for transverse strength given in table 17, and the load arising from change in direction of conductors shall be multiplied by the appropriate overload capacity factor at dead-ends given in table 17.

261. A. Poles and Towers—Continued

TABLE 17.—*Minimum overload capacity factors of completed structures*

[Based on yield strength of metal]

	Overload capacity factors	
	Grade B	Grade C
Vertical strength-----	1. 27	1. 10
Transverse strength-----	2. 54	2. 20
Longitudinal strength:		
At crossings—		
In general-----	1. 10	No require- ment.
At dead-ends-----	1. 65	1. 10
Elsewhere—		
In general-----	1. 00	No require- ment.
At dead-ends-----	1. 65	1. 10

- (e) **THICKNESS OF METAL.** The thickness of metal in members of metal poles or towers shall be not less than the following:

TABLE 18.—*Thickness of structural shapes*

	Thickness of main members of crossarms and legs	Thickness of other members
	<i>Inches</i>	<i>Inches</i>
For localities where experi- ence has shown deteriora- tion of protective covering is rapid-----	$\frac{1}{4}$	$\frac{3}{16}$
For other localities-----	$\frac{3}{16}$	$\frac{1}{8}$

- (f) **UNSUPPORTED LENGTH OF COMPRESSION MEMBERS.** The ratio of L , the unsupported length of a compression member, to R , the least radius of gyration of the

261. A. Poles and Towers—Continued

member, shall not exceed the following (these figures do not apply to the complete structure):

TABLE 19.—*L/R for compression members.*

Kind of compression member	<i>L/R</i>
Leg members-----	150
Other members having figured stresses-----	200
Secondary members without figured stresses-----	250

- (g) GENERAL CONSTRUCTION FEATURES. Metal poles or towers, including parts of footings above ground, shall be constructed so that all parts are accessible for inspection, cleaning, and painting, and so that pockets are not formed in which water can collect.

Recommendation: Unless sample structures, or similar ones, have been tested to assure the compliance of structures in any line with these requirements, it is recommended that structures be designed to have a computed strength at least 10 percent greater than that required by these rules.

- (h) PROTECTIVE COVERING OR TREATMENT. All iron or metal poles, towers, or supporting structures, shall be protected by galvanizing, painting, or other treatment which will effectively retard corrosion. Such protective covering shall be adequately maintained.

4. WOOD POLES.

Wood poles shall be of such material and dimensions as to meet the following requirements (where guys are used, see rule 261, C):

- (a) TRANSVERSE STRENGTH. Wood poles shall withstand the transverse and vertical loads assumed in rule 252, A and B, 1 to 4, inclusive, without exceeding at the ground

261. A. Poles and Towers—Continued

line for unguyed poles, or at the point of guy attachment for guyed poles, the appropriate allowable percentages of their ultimate stress given in table 21.

(b) LONGITUDINAL AND DEAD-END STRENGTH.

The longitudinal and dead-end strength of wood poles shall be such that they will withstand the appropriate longitudinal loading specified in rule 252, C, without exceeding, at the ground line for unguyed poles or at the point of guy attachment for guyed poles, the following percentages of the applicable ultimate fiber stress.

TABLE 20.

	Percentages of ultimate fiber stress for wood poles	
	Grade B	Grade C
Longitudinal:		
When installed.....	¹ 75	No requirement.
At replacement.....	100	No requirement.
Dead-ends:		
When installed.....	¹ 50	¹ 75
At replacement.....	75	100

¹ Where lines are built for a fixed period of temporary service not exceeding 5 years the prescribed percentage of fiber stress at installation may be increased, provided the percentage of ultimate fiber stress required at replacement is not exceeded during the life of the line.

Exception 1: At a Grade B crossing, in a straight section of line, wood poles of approximately round cross section, complying with the transverse strength requirements of rule 261, A, 4 (a), without the use of transverse guys shall be considered as having the required longitudinal strength. This exception does not modify the requirements of this rule for dead-ends.

Exception 2: At a Grade B crossing of a supply line over a highway and a communication line in the same span, where there is an angle in the supply line, wood poles of approximately round cross section shall be considered as

261. A. Poles and Towers—Continued

having the required longitudinal strength if all of the following conditions obtain:

1. The angle is not over 20 degrees.
2. The corner pole is guyed in the plane of the resultant of the conductor tensions on both sides of the corner pole; the tension in this guy not to exceed 50 percent of its ultimate strength under the loading of rule 252, B, 6.
3. The corner pole has sufficient strength to withstand, without guys, the transverse loading of rule 252, B, 1, 2 or 3, which would exist if there were no angle at that pole, without exceeding 25 percent of its ultimate stress when installed, or $37\frac{1}{2}$ percent at replacement.

(c) **ULTIMATE FIBER STRESS.** Various species of wood poles are considered as having the ultimate fiber stresses approved as standard by the American Standards Association and as given in ASA 05.1-1948.

Note: It is recognized that fiber glass plastics and other developments may become available and that American Standards Association's approved values will be determined for such materials or combinations of them. It is further recognized that while these materials are in the process of development, they are subject to such test evaluation and trial installations as may be approved by regulatory authorities.

(d) **ALLOWABLE PERCENTAGES OF ULTIMATE STRESS.** The allowable percentages of ultimate stress of treated and untreated poles to withstand vertical and transverse loads are given in table 21, except as modified in the following paragraph.

At crossings where grade B construction is required, if the supply line is not maintained throughout (or between and including the nearest guyed points on each side of the crossing) so that the poles will not be stressed at any time in excess of 50 percent of their ultimate stress under the transverse loading assumed in rule 252, B, the crossing poles, if unguyed, shall be of such strength

261. A. Poles and Towers—Continued

that they will withstand the transverse loading assumptions of rule 252 B, 1, 2, or 3, without exceeding 16½ percent of their ultimate stress at installation or 25 percent at replacement. If the crossing poles are side guyed, such guys shall meet the requirements of rule 261, C, 5.

TABLE 21.—*Allowable percentages of ultimate stress for treated or untreated wood poles under vertical and transverse loading*

	When installed	At replacement
Grade B-----	25. 0	37. 5
Grade C:		
At crossings-----	37. 5	75. 0
Elsewhere-----	50. 0	75. 0

Note: Where lines are built for a fixed period of temporary service not exceeding 5 years the prescribed percentage of fiber stress at installation may be increased, provided the percentage of ultimate fiber stress required at replacement is not exceeded during the life of the line.

- (e) **FREEDOM FROM DEFECTS.** Wood poles shall be of suitable and selected timber free from observable defects that would decrease their strength or durability.
- (f) **MINIMUM POLE SIZES.** Wood poles shall have a nominal top circumference of not less than 15 inches.
- (g) **SPliced AND STUB-REINFORCED POLES.** Spliced poles shall not be used at crossings, conflicts, or joint-use sections requiring grades B or C construction.
Except at crossings over major railroad tracks, the use of stub reinforcements that develop the required strength of the pole is permitted, provided the pole above the ground is in good condition and is of sufficient size to develop its required strength.

261. A. Poles and Towers—Continued

5. TRANSVERSE-STRENGTH REQUIREMENTS FOR STRUCTURES WHERE SIDE GUYING IS REQUIRED, BUT CAN ONLY BE INSTALLED AT A DISTANCE.

Grade B. In the case of structures where, because of very heavy or numerous conductors or relatively long spans, the transverse-strength requirements of this section can not be met except by the use of side guys or special structures, and it is physically impracticable to employ side guys, the transverse-strength requirements may be met by side-guying the line at each side of, and as near as practicable to, the crossing or other transversely weak structure, and with a distance between such side-guyed structures of not over 800 feet, provided that:

- (a) The side-guyed structures for each such section of 800 feet or less shall be constructed to withstand the calculated transverse load due to wind on the supports and ice-covered conductors, on the entire section between the side-guyed structures.
- (b) The line between such side-guyed structures shall be substantially in a straight line and the average length of span between the side-guyed structures shall be not in excess of 150 feet.
- (c) The entire section between the transversely strong structures shall comply with the highest grade of construction concerned in the given section, except as to the transverse strength of the intermediate poles or towers.

Grade C. The above provision is not applicable to grade C.

6. LONGITUDINAL-STRENGTH REQUIREMENTS FOR SECTIONS OF HIGHER GRADE IN LINES OF A LOWER GRADE OF CONSTRUCTION.

- (a) METHODS OF PROVIDING LONGITUDINAL STRENGTH.

Grade B. The longitudinal-strength requirements for sections of line of higher grade in lines of a lower grade (for assumed longitu-

261. A. Poles and Towers—Continued

dinal loading, see rule 252, C, 1) are usually met by placing supporting structures of the required longitudinal strength at either end of the higher-grade section of the line.

Where this is impracticable, the supporting structures of the required longitudinal strength may be located one or more span lengths away from the section of higher grade, within 500 feet on either side and with not more than 800 feet between the longitudinally strong structures, provided such structures and the line between them meet the requirements as to transverse strength and stringing of conductors, of the highest grade occurring in the section, and provided that the line between the longitudinally strong structures is approximately straight or suitably guyed.

The requirements may also be met by distributing the head guys over two or more structures on either side of the crossing, such structures and the line between them complying with the requirements for the crossing as to transverse strength and as to conductors and their fastenings.

Where it is impracticable to provide the longitudinal strength, the longitudinal loads shall be reduced by increasing the conductor sags. This may require greater conductor separations. (See rule 235, A, 2, (a).)

Grade C. The above provision is not applicable to grade C.

(b) FLEXIBLE SUPPORTS.

Grade B. When supports of the section of higher grade are capable of considerable deflection in the direction of the line, as with wood or concrete poles, or some types of metal poles and towers, it may be necessary to increase the normal clearances specified in section 23, or to provide head guys or special reinforcement to prevent such deflection.

261. A. Poles and Towers—Continued

So-called flexible steel towers or frames, if used at such locations, shall be adequately reinforced to meet the requirements of rule 261, A, 3 (b).

When the situation is one involving an isolated crossing of higher grade in a line of lower-grade construction, then the structure shall, when practicable, be head-guyed or otherwise reinforced to prevent reduction in the clearances required in section 23.

Grade C. The above provision is not applicable to grade C.

7. STRENGTH AT ANGLES IN A LINE.

At an angle in the line, the strength of a pole at the ground line, if not guyed, or at the point of guy attachment if guyed, shall be sufficient to withstand the total transverse loadings specified in Rule 252B6. The transverse wind load shall be multiplied by the appropriate factor as shown below before combining with the load arising from change in direction of conductors. The allowable percentage of ultimate stress at dead-ends given in Rule 261A(b) shall not be exceeded for the total load thus computed.

Grade of construction	When installed	At replacement
B.....	2.0	2.0
C at crossings.....	2.0	1.33
C elsewhere.....	1.5	1.33

B. Foundations.

1. USE OF FOUNDATIONS.

- (a) WOOD AND REINFORCED-CONCRETE POLES.
No special foundation construction is generally required.
- (b) METAL POLES OR TOWERS. Metal poles or towers set in earth shall be suitably protected against injurious corrosion at and below the ground line.

261. B. Foundations—Continued

2. STRENGTH OF FOUNDATIONS.

- (a) **METAL SUPPORTS.** The foundations and footings shall be so designed and constructed as to withstand the stresses due to the loads assumed in rule 252. Metal parts shall withstand these loads with the overload capacity factors specified in table 17.

Since in many localities the soil and climatic conditions are such as to alter the strength of foundations considerably from time to time, there should usually be provided a considerable margin of strength in foundations above that which (by calculation) will just withstand the loads under the assumption of average conditions of climate and soil.

- (b) **WOOD AND CONCRETE POLES.** Foundations and settings for unguyed poles shall be such as to withstand the loads assumed in rule 252 A, B, and C.

C. *Guys*.

1. GENERAL.

The general requirements for guys are covered under "Miscellaneous Requirements" (sec. 28).

2. FOR POLES IN INSECURE EARTH.

Where crossing poles are set in insecure earth the transverse strength requirements should, where practicable, be met by the use of side guys or braces.

3. ON METAL STRUCTURES.

The use of guys to obtain compliance with these requirements is regarded as generally undesirable. When guys are necessarily used, the metal supports or towers, unless capable of considerable deflection, shall be regarded as taking all of the load up to their allowable working load, and the guys shall have sufficient strength to take the remainder of the assumed maximum load. (See rule 261, A, 6, (b) for flexible supports.)

261. C. Guys—Continued

4. ON WOOD OR CONCRETE POLES.

When guys are used to meet the strength requirements for wood or concrete poles, they shall be considered as taking the entire load in the direction in which they act, the poles acting as struts only. Frequently the use of shorter spans or larger poles will permit the omission of guys at crossings.

5. STRENGTH OF GUYS.

- (a) Guys, when required, shall be of such material and dimensions as will withstand the transverse loads assumed in rule 252, B, 1 to 5, inclusive, and the longitudinal load assumed in rule 252, C, without exceeding the following percentages of their ultimate strength:

	Percentages of ultimate strength	
	Grade B	Grade C
For transverse strength (When installed)-----	37. 50	50. 00
For longitudinal strength (at all times):		
In general-----	100. 00	No require- ment
At dead-ends-----	¹ 66. 67	¹ 87. 50

¹ If deflection of supporting structures is taken into account in the computations, 66 $\frac{2}{3}$ percent shall be reduced to 60 percent; 87 $\frac{1}{2}$ percent shall be reduced to 75 percent.

- (b) At an angle in the line, the strength of a transverse guy or guys shall be sufficient to withstand the total transverse loading specified in Rule 252B6. The transverse wind load shall be multiplied by 1.78 for both grades B and C before combining with the load arising from the change in direction of conductors.

The allowable percentage of ultimate strength at dead-ends given in (a) above shall not be exceeded for the total load thus computed.

261. GRADES B AND C CONSTRUCTION—Continued

D. Crossarms.**1. VERTICAL STRENGTH.**

Crossarms shall, when installed, withstand the vertical loads specified in rule 252, A, without the stress under these loads exceeding 50 percent of the assumed ultimate stress of the material.

Exception: For built up metal crossarms on metal structures, see table 17 for minimum overload capacity factors.

2. BRACING.

Crossarms shall be securely supported by bracing, if necessary, so as to support safely all other loads to which they may be subjected in use, including linemen working on them. Any crossarm or buckarm except the top one shall be capable of supporting a vertical load of 225 pounds at either extremity in addition to the weight of the conductors.

3. LONGITUDINAL STRENGTH.

(a) **GENERAL.** Crossarms shall withstand any unbalanced longitudinal loads to which they are exposed, with a limit of unbalanced tension where conductor pulls are normally balanced, of 700 pounds at the outer pin.

(b) **AT DEAD-ENDS AND AT ENDS OF HIGHER-GRADE CONSTRUCTION IN LINE OF LOWER GRADE.**

Grade B. Wood crossarms shall be of sufficient strength to withstand at all times, without exceeding their ultimate stresses, an unbalanced pull equal to the tension in all supported conductors under the assumed conductor loading given in rule 251. Metal arms shall withstand this load with the overload capacity factor for longitudinal loads given in table 17.

Grade C. The above provisions do not apply to grade C.

(c) **AT ENDS OF TRANSVERSELY WEAK SECTIONS.**

Grade B. The crossarms connected to the structure at each end of the transversely

261. D. Crossarms—Continued

weak section, such as described in rule 261, A, 5, shall be such as to withstand at all times, without exceeding their ultimate stresses, under the conductor loading prescribed in rule 251, an unbalanced load equivalent to the combined pull in the direction of the transversely weak section of all the conductors supported.

Grade C. The above provision does not apply to grade C.

(d) METHODS OF MEETING RULE 261 D.

Grade B. Where conductor tensions are limited to a maximum of 2,000 pounds per conductor, double wood crossarms fitted with spacing bolts equipped with spacing nuts and washers, pipe spacers, or similar construction, or with spacing blocks or plates, or metallic support of equivalent strength will be considered as meeting the strength requirements in (b) and (c) preceding.

Grade C. The above provisions do not apply to grade C.

4. DIMENSIONS OF CROSSARMS OF SELECTED YELLOW PINE OR FIR.

The cross-sectional dimensions of selected yellow pine or fir crossarms shall be not less than the values of table 22.

TABLE 22.—Crossarm cross sections

Number of pins	Grade B	Grade C	
		Supply	Communication
2 or 4.....	<i>Inches</i> 3 by 4	<i>Inches</i> 2¾ by 3¾	<i>Inches</i> -----
6 or 8.....	3¼ by 4¼	3 by 4	-----
6.....	-----	-----	2¾ by 3¾
10.....	-----	-----	3 by 4

261. D. Crossarms—Continued

5. DOUBLE CROSSARMS OR BRACKETS.

Grade B. Where pin-type construction is used, double crossarms or a metallic support of equivalent strength shall be used at each crossing structure, at ends of joint use or conflict sections, at dead-ends and at corners where the angle of departure from a straight line exceeds 20 degrees. Where a bracket supports a conductor operated at more than 750 volts to ground and there is no crossarm below, double brackets shall be used.

Exception: The above does not apply where communication cables or conductors cross below supply conductors and either (a) are attached to the same pole, or (b) where supply conductors are continuous and of uniform tension in a crossing span and each adjacent span. This exception does not apply to railroad crossings.

Grade C. The above provisions do not apply to Grade C.

6. LOCATION.

In general, crossarms should be maintained at right angles to the axis of the pole and to the direction of the attached conductors. At crossings, crossarms should be attached to that face of the structure away from the crossing, unless special bracing or double crossarms are used.

E. Pins and Conductor Fastenings.

1. GENERAL.

- (a) The conductor fastenings and the height, material and cross section of the pin shall be chosen so as to afford the required strength.
- (b) Tie wires, fastenings, or conductor supports shall have no sharp edges or burrs at contacts with conductors.
- (c) Where tie wires or similar fastenings are used with pin type construction, conductors shall be placed so that the side pull due to change in direction shall be against the insulator rather than the tie wire.

261. E. Pins and Conductor Fastenings—Continued

2. STRENGTH.

- (a) **GENERAL.** Pins and ties or other conductor fastenings shall have sufficient strength to withstand an unbalanced tension in the conductor, up to a limit of 700 pounds per pin or conductor fastening. (The unbalanced tensions often encountered especially with small conductors will be less than the maximum specified above. For these cases, the conductor fastenings need only develop strength equal to the anticipated unbalance.)

- (b) **AT DEAD-ENDS AND AT ENDS OF HIGHER-GRADE CONSTRUCTION IN LINE OF LOWER GRADE.**

Grade B. Pins and ties or other conductor fastenings connected to the structure at a dead-end or at each end of the higher-grade section shall be of sufficient strength to withstand at all times without exceeding their ultimate strength, an unbalanced pull due to the conductor loading specified in Rule 251.

Grade C. The above provisions do not apply to Grade C except for dead-ends.

- (c) **AT ENDS OF TRANSVERSELY WEAK SECTIONS.**
Grade B. Pins and ties or other conductor fastenings connected to the structure at each end of the transversely weak section as described in Rule 261A5 shall be such as to withstand at all times without exceeding their ultimate strength, the unbalanced pull in the direction of the transversely weak section of the conductor supported, under the loading prescribed in Rule 251.

Grade C. The above provisions do not apply to Grade C.

- (d) **METHOD OF MEETING RULES 261E2 (b) AND (c).**

Grade B. Where conductor tensions are limited to 2,000 pounds and such conductors are supported on pin insulators, double wood pins and ties or their equivalent will be con-

261. E. Pins and Conductor Fastenings—Continued

sidered to meet the requirements of (b) and (c) preceding.

Grade C. The above provision does not apply to Grade C.

3. DOUBLE PINS AND CONDUCTOR FASTENINGS.

Grade B. Where wood pins are used, double pins and conductor fastenings shall be used where double crossarms or brackets are required by Rule 261D5.

Exception: The above does not apply where communication cables or conductors cross below supply conductors and either (a) are attached to the same pole, or (b) where supply conductors are continuous and of uniform tension in a crossing span and each adjacent span. This exception does not apply in the case of railroad crossings.

Grade C. The above provision does not apply to Grade C.

4. SINGLE SUPPORTS USED IN LIEU OF DOUBLE WOOD PINS.

A single conductor support and its conductor fastening when used in lieu of double wood pins, shall develop strength equivalent to double wood pins and their conductor fastenings as specified in Rule 261E2(a). This use of single conductor supports is not permitted at railroad crossings except by mutual agreement.

F. Open Supply Conductors.

1. MATERIAL.

Conductors shall be of material or combinations of materials which will not corrode excessively under the prevailing conditions.

Recommendation: It is recommended that hard-drawn or medium-hard-drawn copper wire (conforming to the specifications of the American Society for Testing Materials) be used instead of soft in new construction where bare wire or cable is used, especially for sizes smaller than No. 2. AWG.

261. G. Supply Cables—Continued

and having a grade of construction less than that required for open wire supply lines of the same voltage, shall meet the requirements of (a), (b), (c), and (d) below:

- (a) **MESSENGERS.** Messengers shall be stranded and of corrosion-resistant material, and shall not be stressed beyond 60 percent of their ultimate strength under the loadings specified in rule 251.
- (b) **GROUNDING OF CABLE SHEATH AND MESSENGER.** Each section of metal sheathed or armored cable between splices shall be suitably and permanently bonded to the messenger wire at not less than two places. The messenger wire shall be grounded at the ends of the line and at intermediate points not exceeding 800 feet apart. (See section 9 for method.)
- (c) **CABLE SPLICES.** Splices in the cable shall be made so that their insulation is not materially weaker than the remainder of the cable. The sheath or armor wire, when present, shall be made electrically continuous at the splice.
- (d) **CABLE INSULATION.** The conductors of the cable shall be insulated so as to withstand a factory potential test of at least twice the operating voltage at operating frequency applied continuously for 5 minutes between conductors and between any conductor and the sheath or armor.

2. OTHER SUPPLY CABLES.

The following requirements apply to all supply cables not included in 1 above.

- (a) **MESSENGER.** The messenger shall be of corrosion-resistant material, and shall not be stressed beyond 60 percent of its ultimate strength under the loadings specified in rule 251.
- (b) **CABLE.** There are no strength requirements for cables supported by messengers.

261. GRADES B AND C CONSTRUCTION—Continued**H. Open-wire Communication Conductors.**

Open-wire communication conductors in grade B or C construction shall have the sizes and sags given in rule 261, F, 2 and 4 for supply conductors of the same grade.

Exception: Where open-wire communication conductors in spans of 150 feet or less are above supply circuits of 5,000 volts or less between conductors, grade C sizes and sags may be replaced by grade D sizes and sags, except that where the supply conductors are trolley-contact conductors of 0 to 750 volts to ground, No. 12 wire may be used for spans of 0 to 100 feet, and No. 9 steel wire may be used for spans of 125 to 150 feet.

I. Communication Cables.**1. METAL-SHEATHED COMMUNICATION CABLES.**

There are no strength requirements for such cables supported by messengers.

2. MESSENGER.

The messenger shall be of corrosion-resistant material, and shall not be stressed beyond 60 percent of its ultimate strength under the loadings specified in rule 251.

J. Paired Communication Conductors.**1. PAIRED CONDUCTORS SUPPORTED ON MESSENGER.**

(a) **USE OF MESSENGER.** A messenger of corrosion-resistant material may be used for supporting paired conductors in any location, but is only required for paired conductors crossing over trolley-contact conductors of more than 7,500 volts to ground.

(b) **SAG OF MESSENGER.** Messenger used for supporting paired conductors required to meet grade B construction because of crossing over trolley-contact conductors shall meet the sag requirements for grade D messengers.

261. J. Paired Communication Conductors—Continued

- (c) **SIZE AND SAG OF CONDUCTORS.** There are no requirements for paired conductors when supported on messenger.

2. **PAIRED CONDUCTORS NOT SUPPORTED ON MESSENGER.**

- (a) **ABOVE SUPPLY LINES.**

Grade B. Sizes and sags shall be not less than those required by rule 261, F, 2 and 4 for supply conductors of similar grade.

Grade C. Sizes and sags shall be not less than the following:

Spans 0 to 100 feet. No sag requirements.

Each conductor shall be of corrosion-resistant material, and shall have an ultimate strength of not less than 170 pounds.

Spans 100 to 150 feet. Sizes and sags shall be not less than required for grade D communication conductors.

Spans exceeding 150 feet. Sizes and sags shall be not less than required for grade C supply conductors. (See rule 261, F, 4.)

- (b) **ABOVE TROLLEY-CONTACT CONDUCTORS.**

Grade B. Sizes and sags shall be not less than the following:

Spans 0 to 100 feet. No size requirements.

Sags shall be not less than for No. 8 AWG hard-drawn copper. (See rule 261, F, 4.)

Spans exceeding 100 feet. Each conductor shall be of corrosion-resistant material, and shall have an ultimate strength of not less than 170 pounds. Sags shall be not less than for No. 8 AWG hard-drawn copper. (See rule 261, F, 4.)

Grade C. Sizes and sags shall be as follows:

Spans 0 to 100 feet. No requirements.

Spans exceeding 100 feet. No sag requirements. Each conductor shall be of corrosion-resistant material, and shall have an ultimate strength of not less than 170 pounds.

261. GRADES B AND C CONSTRUCTION—Continued**K. Short-Span Crossing Construction.**

Where supply lines cross over railways or communication lines by the short-span method, the requirements for grade B or C conductor sags and sizes are waived, in so far as such grades are required by the crossing, provided that an effectively grounded guard arm is installed at each cross-over support in such a manner as to prevent conductors which break in either adjoining span from swinging back into the conductors crossed over, or in the case of a railroad crossing into the space between the crossing supports.

Note: The short-span method of crossing requires the cross-over span to be of such a height that a conductor breaking in that span cannot come within 15 feet of the ground or rails at a railroad crossing or make contact with any wires crossed over at a wire crossing.

This character of construction is facilitated where the cross-over supports can be placed quite near together and in the case of wire crossings where the span crossed over is at a minimum elevation above ground.

L. Cradles at Supply-Line Crossings.

Cradles should not be used.

Note: It is less expensive and better to build the supply line strong enough to withstand extreme conditions than to build a cradle of sufficient strength to catch and hold the supply line if it falls.

M. Protective Covering or Treatment for Metal Work.

All hardware, including bolts, washers, guys, anchor rods, and similar parts of material, subject to injurious corrosion under the prevailing conditions, shall be protected by galvanizing, painting, or other treatment which will effectively retard corrosion.

262. GRADE D CONSTRUCTION.**A. Poles.****1. STRENGTH OF UNGUYED POLES.**

Unguyed poles, except as provided in rule 262, A, 8, shall withstand the vertical and transverse loads specified in rule 252, A and B, and the longitudinal loads specified in rule 252, C, 4, without

262. A. Poles—Continued

exceeding the following percentages of their ultimate stress:

	Percentages of ultimate stress
For transverse loads:	
When installed.....	25. 0
At replacement.....	37. 5
For longitudinal loads:	
When installed.....	75. 0
At replacement.....	100. 0

2. STRENGTH OF GUYED POLES.

Where poles are guyed, the poles shall be considered as acting as struts, resisting the vertical component of the tension in the guy, calculated as in rule 262, C, combined with the vertical load.

3. STRENGTH REQUIREMENTS FOR POLES WHERE GUYING IS REQUIRED, BUT CAN ONLY BE INSTALLED AT A DISTANCE.

Where on account of physical conditions it is impracticable to guy or brace the crossing poles as specified in rule 262, C the requirements there given may be met by head-guying and side-guying the line as near as practicable to the crossing, but at a distance not exceeding 500 feet from the nearest crossing pole, provided that the line is approximately straight and that a stranded steel wire or other standard strand of strength equivalent to that of the head guy is run between the two guyed poles, being attached to the guyed poles at the point at which the head guys are attached, this wire being securely attached to every pole between the guyed poles.

4. POLE LOCATIONS AT CROSSINGS.

Where communication lines cross over railroads, the poles shall be located as follows:

- (a) The poles supporting the crossing span and the adjacent spans should be located in a straight line, if practicable. Where the poles

262. A. Poles—Continued

supporting the crossing span and the adjacent spans are not in line, guying shall be placed to take care of the unbalanced load.

- (b) The crossing span shall, where practicable, not exceed 100 feet in the heavy loading district, 125 feet in the medium loading district, and 150 feet in the light loading district.

5. FREEDOM FROM DEFECTS.

Wood poles shall be of suitable and selected timber free from observable defects that would decrease their strength or durability.

6. MINIMUM POLE SIZE

Wood poles shall have a nominal top circumference of not less than 15 inches.

7. SPLICED AND STUB-REINFORCED POLES.

Spliced poles shall not be used at grade D crossings. At crossings over minor railroad tracks, the use of stub-reinforcements that develop the required strength of the pole is permitted, provided the pole above the ground line is in good condition and is of sufficient size to develop its required strength.

8. POLES LOCATED AT CROSSINGS OVER SPUR TRACKS.

Where a communication line paralleling a railroad track on the right-of-way of the railroad crosses a spur or stub track without any change in the general direction of line, the transverse strength requirements for grade D construction may be met without the use of side guys, provided the pole is not stressed beyond one-third of its ultimate stress. No requirements for longitudinal strength are made if the conductor tensions are balanced. Where conductor tensions are not balanced, due to a small angle in the line at one or both poles, or to dead-ending any of the wires, either guys or braces capable of withstanding such unbalanced tensions shall be installed.

262. GRADE D CONSTRUCTION—Continued

B. Pole Settings.

Foundations and settings for unguyed poles shall be such as to withstand the loads assumed in rule 252, A, B, and C.

C. Guys.

1. GENERAL.

The general requirements for guys are covered under "Miscellaneous Requirements" (sec. 28).

2. WHERE USED.

Side guys or braces shall be used on poles supporting the crossing span to withstand the loads put upon them in accordance with the conditions specified in rule 252, B.

Head guys shall be installed in accordance with table 24.

Exception 1: Side guys are not required where the crossing poles have the transverse strength specified in rule 262, A, 1 without the reduction for conductor shielding specified in rule 252, B, 1 and 2.

Exception 2: Head guys are not required where the crossing poles have the longitudinal strength specified in rule 262, A, 1, or for lines carrying only aerial cable. For lines carrying both open wire and aerial cable, head guying is required only for the number of wires in excess of 10 if the cable is supported by a 6,000-pound messenger, or for the number of wires in excess of 20 if the cable is supported by a 10,000-pound or stronger messenger.

Exception 3: Where a line crossing a railroad changes direction more than 10 degrees at either crossing support, the side guy within the angle may be omitted and the head guy, if required, shall be placed in the direction of the adjacent span unless the angle of turn is greater than 60 degrees.

Exception 4: Guying may be omitted where communication lines cross over spur or stub tracks as provided in rule 262, A, 8.

262. C. Guys—Continued

Exception 5: This rule does not apply to crossing poles under the special conditions set forth in rule 262, A, 3.

TABLE 24.—*Strength (in pounds) of head guys required for loading districts indicated*¹

[Combinations of standard-size guys may be used]

Number of wires	Ratio of guy lead to height not less than—				
	1¼	1	¾	⅔	½
HEAVY LOADING					
2.....	4,000	4,000	4,000	4,000	4,000
6.....	4,000	4,000	4,000	4,000	6,000
10.....	6,000	6,000	6,000	10,000	10,000
20.....	10,000	10,000	12,000	16,000	16,000
30.....	16,000	16,000	20,000	20,000	26,000
40.....	20,000	20,000	26,000	26,000	32,000
50.....	20,000	20,000	30,000	32,000	42,000
60.....	26,000	30,000	36,000	36,000	48,000
70.....	30,000	30,000	40,000	48,000	60,000
80.....	36,000	40,000	48,000	60,000	70,000
MEDIUM LOADING					
2.....	4,000	4,000	4,000	4,000	4,000
6.....	4,000	4,000	4,000	4,000	4,000
10.....	4,000	4,000	6,000	6,000	6,000
20.....	6,000	10,000	10,000	10,000	12,000
30.....	10,000	10,000	12,000	16,000	16,000
40.....	12,000	16,000	16,000	16,000	20,000
50.....	16,000	16,000	20,000	20,000	26,000
60.....	20,000	20,000	26,000	26,000	30,000
70.....	20,000	20,000	26,000	30,000	36,000
80.....	26,000	26,000	30,000	32,000	40,000
LIGHT LOADING					
2.....	4,000	4,000	4,000	4,000	4,000
6.....	4,000	4,000	4,000	4,000	4,000
10.....	4,000	4,000	4,000	4,000	4,000
20.....	4,000	6,000	6,000	6,000	10,000
30.....	6,000	10,000	10,000	10,000	12,000
40.....	10,000	10,000	10,000	12,000	16,000
50.....	10,000	10,000	16,000	16,000	20,000
60.....	12,000	16,000	16,000	16,000	20,000
70.....	16,000	16,000	20,000	20,000	26,000
80.....	16,000	20,000	20,000	26,000	30,000

¹ This table is based on ultimate or breaking strength of guys equal to seven-sixths of the nominal strengths shown in the table and a wire load of 50 percent No. 8 BWG iron and 50 percent No. 9 AWG copper with an average pull of 408.75 pounds per wire.

No guy will be required for cable, since the messenger serves as a head guy.

262. C. Guys—Continued

3. GUYS USED FOR TRANSVERSE STRENGTH.

Side guys used in straight sections of line shall be considered as taking the entire load in the direction in which they act, without exceeding 37.5 percent of their ultimate strength.

4. GUYS USED FOR LONGITUDINAL STRENGTH.

(a) **DIRECTION OF HEAD GUYS.** Where head guys are required, they shall be installed in the direction away from the crossing.

(b) **SIZE AND NUMBER OF HEAD GUYS.** Guys, if required for various open-wire loads, shall be in accordance with table 24.

5. MAINTENANCE.

Guys and anchors shall be maintained so that the guys carry the load.

D. Crossarms.

1. MATERIAL.

Wood crossarms supporting the crossing span shall be of yellow pine, fir, or other suitable timber. Metal crossarms protected against corrosion and of strength equal to wood crossarms may be used.

2. MINIMUM SIZE.

(a) **WOOD CROSSARMS.** Wood crossarms shall have a cross section not less than the following:

Maximum number of wires to be carried	Nominal length		Nominal cross section (Inches)
	Feet	Inches	
2-----	1	4½	2½ ₁₆ by 3½ ₁₆
4-----	3	4½	2½ ₁₆ by 3½ ₁₆
6-----	6	0	2¾ by 3¾
10-----	8	6	2¾ by 3¾
10-----	10	0	3 by 4
12 ¹ -----	10	0	3¾ by 4¾
16 ² -----	10	0	3¾ by 4¾

¹ Where crossarms are bored for ½-inch steel pins, 3-inch by 4½-inch crossarms may be used.

² Permitted in medium and light loading districts only.

262. D. Crossarms—Continued

3. DOUBLE CROSSARMS.

Crossarms and insulators shall be double on the crossing poles. The crossarms shall be held together with properly fitted spacing blocks or bolts placed immediately adjoining the outside pins. Spacing blocks or spacing bolts are not required for two-pin crossarms.

Exception: Single dead-end type crossarms may be used where it is necessary to dead-end conductors of the crossing span, provided such crossarms and associated dead-end fastenings are of sufficient size and strength to withstand the maximum tension of the conductors under the loading specified in Rule 251 and provided further that the conductors are dead-ended on insulators so designed and installed that the conductor will not fall in the event of insulator breakage.

E. Brackets and Racks.

Wood brackets may be used only if used in duplicate or otherwise designed so as to afford two points of support for each conductor. Single metal brackets, racks, drive hooks or other fixtures may be used if designed and attached in such manner as to withstand the full dead-end pull of the wires supported.

F. Pins.

1. MATERIAL.

Insulator pins shall be of steel or other appropriate metal, or locust or equivalent wood.

2. STRENGTH.

Insulator pins shall have sufficient strength to withstand the loads to which they may be subjected.

3. SIZE.

(a) **WOOD PINS.** Wood pins shall be sound and straight-grained with a diameter of shank not less than $1\frac{1}{4}$ inches.

(b) **METAL PINS.** Steel or iron pins shall have diameter of shank not less than $\frac{1}{2}$ inch.

262. GRADE D CONSTRUCTION—Continued

G. Insulators.

Each insulator shall be of such pattern, design, and material that when mounted it will withstand without injury and without being pulled off the pin, the ultimate strength of the conductor attached to the insulator.

H. Attachment of Conductor to Insulator.

The conductors shall be securely tied to each supporting insulator.

I. Conductors.**1. MATERIAL.**

Conductors shall be of material or combinations of materials which will not corrode excessively under the prevailing conditions.

2. SIZE.

Conductors of the crossing span, if of hard-drawn copper or galvanized steel, shall have sizes not less than specified in (a) and (b) below. Conductors of material other than the above shall be of such size and so strung as to have a mechanical strength not less than that of the sizes of copper conductors given in (a) and (b) below.

(a) **SPANS NOT EXCEEDING 150 FEET.** The sizes in table 25 apply for all loading districts.

TABLE 25.—*Minimum wire sizes*

[AWG for copper; Stl. WG for steel]

Conductor	Spans of 125 feet or less	Spans 125 to 150 feet
Copper, hard-drawn.....	10	9
Steel, galvanized:		
In general.....	10	8
In rural districts of arid regions....	12	10

(b) **SPANS EXCEEDING 150 FEET.** If spans in excess of 150 feet are necessary, the size of conductors specified above or the sags of the conductors shall be correspondingly increased.

262. I. Conductors—Continued

3. PAIRED CONDUCTORS WITHOUT MESSENGERS.

Paired wires without a supporting messenger shall be eliminated as far as practicable and where used shall meet the following requirements:

- (a) MATERIAL AND STRENGTH. Each conductor shall be of material or combinations of materials which will not corrode excessively under the prevailing conditions and shall have an ultimate strength of not less than 170 pounds.
- (b) LIMITING SPAN LENGTHS. Paired wires shall in no case be used without a supporting messenger in spans longer than 100 feet in the heavy loading district, 125 feet in the medium loading district, and 150 feet in the light loading district.

4. SAGS.

Table 26 specifies the recommended sags for copper.

TABLE 26.—*Stringing sags*

HEAVY AND MEDIUM LOADING DISTRICTS

Length of span	100°F	80°F	60°F	40°F	20°F	0°F
<i>Feet</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>
70	5.7	4.4	3.4	2.7	2.2	1.8
75	6.4	5.1	4.0	3.1	2.5	2.1
80	7.4	5.8	4.5	3.5	2.9	2.4
85	8.4	6.6	5.1	4.0	3.2	2.7
90	9.4	7.3	5.7	4.5	3.6	3.0
95	10.0	8.2	6.3	5.0	4.0	3.4
100	11.6	9.0	7.0	5.5	4.5	3.7
110	14.0	11.0	8.5	6.7	5.4	4.5
120	16.6	13.0	10.1	7.9	6.4	5.4
130	19.5	15.3	11.8	9.3	7.6	6.3
140	22.6	17.7	13.7	10.8	8.8	7.3
150	26.0	20.3	15.8	12.4	10.1	8.4

262. I. Conductors—Continued

TABLE 26.—Stringing sags—Continued

LIGHT LOADING DISTRICT

Length of span	110°F	100°F	80°F	60°F	40°F	20°F	10°F
<i>Feet</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>
80	5.5	5.0	4.2	3.4	2.8	2.4	2.2
85	6.2	5.7	4.7	3.9	3.2	2.7	2.5
90	7.0	6.4	5.3	4.3	3.6	3.0	2.8
95	7.8	7.1	5.8	4.8	4.0	3.4	3.1
100	8.6	7.9	6.5	5.3	4.4	3.7	3.5
110	10.4	9.5	7.8	6.5	5.4	4.5	4.2
120	12.4	11.3	9.3	7.7	6.4	5.4	5.0
130	14.6	13.3	11.0	9.0	7.5	6.3	5.9
140	16.9	15.4	12.7	10.5	8.7	7.3	6.8
150	19.4	17.7	14.6	12.0	10.0	8.4	7.8

For conductors other than copper, conductor sags shall be such that, under the assumed loading of Rule 251 for the district concerned, and assuming rigid structures for the purpose of calculations, the tension of the conductor shall be not more than 60 per cent of its ultimate strength. Also the tension at 60 degrees F, without external load, shall not exceed 20 percent of the conductor ultimate strength.

5. SPLICES AND TAPS.

Splices shall as far as practicable be avoided in the crossing and adjacent spans. If it is impracticable to avoid such splices, they shall be of such a type and so made as to have a strength substantially equal to that of the conductor in which they are placed.

Taps shall be avoided in the crossing span where practicable, but if required shall be of a type which will not impair the strength of the conductors to which they are attached.

J. Messengers.

1. MINIMUM SIZE.

- (a) SPANS NOT EXCEEDING 150 FEET. Table 27 gives the minimum sizes of galvanized

262. J. Messengers—Continued

steel-strand messenger to be used for supporting different sizes of cables:

TABLE 27.—*Minimum sizes of messenger*

Size of cable in weight per foot	Messenger (nominal breaking load)
Less than 2.25 pounds.....	<i>Pounds</i> 6,000
2.25 to 5 pounds.....	10,000
Exceeding 5 and less than 8.5 pounds.....	16,000

- (b) SPANS EXCEEDING 150 FEET. For spans exceeding 150 feet or for heavier cables a proportionately larger messenger or other proportionately stronger means of support shall be used.

2. SAGS AND TENSIONS.

Multiple-conductor cables and their messengers shall be so suspended that when they are subjected to the loading prescribed in rule 251, the tension in the messenger will not exceed 60 per cent of its ultimate strength.

K. Inspection.

See rule 213.

263. GRADE N CONSTRUCTION.

A. Poles and Towers.

Poles used for lines for which neither grade B, C, or D is required shall be of such initial size and so guyed or braced, where necessary, as to withstand safely the loads to which they may be subjected, including linemen working on them. Such poles and stubs on State and Federal highways shall be located as far as practicable from the traveled portion of such highways. The number of crossings over such highways should be kept to a minimum.

263. A. Poles and Towers—Continued

Such poles and stubs located within falling distance of the traveled portion of such highways, or so located that their failure would permit wires, cables, guys, or other equipment to fall into the traveled portion of the highway, or would reduce the clearances specified in table 1 over the traveled portion of such highways, shall be periodically inspected and maintained in safe condition.

B. Guys.

The general requirements for guys are covered under "Miscellaneous Requirements" (sec. 28).

C. Crossarm Strength.

Crossarms shall be securely supported, by bracing if necessary, so as to support safely loads to which they may be subjected in use, including linemen working on them. Any crossarm, or buckarm, except the top one, shall be capable of supporting a vertical load of 225 pounds at either extremity, in addition to the weight of the conductors

Note: Double crossarms are generally used at crossings, unbalanced corners, and dead-ends, in order to permit conductor fastenings at two insulators, and so prevent slipping, although single crossarms might provide sufficient strength. To secure extra strength, double crossarms are frequently used, and crossarm guys are sometimes used.

D. Supply-line Conductors.**1. MATERIAL.**

All supply-line conductors shall be of material or combinations of materials which will not corrode excessively under the prevailing conditions.

2. SIZE.

Supply-line conductors shall be not smaller than the following:

263. D. Supply-line Conductors—Continued

Grade N minimum sizes for supply-line conductors

[AWG for copper and aluminum; Stl. WG for steel]

	Urban	Rural
Soft copper-----	6	8
Medium or hard-drawn copper--	8	8
Steel-----	9	9
	Urban and rural	
	Spans 150 feet or less	Spans exceed- ing 150 feet
Stranded aluminum:		
Not reinforced-----	1	0
Steel-reinforced-----	6	4

Recommendation: It is recommended that, except as modified in rule 261, F, 2, these minimum sizes for copper and steel not be used in spans longer than 150 feet for the heavy-loading district, and 175 feet for the medium- and light-loading districts.

E. Supply Services.**1. MATERIAL.**

All supply service conductors shall be of material or combinations of materials which will not corrode excessively under the prevailing conditions.

2. SIZE OF OPEN-WIRE SERVICES.

(a) **NOT OVER 750 VOLTS.** Supply-service leads of not over 750 volts shall be not smaller than required by (1) or (2) below:

(1) **SPANS NOT EXCEEDING 150 FEET.**
 Sizes shall be not smaller than specified in table 28.

263. E. Supply Services—Continued

TABLE 28.—*Minimum sizes of service leads carrying 750 volts or less*

[Voltages of trolley-contact conductors are voltage to ground in all cases]

[A WG for copper; Stl. WG for steel]

Situation	Copper wire		Steel wire
	Soft-drawn	Medium or hard-drawn	
Alone.....	10	12	12
Concerned with communication conductor.....	10	12	12
Over supply conductors of—			
0 to 750 volts.....	10	12	12
750 to 8,700 volts ¹	8	10	12
Exceeding 8,700 volts ¹	6	8	9
Over trolley-contact conductors—			
0 to 750 volts ac or dc.....	8	10	12
Exceeding 750 volts ac or dc.....	6	8	9

¹ Installation of service leads of not more than 750 volts above supply lines of more than 750 volts should be avoided where practicable.

(2) SPANS EXCEEDING 150 FEET. Sizes shall be not smaller than required for Grade C. (Rule 261, F, 2.)

(b) EXCEEDING 750 VOLTS. Sizes of supply-service leads of more than 750 volts shall be not less than required for supply-line conductors of the same voltage.

3. SAG, OPEN-WIRE SERVICES.

(a) NOT OVER 750 VOLTS. Supply service leads of not over 750 volts shall have sags not less than shown in table 29.

TABLE 29.—*Sags for open-wire services*

Span lengths	Sag
<i>Feet</i>	<i>Inches</i>
100 or less.....	12.
100 to 125.....	18.
125 to 150.....	27.
Exceeding 150.....	Grade C sags.

263. E. Supply Services—Continued

- (b) **EXCEEDING 750 VOLTS.** Supply service leads of more than 750 volts shall comply as to sags with the requirements for supply line conductors of the same voltage.

4. CABLED SERVICES.

Supply service leads may be grouped together in a cable, provided the following requirements are met:

- (a) **SIZE.** The size of each conductor shall be not less than required for leads of separate conductors (rule 263, E, 2).
- (b) **SAG.** The sag of the cable should be not less than required for leads of separate conductors (rule 263, E, 3).
- (c) **INSULATION.** The insulation should be sufficient to withstand twice the normal operating voltage.

F. Lightning-Protection Wires.

Lightning-protection wires paralleling the line conductors shall be regarded, in respect to size and material requirements, as supply conductors.

G. Trolley-Contact Conductors.

In order to provide for wear, no trolley-contact conductors shall be installed of less size than No. 0, if of copper, or No. 4, if of silicon bronze.

H. Cradles at Supply-Line Crossings.

Cradles should not be used.

Note: It is less expensive and better to build the supply line strong enough to withstand extreme conditions than to build a cradle of sufficient strength to catch and hold the supply line if it falls.

I. Communication Conductors.

There are no specific requirements for grade N communication line conductors or service drops.

SEC. 27. LINE INSULATORS**270. APPLICATION OF RULE.**

These requirements apply only to supply lines. (See rule 242, E, for insulation requirements for neutral conductors.)

271. MATERIAL AND MARKING.

Insulators for operation on supply circuits at voltages of 2,300 and above shall be of porcelain, made by the wet process or one equally suitable as regards electrical and mechanical properties, or other material which will give equally good results in respect to mechanical and electrical performance and durability. They should be marked by the maker with his name, trade-mark, or identification number so applied as not to reduce the electrical or mechanical strength of the insulator.

272. ELECTRICAL STRENGTH OF INSULATORS IN STRAIN POSITION.

Where insulators are used in a strain position they shall have not less electrical strength than the insulators generally used on the line when under the normal mechanical stresses imposed by the loadings specified in section 25.

273. RATIO OF FLASH-OVER TO PUNCTURE VOLTAGE.

Insulators shall be designed so that their dry flash-over voltage is not more than 75 percent of their puncture voltage at a frequency of 60 cycles per second.

274. TEST VOLTAGES.

Insulators when tested under the current specifications of the American Standards Association shall not flash over at values less than given in table 30.

TABLE 30.—*Test-voltage requirements*

[For application see rules 276 and 278]

Nominal voltage	Minimum test dry flash-over voltage of insulators	Nominal voltage	Minimum test dry flash-over voltage of insulators
750	5,000	46,000	125,000
2,400	20,000	69,000	175,000
7,200	40,000	115,000	315,000
13,200	55,000	138,000	390,000
23,000	75,000	161,000	445,000
34,500	100,000	230,000	640,000
(Interpolate for intermediate values.)			

275. FACTORY TESTS.

Each insulator or insulating part thereof for use on circuits operating at voltages in excess of 15,000 volts shall be subjected to a routine dry flash-over test at the factory for a period of 3 minutes at a frequency of 60 cycles per second or to any other test sanctioned by good modern practice, such as high-frequency tests.

276. SELECTION OF INSULATORS.**A. Insulators for Constant-Current Circuits.**

Insulators for use on constant-current circuits shall be determined on the basis of the nominal full-load voltage of the circuit.

B. Insulators for Single-phase Circuits Directly Connected to Three-phase Circuits.

Insulators used on single-phase circuits directly connected to three-phase circuits (without intervening isolating transformers) shall have a flash-over voltage not less than that required for the insulators on the three-phase circuits.

C. Insulators for Nominal Voltages Between Conductors.

In selecting insulators of the test voltage to be used for any nominal voltage between conductors, consideration shall be given to the conditions under which the line will operate as follows:

1. Where the system is of moderate extent, in open country, subject to intermittent rains and moderate lightning, insulators having flash-over values not less than given in table 30 shall be used.
2. Where operating conditions are more severe than set forth in 1 above, due to extent of system, prevalence of exceptionally severe lightning, bad atmospheric conditions (caused by chemical fumes, smoke, cement dust, salt fog, or other foreign matter), or to a long dry season with heavy dust accumulation followed by moisture, insulators having a higher flash-over than given in table 30 or other equally effective means of increasing insulation shall be used. The increase is to be determined by local conditions and experience.

277. PROTECTION AGAINST ARCING.

In installing the insulators and conductors, such precautions as are sanctioned by good modern practice shall be taken to prevent, as far as possible, any arc from forming or to prevent any arc which might be formed from injuring or burning any parts of the supporting structures, insulators or conductors which might render the conductors liable to fall.

278. COMPLIANCE WITH RULE 277 AT CROSSINGS.

Construction in accordance with any one of the methods (A to G) given below will be considered as a means of meeting the requirements of rule 277 above, provided that insulators having a flash-over not less than required by rule 276, C, 1 or C, 2 are used, and in no case having a lower flash-over than insulators generally used in adjacent sections of the line.

Exception: If the insulator hardware on the structure is grounded at crossings and is not grounded on the adjacent parts of the line, construction in accordance with A or B below should be followed, or other equally effective means employed.

The use of grounded construction at crossings only should in general be avoided.

- A. The use of a protective device such as a gap, protector tube, lightning arrester, or the like, on or adjacent to the insulator, which is effective in suppressing the power arc or in holding it clear of the insulator, conductor, supporting structure, and hardware.
- B. The use of protective gaps or other voltage-limiting devices on structures adjacent to crossing structures, if such devices limit the voltage to not more than 80 percent of the flash-over value of the insulators on the crossing structures.
- C. The use of circuit protection by fast-clearing fuses or circuit-breakers. Fuses, or breakers in combination with their relays, shall be considered "fast-clearing" if they interrupt fault currents within one-fifth second (12 cycles at 60 cycles per second).
- D. The use of one or more overhead ground wires installed at a higher level than the phase wires on not less than five consecutive spans, including two adjacent spans on each side of the crossing span,

278. COMPLIANCE WITH RULE 277 AT CROSSINGS—Con.

provided the ground wire is effectively grounded at structures adjacent to crossing structures.

Such overhead ground wires shall not be grounded at crossing structures unless such structures are inherently grounded or unless the ground wires are grounded at each of the two supporting structures on both sides of and adjacent to the crossing structures. In this latter case the down leads from the overhead ground wires shall be suitably offset from the crossing structures or otherwise arranged so as not to appreciably increase the probability of lightning flash-over from the overhead ground wire and its connections to the phase wires and other current-carrying parts.

- E. The use of insulators with ungrounded pins or supporting insulator attachments carried on wood arms.
- F. The use of insulators having a flash-over 25 percent greater than those employed on adjacent sections of the line, but not less than 25 percent greater than the values in table 30.
- G. If the insulator supports on the crossing structure and on adjacent sections of the line are grounded, the use of insulator strings with higher flash-over voltage at crossing supports than on the adjacent sections, as follows:
 - (1) If the adjacent parts of the line have five or less units—one extra unit at the crossing.
 - (2) If the adjacent parts of the line have six or more units—two extra units at the crossing.
 - (3) Insulation equivalent to that provided by (1) or (2).

SEC. 28. MISCELLANEOUS REQUIREMENTS

280. SUPPORTING STRUCTURES FOR OVERHEAD LINES

A. Poles and Towers.

1. RUBBISH.

Poles and towers shall be placed, guarded, and maintained so as to be exposed as little as practicable to brush, grass, rubbish, or building fires.

280. A. Poles and Towers—Continued

2. GUARDING POLES.

(a) PROTECTION AGAINST MECHANICAL INJURY.

Where poles and towers are exposed to abrasion by traffic or to other damage which would materially affect their strength, they shall be protected by guards.

(b) PROTECTION AGAINST CLIMBING. On closely latticed poles or towers carrying supply conductors exceeding 300 volts to ground, either guards or warning signs shall be used, except as follows:

Exception 1: Where the right-of-way is completely fenced.

Exception 2: Where the right-of-way is not completely fenced, provided the poles or towers are not adjacent to roads, regularly traveled thoroughfares, or places where people frequently gather, such as schools or public playgrounds.

3. WARNING SIGNS.

(a) ON POLES OR TOWERS. For warning signs on poles or towers, see rule 280, A, 2, (b).

(b) ON BRIDGE FIXTURES. Structures attached to bridges for the purpose of supporting conductors shall be plainly marked with the name, initials, or trade-mark of the utility responsible for the attachment and, in addition, where the voltage exceeds 750 volts to ground, by the following sign or its equivalent:

“Danger—Do Not Touch.”

4. GROUNDING METAL POLES.

Metal poles not guarded or isolated shall always be specially grounded where in contact with metal-sheathed cable or the metal cases of equipment operating at voltages exceeding 750 volts to ground.

Metal poles not guarded, isolated, or specially grounded should always be considered as imperfectly grounded and the insulators supporting line conductors as well as the strain insulators in attached span wires should, therefore, have a

280. A. Poles and Towers—Continued

suitable margin of safety and be maintained with special care to prevent leakage to the pole as far as practicable.

5. POLE STEPS.

(a) METAL STEPS. Steps closer than $6\frac{1}{2}$ feet from the ground or other readily accessible place shall not be placed on poles.

6. IDENTIFICATION OF POLES.

Poles, towers and other supporting structures on which are maintained electric conductors shall be so constructed, located, marked, or numbered as to facilitate identification by employees authorized to work thereon. Date of installation of such structures shall be recorded where practicable by the owner.

7. OBSTRUCTIONS.

All poles should be kept free from posters, bills, tacks, nails, growing vines, and other unnecessary obstructions, such as through bolts not properly trimmed.

B. Crossarms.

1. LOCATION.

In general, crossarms should be maintained at right angles to the axis of the pole and to the direction of the attached conductors, and at crossings should be attached to that face of the structure away from the crossing, unless special bracing or double crossarms are used.

Note: Double crossarms are generally used at crossings, unbalanced corners, and dead-ends in order to permit conductor fastenings at two insulators and so prevent slipping, although single crossarms might provide sufficient strength. To secure extra strength, double crossarms are frequently used and crossarms guys are sometimes used.

2. BRACING.

Crossarms shall be securely supported, by bracing, if necessary, so as to support safely loads to which they may be subjected, including linemen working on them. Any crossarm or buckarm,

280. B. Crossarms—Continued

except the top one, shall be capable of supporting a vertical load of 225 pounds at either extremity in addition to the weight of the conductors.

C. Unusual Conductor Supports.

Where conductors are attached to structures other than those used solely or principally for supporting the lines, all rules shall be complied with as far as they apply and such additional precautions as may be deemed necessary by the administrative authority shall be taken to avoid injury to such structures or to the person using them. The supporting of conductors on trees and roofs should be avoided where practicable.

281. TREE TRIMMING.

A. General.

Where trees exist near supply-line conductors, they shall be trimmed, if practicable, so that neither the movement of the trees nor the swinging or increased sagging of conductors in wind or ice storms or at high temperatures will bring about contact between the conductors and the trees.

Exception: For the lower-voltage conductors, where trimming is difficult, the conductor may be protected against abrasion and against grounding through the tree by interposing between it and the tree a sufficiently nonabsorptive and substantial insulating material or device.

B. At Wire Crossings and Railroad Crossings.

The crossing span and the next adjoining spans shall be kept free, as far as practicable, from overhanging or decayed trees which might fall into the line.

282. GUYING.

A. Where Used.

When the loads to be imposed on poles, towers, or other supporting structures are greater than can be safely supported by the poles or towers alone, additional strength shall be provided by the use of guys, braces, or other suitable construction.

282. A. Where Used—Continued

Guys shall be used also, where necessary, wherever conductor tensions are not balanced, as at corners, angles, dead-ends, and changes of grade of construction.

Note: This is to prevent undue increase of sags in adjacent spans as well as to provide sufficient strength for those supports on which the loads are considerably unbalanced.

B. Strength.

The strength of the guy shall meet the requirements of section 26 for the grade of construction that applies.

When guys are used with wood or other poles or towers capable of considerable deflection before failure, the guys shall be able to support the entire load in the direction in which they act, the pole acting simply as a strut.

C. Point of Attachment.

The guy should be attached to the structure as near as practicable to the center of the conductor load to be sustained, but for voltages exceeding 8,700 volts the insulation afforded by wood crossarms and poles should not be reduced any more than is necessary.

D. Guy Fastenings.

Guys should be stranded and where attached to anchor rods should be protected by suitable guy thimbles or their equivalent. Cedar and other soft-wood poles around which any guy having a strength of 10,000 pounds or more is wrapped should be protected by the use of suitable guy shims and, where there is a tendency for the guy to slip off the shim, guy hooks or other suitable means of preventing this action should be used. Shims are not necessary in the case of supplementary guys, such as storm guys.

E. Guy Guards.

The ground end of all guys attached to ground anchors exposed to traffic shall be provided with a substantial and conspicuous wood or metal guard not less than 8 feet long.

282. E. Guy Guards—Continued

Recommendation: It is recommended that in exposed or poorly lighted locations such guards be painted white or some other conspicuous color.

F. Insulating Guys from Metal Poles.

Where anchors would otherwise be subject to electrolysis, guys attached to metal poles or structures and not containing guy insulators should be insulated from the metal pole or structure by suitable blocking.

G. Anchor Rods.

Anchor rods shall be installed so as to be in line with the pull of the attached guy when under load, except in rock or concrete. The anchor rod shall have an ultimate strength in the eye and shank equal to that required of the guy.

H. Grounding.

The anchored end of guys attached to wood poles carrying circuits of more than 15,000 volts shall be effectively grounded (see section 9 for method) wherever this part of the guy has a clearance of less than 8 feet to ground.

Exception 1: This does not apply to guys in rural districts.

Exception 2: This does not apply if the guy contains an insulator which will meet the requirements of rule 283, A, 2 for the highest voltage liable to be impressed on it.

283. INSULATORS IN GUYS ATTACHED TO POLES AND TOWERS.

A. Properties of Guy Insulators.

1. MATERIAL.

(a) **GRADE B.** Guy insulators shall be made of wet process porcelain, wood, or other material of suitable mechanical and electrical properties.

(b) **GRADES C, D, AND N.** No requirements are made for material.

2. ELECTRICAL STRENGTH.

Guy insulators shall have a dry flash-over voltage at least double the normal line voltage and a wet

283. A. Properties of Guy Insulators—Continued

flash-over voltage at least as high as the normal line voltage between conductors.

3. MECHANICAL STRENGTH.

Guy insulators shall have a mechanical strength at least equal to that required of the guys in which they are installed.

B. Use of Guy Insulators.

1. ONE INSULATOR.

An insulator shall be located in each guy which is attached to a pole or structure carrying any supply conductors of more than 300 volts to ground and not more than 15,000 volts, or in any guy which is exposed to such voltages. This guy insulator shall be located at least 8 feet above the ground.

Exception 1: A guy insulator is not required where the guy is grounded under the conditions set forth in 4 following.

Exception 2: A guy insulator is not required if the guy is attached to a pole on private right-of-way carrying no supply circuits whose voltage exceeds 550 volts or whose transmitted power exceeds 3,200 watts.

Exception 3: A guy insulator is not required if all supply conductors are cable having effectively grounded continuous metal sheath, or insulated conductors supported on and cabled together with an effectively grounded messenger.

2. TWO INSULATORS.

Where a guy attached to any pole carrying communication or supply conductors or both, is carried over or under any overhead supply conductor of more than 300 volts to ground and where hazard would otherwise exist, two or more guy insulators shall be placed so as to include the exposed section of the guy between them as far as possible. Neither insulator shall be within 8 feet of the ground.

283. B. Use of Guy Insulators—Continued

Exception: These insulators are not required where the guy is grounded under the conditions set forth in 4 following:

3. RELATIVE LOCATION OF INSULATORS IN GUYS LOCATED ONE ABOVE THE OTHER.

Where guys in which it is necessary to install insulators are so arranged that one crosses or is above another, insulators shall be so placed that in case any guy sags down upon another the insulators will not become ineffective.

4. INSULATORS NOT REQUIRED.

Insulators are not required in guys under any one of the following conditions:

- (a) Where the guy is electrically connected to grounded steel structures or to an effective ground connection on wood poles.
- (b) Where the guys are uniformly effectively grounded throughout any system of overhead lines.
- (c) Where the guys are connected to a line conductor which has at least four ground connections in each mile of line in addition to the ground connections at individual services.

284. SPAN-WIRE INSULATORS.

A. Mechanical Strength.

Span-wire insulators shall have a mechanical strength at least equal to that required of the span wire in which they are installed.

B. Use of Span-Wire Insulators.

All span wires, including bracket span wires, shall have a suitable strain insulator (in addition to an insulated hanger if used) inserted between each point of support of the span wire and the lamp or trolley-contact conductor supported, except that single insulation, as provided by an insulated hanger, may be permitted when the span wire or bracket is supported on wood poles supporting

284. B. Use of Span-Wire Insulators—Continued

only trolley, railway feeder, or communication conductors used in the operation of the railway concerned. In case insulated hangers are not used, the strain insulator shall be located so that in the event of a broken span wire the energized part of the span wire cannot be reached from the ground.

Exception: This rule does not apply to insulated feeder taps used as span wires.

285. OVERHEAD CONDUCTORS.**A. Identification.**

All conductors of electric-supply and communication lines should be arranged to occupy definite positions throughout, as far as practicable, or shall be constructed, located, marked, numbered, or attached to distinctive insulators or crossarms, so as to facilitate identification by employees authorized to work thereon. This does not prohibit systematic transposition of conductors.

B. Branch Connections.**1. ACCESSIBILITY.**

Connections of branches to supply circuits, service loops, and equipment in overhead construction shall be readily accessible to authorized employees. When possible, connections shall be made at poles or other structures.

2. CLEARANCE.

Branch connections shall be supported and placed so that swinging or sagging cannot bring them in contact with other conductors or interfere with the safe use of pole steps, or reduce the climbing or lateral working space.

C. Common Neutral.

Primary and secondary circuits may utilize a single conductor as a common neutral if such conductor has at least four ground connectors in each mile of line. Ground connections at individual services are to be counted only if made to underground metallic water piping systems.

286. EQUIPMENT ON POLES.**A. Identification.**

All equipment of electric-supply and communication lines should be arranged to occupy definite positions throughout, as far as practicable, or shall be constructed, located, marked, or numbered so as to facilitate identification by employees authorized to work thereon.

B. Location.

Transformers, regulators, lightning arresters, and switches, when located below conductors or other attachments, shall be mounted outside of the climbing space.

C. Guarding.

Current-carrying parts of switches, automatic circuit-breakers, and lightning arresters shall be suitably inclosed or guarded if all the following conditions apply:

1. If of more than 300 volts to ground, and,
2. If located on the climbing side of the pole less than 20 inches from the pole center, and,
3. If located below the top crossarm.

D. Hand Clearance.

All current-carrying parts of switches, fuses, lightning arresters, also transformer connections and other connections which may require operation or adjustment while alive and are exposed at such times, shall be arranged so that in their adjustment while alive the hand need not be brought nearer to any other current-carrying part at a different voltage than the clearances from pole surfaces required in table 9, rule 235, A, 3, (a), for conductors of corresponding voltages. (See also rule 422, A, B, and C, part 4 of this code, for clearances from live parts.)

E. Street-Lighting Equipment.**1. CLEARANCES FROM POLE SURFACE.**

All exposed metal parts of lamps and their supports (unless effectively insulated from the current-carrying parts) shall be maintained at the

286. E. Street-Lighting Equipment—Continued

following distances from the surface of wood poles:

In general	<i>Inches</i> 20
If located on the side of the pole opposite the designated climbing side	5

Exception: This does not apply where lamps are located at pole tops.

2. CLEARANCES ABOVE GROUND.

Street lamps shall be mounted at not less than the following heights above ground:

Over walkways	<i>Feet</i> 10
Over roadways:	
Connected to circuits of 150 volts or less	14
Connected to circuits of more than 150 volts	15

3. HORIZONTAL CLEARANCE.

Arc and incandescent lamps in series circuits should have at least 3 feet horizontal clearance from windows, porches, and other spaces accessible to the general public.

4. MATERIAL OF SUSPENSION.

The lowering rope or chain for lighting units arranged to be lowered for examination or maintenance shall be of a material and strength designed to withstand climatic conditions and to sustain the lighting unit safely. The lowering rope or chain, its supports, and fastenings shall be examined periodically.

5. INSULATORS IN SUSPENSION ROPES.

Effective insulators, as specified in rule 283, A, should be inserted at least 8 feet from the ground in metallic suspension ropes or chains supporting lighting units of series circuits.

6. ARC-LAMP DISCONNECTORS.

A suitable device shall be provided by which each arc-lighting unit on series circuits of more than

286. E. Street-Lighting Equipment—Continued

300 volts to ground may be safely and entirely disconnected from the circuit before the lamp is handled, unless the lamps are always worked on from suitable insulating stools, platforms, or tower wagons, or handled with suitable insulating tools, and treated as under full voltage of the circuit concerned.

7. GROUNDING LAMP POSTS.

Metal lamp posts shall be effectively grounded.

F. Transformers.

Transformers mounted on arms or poles on public thoroughfares shall be at a height above ground not less than 10 feet where over walkways and not less than 15 feet where over roadways.

Exception: Where it is the established practice to mount transformers at lesser distances above ground, such practice may be continued if the reduced mounting heights are carefully maintained.

287. PROTECTION FOR EXPOSED OVERHEAD COMMUNICATION LINES.**A. Open Wire.**

Communication lines for public use and fire-alarm lines shall be treated as follows, if at any point they are exposed to supply (including trolley) lines of more than 400 volts to ground:

1. At stations for public use they shall be protected by one of the methods specified in part 3, section 39 of this code.
2. Elsewhere they shall be isolated by elevation or otherwise guarded so as to be inaccessible to the public.

B. Metal-Sheathed Cable.

Metal-sheathed cables and messengers shall be isolated or grounded in conformity with the general requirements of section 21.

288. CIRCUITS OF ONE CLASS USED EXCLUSIVELY IN THE OPERATION OF CIRCUITS OF ANOTHER CLASS.

A. Overhead Communication Circuits Used Exclusively in the Operation of Supply Circuits.

1. CHOICE OF METHOD.

Communication circuits used exclusively in the operation of supply lines may be run either as ordinary communication circuits or as supply circuits under the conditions specified in 3 and 4 of this rule, respectively. After selection of the type of communication-circuit construction and protection for any section which is isolated, or is separated by transformers, such construction and protection shall be consistently adhered to throughout the extent of such isolated section of the communication system.

2. GUARDING.

Communication circuits used in the operation of supply lines shall be isolated by elevation or otherwise guarded at all points so as to be inaccessible to the public.

3. WHERE ORDINARY COMMUNICATION-LINE CONSTRUCTION MAY BE USED.

Communication circuits used in the operation of supply lines may be run as ordinary communication conductors under the following conditions:

(a) Where such circuits are below supply conductors in the operation of which they are used (including high-voltage trolley feeders) at crossings, conflicts, or on commonly used poles, provided:

- (1) Such communication circuits occupy a position below all other conductors or equipment at crossings, conflicts, or on commonly used poles.
- (2) Such communication circuits and their connected equipment are adequately guarded and are accessible only to authorized persons.
- (3) The precautions in part 3, section 39, and part 4, section 44 of this code, have been taken.

288. A. Overhead Communication Circuits Used Exclusively in the Operation of Supply Circuits—Continued

- (b) Where such circuits are below supply conductors in the operation of which they are used and are above other supply or communication conductors at wire crossings, conflicts, or on the same poles, provided the communication circuits are protected by fuseless lightning arresters, drainage coils, or other suitable devices to prevent the communication circuit voltage from normally exceeding 400 volts to ground.

Note: The grades of construction for communication conductors with inverted levels apply.

4. WHERE SUPPLY-LINE CONSTRUCTION MUST BE USED.

Communication circuits used in the operation of supply lines shall comply with all requirements for the supply lines with which they are used, where they do not comply with the provisos of 3 (a) or (b) above.

Exception 1: If the voltage of the supply conductors concerned exceeds 8,700 volts, the communication conductors, need only meet the requirements for supply conductors of 5,000 to 8,700 volts.

Exception 2: Where the supply conductors are required to meet grade C, the size of the communication conductors may be the same as for grade D (see rule 262, I, 2) for spans up to 150 feet.

B. Supply Circuits Used Exclusively in the Operation of Communication Circuits.

(See also sec. 29.)

Circuits used for supplying power solely to apparatus forming part of a communication system may be run either in open wire or in aerial or underground cable as follows:

1. WHERE RUN IN OPEN WIRE, such circuits shall have the grades of construction, clearances, insulation, etc., prescribed elsewhere in part 2

288. B. Supply Circuits Used Exclusively in the Operation of Communication Circuits—Continued

for supply or communication circuits of the voltage concerned.

2. WHERE RUN IN AERIAL OR UNDERGROUND CABLE and the following requirements are met, the grades of construction, clearances, separations, locations, etc., prescribed elsewhere in part 2 for communication cables shall apply:

- (a) Such cables are covered with effectively grounded continuous metal sheaths or are carried in metal cable rings on effectively grounded messengers.
- (b) All circuits in such cables are owned or operated by one party and are maintained only by qualified employees.
- (c) Supply circuits included in such cables are terminated at points accessible only to qualified employees.
- (d) Communication circuits brought out of such a cable, if they do not terminate in a repeater station or terminal office, shall be so protected or arranged that in the event of a failure within the cable, the voltage on these communication circuits will not exceed 400 volts to ground.
- (e) Terminal apparatus for the power supply shall be arranged so that live parts are inaccessible when such supply circuits are energized.

Exception: The provisions of B, 1 and 2 above, do not apply to supply circuits of 550 volts or less and which carry power not in excess of 3,200 watts, covered in rule 220, B, 3.

289. OVERHEAD ELECTRIC RAILWAY CONSTRUCTION.

A. Trolley-Contact Conductor Supports.

All overhead trolley-contact conductors shall be supported and arranged so that the breaking of a single contact conductor fastening will not allow the trolley conductor, live span wire, or current-carrying connection to come within 10 feet (measured vertically) from the ground, or from any platform accessible to the general public.

289. A. **Trolley-Contact Conductor Supports—Continued**
Span-wire insulation for trolley-contact conductors shall comply with rule 284.

B. High-Voltage Contact Conductors.

Every trolley-contact conductor of more than 750 volts in urban districts where not on fenced right-of-way shall be suspended so as to minimize the liability of a break and, as far as practicable, so that if broken at a single point, it can not fall within 12 feet (measured vertically) from the ground or any platform accessible to the general public.

C. Third Rails.

Third rails shall be protected where not on fenced rights-of-way by adequate guards composed of wood or other suitable material.

D. Prevention of Loss of Contact at Railroad Crossings.

Trolley-contact conductors shall be arranged as set forth in either 1 or 2 following, at grade crossings with interurban or other heavy-duty or high-speed railroad systems:

1. The trolley-contact conductor shall be provided with live trolley guards of suitable construction, or,
2. The trolley-contact conductor shall be as far as practicable at the same height above its own track throughout the crossing span and the next adjoining spans. Where a uniform height above rail is not adhered to, the change shall be made in a very gradual manner. Where the crossing span exceeds 100 feet, catenary construction shall be used.

Exception: This rule does not apply where the system is protected by interlocking derails or by gates.

E. Guards Under Bridges.

1. **WHERE GUARDING IS REQUIRED.**

Guarding is required where the trolley-contact conductor is so located that a trolley pole leaving the conductor can make simultaneous contact between it and the bridge structure.

289. E. Guards Under Bridges—Continued

2. NATURE OF GUARDING.

Guarding shall consist of a substantial inverted trough of nonconducting material located above the contact conductor, or other suitable means of preventing contact between the trolley pole and the bridge structure.

SEC. 29. RULES FOR UNDERGROUND LINES

(See also rule 288, B, 2.)

290. LOCATION.

A. General Location.

Underground systems of electric conductors should be located so as to be subject to the least practicable disturbance. Railway tracks and underground structures, including catch basins, gas pipes, etc., should be avoided where practicable.

B. Ducts.

The ducts between adjacent manholes or other outlets should be laid as straight and direct as practicable.

C. Manholes.

Manhole openings, where practicable, shall be located so as to provide safe and convenient access. At crossings under railroads, the manholes, pull boxes, and terminals should, where practicable, be located away from the roadbed.

291. CONSTRUCTION OF DUCT AND CABLE SYSTEMS.

A. Material, Size, and Finish of Ducts.

Ducts shall be of such material, size, mechanical strength, and finish as to facilitate the installation and maintenance of conductors or cables. Ducts shall be freed from burrs before laying and shall have clear bores.

B. Grading of Ducts.

Where it is necessary to drain ducts the grade of the ducts shall be such as to permit proper and adequate drainage.

291. CONSTRUCTION OF DUCT AND CABLE SYSTEMS—Continued

C. Settling.

Ducts should be suitably reinforced or be laid on suitable foundations of sufficient mechanical strength where necessary to protect them from settling.

D. Clearances.

1. GENERAL.

The clearance between duct or cable systems and other underground structures paralleling them, shall be as great as practicable. The distance between the top covering of the system and the pavement surface, or other surface under which the system is constructed, shall be sufficient to protect the system from injury by traffic.

2. BELOW BASE OF RAIL.

The top of all duct and cable system structures, except as hereafter specified, shall generally be located at a depth of not less than 30 inches, in the case of street railways, and not less than 42 inches, in the case of steam and electric railroads, below the base of rail. Where unusual conditions exist or where proposed construction would interfere with existing construction, a greater depth than specified above may be required.

Exception 1: Where this is impracticable, or for other reasons, this clearance may be reduced by agreement between the parties concerned. In no case, however, shall the top of the conduit protection extend higher than the bottom of the ballast section which is subject to working or cleaning.

Exception 2: Where physical and chemical conditions will permit, a conduit consisting of not more than two iron pipes, not exceeding 4 inches in diameter, or two creosoted wood ducts not exceeding 6 inches square, or one or more cables of a type designed for burying directly in the earth used for communication lines, or for service supply circuits not exceeding 750 volts, may be laid in the ground beneath railroad tracks without any form of

291. D. Clearances—Continued

protection at a minimum depth of 18 inches below the base of the rail unless the worked ballast section of the roadbed exceeds 18 inches, in which case the conduit shall be laid below the ballast section.

3. IRON PIPE CONDUIT.

Where iron pipe is used as a conduit for underground cables or conductors, it shall not be laid in contact with water, gas, or steam metallic-pipe systems. Where the clearance is less than two inches, the metal conduit shall be adequately separated from other metallic-pipe systems by a barrier of suitable materials, or they shall be electrically bonded together at the point of least separation.

E. Separations Between Supply and Communication Duct Systems.

1. GENERAL.

Duct systems, including laterals, to be occupied by communication conductors for public use should be separated, where practicable, from duct systems, including laterals, for supply conductors by not less than 3 inches of concrete, 4 inches of brick masonry, or 12 inches of well-tamped earth.

Exception 1: Extensions may, however, be made to existing interconnected or jointly owned and jointly occupied duct systems used in common by municipalities, communication companies, or supply companies with less effective separations than above specified.

Exception 2: Cables containing circuits of 550 volts or less between conductors and having a total transmitted power of not in excess of 3,200 watts, used exclusively in connection with the operation of a railway signal or supply system, may be carried in the same duct system with communication cables, if such construction is agreed to by all parties concerned, and where the communication cables are exclusively used for the operation

291. E. Separations Between Supply and Communication Duct Systems—Continued

of the railway signal or supply system, they may be carried in the same duct.

2. ENTERING MANHOLES.

Where communication and supply conductors or cables occupy ducts terminating in the same manhole, the two classes of ducts should be separated as widely as practicable and where practicable should enter the manhole from opposite sides.

Note: This requirement is made so that cables can be racked along side walls with a minimum of crosses between the two classes of conductors.

F. Duct Entrances Into Manholes.

Iron-pipe conduit terminating in manholes, hand-holes, or other permanent openings of underground systems, shall be provided with an effective shield, bushing or other smooth outlet.

Exception: This does not apply to communication conductors, to supply conductors of less than 300 volts between conductors, or to armored cables of any voltage.

G. Sealing Laterals.

Lateral ducts for service connections to buildings, through which gas or water may enter buildings or other duct systems, should be effectively plugged or cemented by the use of asphaltum, pitch, or other suitable means.

H. Duct Arrangement for Dissipation of Heat.

Duct systems intended to carry supply cables of large current capacity should be arranged, where practicable, so that ducts carrying such cables will not dissipate their heat solely through other ducts.

292. CONSTRUCTION OF MANHOLES.

A. Minimum Strength.

The design and construction of manholes and hand-holes shall provide sufficient strength to sustain, with a suitable margin of safety, the loads which may reasonably be imposed on them.

292. CONSTRUCTION OF MANHOLES—Continued

B. Dimensions.

Manholes should meet the following requirements where practicable:

1. WIDTH.

The least horizontal inside dimension should be not less than 3 feet 6 inches.

2. WORKING SPACE.

A clear working space should be provided. The horizontal dimension should be not less than 3 feet. The vertical dimension should be not less than 6 feet except in manholes where the opening is within 1 foot on each side of the full size of the manhole.

Exception: The dimensions specified in 1 and 2 above are not necessary in service boxes, handholes, or in manholes serving a small number of ducts, or in manholes used exclusively for communication-system equipment and cables.

C. Drainage.

Where drainage is into sewers, suitable traps shall be provided to prevent entrance of sewer gas into manholes.

D. Ventilation.

Adequate ventilation to open air shall be provided for manholes from which any openings exist into subways entered by the public. Where such manholes house transformers, sectionalizing switches, or regulators, etc., the ventilator ducts shall be cleaned at necessary intervals.

Exception: Subways under water or in other locations where it is impracticable to comply.

E. Manhole Openings.

Round openings to any manhole should be not less than 24 inches in diameter. Rectangular openings should have dimensions not less than 24 by 20 inches.

Exception: The dimensions specified above are not necessary in service boxes and handholes or in manholes serving a small number of ducts.

292. CONSTRUCTION OF MANHOLES—Continued

F. Manhole Covers.

Manholes and handholes, while not being worked in, shall be securely closed by covers of sufficient strength to sustain such loads as may reasonably be imposed upon them.

G. Supports for Cables.

Cables should be adequately supported at each manhole.

H. Manhole Location.

Manhole openings shall, where practicable, be located so that barriers or other suitable guards can be placed to protect the opening effectively when uncovered.

293. LOCATION OF CABLES.

A. Accessibility.

Cables in manholes shall be reasonably accessible to workmen and clear working space shall be maintained at all times.

B. Cables Carrying Large Currents.

Cables intended to carry large currents should be located, where practicable, in outside ducts so that they will not necessarily dissipate heat solely through adjacent ducts.

C. Separation Between Conductors.

1. CABLES OF DIFFERENT VOLTAGES.

Cables shall be arranged and supported in ducts and manholes so that those operating at higher voltages will be separated as far as practicable from those operating at lower voltages.

2. CABLES OF DIFFERENT SYSTEMS.

Cables belonging to different systems, particularly supply-distribution and communication systems, shall not be installed in the same duct.

Exception: This does not apply to the installation of railway-signal supply and communication cables in the same duct, as permitted by exception 2 in rule 291, E, 1.

293. C. Separation Between Conductors—Continued

3. CABLES OF SUPPLY AND COMMUNICATION SYSTEMS.

- (a) **GENERAL.** Supply cables and communication cables for public use should, in general, be maintained in separate duct systems, and particularly in separate manholes.

Exception 1: Cable extensions may be made to existing interconnected or jointly owned and jointly occupied duct systems used in common by municipalities, communication companies, or supply companies.

Exception 2: This does not apply where railway-signal supply and communication cables are carried in the same duct system as permitted in exception 2, rule 291, E, 1.

- (b) **IN THE SAME MANHOLE.** Supply cables and communication cables for public use occupying the same manhole should, where practicable, be maintained at opposite sides of the manhole.

Where supply and communication cables must cross, a separation of at least 1 foot shall, where practicable, be maintained.

294. PROTECTION AND SEPARATION OF CONDUCTORS BURIED IN EARTH.

A. Separation.

The separation between buried communication and buried supply conductors or cables shall consist of not less than 12 inches of well tamped earth, 4 inches of brick, or 3 inches of concrete.

Exception: This separation and protection is not required where supply circuits having a potential of 550 volts or less between conductors and having a total transmitted power of not in excess of 3,200 watts are laid adjacent to communication cables, if all cables are used exclusively for the operation of a railway-signal or supply system, and are maintained by the same company.

294. PROTECTION AND SEPARATION OF CONDUCTORS BURIED IN EARTH—Continued

B. Protection at Crossings of Cables.

At all crossings where buried supply conductors or cables are above communication conductors or cables, the supply conductors or cables shall be protected from digging operations by concrete or creosoted wood plank or equivalent mechanical protective covering extending at least 2 feet in each direction from the point of crossing.

Exception: This separation and protection is not required where supply circuits having a potential of 550 volts or less between conductors and having a total transmitted power of not in excess of 3,200 watts are laid adjacent to communication cables, if all cables are used exclusively for the operation of a railway-signal or supply system, and are maintained by the same company.

C. Protection of Cables Installed Parallel.

Where buried communication and buried supply conductors or cables are installed in the same trench generally parallel to each other, the buried supply conductors or cables shall be covered with concrete or creosoted wood plank or equivalent mechanical protection, except that this covering may be omitted in the following cases:

1. Where the voltage of the supply conductors does not exceed 300 volts to ground.
2. Where the supply conductors or cables are encased in a continuous metallic sheath effectively grounded.
3. Where the supply conductors or cables are installed more than 2 feet horizontally from communication conductors.

Exception: This separation and protection is not required where supply circuits having a potential of 550 volts or less between conductors and having a total transmitted power of not in excess of 3,200 watts are laid adjacent to communication cables, if all cables are used exclusively for the operation of a railway-signal or supply system, and are maintained by the same company.

295. PROTECTION OF CONDUCTORS IN DUCT SYSTEMS AND MANHOLES.**A. Protection Against Arcing.**

A suitable fire-resistant covering should be placed on the following cables to prevent injury from arcing:

1. Closely grouped lead-sheathed supply cables containing circuits of more than 8,700 volts, or of large current capacity operating at more than 750 volts ac or 300 volts dc.
2. Communication cables and supply cables of large current capacity, if occupying the same side of the manhole, or if they cross each other.

B. Bonding.

Exposed metallic cable sheaths shall be bonded at suitable intervals with a conductor of suitable size, electrolysis conditions permitting. Supply cable sheaths need not be bonded to communication cable sheaths.

296. GUARDING OF LIVE PARTS IN MANHOLES.**A. Conductor Joints or Terminals.**

Joints or terminals of conductors or cables of supply systems shall be arranged so that there are no bare ungrounded current-carrying metal parts exposed to accidental contact within manholes or handholes.

B. Apparatus.

Live parts of protective, control or other apparatus installed and maintained in manholes should be enclosed in suitable grounded cases or in cases having no exposed metallic parts.

297. CONSTRUCTION AT RISERS FROM UNDERGROUND.**A. Separation Between Risers of Communication and Supply Systems.**

The placing of risers for communication systems and risers for supply systems on the same pole should be avoided where practicable. If it is necessary to use the same pole for the risers of both systems, they shall be placed on opposite semicircumferences of the pole where practicable. Where located on streets or highways, risers should, where

297. A. Separation Between Risers of Communication and Supply Systems—Continued

practicable, be placed on poles so as to be in the safest available location from the point of view of traffic damage.

B. Mechanical Protection of Conductors.

All supply conductors or cables from underground systems which connect to overhead systems shall be protected by a covering which gives suitable mechanical protection up to a point 8 feet above the ground.

Exception: Armored cables or cables installed in a grounded metal conduit.

C. Grounding of Riser Pipes.

Exposed metal riser pipes containing supply conductors shall be grounded unless such conductors are covered with a grounded metal sheath or are themselves grounded.

D. Conductor Terminal Construction.

The terminals of underground cables operating at more than 750 volts to ground and connecting to overhead open-wire systems shall meet the following requirements:

1. PROTECTION AGAINST MOISTURE.

Protection shall be provided so that moisture will not enter the cable.

2. INSULATION OF CONDUCTORS.

Conductors shall be properly insulated from the grounded metal sheath. In addition, the conductors of multiple-conductor cable shall be properly separated and insulated from each other.

Note: These requirements may be fulfilled by the use of potheads or other equivalent devices, such as oil switches, if incidentally they accomplish the same purpose.

E. Clearance Above Ground for Open Supply Wiring.

For supply wires connecting to underground systems see rule 232, C.

298. IDENTIFICATION OF CONDUCTORS.

Cables shall be permanently identified by tags or otherwise at each manhole or other permanent opening of the underground system. Where the duct formation on opposite sides of the manhole is the same, the cables where practicable should be installed in corresponding ducts.

Exception: This requirement does not apply where the position of a cable, in conjunction with diagrams supplied to workmen, gives sufficient identification, or where the manhole is occupied solely by the communication cables of one utility, or of two utility companies agreeing thereto.

299. IDENTIFICATION OF APPARATUS CONNECTED IN MULTIPLE.

Where transformers, regulators, or other similar apparatus not located in the same manhole operate in multiple, special tags, diagrams, or other suitable means shall be used to indicate that fact.

Exception: This requirement does not apply where disconnecting devices are provided to permit cutting such equipment completely off the system.

INDEX

	Rule	Rule page
Accessibility:		
Lines.....	212.....	44
Switches.....	216A.....	46
Alternating-current circuits.....	93B2.....	17
Ground connections.....	94C2.....	21
Made electrodes.....	94C.....	21
Grounding.....	92B.....	15
Grounding conductor.....	93B.....	17
Size and capacity.....	93B2.....	17
Anchor rods and guys.....	282G.....	162
Angles in line, strength requirements.....	261A.....	118, 126
Apparatus:		
Identification in manholes.....	299.....	183
Location relative to climbing space.....	236D.....	79
Application of grounding rules.....	90, 91.....	14
Application of rules for lines.....	201.....	42
Intent.....	201A.....	42
Temporary installations.....	201C.....	43
Waivers.....	201D.....	43
Arrangement:		
Switches.....	216.....	46
Bonding.....	295B.....	181
Brackets and racks:		
Grades B and C.....	261D.....	131
Grade D.....	262E.....	145
Bridges:		
Conductor clearances.....	234D.....	70
Conductor separation.....	235C.....	78
Buckarms:		
Climbing space.....	236F.....	80
Working space.....	237D.....	83
Buildings:		
Clearances from.....	234C.....	68
Separation of conductors.....	235B.....	77
Cabled services.....	263E4.....	153
Cables (<i>see also</i> Conductors):		
Bonding.....	295B.....	181
Communication:		
Covering.....	239G1.....	98
Strength.....	261I.....	137
Identification.....	298.....	183
Location in manholes.....	293.....	179
Protection.....	297B.....	182
Underground.....	294.....	179
Supply:		
Construction.....	241A.....	100
Covering.....	239F1.....	95
Strength.....	261G.....	135
Supports in manholes.....	292G.....	178
Underground construction.....	291.....	173
Clearances:		
Basic:		
Vertical.....	232A.....	55
Wire—Crossing.....	233A.....	62
Bridges.....	234D.....	70
Buildings.....	234C.....	68
Cables, supply.....	230C.....	53
Circuits, constant current.....	230B.....	53

Clearances—Continued	Rule	Rule page
Climbing space	236	78
Buckarm construction	236F	80
Dimensions	236A, E	78, 79
Location	236A, D	78, 79
Longitudinal runs	236G	81
Miscellaneous equipment	286B	166
Ridge pin conductors	236I	82
Through conductors on cross-arms	236E	79
Vertical conductors	236H, 239A	82, 90
Conductors:		
Attached to buildings	235B	77
Attached to bridges	235C	78
From bridges	234D	70
From buildings	234C	68
From conductors of another line	234A	67
From supporting structures of another line	234B	67
Lateral and vertical:		
Climbing space	239A	90
Communication wires on poles	239E, G	94, 98
Conductors not in conduit	239B	91
From supports and other wires	235A3, 239	74, 90
Mechanical protection	239C	91
Pole steps	239A	90
Power wires on poles	239D, F	92, 95
Separation	235A	71
Working space	239A	90
Neutral	230D	53
On pole lines:		
Application of rules	235A	71
Different voltages on same cross-arm	235A5	77
Line conductors, horizontal:		
Fixed supports	235A2, 3	72, 74
Suspension insulators	235A2	72
Line conductors and:		
Guy wires on same support	235A3	74
Support itself	235A3, 239	74, 90
Vertical conductors on same support	235A3, 239	74, 90
Racks, vertical	235A4	76
Open, not in conduit	237B	82
Equipment, street-lighting	286E	166
Fire hydrants	231A	53
General:		
Application	230	52
Constant current circuits	230B	53
Maintenance	230E	53
Metal-sheathed supply circuits	230C	53
Miscellaneous equipment on poles	286B	166
Neutral conductors	230D	53
Hand, equipment on poles	286D	166
Horizontal:		
Conductors attached to buildings	235B	77
Conductors attached to bridges	235C	78
Conductors on pole lines:		
Fixed supports	235A2, 3	72, 74
Suspension insulators	235A2	72
Conductors of different voltage on same cross-arm	235A5	77
Conductors to span or guy wires on same support	235A3	74
Conductors to supports	235A3, 239	74, 90
Conductors to vertical or lateral conductors	235A3, 239	74, 90
Pole lines	235A2	72
Supporting structures from:		
Conductors of another line	234B	67
Curbs	231C	54
Fire hydrants	231A	53
Railroad tracks	231D	54
Street corners	231B	54
Increased:		
High voltage	233B2	66
Long spans	233B1	64
Wire crossings	233B	64

Clearances—Continued

	Rule	Rule page
Joint use poles:		
Communication, vertical and lateral:		
In communication space.....	239E.....	94
Through power space.....	239G.....	98
Crossarms, horizontal.....	238A.....	84
Crossarms, not horizontal.....	238C.....	87
Line conductors.....	238B, D.....	86, 88
Power, vertical and lateral:		
In power space.....	239D.....	92
Through communication space.....	239F.....	95
Maintenance.....	230E.....	53
Supply circuits of different voltage.....	235A5.....	77
Underground lines.....	291D.....	174
Vertical:		
Above ground or rails.....	232.....	54
Basic.....	232A.....	55
Increases over basic.....	232B.....	58
Spans longer than basic.....	232B.....	58
Suspension insulators over rails.....	232B3.....	60
Avoiding increases over rails.....	232B4.....	61
Voltages over 50,000.....	232B2.....	60
Transformers.....	286F.....	168
Street lights.....	286E.....	166
Power wires at underground risers.....	232C.....	61
Climbing space.....	236.....	78
Conductors attached to bridges.....	235C.....	78
Conductors attached to buildings.....	235B.....	77
Conductors and equipment.....	238.....	84
Conductors on horizontal crossarms.....	238B.....	86
Different sags.....	238B3.....	86
Different voltage.....	238B2.....	86
Same voltage.....	238B1.....	86
Conductors on nonhorizontal crossarms.....	238C.....	87
Conductors not on crossarms.....	238D.....	88
Conductors and noncurrent-carrying metal parts.....	238E.....	88
Conductors on racks.....	235A4.....	76
Conductors to supports.....	235A3.....	74
Crossarms, horizontal.....	238A.....	84
Crossings, wire.....	233.....	62
Basic.....	233A.....	62
Increases over basic.....	233B.....	64
Jointly used poles.....	239F, G.....	95, 98
Street-light span and communication wires.....	238E3.....	89
Supply pole wiring.....	232C.....	61
Trolley span and communication wires.....	238E3.....	89
Working space.....	237B, C.....	82, 83
Working space.....	237.....	82
Buckarms.....	237D.....	83
Dimensions.....	237B.....	82
Location.....	237A.....	82
Vertical and lateral conductors.....	237B, 239A.....	82, 90
Climbing space:		
Buckarm construction.....	236F.....	80
Location and dimensions.....	236A.....	78
Location relative to:		
Crossarms.....	236C.....	78
Supply apparatus.....	236D.....	79
Supporting structures.....	236B.....	78
Vertical and lateral conductors.....	239A.....	90
Longitudinal runs.....	236G.....	81
Near ridge-pin conductors.....	236I.....	82
Past vertical conductors.....	236H.....	82
Through conductors.....	236E.....	79
Communication circuits:		
Grades of construction.....	242C.....	103
Used in operation of supply circuits.....	288A.....	169
Communication lines, protection.....	287.....	168
Conductor:		
Clearances:		
Another line.....	234A.....	67
Not in conduit.....	239B.....	91
Fastenings.....	261E.....	131

	Rule	Rule page
Conductor—Continued		
Grounding:		
Common.....	93E.....	20
Continuity.....	93A.....	16
Current flow.....	92C.....	16
Lightning arresters, arrangement.....	93A.....	16
Material.....	93A.....	16
Mechanical protection.....	93C.....	18
Underground.....	93D.....	20
Separation:		
Bridges.....	235C.....	78
Crossarms.....	238B.....	86
Equipment parts.....	238E.....	88
Manholes and ducts.....	293C.....	178
Underground.....	294.....	179
Vertical.....	235A.....	71
Not on crossarms.....	238D.....	88
On crossarms.....	238B.....	86
Terminals, risers from underground.....	297D.....	182
Conductors (<i>See also</i> Cables):		
Branch connections.....	285B.....	165
Climbing space.....	236E, G.....	79, 81
Near ridge-pins.....	236I.....	82
Vertical.....	236H.....	82
Communication:		
Covering.....	239G2.....	99
Separation.....	239G4.....	99
Strength requirements.....	261H, J.....	137
Vertical and lateral clearance.....	239E.....	94
Grades of construction.....	242.....	102
Communication used with supply lines.....	242C.....	103
Constant current.....	242A.....	102
Fire alarm.....	242D.....	103
Lightning protection wires.....	261F3.....	134
Neutral conductors.....	242E.....	106
Railway feeders.....	242B.....	103
Trolley contact.....	242B, 261F6.....	103, 135
Grades B and C.....	242.....	102
Communication conductors and cables.....	261H, I.....	137
Material.....	261F1.....	133
Minimum size.....	261F2.....	134
Power cables.....	261G.....	135
Sags and tensions.....	261F4.....	134
Splices and taps.....	261F5.....	135
Grade D:		
Inspection.....	213.....	44
Material and size.....	262I.....	146
Messengers.....	262J.....	148
Paired conductors.....	262I3.....	147
Sags.....	262I4.....	147
Splices and taps.....	262I5.....	148
Grade N:		
Communication.....	263I.....	153
Lightning wire.....	263F.....	153
Line, material and size.....	263D.....	150
Service:		
Cabled.....	263E4.....	153
Material and size.....	263E.....	151
Sag, open wire.....	263E3.....	152
Trolley contact.....	263G.....	153
Grounding:		
Attachment points for.....	92.....	15
Capacity and size.....	93B.....	17
Continuity and material.....	93A.....	16
Current flow in.....	92C.....	16
Mechanical protection.....	93C.....	18
Multiple use.....	93E, 97A, 285C.....	20, 24, 165
Scope and application of rules.....	90, 91.....	14
Underground.....	93D.....	20
Ground used as one conductor of circuit.....	215C.....	46
Identification.....	285A.....	165
Manholes.....	298.....	183

	Rule	Rule page
Conductors—Continued		
Levels on various classes of lines.....	220.....	47
Preferred levels:		
Power and communication lines.....	220B.....	47
Exceptions:		
Minor extensions.....	220B2.....	48
Small power circuits.....	220B3, 232A, 238B.....	48, 55, 86
Power lines of different voltages.....	220C2.....	50
Standardization, general:		
Lightning protection.....	261F3.....	134
Loading.....	251.....	111
Neutral, common use.....	285C.....	165
Overload.....	285.....	165
Protection:		
Manholes and ducts.....	295.....	181
Risers from underground.....	297.....	181
Underground.....	294.....	179
Sags and tensions.....	261F4.....	134
Span lengths.....	252D.....	115
Strength requirements.....	262I.....	146
Supply:		
Clearances.....	239F.....	95
Installation.....	239F2.....	96
Separation.....	239F4.....	98
Sizes.....	261F2.....	134
Strength requirements:		
Grades B and C.....	261F.....	133
Grade N.....	263D.....	150
Supports:		
Unusual.....	280C.....	160
Trolley:		
Construction.....	289.....	171
Sizes.....	261F6.....	135
Vertical:		
Mechanical protection.....	239C.....	91
Separation.....	238.....	84
Vertical and lateral:		
Clearance.....	239.....	90
Location.....	239A.....	90
Working space.....	237C.....	83
Conflicts:		
Avoidance of, supply lines.....	221.....	51
Conductor construction.....	242A, B.....	102, 103
Lines.....	241E.....	102
Structure construction.....	241E.....	102
Connections:		
Overhead.....	285B.....	165
Constant-current circuits.....	242A.....	102
Construction:		
Grades.....	240.....	99
Lines.....	210.....	43
Cradles at power line crossings:		
Grades B and C.....	261L.....	139
Grade N.....	263H.....	153
Crossarms:		
Bracing.....	280B2.....	159
Climbing space.....	236C.....	78
Dimensions.....	261D4.....	130
Grades of construction required.....	243B.....	107
Grades B and C:		
Braces.....	261D2.....	129
Double crossarms, where required.....	261D5.....	131
Location on pole.....	261D6.....	131
Longitudinal strength:		
Dead ends.....	261D3.....	129
Ends of higher grade construction.....	261D3.....	129
Ends of transversely weak sections.....	261D3.....	129
General.....	261D3.....	129
Methods of meeting requirements.....	261D3.....	129
Size.....	261D4.....	130
Vertical strength.....	261D1.....	129

		Rule	page
Crossarms—Continued			
Grades of construction required—Continued			
Grade D:			
Double crossarms, where required.....	262D3.....		145
Material.....	262D1.....		144
Size.....	262D2.....		144
Grade N.....	263C.....		150
Location.....	280B1.....		159
Separation.....	238A.....		84
Crossings:			
Insulators.....	278.....		156
Line.....	241D.....		100
Curbs, clearance from.....	231C.....		54
Current flow, grounding conductor.....	92C.....		16
Current-carrying part, guarding.....	214A.....		45
Definitions of special terms.....			1
Index.....			185
Design of lines.....	210.....		43
Direct-current systems, grounding.....	92A.....		15
Direct-current circuits.....	93B1.....		17
Ducts:			
Construction.....	291.....		173
Dissipation of heat.....	291H.....		176
Lateral, sealing.....	291G.....		176
Electric railway, overhead construction.....	289.....		171
Equipment:			
Grounding.....	92D.....		16
Grounding conductor.....	97A3.....		25
Size and capacity.....	93B5, 6.....		18
On poles.....	286.....		166
Separation of conductors.....	238E.....		88
Street lighting.....	286E.....		166
Fastenings, conductor.....	243C.....		108
Fire hydrants, clearances from.....	231A.....		53
Fire-alarm conductors.....	242D.....		103
Foundations, strength requirements.....	261B.....		126
General Requirements for overhead and underground lines.....	210.....		43
Construction.....	210.....		43
Design.....	210.....		43
Grounding of circuits and equipment.....	215.....		45
Methods.....	215A.....		45
Urban districts, parts to be grounded.....	215B.....		46
Use of ground wire as one conductor of circuit.....	215C.....		46
Inspections:			
Lines of service.....	213A.....		44
Lines out of service.....	213B.....		44
Maintenance.....	211.....		44
Switches, arrangements.....	216.....		46
Grades of construction.....	240, 241.....	99,	100
Conductors.....	242.....		102
Crossings, multiple.....	241D3.....		101
Crossings, normal.....	241D.....		100
General.....	240.....		99
Order of grades.....	241C.....		100
Short span.....	261K.....		139
Two or more conditions.....	241B.....		100
Ground clamps, how attached.....	95B.....		23
Ground connections:			
Contact surfaces.....	95C.....		23
Made electrodes.....	94C.....		21
Metal structures.....	94B.....		21
Piping systems.....	94A.....		20
Railway return.....	94D.....		22
Ground resistance.....	96A, B.....		24
Grounding:			
Alternating-current systems.....	92B.....		15
Circuits.....	215.....		45

Grounding—Continued	Rule	Rule page
Conductor:		
Attachment point.....	92.....	15
Capacity.....	93B.....	17
Continuity.....	93A.....	16
Covering.....	239G.....	98
Current flow in.....	92C.....	16
Material.....	93A.....	16
Mechanical protection.....	93C.....	18
Multiple use.....	93E, 97, 285C.....	20, 24, 165
Size.....	93B.....	17
Underground.....	93D.....	20
Conductors:		
Capacity.....	93B.....	17
Common.....	93E.....	20
Continuity.....	93A.....	16
Current flow.....	92C.....	16
Equipment.....	97A3.....	25
Guarding against contact.....	93C.....	18
Lightning arresters.....	97A1.....	25
Arrangement.....	93A.....	16
Lightning rods.....	97A4.....	25
Material.....	93A.....	16
Mechanical protection.....	93C.....	18
Point of attachment.....	92.....	15
Power circuits.....	97A2.....	25
Separate conductors, where required.....	97A.....	24
Size.....	93B.....	17
Underground.....	93D.....	20
Connection, lightning arrester.....	97C.....	25
Continuity.....	95A, C.....	22, 23
Direct-current distribution systems.....	92A.....	15
Equipment.....	92D, 215.....	16, 45
Ground resistance, limits.....	96.....	24
Guys.....	282H.....	162
Means:		
Ground clamps.....	95B.....	23
Made electrodes.....	95D.....	23
Method:		
Piping.....	95A.....	22
Protective:		
Application of rules.....	91.....	14
Emergency.....	91D.....	15
Scope of rules.....	90.....	14
Temporary installations.....	91C.....	15
Waiver of rules.....	91A.....	14
Raceway.....	92D.....	16
Riser pipes.....	297C.....	182
Rules:		
Application.....	91.....	14
Scope.....	90.....	14
Waiving.....	91.....	14
Service conduit.....	93E.....	20
Waterpiping system, point of attachment.....	95A.....	22
Wires:		
Jointly used poles.....	239F.....	95
Mechanical protection.....	239C.....	91
Supply.....	239F.....	95
Grounds:		
Made electrodes.....	94C, 95D.....	21, 23
Metallic underground.....	94B.....	21
Multiple use.....	97C.....	25
Piping systems.....	94A, 95A, C.....	20, 22, 23
Guarding:		
Equipment on poles.....	286C.....	166
Lines.....	214.....	45
Live parts:		
Manholes.....	296.....	181
Trolley-contact conductors.....	289E.....	172
Guards:		
Guys.....	282E.....	161
Guying.....	282.....	160

	Rule	Rule page
Guy:		
Anchor rods.....	282G.....	162
Fastenings.....	282D.....	161
Grades B and C:		
Angles.....	261C5.....	128
General requirements.....	261C.....	127
Strength requirements.....	261C5.....	128
Grade D:		
General requirements.....	262C.....	142
Maintenance.....	262C5.....	144
Strength requirements.....	262C3, 4.....	144
Grade N.....	263B.....	150
Grounding.....	282H, 283B4.....	162, 164
Guards.....	282E.....	161
Insulation from metal poles.....	282F.....	162
Insulators:		
Material.....	283A1.....	162
Required locations.....	283B.....	163
Strength.....	283A.....	162
Point of attachment.....	282C.....	161
Span wire insulators.....	284B.....	164
Hardware, protective coverings.....	261M.....	139
Ice loading on conductors.....	251.....	111
Identification:		
Apparatus in manholes.....	299.....	183
Poles.....	280A6.....	159
Inspection:		
Lines and equipment.....	213.....	44
Installation:		
Lines.....	211.....	44
Instrument:		
Transformers, grounding, conductors.....	93B3.....	17
Insulating:		
Guards, grounding.....	93C.....	18
Insulators:		
Crossings.....	278.....	156
Electrical strength.....	272.....	154
Factory tests.....	275.....	155
Grade of construction.....	243C.....	108
Grade B:		
Constant current circuits.....	276A.....	155
Dry flashover voltage.....	274.....	154
Factory tests.....	275.....	155
Material and marking.....	271.....	154
Operating conditions.....	276C.....	155
Protection against arcing.....	277.....	156
Puncture voltage.....	273.....	154
Requirements, methods of meeting.....	278.....	156
Strain position.....	272.....	154
Grade D.....	262G.....	146
Guy:		
Material and strength.....	283A.....	162
Required locations.....	283B.....	163
Guys.....	283.....	162
Neutral conductors.....	242E.....	106
Protection against arcing.....	277.....	156
Selection.....	276.....	155
Span wire.....	284B.....	164
Street light suspension ropes.....	286E5.....	167
Test voltages.....	274.....	154
Joint use of poles by power and communication.....	222.....	51
Jointly used poles, loading.....	252C2.....	114
Joints:		
Manholes.....	296A.....	181

	Rule	Rule page
Levels of conductors.....	220.....	47
Preferred levels:		
Power and communication lines.....	220B.....	47
Exceptions.....	220B2.....	48
Minor extensions.....	220B2.....	48
Small power circuits.....	220B3, 232A, 238A.....	48, 55, 84
Power lines of different voltage.....	220C.....	50
Standardization general.....	220.....	47
Lightning arresters.....	94C1.....	21
Grounding conductors.....	97A1.....	25
Arrangement.....	93A.....	16
Size and capacity.....	93B4.....	17
Interconnection.....	97C.....	25
Made electrodes.....	94C1.....	21
Lightning protection wires.....	263F.....	153
Lightning rods, grounding conductor.....	97A4.....	25
Line:		
Construction, order of grades.....	241C.....	100
Crossings, grades of construction.....	241D.....	100
Insulators.....	270.....	153
Supports, loading.....	252.....	112
Lines:		
Communication:		
Protection.....	287.....	168
Levels:		
Preferred.....	220B1.....	47
Relative.....	220B, C.....	47, 50
Standardization of levels.....	220A.....	47
Supply and communication:		
Accessibility.....	212.....	44
Arrangement of switches.....	216.....	46
Avoidance of conflict.....	221.....	51
Design and construction.....	210.....	43
Exemptions.....	201.....	42
Grounding.....	215.....	45
Guarding.....	214.....	45
Inspection and tests.....	213.....	44
Installation and maintenance.....	211.....	44
Isolation of.....	214.....	45
Joint use of poles.....	222.....	51
Minimum requirements.....	202.....	43
Scope of rules.....	200.....	42
Separate poles.....	223.....	52
Underground:		
Location.....	290.....	173
Live parts:		
Guarding:		
Manholes.....	296.....	181
Loading, grades B, C, and D.....	251.....	111
Conductor.....	251.....	111
General map.....	250.....	109
Line supports.....	252E.....	116
Longitudinal.....	252E.....	116
Application of loads.....	252E.....	116
Dead ends.....	252C3.....	115
General.....	252C.....	114
Jointly used poles.....	252C2.....	114
Span lengths.....	252D.....	115
Transverse.....	252B6.....	113
Angles.....	252B6.....	113
Application of loads.....	252E.....	116
Flat surfaces.....	252B5.....	113
General.....	252B.....	112
Trolley contacts.....	252B4.....	113
Vertical.....	252E.....	116
Application of loads.....	252E.....	116
General.....	252A.....	112
Loading map.....	250.....	109
Locking, switches.....	216C.....	46
Longitudinal loading, line supports.....	252C.....	114

	Rule	Rule page
Maintenance:		
Clearances.....	230E.....	53
Lines.....	211.....	44
Manholes:		
Construction.....	292.....	176
Duct entrances.....	291F.....	176
Underground lines.....	290C.....	173
Mechanical protection:		
Grounding conductor.....	93C.....	18
Near ground.....	239C.....	91
Messengers.....	262J.....	148
Metal structures, ground connections.....	94B.....	21
Neutral, overhead conductors.....	285C.....	165
Pins.....	243C.....	108
Grade of construction.....	243C.....	108
Grades B and C, longitudinal strength:		
Double pins.....	261E3, 4.....	133
General.....	261E1.....	131
Strength.....	261E2.....	132
Grade D.....	262F.....	145
Material.....	262F1.....	145
Size.....	262F3.....	145
Strength.....	262F2.....	145
Piping systems, ground connections.....	94A.....	20
Pole:		
Obstructions.....	280A7.....	159
Settings.....	262B.....	142
Steps.....	239A, 280A5.....	90, 159
Poles:		
Construction features.....	261A.....	116
Crossings, location.....	262A8.....	141
Equipment on.....	286.....	166
Miscellaneous.....	286.....	166
Street lighting.....	286E.....	166
Transformers.....	286F.....	168
Fiber stresses.....	261A4.....	120
Flexible supports.....	261A6.....	124
Grade of construction required.....	243A.....	107
Grades B and C.....	261A.....	116
Defects.....	261A4.....	120
Flexible supports.....	261A6.....	124
Foundations.....	261B.....	126
Guys, use of.....	261C.....	127
Minimum size.....	261A4.....	120
Spliced and stub reinforced.....	261A4.....	120
Strength requirements.....	261A.....	116
Concrete poles.....	261A2.....	117
General.....	261A.....	116
Wood poles.....	261A4.....	120
Angles.....	261A7.....	126
Dead ends.....	261A4.....	120
Longitudinal.....	261A4, 6.....	120, 124
Transverse.....	261A4, 5.....	120, 124
Vertical.....	261A4, 5.....	120, 124
Grade D.....	262A.....	139
Foundations.....	262B.....	142
Freedom from defects.....	262A5.....	141
Locations at crossings.....	262A4, 8.....	140, 141
Minimum size.....	262A6.....	141
Spliced and stub reinforced.....	262A7.....	141
Strength requirements.....	262A.....	139
Guyed poles.....	262A2.....	140
Methods of providing.....	262A3, 262C3, 4.....	140, 144
Unguyed poles.....	262A1.....	139
Grade N.....	263A.....	149
Guarding.....	280A2.....	158
Guying.....	282.....	160
Identification.....	280A6.....	159
Joint use, general.....	222.....	52
Jointly used, clearances.....	239E, F, G.....	94, 95, 98
Metal, grounding.....	215B, 280A4.....	46, 157

	Rule	Rule page
Poles—Continued		
Obstructions and rubbish	280A1, 7	157, 159
Pole steps	280A5	159
Protection	280A2	158
Separate lines, general	223	52
Splicing	262A7	141
Strength requirements:		
Grades B and C	261A	116
Grade D	262A	139
Grade N	263A	149
Warning signs	280A3	158
Portable equipment, grounding conductor, size, and capacity	93B6	
Power lines for communication circuits	288B	170
Protection for exposed overhead lines	287	168
Protective:		
Covering, metal parts	261M	139
Raceway:		
Grounding	92D	16
Grounding conductor, size	93B5	18
Railroad tracks, clearance	231D	54
Railway feeders, construction grades	242B	103
Relative levels, lines	220B, C	47, 50
Rubbish	280A1	157
Rules for installation of lines	201	42
Application	201	42
Waivers	201D	43
Requirements, minimum	202	43
Scope	200	42
Sag, services, open wire	263E3	152
Sags:		
Grade D construction	262I4	147
Separation of conductors	235A2	72
Sags and tensions, supply conductors	261F4	134
Scope:		
Grounding rules	90	14
Scope of rules:		
Lines, installation and maintenance	200	42
Separation:		
Conductors on crossarms	238C	87
Duct systems	291E	175
Vertical:		
Conductors and equipment	238A, B, D, E	84, 86, 88
Side guying of poles	261A5	124
Span lengths, longitudinal loading	252D	115
Splices:		
Grades B and C	261F5, 261G1	135
Grade D	262I5	148
Steps, pole	280A5	159
Street corners, clearances	231B	54
Strength requirements:		
Conductor fastenings	261E	131
Conductors:		
Grades B and C	261F	133
Grade D	262I	146
Grade N	263D	150
Crossarms:		
Grades B and C	261D	129
Grade D	262D	144
Grade N	263C	150
Foundations	261B	126
Guys:		
Grades B and C	261C	127
Grade D	262C	142
Messengers	262J	148
Pins	262F	145
Poles:		
Grades B and C	261A	116
Grade D	262A	139
Grade N	263A	149
Supply services	263E	151

	Rule	Rule page
Structures, supporting.....	243.....	107
Supply:		
Cables.....	241A.....	100
Circuits.....	242E.....	106
Communication circuits.....	288B.....	170
Lines, short span crossing.....	261K.....	139
Services.....	263E.....	151
Switches:		
Uniform position.....	216D.....	47
PART 2		
Tables:		
1. Minimum vertical clearance of wires above ground or rails.....	232A.....	56
2. Clearance above ground for open supply wiring.....	232C.....	61
3. Minimum clearances at crossings of wires carried on different supports.....	233A.....	63
4. Clearances of supply conductors from buildings.....	234C.....	69
5. Clearances from bridges.....	234D.....	71
6. Minimum horizontal separation at supports be- tween line conductors of the same or different circuits.....	235A.....	73
7. Separation in inches required for line conductors smaller than No. 2 A.W.G.....	235A.....	74
8. Separation in inches required for line conductors No. 2 A.W.G or larger.....	235A.....	74
9. Minimum clearance in any direction from line con- ductors to supports, and to vertical or lateral con- ductors, span or guy wires attached to the same support.....	235A.....	75
10. Minimum horizontal dimensions of climbing space.....	236E.....	80
11. Vertical separation of crossarms carrying conductor.....	238A.....	85
12. Span wires and brackets.....	238E3.....	89
13. General clearances.....	239D.....	92
14. Grades of construction for communication conduc- tors crossing over railroad tracks and supply lines.....	241D.....	102
15. Grades of construction for supply conductors alone, at crossings, at conflicts, or on the same poles with other conductors.....	242.....	104
16. Grades of construction for communication conduc- tors alone, or in upper position at crossings, at conflicts, or on joint poles.....	242.....	106
17. Minimum overload capacity factors of completed structures.....	261A.....	119
18. Thickness of structural shapes.....	261A.....	119
19. L/R for compression members.....	261A.....	120
20. Allowable percentages of ultimate stress for wood poles under longitudinal and dead-end loading.....	261A.....	121
21. Allowable percentages of ultimate stress for treated or untreated wood poles under vertical and trans- verse loading.....	261A.....	123
22. Crossarm cross sections.....	261D.....	
23. Minimum over-all conductor sizes.....	261F.....	130
24. Strength (in pounds) of head guys required for load- ing districts indicated.....	262C.....	134
25. Minimum wire sizes.....	262I.....	143
26. Stringing sags.....	262I.....	146
27. Minimum sizes of messenger.....	262J.....	147
28. Minimum sizes of service leads carrying 750 volts or less.....	263E.....	149
29. Sags for open-wire services.....	263E.....	152
30. Test-voltage requirements.....	274.....	152
Temporary installations, waiving rules.....	201C.....	154
Tests:		43
Lines.....	213.....	
Third rail:		44
Construction.....	289C.....	
Towers:		172
Grades of construction.....	243A.....	107
Grades B and C:		
Flexible supports.....	261A6.....	124
Foundations.....	261B.....	126

	Rule	Rule page
Towers—Continued		
Guys, use.....	261C5.....	128
Miscellaneous requirements.....	261A3.....	116
Strength requirements:		
Angles.....	261A3.....	117
General.....	261A.....	116
Longitudinal.....	261A3.....	117
Transverse.....	261A3.....	117
Vertical.....	261A3.....	117
Grade N.....	263A.....	149
Transverse loading, line supports.....	252B.....	112
Tree trimming.....	281.....	160
Trolley-contact conductors.....	261F, 263G, 289D.....	133, 153, 172
Underground, grounding conductors.....	93D.....	20
Underground lines:		
Bonding.....	295B.....	181
Buried cables:		
Protection at crossings.....	294B.....	180
Protection where parallel.....	294C.....	180
Separation.....	294A.....	179
Cables in conduit:		
Clearances.....	293C.....	178
Identification.....	298.....	183
Live parts in manholes.....	296B.....	181
Location in conduit.....	293C.....	178
Protection against arcing.....	295A.....	181
Clearances:		
Buried cables.....	294A.....	179
Cables in ducts and manholes.....	293C.....	178
Duct lines.....	291D, E.....	174, 175
Risers from underground.....	297A.....	181
Conductor terminals.....	297D.....	182
Ducts.....	291.....	173
Location.....	290, 292H.....	173, 178
Manholes.....	290C, 292.....	173, 176
Risers.....	297.....	181
Unguyed poles, strength requirements.....	262A1.....	139
Unusual conductor supports.....	280C.....	160
Ventilation, manholes.....	292D.....	177
Vertical loading, line supports.....	252A.....	112
Waiving of rules:		
Lines, supply and communication.....	201C, D.....	43
Warning signs.....	280A3.....	158
Wind loading, line supports.....	252B.....	112
Wire-crossing clearances.....	233.....	62
Wood poles (see Poles).		
Working space:		
Conductors.....	237C, 239A.....	83, 90
Dimensions.....	237B.....	82
Location of buckarms.....	237D.....	83

