NATIONAL BUREAU OF STANDARDS REPORT

8611

on

Interlaboratory Intercomparisons

of

40-Watt Fluorescent Lamps

by

Velma I. Burns
Photometry and Colorimetry Section
Metrology Division



U.S. DEPARTMENT OF COMMERCE NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

Institute for Basic Standards. Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.** Office of Standard Reference Data.

Institute for Materials Research. Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.** Office of Standard Reference Materials.

Central Radio Propagation Laboratory.** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

Institute for Applied Technology. Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

^{*} NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado. ** Located at Boulder, Colorado.

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

2120113

December 1964

8611

Interlaboratory Intercomparisons

of

40-Watt Fluorescent Lamps

bу

Velma I. Burns
Photometry and Colorimetry Section
Metrology Division

IMPORTANT NOTICE

NATIONAL BUREAU OF STAN for use within the Government. Bet and review. For this reason, the pu whole or in part, is not authorized Bureau of Standards, Washington, I the Report has been specifically pre

Approved for public release by the director of the National Institute of Standards and Technology (NIST) on October 9, 2015

ccounting documents intended jected to additional evaluation ing of this Report, either in fice of the Director, National e Government agency for which s for its own use.



U.S. DEPARTMENT OF COMMERCE NATIONAL BUREAU OF STANDARDS



Interlaboratory Intercomparisons of 40-Watt Fluorescent Lamps

ABSTRACT

Three groups of 40-Watt fluorescent lamps, F40Tl2/Cool White, F40Tl2/Day-light and F40Tl2/Pink, were measured in each of six laboratories. Each group was measured while holding the line voltage constant at 236.0 volts and again measured while holding the lamp Watts constant at 40 Watts. Luminous flux, lamp current, lamp voltage, and lamp watts were measured. The results of the measurements made by the individual laboratories and an analysis of the results are given in this report.

1. INTRODUCTION

This intercomparison was undertaken to determine the uniformity of measurements of three colors of fluorescent lamps made at the participating laboratories. The laboratories participating and the order of reading are as follows:

- 1. Westinghouse
- 2. Champion
- 3. Sylvania
- 4. El Tronics
- 5. General Electric
- 6. Duro Test

Each laboratory followed its own customary procedure in making the measurements. In each laboratory the lamps were measured while using a standard reactor of 439 ohms impedance, 7-8% power factor. The measurements were made while holding the line voltage constant at 236.0 volts and measurements were made again while holding the lamp watts constant at 40 watts. Luminous flux, lamp current, lamp voltage and lamp watts were measured and lumens per watt were computed.

II. RESULTS OF MEASUREMENTS

The results are reported in tables 1 through 15. The averages reported for each lamp and for each laboratory are also given. The difference, Δ , between the average for each laboratory and the average for all the laboratories for all the lamps is also given in the tables.



III. ANALYSIS OF RESULTS

An analysis of the results of the measurements has been made following a modification of the method described by W. J. Youden (1), (2) and (3). The modification is described in National Bureau of Standards Report No. 6605, Interlaboratory Intercomparisons of 32-Watt T12 Cool White Circline Lamps, and Report No. 6698, Interlaboratory Intercomparisons of 40 Watt T12 Cool White Fluorescent Lamps. The analysis is shown on the following graphs. The point representing the measurements of an individual laboratory is designated by the first letter in the name of that laboratory. The point representing the average of all the laboratories is designated by the letter A.

- A Graphical Diagnosis of Interlaboratory Test Results, Industrial Quality Control, Vol. XV, No. 11, May 1959.
- (2) Product Specification and Test Procedures, Industrial and Engineering Chemistry, Vol. 50, page 914, October 1958.
- (3) Circumstances Alter Cases, Industrial and Engineering Chemistry, Vol. 50, page 77A, December 1958.



Table 1

F40T12/Cool White Lamps
Operated at 236.0 line volts

Lumens

.anp No.	West	Champ	Sy1	El Tronics	GE	Duro T	Ave
1	2616	2596	2596	2618	2631	2602	2610
2	2625	26 06	2596	2615	2661	2618	2620
3	2589	2570	2572	2595	2620	2578	2587
4	2599	2582	2596	2594	2624	2583	2596
5	2631	2608	2622	2616	2639	2619	26 22
6	2558	2536	2550	2530	2575	2541	2548
Ave	2603	2583	2589	2595	2625	2590	2597
\triangle	+ 6	- 14	- 8	- 2	+ 28	- 7	
%△	. 23	• 54	.31	.08	1.08	. 27	
		Ope	rated at	40 Watts			
1		2574	2564	2600	2570	2544	2570
2		2606	2584	2549	2603	2540	2576
3		2552	2542	2510	2555	2502	2532
4		2582	2550	2520	2562	2517	2546
5		2584	2600	2536	2573	2577	2574
6		2534	2530	2460	2508	2471	2501
Ave		2572	2561	2529	2562	2525	2550
Δ		+ 22	+ 11	- 21	+ 12	- 25	
%△		. 86	•43	.82	•47	.98	



Table 2

<u>F40T/Cool White Lamps</u>
Operated at 236.0 volts

Amperes

Lamp No.	West	Champ	Sy1	El Tronics	GE	Duro T	Ave
1	0.431	0.428	0.430	0.421	0.430	0.425	.4275
2	.431	.429	.431	.425	.429	.425	.4283
3	.430	.426	.430	.426	.429	.425	.4277
4	.432	.430	.429	.426	.430	.425	.4287
5	.430	.428	.430	.426	.429	.425	.4280
6	.430	.428	431	.425	430	.425	.4282
Ave	.4307	.4282	.4302	.4248	.4295	.4250	.4281
\triangle	+ .0026	+ .0001	+ .0021	0033	+ .0014	0031	
% △	.61	.02	. 49	.77	. 33	.72	
		Operat	ed at 40	Watts			
1		0.423	0.423	0.416	0.416	0.414	0.4184
2		.429	.427	.411	.417	.412	.4192
3		.423	.423	.414	.414	.409	.4166
4		.430	.420	.412	.416	.411	.4178
5		.424	.429	•412	.415	.414	.4188
6		.427	.427	.410	.415	.411	.4180
Ave		.4260	.4248	.4125	.4155	.4118	.4181
\triangle		+ .0079	+ .0067	0056	0026	0063	
%△		1.89	1.60	1.34	.62	1.51	



Table 3

<u>F40T12/Cool White Lamps</u>
Operated at 236.0 line volts

Lamp Volts

Lamp No.	West	Champ	Sy1	El Tronics	GE	Duro T	Ave
1 2 3 4 5 6 Ave △	103.9 103.7 104.7 103.1 103.6 103.8 103.8	104.1 103.2 105.0 103.1 103.9 103.9 7 .67	102.7 102.3 103.0 103.5 102.5 102.7 -1.9 1.82	106.0 106.7 106.7 106.0 106.5 106.9 106.5 + 1.9	104.2 104.5 104.6 103.9 104.5 104.1 104.3	106.7 106.1 106.5 106.5 106.6 106.4 + 1.8 1.72	104.6 104.4 105.0 104.4 104.6 104.6
		Opera	ated at 40) Watts			
1 2 3 4 5 6 Ave △ %△	S 4	104.2 103.2 104.9 103.1 104.2 103.9 103.9 - 1.4 1.33	103.0 102.5 103.0 103.5 102.0 102.5 102.7 - 2.6 2.47	106.0 107.1 107.8 106.7 107.1 107.1 107.0 + 1.7 1.61	105.1 105.1 106.0 105.1 105.5 105.3 105.4 + .1	106.9 107.0 108.0 107.5 107.6 107.2 107.4 + 2.1 1.99	105.0 105.0 105.9 105.2 105.3 105.2

Table 4 <u>F40T12/Cool White Lamps</u> Operated at 236.0 line volts

Watts

Lamp No.	West	Champ	<u>Sy1</u>	El Tronics	GE	Duro T	Ave
1	40.6	40.4	40.5	40.1	41.0	41.1	40.6
2	40.3	40.0	40.2	41.2	40.9	41.1	40.6
3	40.8	40.3	40.5	41.5	41.1	41.0	40.9
4	40.3	40.0	40.7	41.2	40.9	41.0	40.7
5	40.2	40.1	40.2	41.5	41.0	41.0	40.7
6	40.5	40.1	40.3	41.2	41.0	41.0	40.7
Ave	40.5	40.2	40.4	41.1	41.0	41.0	40.7
\triangle	2	5	3	+ .4	+ .3	+ .3	
% <u>\</u>	.49	1.23	.74	.98	.74	.74	



Table 5

F40T12/Cool White Lamps
Operated at 236.0 line volts

Lumens per Watt

Lamp No.	West	Champ	S ýż e	El Tronics	GE	Duro T	Ave
1	64.4	64.2	64.1	65.3	64.2	63.3	64.2
2	65.1	65.2	64.6	63.5	65.1	63.7	64.5
3	63.5	63.8	63.5	62.5	63,7	62.9	63.3
4	64.5	64.6	63.8	63.0	64.2	63.0	63.8
5	65.4	65.0	65.2	63.0	64.4	63.9	64.5
6	63.2	63.2	63.3	61.4	62.8	62.0	62.6
Ave	64.4	64.3	64.1	63.1	64.1	63.1	63.8
\triangle	+ .6	+ .5	+ .3	7	+ .3	· .7	
%	. 94	.78	.47	1.10	.47	1.10	
		Operate	d at 40 W	atts			
1		64.4	64.1	65.0	64.2	63.6	64.3
2		65.2	64.6	63.7	65.1	63.5	64.4
3		63.8	63.6	62.8	63.9	62.6	63.3
4		64.6	63.8	63.0	64.0	62.9	63.7
5		64.6	65.0	63.4	64.3	64.4	64.3
6		63,4	63.2	61.5	62.7	61,8	62.5
Ave		64.3	64.0	63.2	64.0	63.1	63.7
\triangle		+ .6	+ .3	5	+ .3	6	
%		。94	• 47	•78	.47	.94	



Table 6

<u>F40T12/Daylight Lamps</u>
Operated at 236.0 line volts

Lumens

Lamp No.	West	Champ	Sy1	El Tronics	GE	Duro T	Ave
2	2256	2266	2276	2214	2313	2270	2266
3	2232	2264	2298	2214	2298	2257	2260
4	2254	2278	2304	2240	2323	2274	2279
6	2236	2260	2256	2175	2297	2236	2243
7	2231	2256	2290	2190	2289	226/0	2253
8	2232	2264	2298	2200	2273	2250	2253
10	2233	2264	2264	2186	2292	2266	2251
12	2244	2260	2306	2232	2302	2266	2268
Ave	2240	2264	2286	2206	2298	2260	2259
Δ	- 19	+ 5	+ 27	- 53	+ 39	+ 1	
%	. 84	.22	1.20	2.35	1.73	. 04	
		Op	erated at	: 40 Watts			
2		2290	2260	2189	2290	2223	2250
3		2244	2270	2136	2229	2181	2212
4		2278	2314	2165	2285	2242	2257
6		2274	2244	2160	2261	2171	2222
7		2262	2302	2190	2250	2220	2245
8		2270	2294	2194	2222	2211	2238
10		2298	2218	2075	2290	2246	2225
12		2270	2286	2216	2267	2216	2251
Ave		2273	2273	2166	2262	2214	2238
\triangle		+ 35	+ 35	- 72	+ 24	- 24	
%△		1.56	1.56	3.22	1.07	1.07	



Table 7

F40T12/Daylight Lamps
Operated at 236.0 line volts

Amperes

Lamp No.	West	Champ	Sy1	El Tronics	GE	Duro T	Ave
. 2	0.433	0.429	0.432	0.426	0.431	0.427	0.4296
3	.427	.426	.429	.422	.428	.424	.4260
4	.432	.431	.432	.426	.433	.429	.4305
6	.432	.430	.432	.421	.430	.427	.4287
7	.429	.428	.432	.422	.431	.427	.4282
8	.431	.428	.434	.424	.430	.425	.4287
10	.433	.430	.431	.424	.43 2	.427	.4295
12	.431	.428	.431	.421	430	425	.4277
Ave	.4310	.4288	.4316	.4232	.4306	.4264	.4286
Δ	+ .0024	+ .0002	+ .0030	. .0054	+ .0020	0022	
%∆	. 56	.05	.70	1.26	.47	.51	
		Oj	perated at	40 Watts			
2		0.435	0.427	0.421	0.426	0.420	0.4258
2		.420	.424	.410	.410	.408	.4144
4		.431	.436	.411	.421	.419	.4236
6		.434	.428	.416	.420	.416	.4228
7		.431	.427	.422	.420	.419	.4238
8		.431	.432	.411	.419	.420	.4226
10		.438	.419	.417	.430	.425	.4258
12		.431	.427	.420	.421 .4209	.417	.4232
Ave		.4314	.4275	.4160		.4180	.42288
Δ		+ .0086	+ .0047	0068	0019	0048	
%∆		2.03	1.11	1.61	.45	1.14	



Table 8

<u>F40T12/Daylight Lamps</u>
Operated at 236.0 line volts

Lamp Volts

Lamp No.	West	Champ	Sy1	El Tronics	GE	<u>Duro T</u>	Ave
2 3 4 6 7 8 10 12 Ave Δ %Δ	101.5 105.0 102.7 102.4 103.9 103.3 101.5 103.0 102.9	102.2 104.8 102.8 102.5 103.1 103.0 102.0 103.0 102.9	102.5 102.8 100.5 101.5 100.7 100.8 103.0 102.0 101.7 - 1.8 1.74	104.2 107.1 105.9 105.9 104.0 104.1 105.0 105.2 105.2 + 1.7 1.64	102.2 105.1 102.8 103.3 103.5 104.0 101.6 103.1 103.2	104.9 106.7 104.5 105.1 105.2 106.4 104.6 106.1 105.4 + 1.9	102.9 105.2 103.2 103.4 103.6 103.0 103.7
		Op	erated at	40 Watts			
2 3 4 6 7 8 10 12 Ave Δ %Δ		102.1 104.9 102.8 102.1 103.0 102.7 101.0 103.0 102.7 - 1.2 1.15	102.5 102.7 100.5 101.8 100.5 101.0 103.7 102.3 101.9 - 2.0 1.92	104.9 108.1 106.1 105.9 104.0 104.1 104.9 105.2 105.4 + 1.5 1.44	102.8 106.4 103.6 104.2 104.1 104.6 102.0 104.0 + .1 .10	105.6 107.6 105.9 106.0 105.6 105.1 104.6 106.1 105.8 + 1.9 1.83	103.6 105.9 103.8 104.0 103.4 103.5 103.2 104.1



Table 9

<u>F40T12/Daylight Lamps</u>
Operated at 236.0 line volts

Watts

Lamp No.	West	Champ	<u>Syl</u>	El Tronics	GE	Duro T	Ave
2	20.0	20. (/ 0 - 5	10.0	/ 0 0	10.1	40.0
2	39.9	39.6	40.5	40.9	40.2	40.4	40.2
3	41.0	40.4	40.5	41.9	41.4	41.2	41.1
4	40.2	40.0	39.8	41.5	40.7	40.5	40.4
6	40.1	39.7	40.3	40.5	40.6	40.7	40.3
7	40.5	39.9	39.7	40.0	40.9	40.9	40.3
8	40.4	39.8	40.1	40.1	41.1	41.0	40.4
10	39.8	39.3	40.8	41.0	40.0	40.3	40.2
12	40.1	<u>39.9</u>	40.2	<u>40.5</u>	<u>40.7</u>	41.0	40.4
Ave	40.3	39.8	40.2	40.8	40.7	40.8	40.4
Δ	1	6	2	+ .4	+ .3	+ .4	
%∆	. 25	1.49	. 50	.99	. 74	.99	



Table 10 $\frac{\text{F40T12/Daylight Lamps}}{\text{Operated at 236.0 line volts}}$

Lumens per Watt

Lamp No.	West	Champ	<u>Syl</u>	El Tronics	GE	Duro T	Ave
2	56.5	57.2	56.2	54.1	57.5	56.2	56.3
3	54.4	56.1	56.7	52.8	55.5		55.0
4	56.1	56.9	57.9	54.0	57.1	56.1	56.4
6	55.8	56.9	56.0	53.7	56.6	54.9	55.6
7	55.1	56.4	57.7	54.8	56.0		56.0
8	55.2	56.8		54.9	55.3		55.7
10	56.1	57.6	55.5	53.3	57.3		56.0
12	56.0	<u>56.6</u>	<u>57.4</u>	55.1	<u>56.6</u>		56.2
Ave	55.7	56.8	56.8	54.1	56.5	55.5	55.9
Δ	2	+ .9	+ .9	-1.8	+ .6	4	
%∆	. 36	1_4 61	1.61	3.22	1.07	. 72	
		Operat	ed at 40	Watts			
2		57.2	5 6.5	54.7	57.2	55.6	56.2
3		56.2	56.7	53.4	55.7	54.5	55.3
4		57.0	57.9	54.1	57.1	56.0	56.4
6		56.9	56.1	54.0	56.5		55.6
7		56.6	57.6	54.8	56.2	55.5	56.1
8		56.8	57.3	54.8	55.6	55.3	56.0
10		57.4	55.5	51.9	57.2	56.2	55.6
12		56.8	57.2	55.4	56.7		56.3
Ave		56.9	56.8	54.1	56.5	55.4	55.9
Δ		+1.0	+ .9	-1.8	+ .6		
% <u>\</u>		1.79	1.61	3.22	1.07	.89	



Table 11

F40T12/Pink Lamps
Operated at 236.0 line volts

Lumens

Lamp No.	West	Champ	<u>Syl</u>	El Tronics	<u>GE</u>	<u>Duro T</u>	Ave
2 3 4 5 6 Av e Δ %Δ	1264 1100 1347 1386 1320 1283 +126 10.9	1130 940 1206 1234 1174 1137 - 20 1.7	1046 892 1116 1166 1086 1061 - 96 8.3	1211 1016 1286 1331 <u>1275</u> 1224 + 67 5.8	1028 853 1109 1149 1088 1045 -112 9.7	1176 983 1255 1308 <u>1243</u> 1193 + 36 3.1	1142 964 1220 1262 1198 1157
		Operate	ed at 40	Watts			
2 3 4 5 6 A ve Δ		1154 960 1232 1234 1190 1154 + 18 1.6	1058 908 1142 1178 1098 1077 - 59 5.2	1211 1006 1280 1331 <u>1265</u> 1219 + 83 7.3	1025 851 1113 1140 1076 1041 - 95 8.4	1182 972 1250 1294 <u>1241</u> 1188 + 52 4.6	1126 939 1203 1235 <u>1174</u> 1136



Table 12

F40T12/Pink Lamps
Operated at 236.0 line volts

Amperes

Lamp No.	West	Champ	<u>Syl</u>	El Tronics	<u>GE</u>	Duro T Ave
2	0.433	0.433	0.434	0.429	0.434	0.431 0.4323
3	. 434	.432	. 435	. 429	.433	.431 .4323
4	.432	.428	.431	. 427	.433	.430 .4302
5	. 431	. 428	. 431	. 426	.431	.428 .4292
6	. 434_	.430_	.435	. 426_	.433_	4294312
Ave	. 4328	.4302	. 4332	. 4274	.4328	.4298 .4310
Δ	+.0018	0008	+.0022	0036	+.0018	0012
%∆	. 42	.19	. 51	. 84	. 42	. 28
		Opera	ited at 40	Watts		
2		0.445	0.440	0.429	0.433	0.434 0.4362
3		.443	. 449	.427	. 432	.425 .4352
4		. 443	. 447	. 425	.436	.430 .4362
5		.428	.437	.429	.427	.425 .4292
6		440_	. 442	. 425	.429	.431 .4334
Ave		. 4398	. 4430	. 4270	.4314	.4290 .4340
Δ		+.0058	+.0090	0070	0026	0050
%∆		1.34	2.07	1.61	. 60	1.15



Lamp Volts

Lamp No.	West	Champ	<u>Syl</u>	El Tronics	GE	Duro T	Ave	
2 3 4 5 6 Ave	100.8 101.2 100.5 102.0 101.3 101.2	100.0 101.0 101.0 102.9 101.8 101.3	99.7 99.3 99.8 100.6 99.4 99.8 - 1.8	103.2 103.0 103.9 103.1 104.0 103.4 + 1.8	100.6 100.9 100.3 101.8 101.6 101.0	101.8 103.1 103.7 103.6 103.1 + 1.5	101.0 101.4 101.4 102.4 102.0 101.6	
%∆	. 39	. 30	1.77	1.77	. 59	1.48		
Operated at 40 Watts								
2		99.5	99.5	102.1	100.9	102.5	100.9	
3 4		100.2 100.0	99.0 98.5	103.5 104.0	101.1 100.5	104.0 103.5	101.6 101.3	
5		100.0	100.2	104.0	100.3	103.3	101.5	
6		101.0	99.0	104.0	101.7	102.6	101.7	
Ave		100.7	99.2	103.3	101.3	103.3	101.6	
∆ %∆		9 .89	-2.4 2.36	+ 1.7 1.67	3 .30	+ 1.7 1.67		



Table 14

F40T12/Pink Lamps Operated at 236.0 line volts

Watts

Lamp No.	West	Champ	Syl E1	Tronics	GE	Duro T	Ave
2 3 4 5 6 Ave Δ %Δ	39.7 39.8 39.3 40.0 39.8 39.7 1	39.1 39.2 38.8 40.0 <u>39.4</u> 39.3 5	39.6 39.3 39.2 39.6 39.6 39.5	40.0 40.5 40.4 40.0 <u>40.2</u> 40.2 + .4 1.00	40.0 40.0 39.5 40.3 40.3 40.0 + .2	39.8 40.1 40.0 40.1 40.1 40.0 + .2	39.7 39.8 39.5 40.0 39.9 39.8

Table 15

F40T12/Pink Lamps Operated at 236.0 line volts

Lumens per Watt

27.4

26.9

-1.5

5.3

29.8

28.9

+ .5

1.8

6

Ave

Δ

%∆

2 3 4 5 6 A ve Δ	31.8 27.6 34.3 34.7 33.2 32.3 +3.2 11.0	28.9 24.0 31.1 30.9 29.8 28.9 2 .7	26.4 22.7 28.5 29.4 27.4 26.9 -2.2 7.6	30.3 25.1 31.8 33.3 31.7 30.4 +1.3 4.5	25.7 21.3 28.1 28.5 27.0 26.1 -3.0 10.3	29.5 24.5 31.4 32.6 31.0 29.8 + .7 2.4	28.8 24.2 30.9 31.6 30.0 29.1	
Operated at 40 Watts								
2 3 4 5		28.9 24.0 30.8 30.9	26.4 22.7 28.5 29.4	30.3 25.2 32.0 33.3	25.6 21.3 27.8 28.5	29.6 24.3 31.2 32.4	28.2 23.5 30.2 30.9	

31.6

30.5

+2.1

7.4

26.9

26.0

-2.4

8.5

31.0

29.7

+1.3

4.6

29.3

28.4



Figure 1

F40T12/Cool White Lamps operated at 236.0 line volts

Lumens

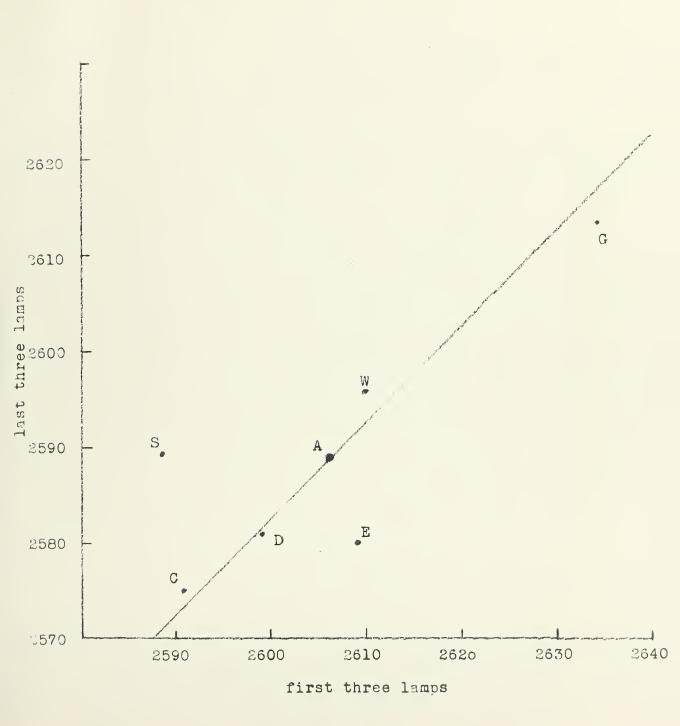




Figure 2
F40Tl2/Cool White Lamps
operated at 40 watts

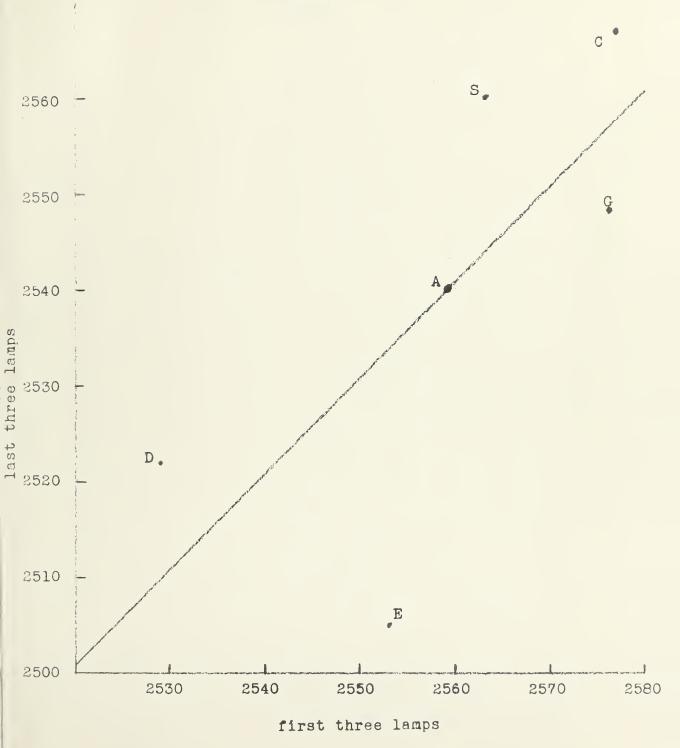




Figure 3

F40T12/Daylight Lamps
operated at 236.0 line volts

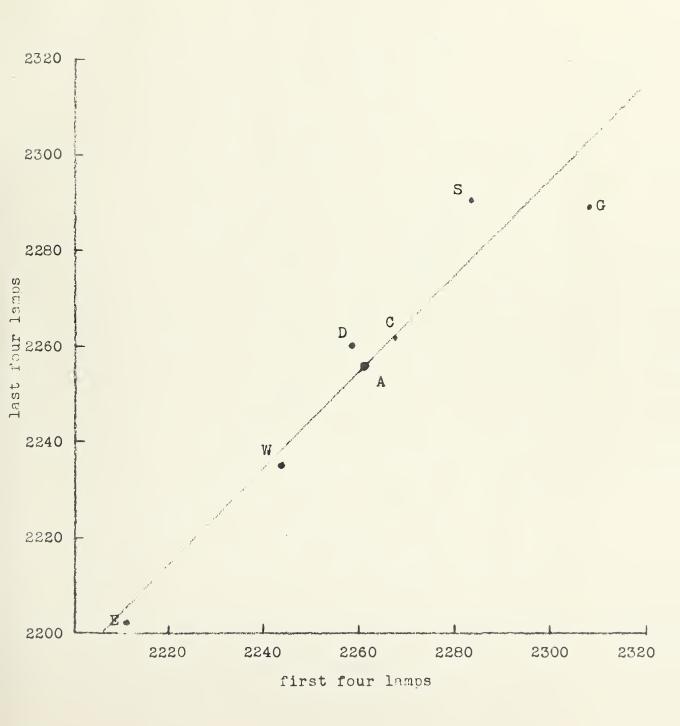




Figure 4
F40Tl2/Daylight Lamps operated at 40 watts

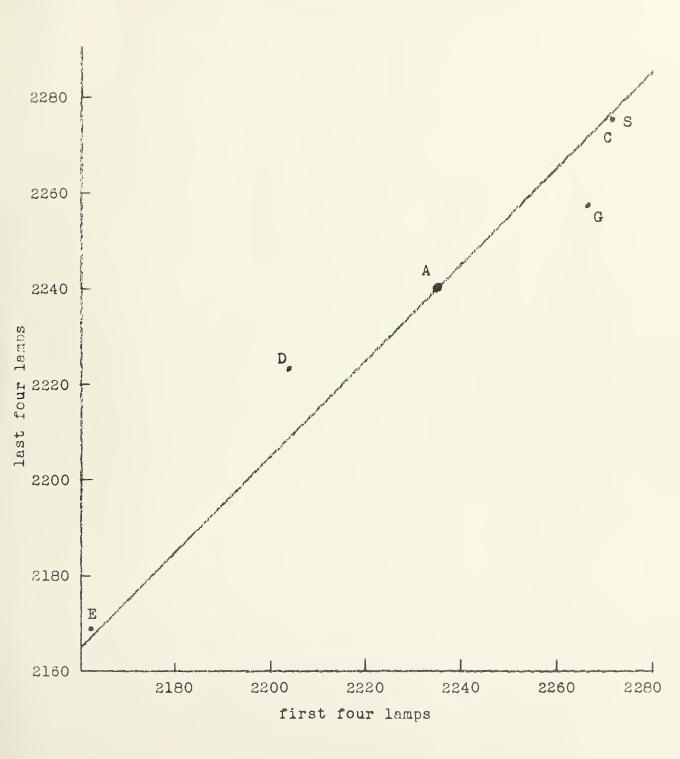




Figure 5

F40Tl2/Pink Lamps
operated at 236.0 line volts

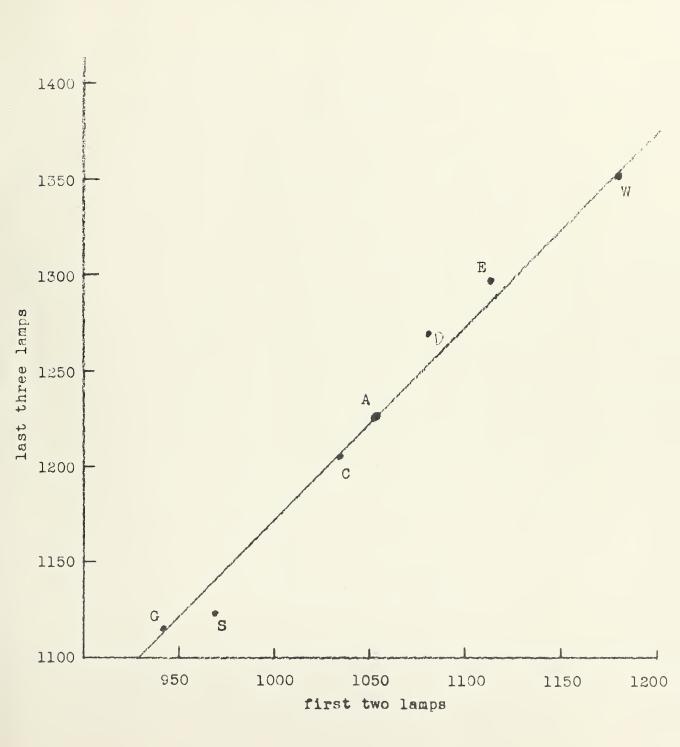




Figure 6

F40Tl2/Pink Lamps operated at 40 watts

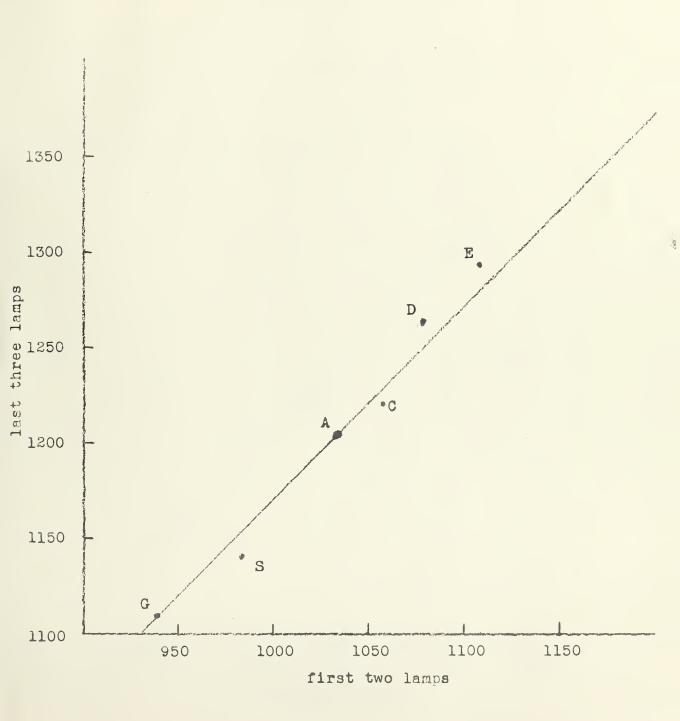




Figure 7

Fluori2/Cool White Lamps operated at 236.0 line volts

Amperes

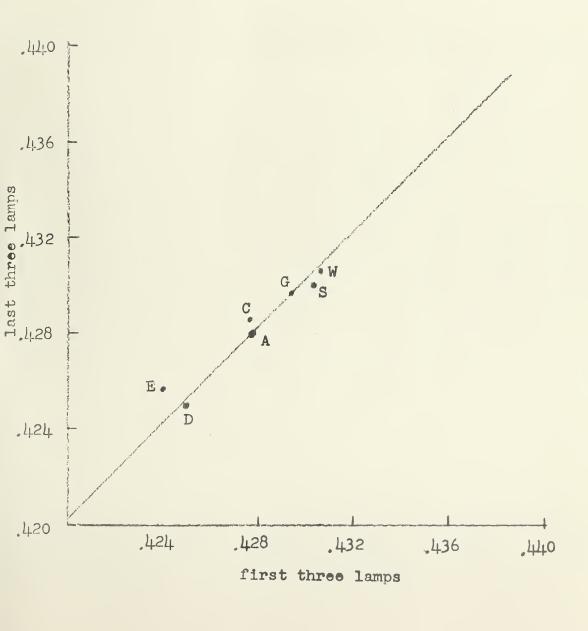




Figure 8

F40Ti2/Cool White Lamps operated at 40 watts

Amperes

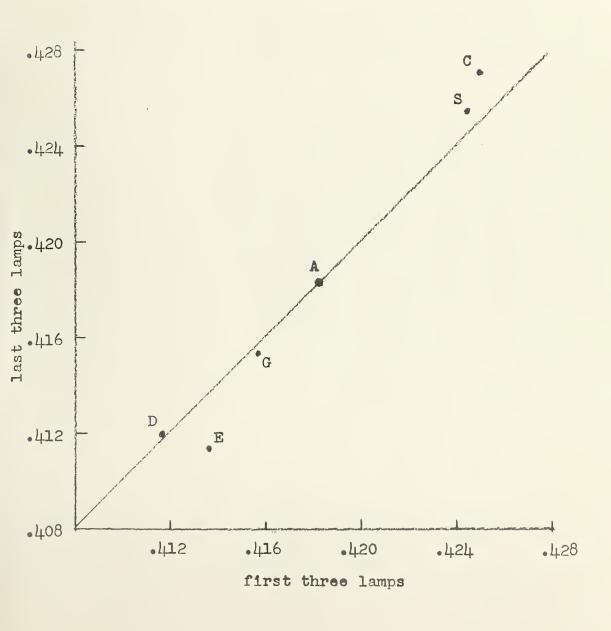




Figure 9

F40T12/Daylight Lamps
operated at 236.0 line volts

Amperes

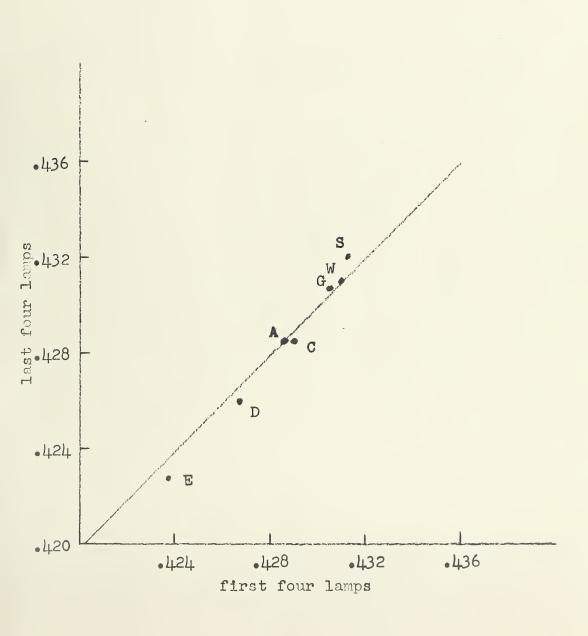




Figure 10
F40T12/Daylight Lamps operated at 40 watts

Amperes

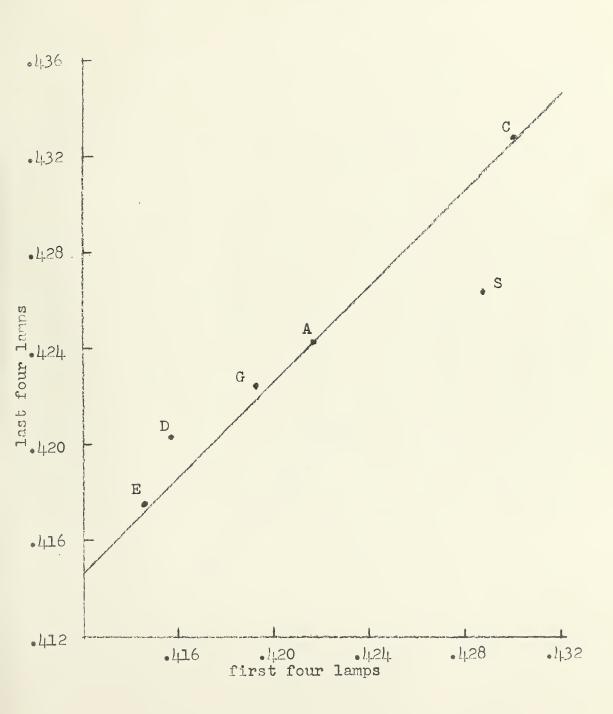




Figure 11

F40Tl2/Pink Lamps operated at 236.0 line volts

amperes

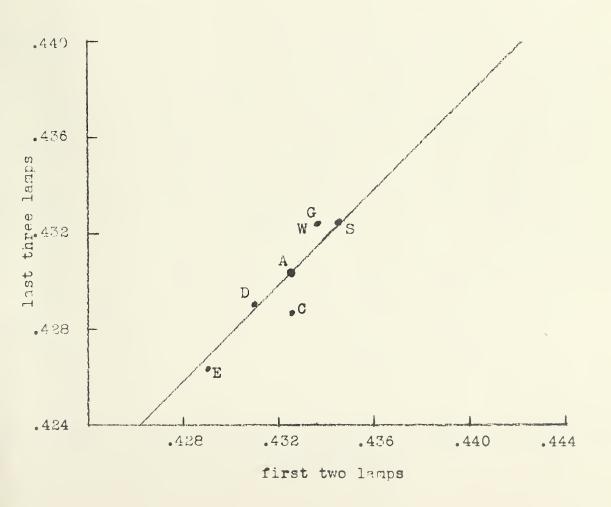




Figure 12

F40T12/Pink Lamps operated at 40 watts

Amperes

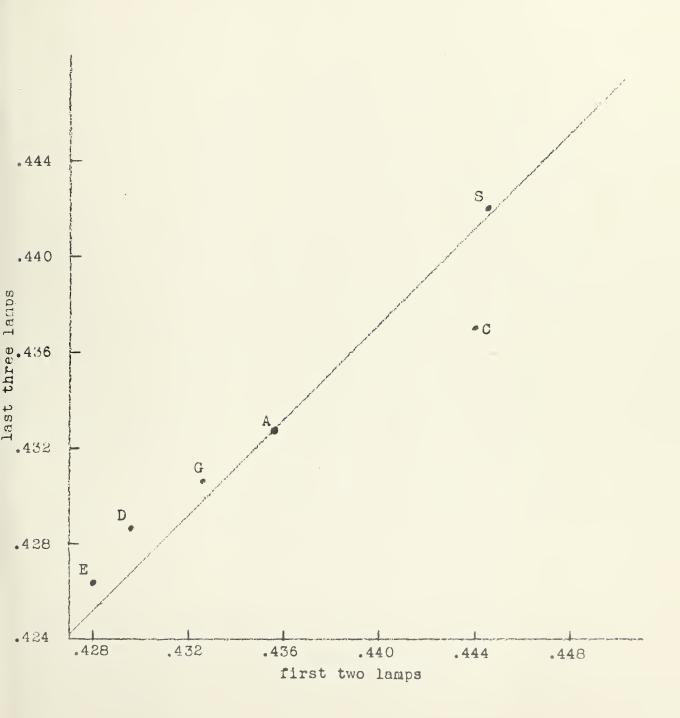





Figure 13

F40T12/Cool White Lamps operated at 236.0 line volts



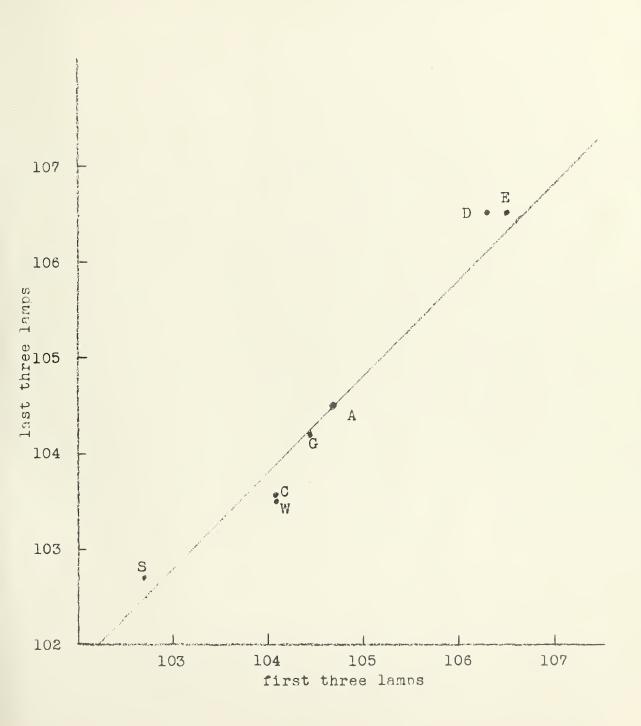




Figure 14
F40T12/Cool White Lamps operated at 40 watts
Lamp Volts


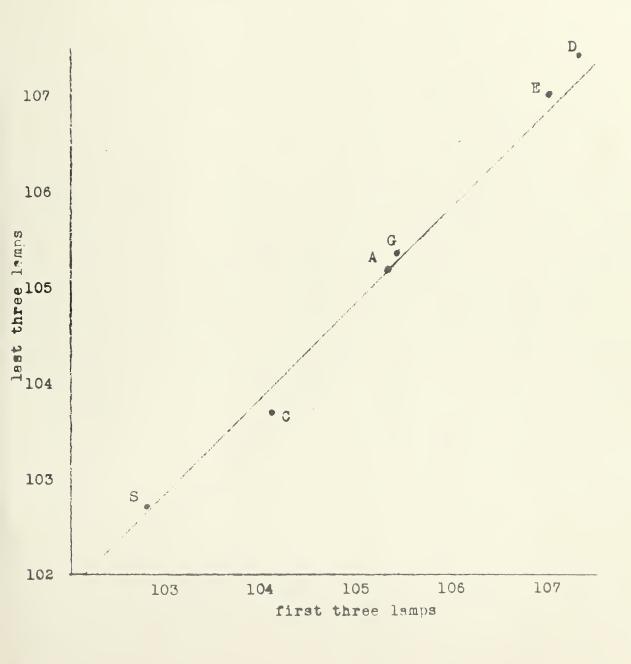




Figure 15
F40T12/Daylight Lambs
operated at 006.0 line volts

Lamb Volts



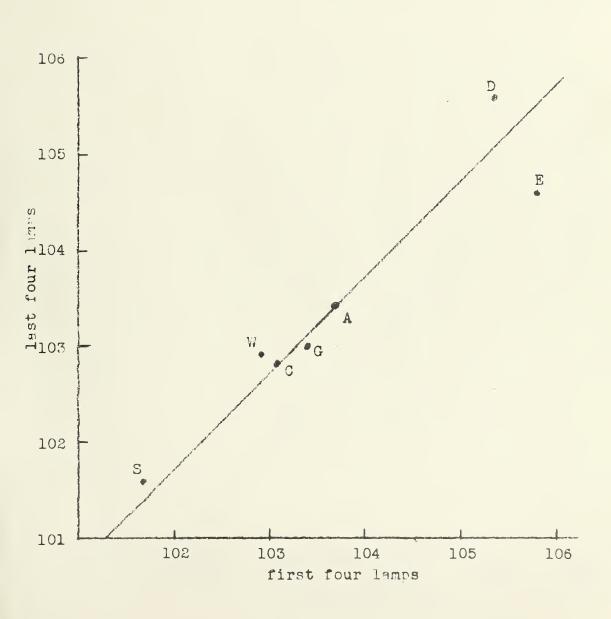

Figurs 16
F40T12/Daylight Lamps operated at 40 watts
Lamp Volts

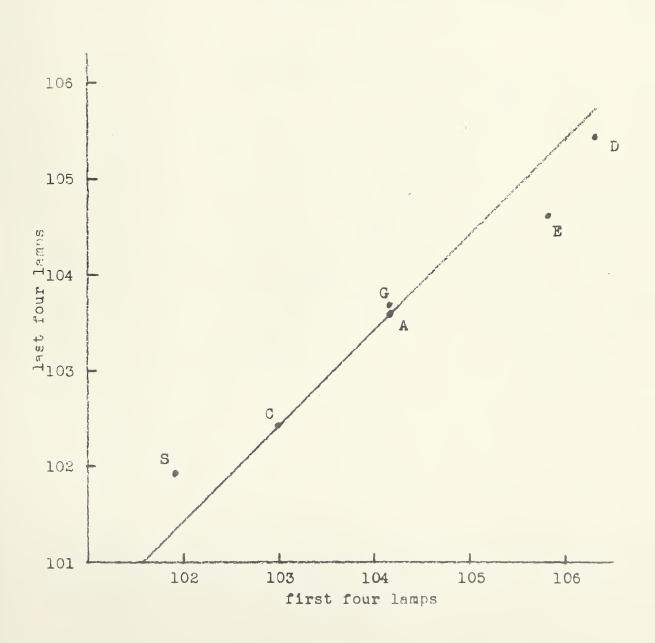




Figure 17

F40Tl2/Pink Lamps operated at 236.0 line volts

Lamp Volts

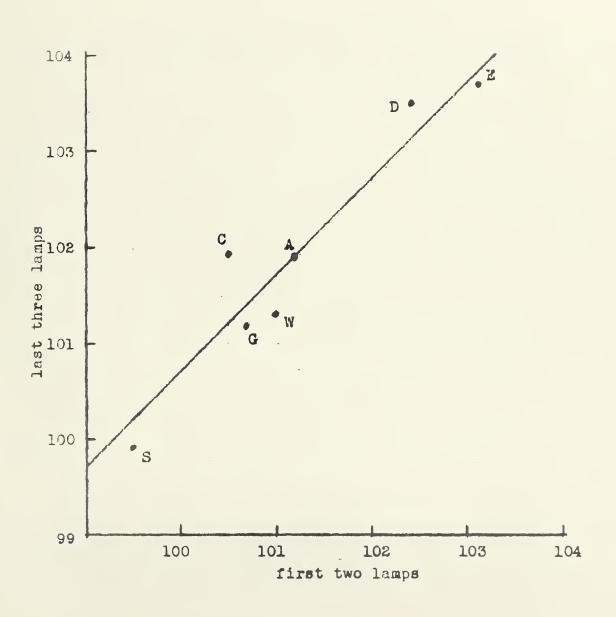




Figure 18

F40Tl2/Pink Lamps
operated at 40 watts

Lamp Volts

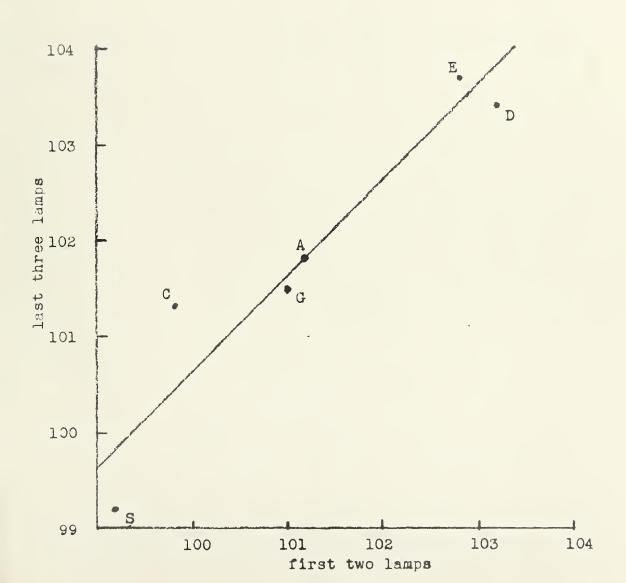




Figure 19

F40T12/Cool White Lamps operated at 236.0 line volts

Watts

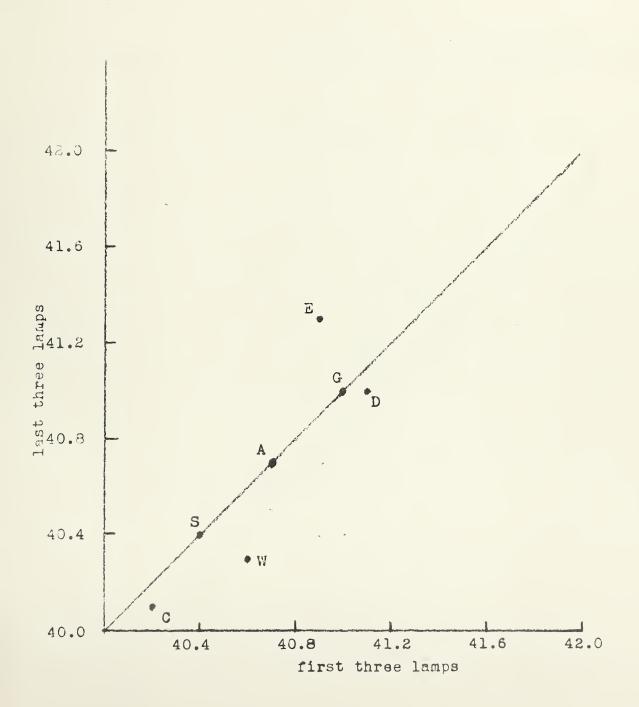




Figure 20

F40T12/Daylight Lamps operated at 236.0 line volts

Watts

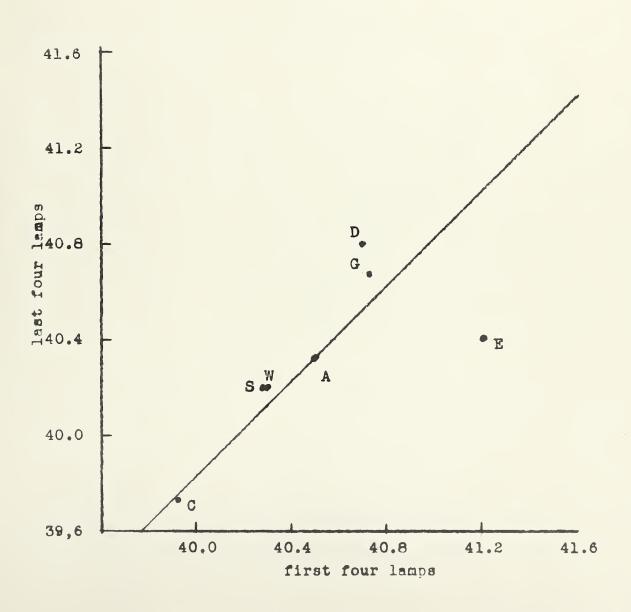




Figure 21

F40T12/Pink Lamps operated at 236.0 line volts

Watts

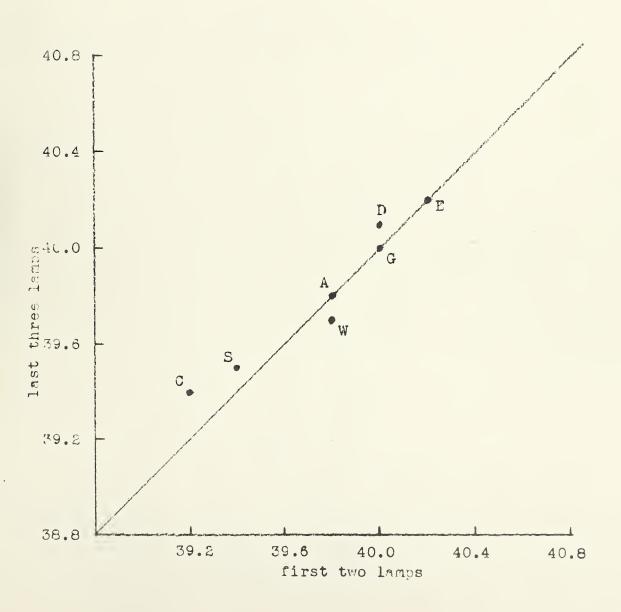




Figure 22

F40T12/Cool White Lamps operated at 236.0 line volts

Lumens per Watt

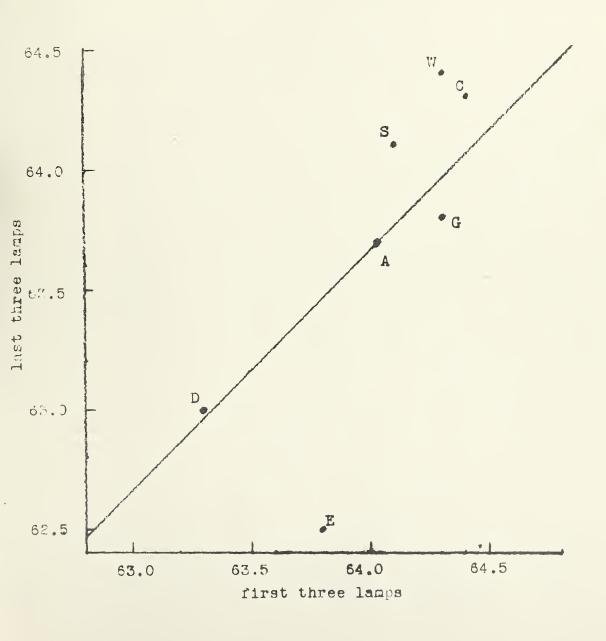




Figure 23
F40T12/Cool White Lamps
operated at 40 watts
Lumens per Wett

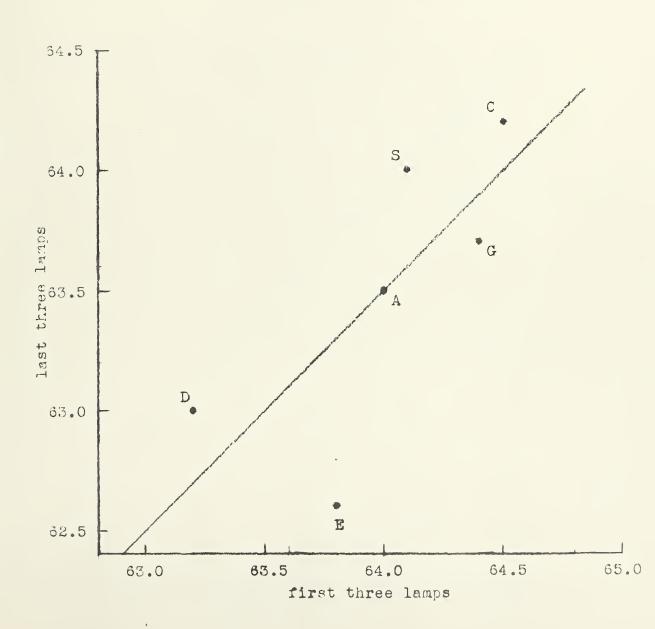




Figure 24
F40Tl2/Daylight Lamps

F40Tl2/Daylight Lamps operated at 236.0 line volts

Lumens per Watt

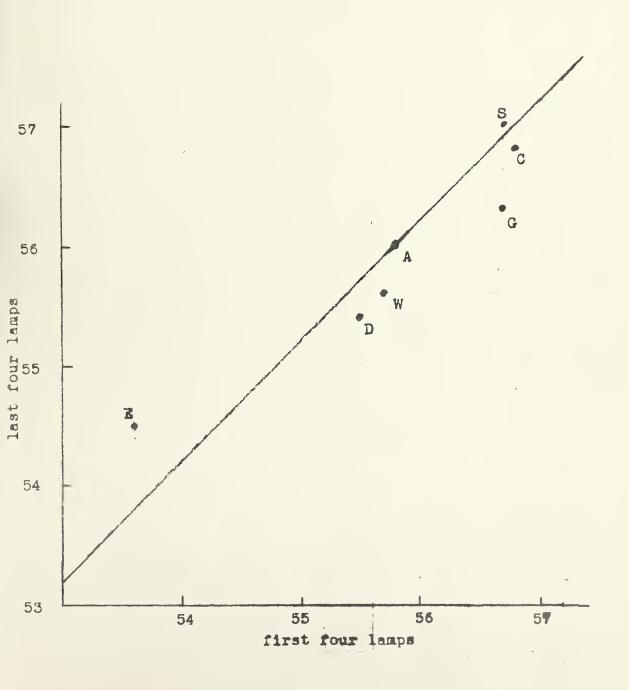




Figure 25
F40T12/Daylight Lamps operated at 40 watts
Lumens per Watt

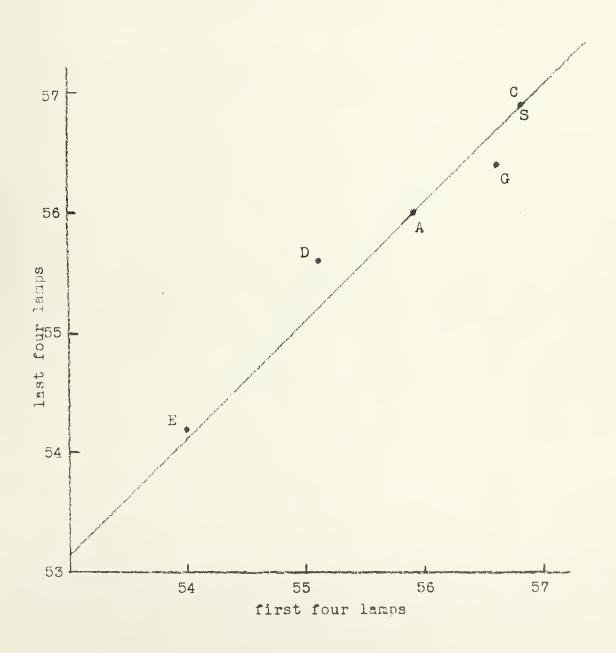




Figure 26

F40Tl2/Pink Lamps
operated at 236.0 line volts

Lumens per Watt

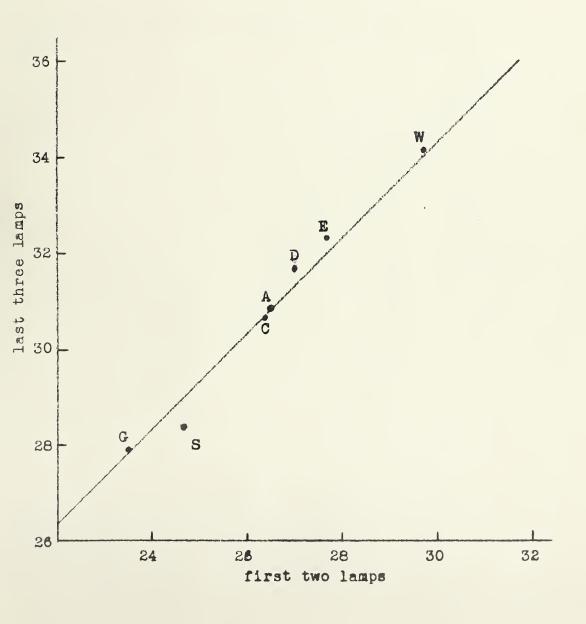




Figure 27

F40T12/Pink Lamps operated at 40 watts

Lumens per Watt

