





*Please return to; [unclear]*

3321

# NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

1001-10-1311

May 26, 1952

3321

## FIRE TEST OF PRECAST, REINFORCED CONCRETE ROOF SLABS

by

James V. Ryan



The publication, reproduction, or translation of this report is prohibited unless permission is obtained from the National Institute of Standards and Technology, Gaithersburg, Maryland 20899. Such permission is granted for noncommercial purposes if that agency has been specifically notified for its own use.

Approved for public release by the Director of the National Institute of Standards and Technology (NIST) on October 9, 2015.

part, is prohibited standards, Washington has been specifically for its own use.



## FIRE TEST OF PRECAST, REINFORCED CONCRETE ROOF SLABS

Test Report No. TUL-218-23:R73273

Fire Test 339

### 1. INTRODUCTION

At the request of the Bureau of Yards and Locks, a roof deck consisting of three precast concrete channel slabs of a special design was subjected to a fire endurance test. This test was a part of a development program of the Bureau of Yards and Locks and was intended to provide data for use in future designs, including prestressed concrete slabs.

### 2. TEST SPECIMEN

The specimen subjected to test was made up of three identical panels, each of which was in the form of a channel 17 ft 10 in. long, 4 ft 2 1/2 in. wide, 8 in. deep along each side or flange, and 1 1/4 in. thick through the web. Transverse ribs were located one at each end, at each quarter point, and at the center, thereby dividing each panel into four equal bays. The 1 1/4 in. thick web was reinforced at mid-thickness with 2- by 2-in. No. 12 ga welded wire fabric which was carried down each side flange to 3/4 in. from the bottom. Each flange included a single longitudinal 3/4-in. deformed reinforcing bar and each transverse rib, two 1/4-in. deformed round bars.

The concrete was mixed in the proportions of 1 part (by weight) cement, 2 1/2 parts clean Potomac River sand, and 2 parts clean White Marsh gravel. The gravel had been passed through a 3/8-in. sieve. The tests of nine cylindrical samples of the concrete (at the time of the fire test: 10 to 11 months after casting) indicated compressive strengths from 5340 to 7420 lb/in.<sup>2</sup> averaging 6250 lb/in.<sup>2</sup> The details of the construction are given in Figure 1.

### 3. TEST METHOD

The three panels were aged under the temperature and humidity conditions in a ventilated occupied work room for 10 to 11 months before test. They were placed to span the long dimension of the test furnace, their edges butted and the joints were filled with grout. During test the bottom sides of the panels were directly exposed to the furnace fires which were controlled to provide average furnace temperatures close to those specified in the Standard Methods of Fire Tests

THE UNIVERSITY OF CHICAGO  
DEPARTMENT OF CHEMISTRY  
CHICAGO, ILLINOIS

MEMORANDUM

TO : [Illegible]

FROM : [Illegible]

SUBJECT : [Illegible]

[Illegible text block]

[Illegible text block]

[Illegible text block]

of Building Construction and Materials, ASTM C119-55 which include: 1000° F at 5 min, 1300° F at 10 min, 1500° F at 30 min, 1700° F at 1 hr, and 1850° F at 2 hr. Temperatures were measured in the furnace chamber, on the reinforcing bars and wire fabric in the concrete, and on the unexposed surface of the panels. Such measurements were made for all three panels but only those for the center panel were considered, in order to eliminate edge effects. The panels were subjected to an applied load of 15.3 lb/ft<sup>2</sup> and the deflections of the center panel were measured.

#### 4. RESULTS

During the fire test, considerable smoke and steam issued from the joints in the test specimen in the first few minutes; at 10 min, the average temperature of the unexposed surface had risen 250 deg F above its initial value; 18 min, hairline cracks in the top surface outlined the bays; 23 min, whole assembly bowing upwards but webs of channels sagging slightly; 27 min, grouted joints between panels open 1/2 to 1 in.; 37 min, coarse cracks over top surface; 51 min, cracks in upper surface transverse to flanges and ribs, none over 1/10 in. wide; 1 hr 30 min, no cracks in concrete over 1/2 in. wide; 1 hr 52 min, central panel sagging rapidly, load removed; 2 hr 3 min, gas off.

The fire resistance was limited to 1 1/2 hr by excessive transmission of heat through the specimen. However, the assembly remained an effective barrier to the penetration of flames for about 2 1/2 hr and the individual panels remained so throughout the 2 hours. No cracks were observed in the exposed surface during the test but many were obvious after cooling, as shown in the figures. The center panel sagged about 2 ft below its original position at center span, most of this deflection having occurred in the last 10 min of the test after the removal of the applied load. The average temperature of the 3/4-in. reinforcing bars of the center panel reached 1000° F at 1 hr 25 min and the maxi-um reached 1200° F at 1 hr 47 min. The fire exposure severity for the 2-hr duration was 92.7 percent of standard. Plots of the various temperatures measured are given in figure 2, the deflections at midspan of the center panel during the test in figure 3, the profile of the center panel the day after test in figure 4, and views of the condition of the specimen in figures 5 through 7.

The results of this test indicate a fire endurance limit of about 1 1/2 hr for the particular specimen tested.

Neither the contents of this report nor the fact that the test was conducted at the National Bureau of Standards may be used in advertising or promotional literature.

1877

...

...

...

...










Faint, illegible text at the top of the page, possibly a header or introductory paragraph.

Second block of faint, illegible text, appearing as a distinct paragraph.

Third block of faint, illegible text, continuing the document's content.

Final block of faint, illegible text at the bottom of the page.

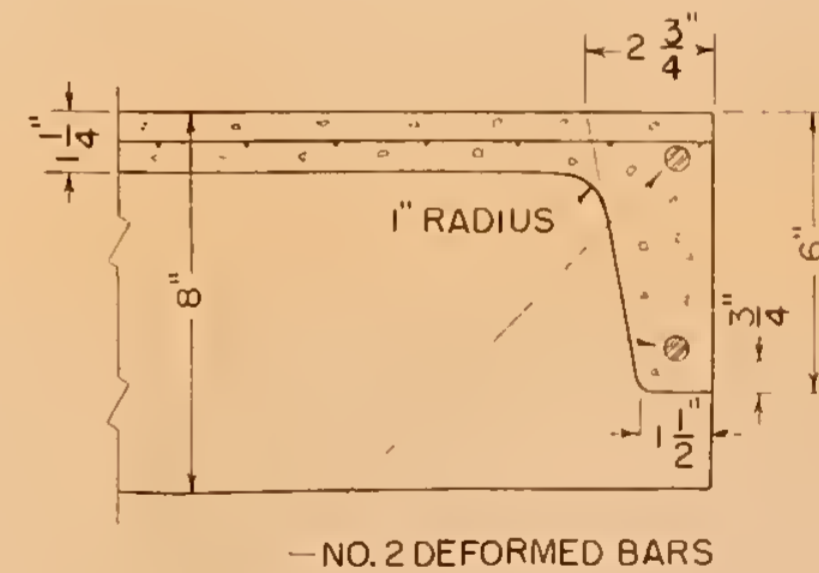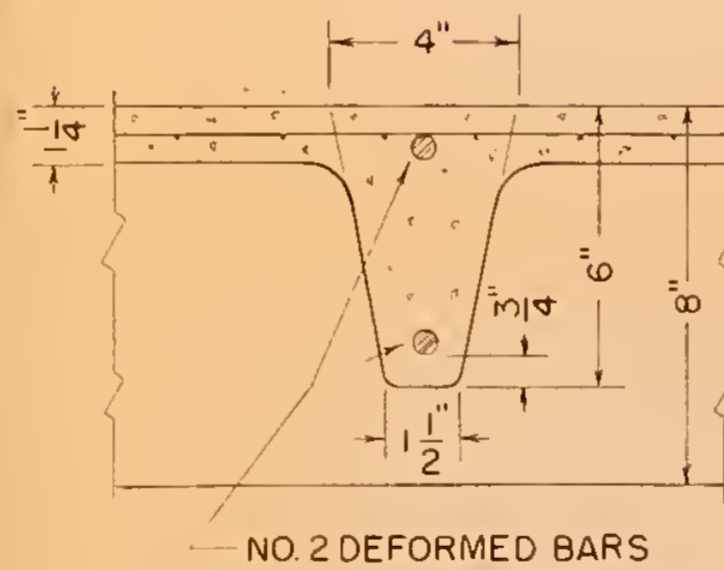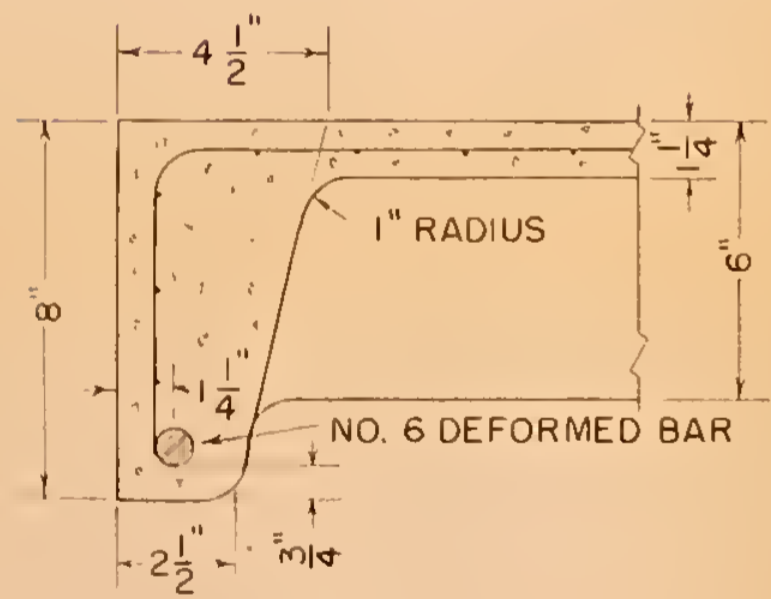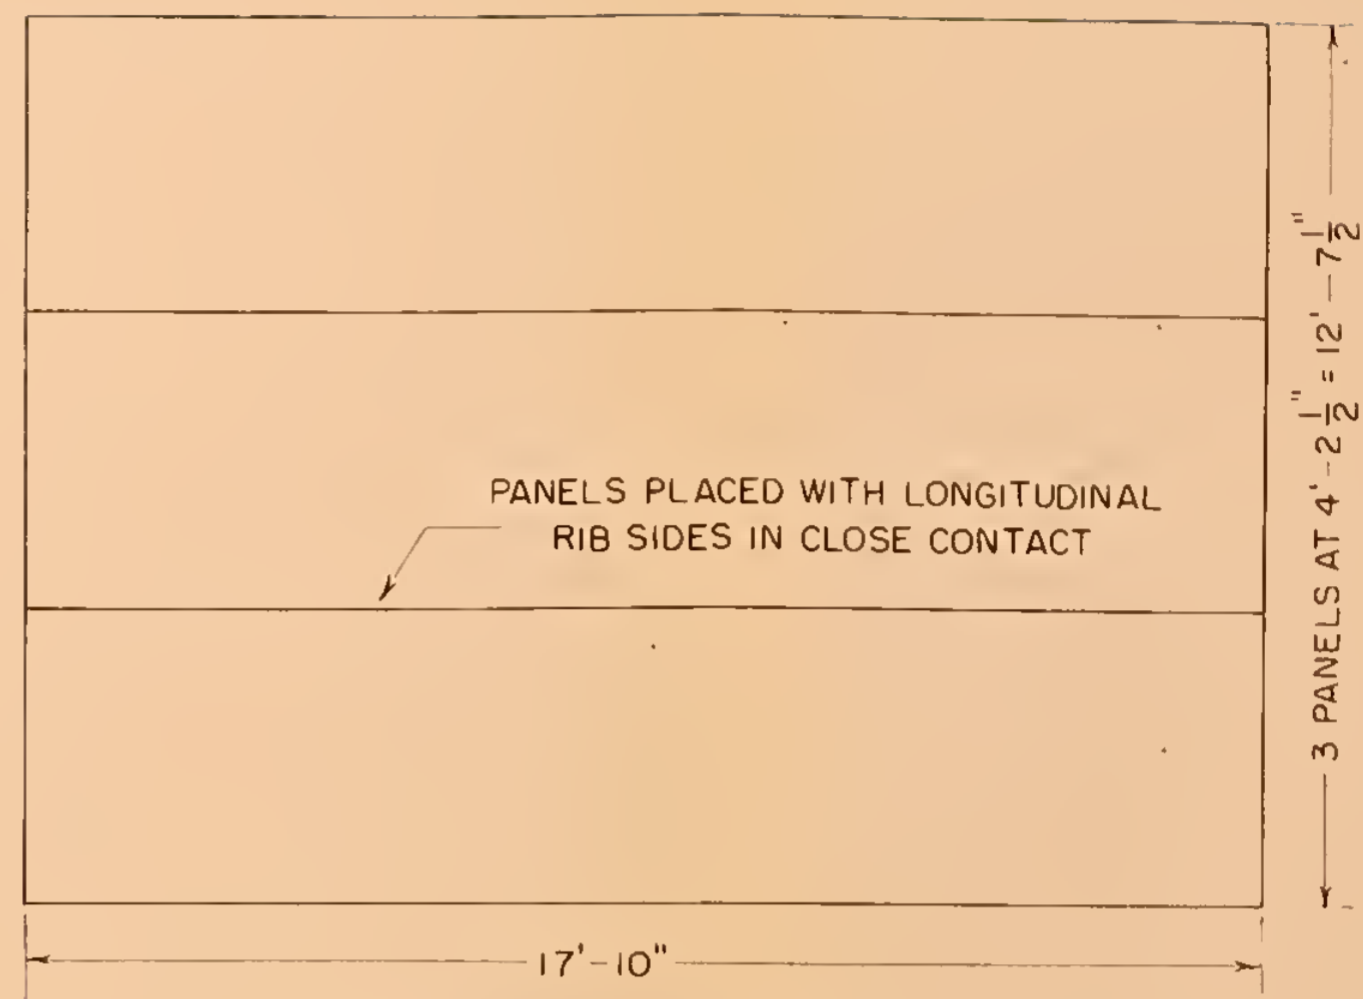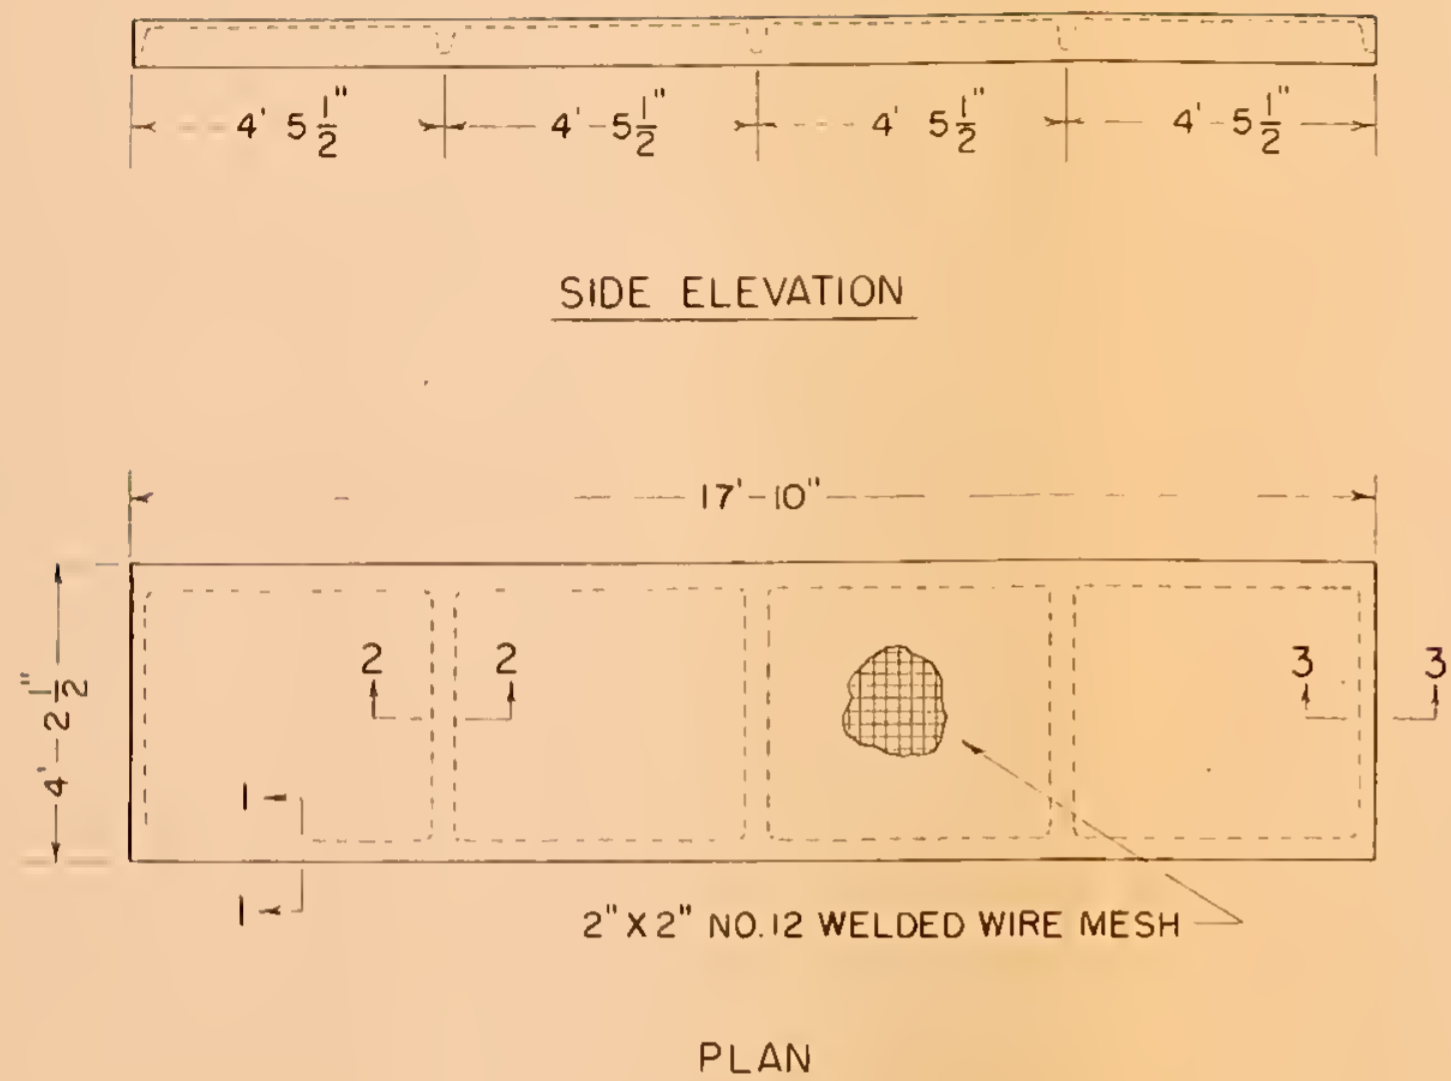

NOTES

CEMENT FACTOR	7 BAGS/CU. YD.	INTERMEDIATE GRADE REINFORCING	24,000 PSI
MAXIMUM SIZE AGGREGATE	3/8 IN.	WIRE MESH	30,000 PSI

FIG. 1 CONSTRUCTION DETAILS OF PRECAST ROOF PANELS



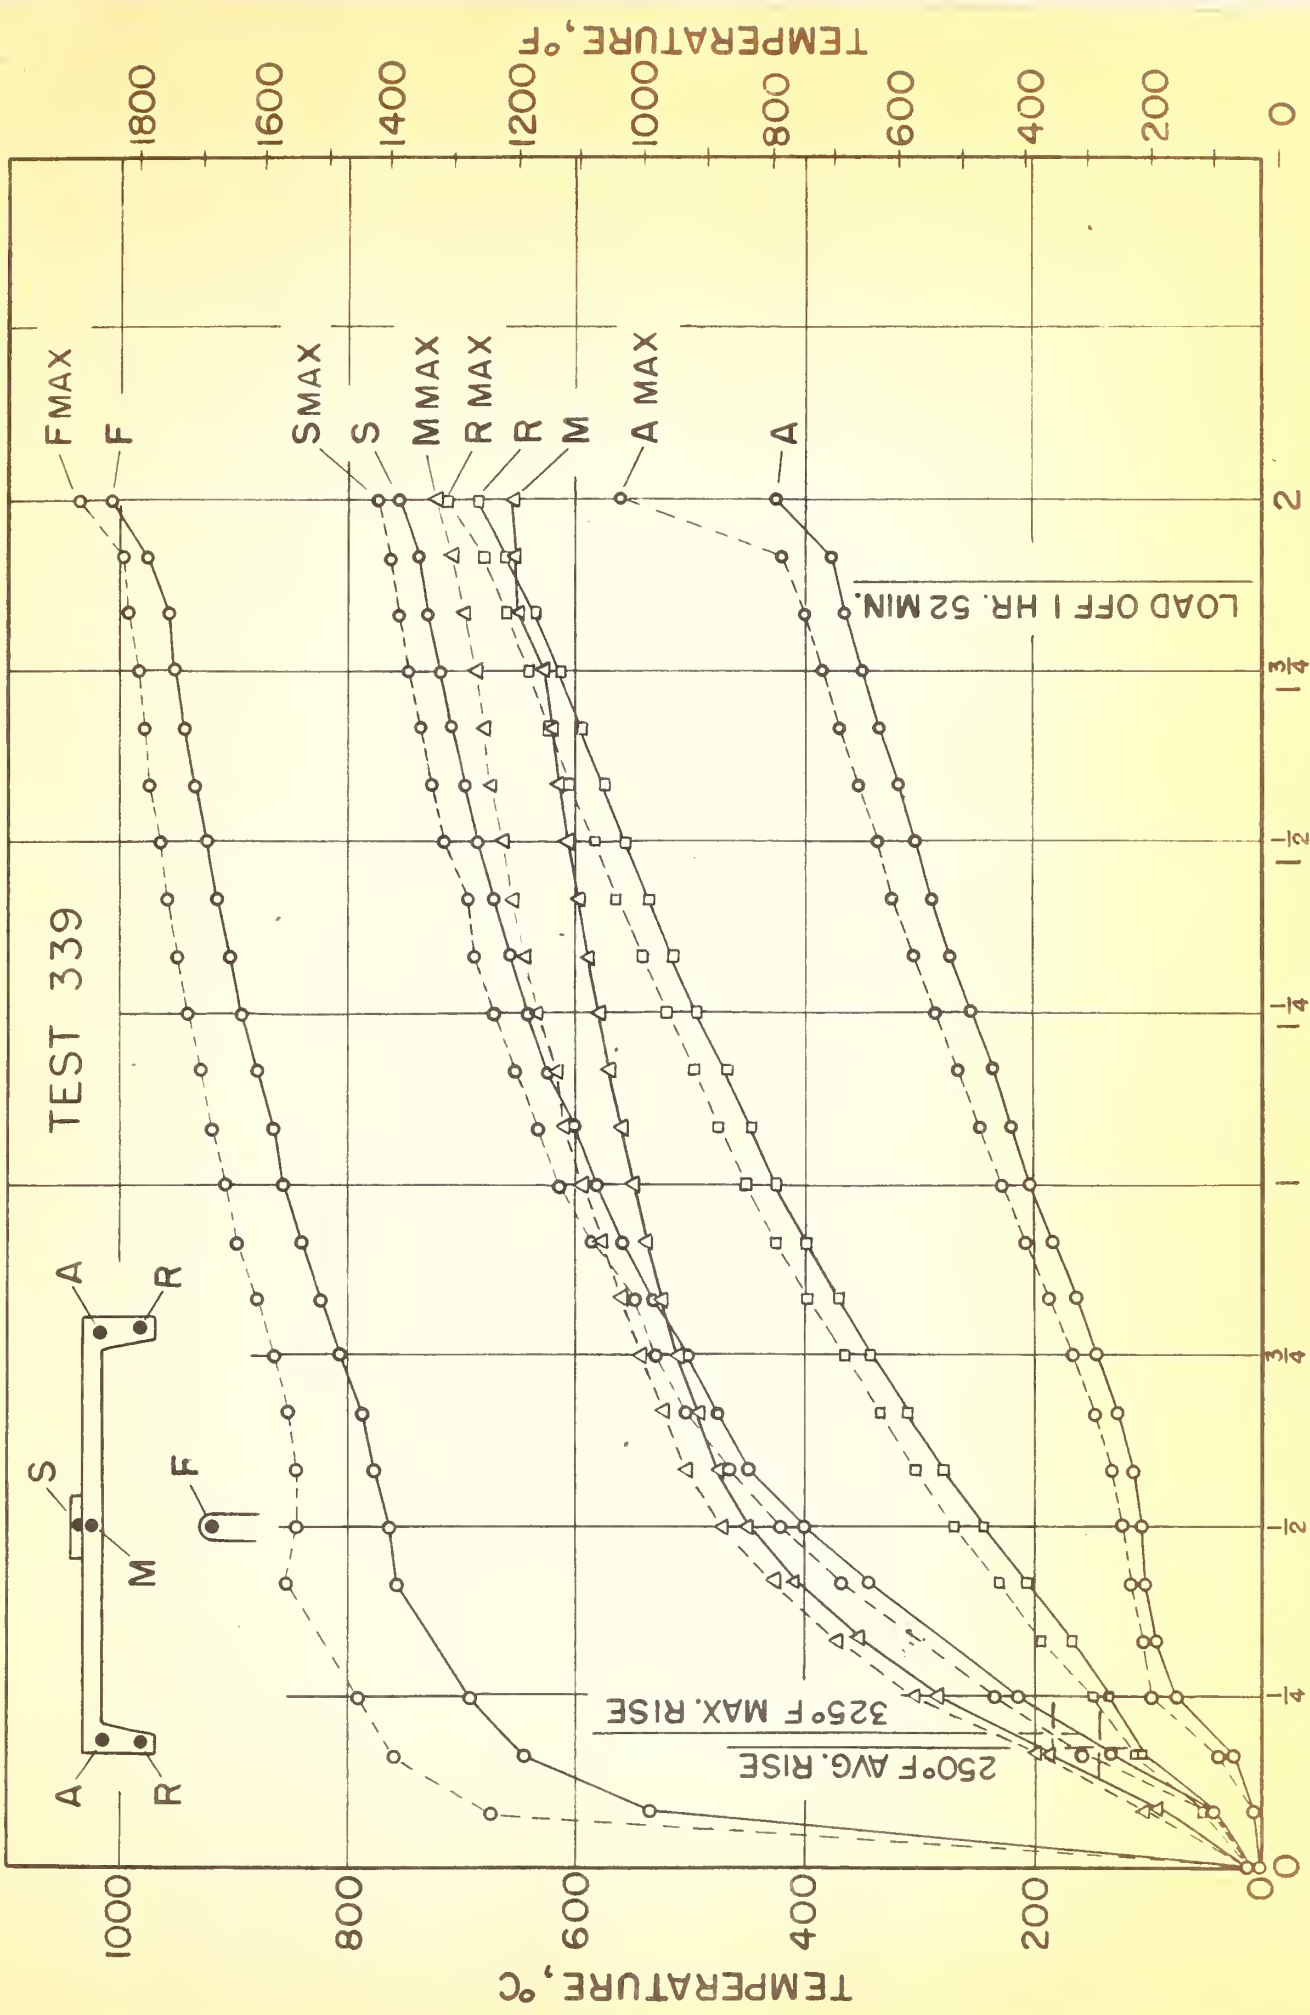


FIG. 2 OBSERVED TEMPERATURES, MAX. AND AVG., CENTER SLAB ONLY



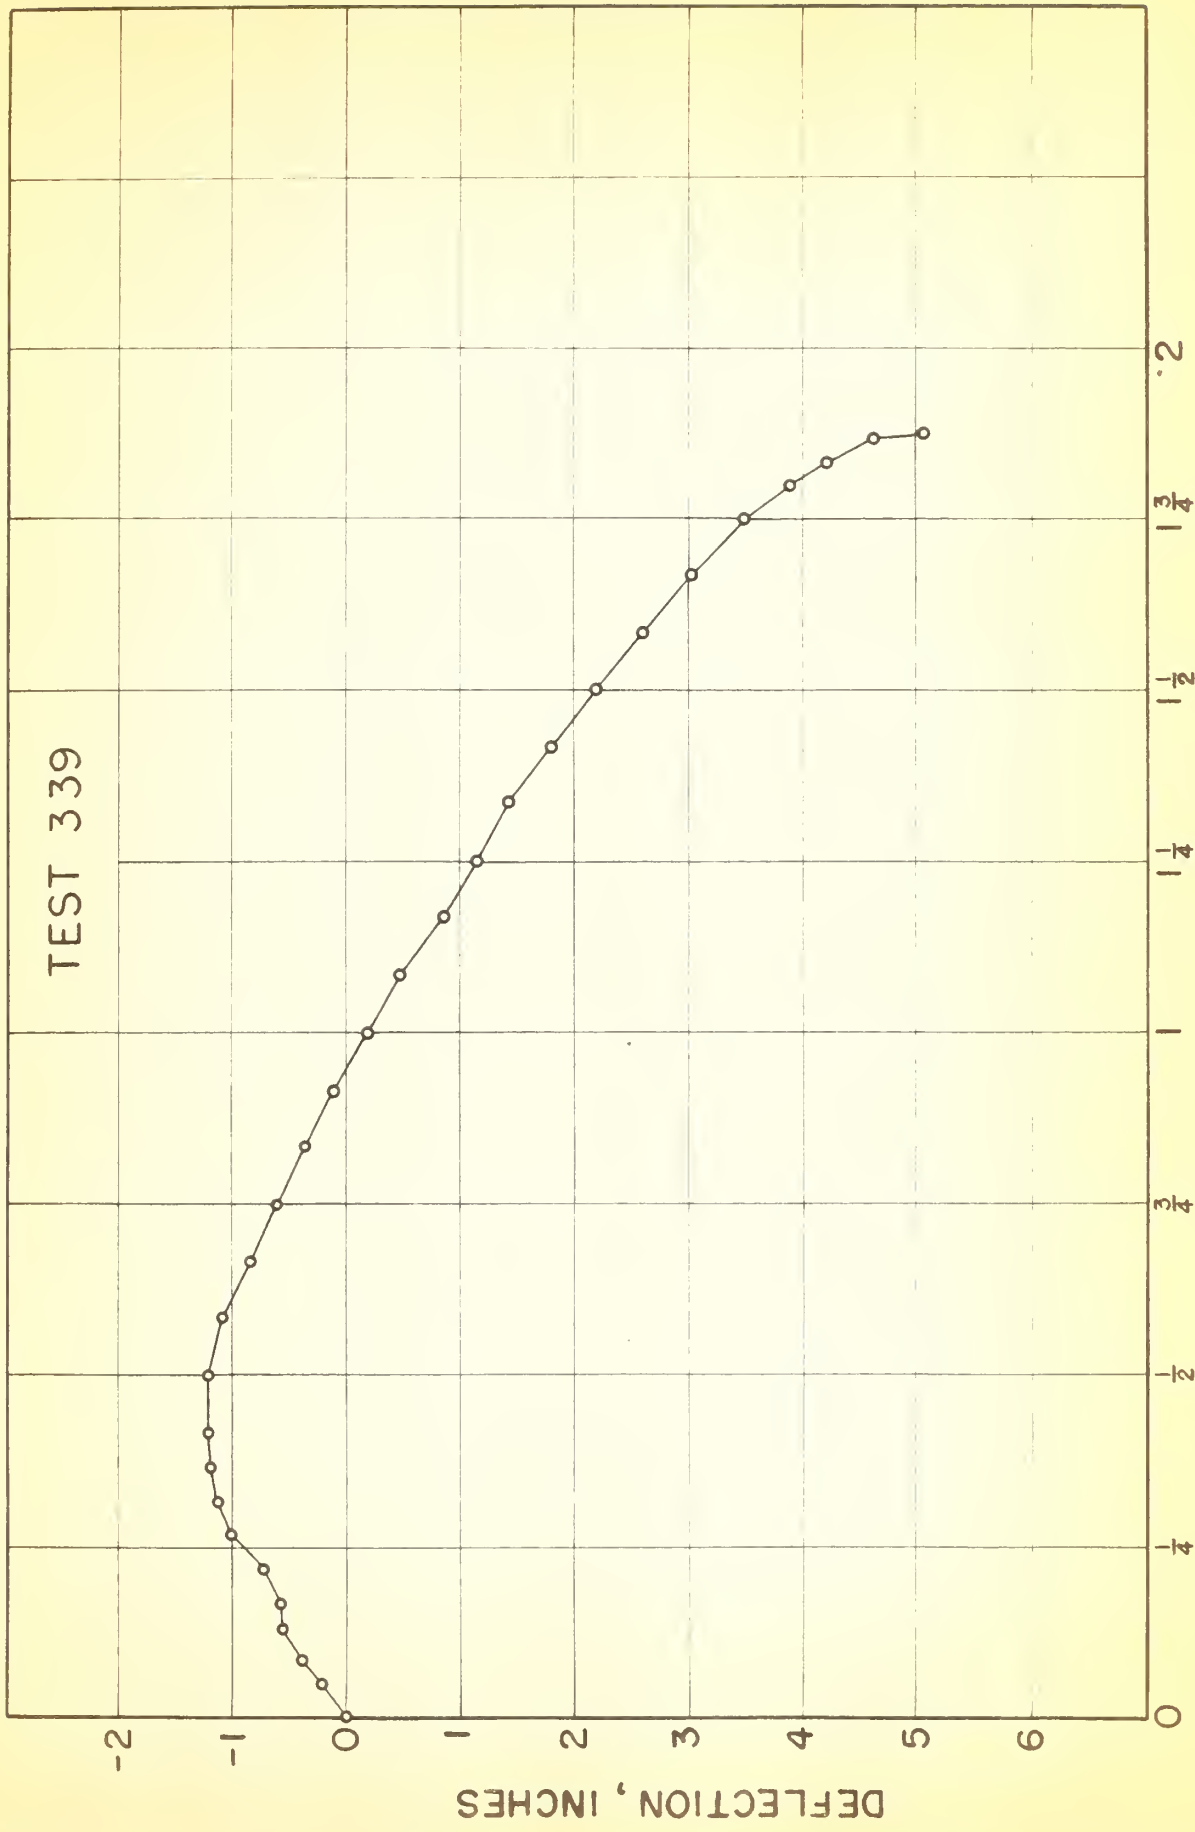


FIG. 3 DEFLECTIONS AT CENTER SPAN VS TIME  
 NEGATIVE DEFLECTIONS UP, POSITIVE DOWN





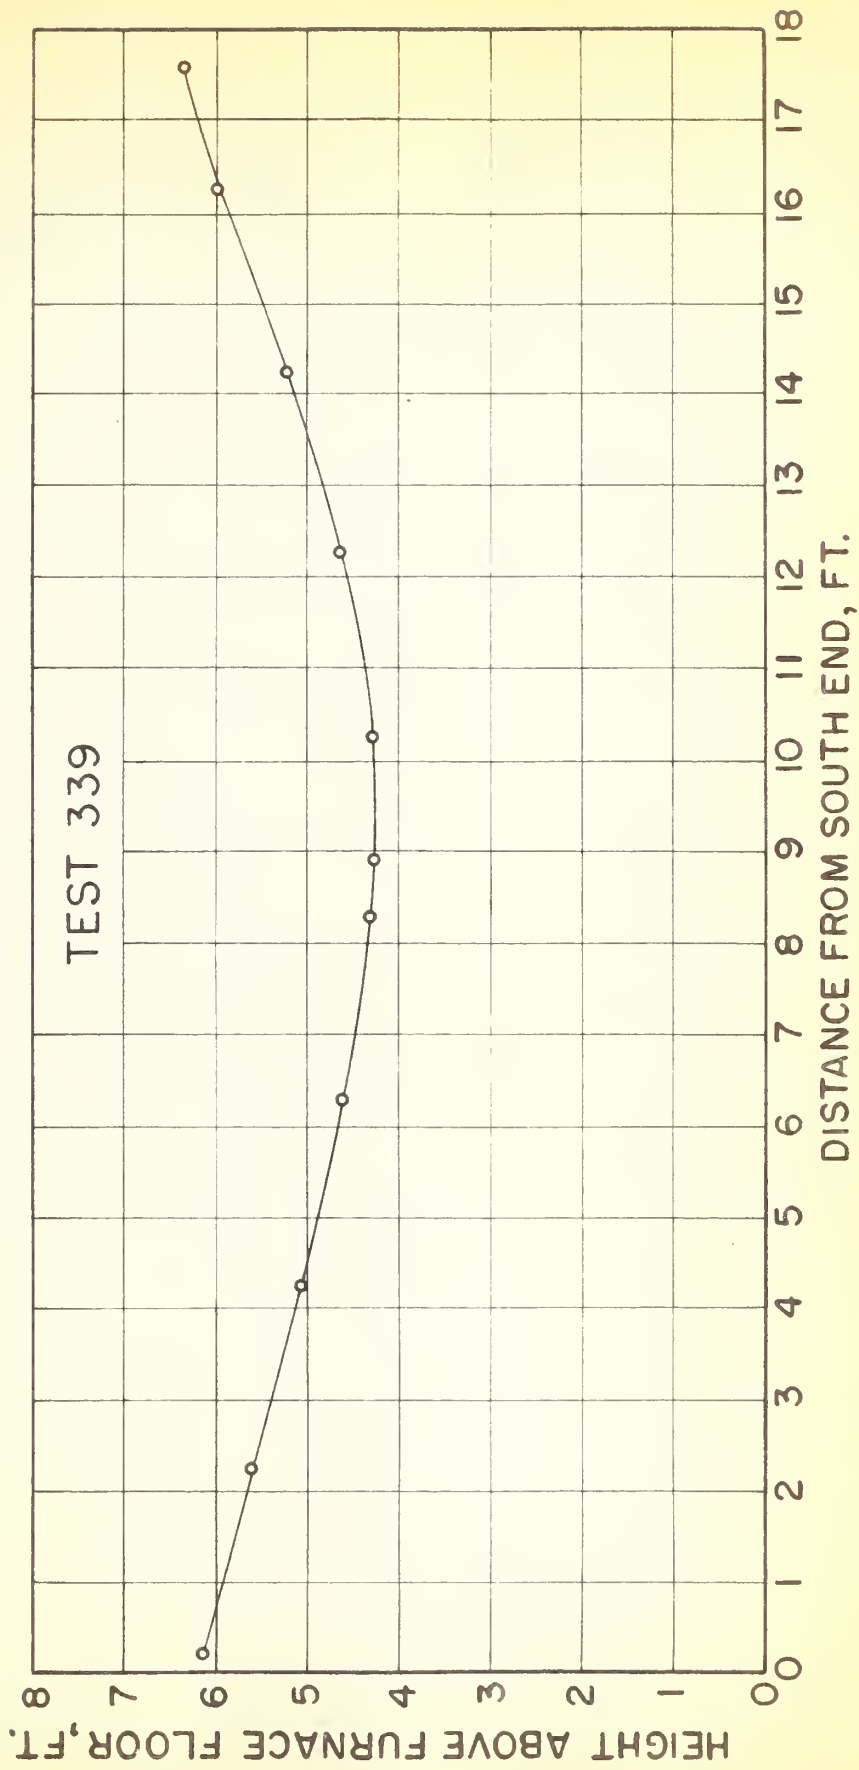


FIG. 4 PROFILE OF WEST FLANGE  
MEASURED AFTER COOLING, UNDER PARTIAL LOAD







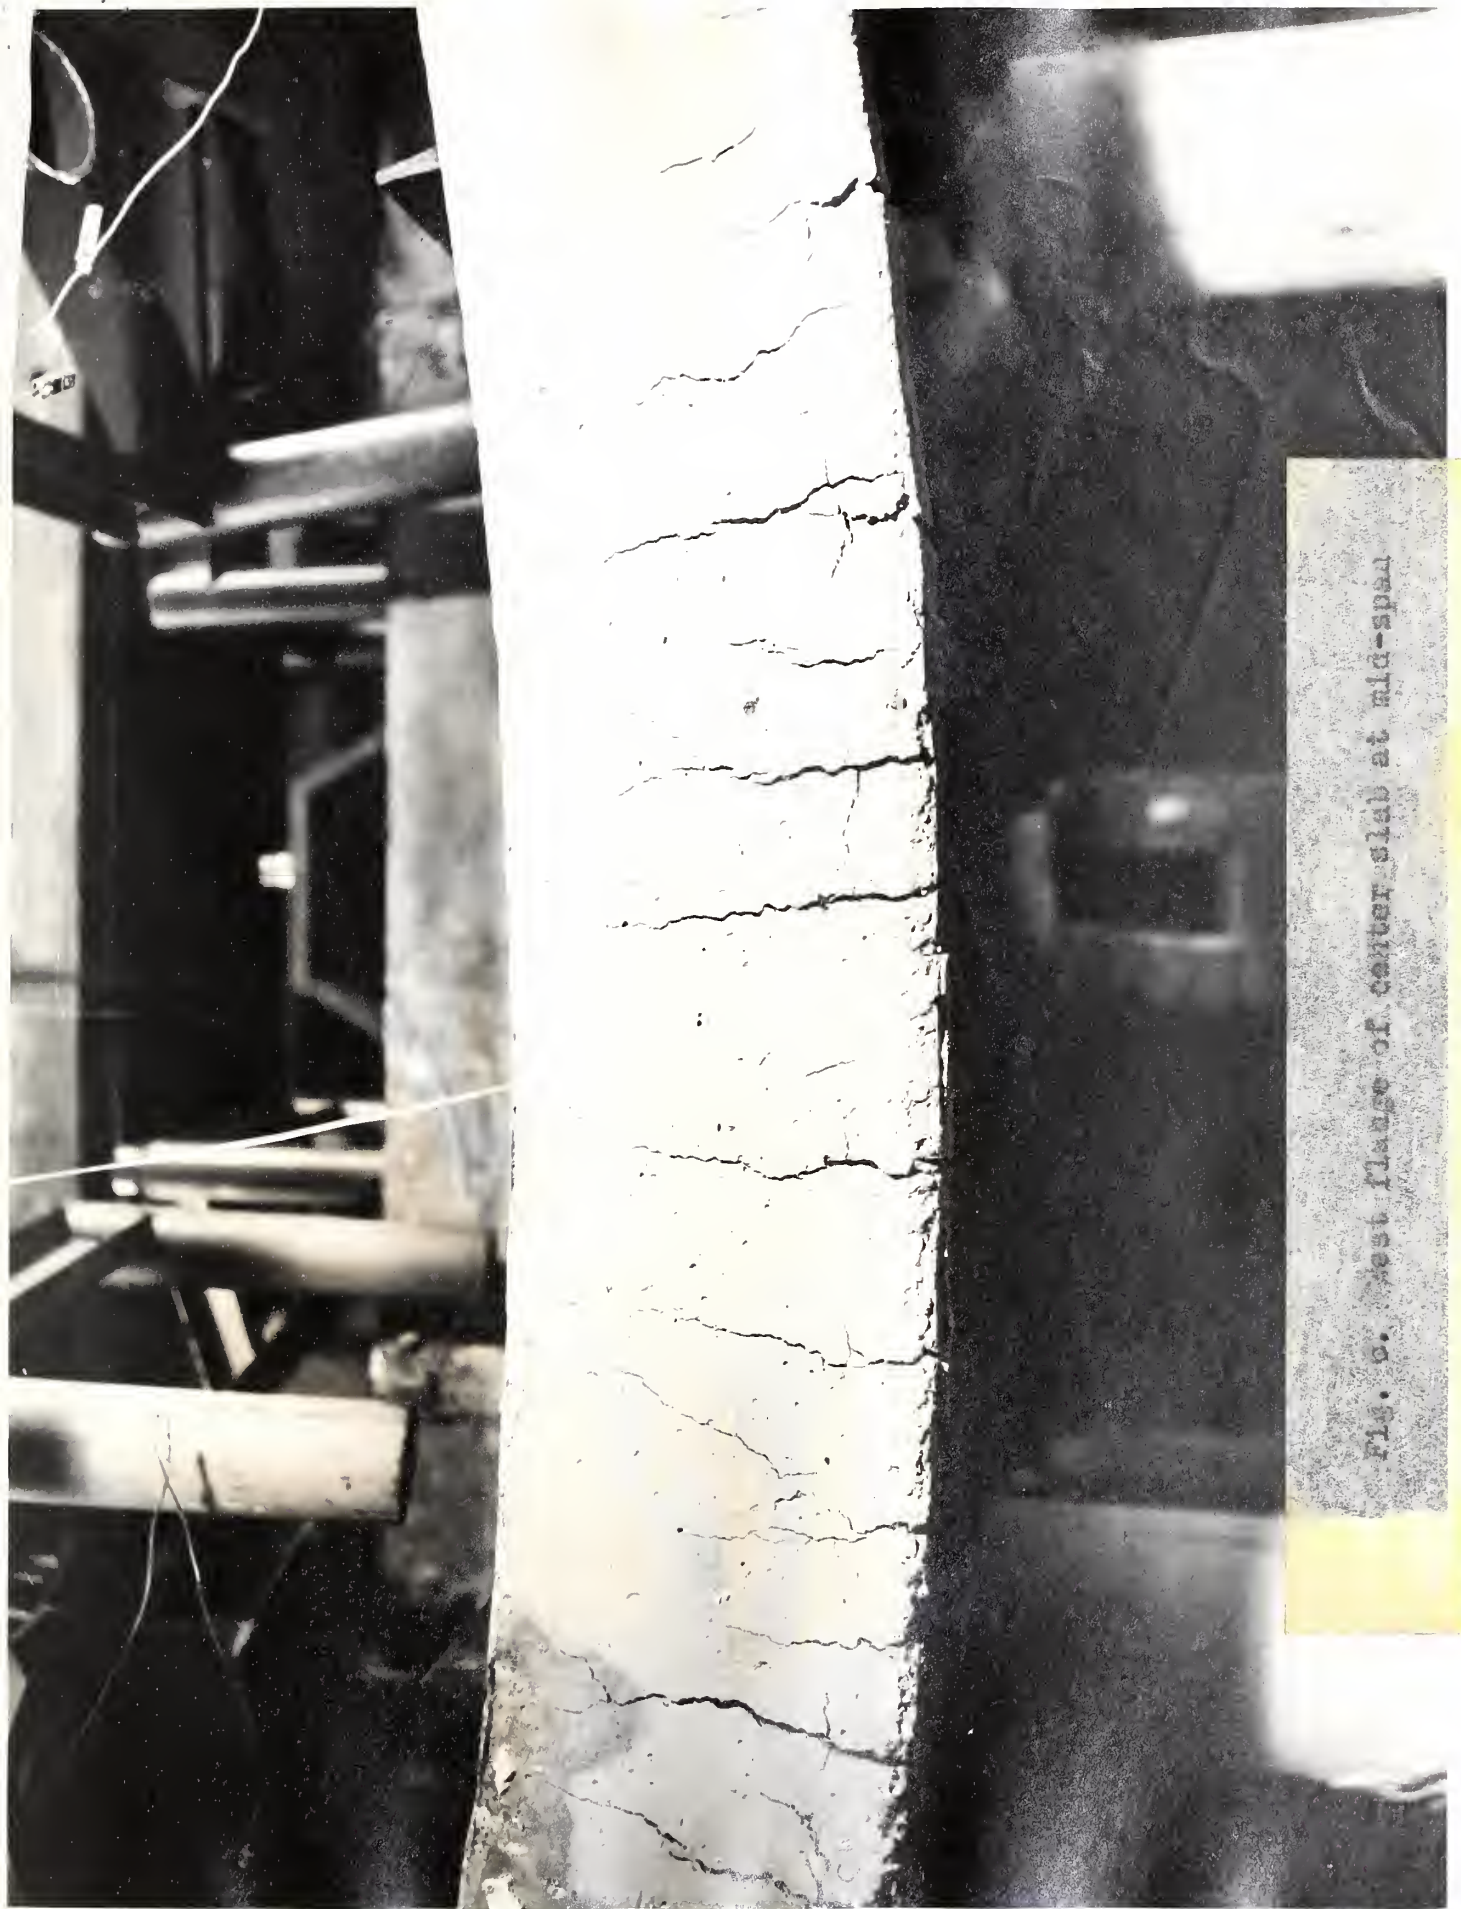


Fig. 6. Test flange of center slab at mid-span





Fig. 7. North end of center slab, exposed face



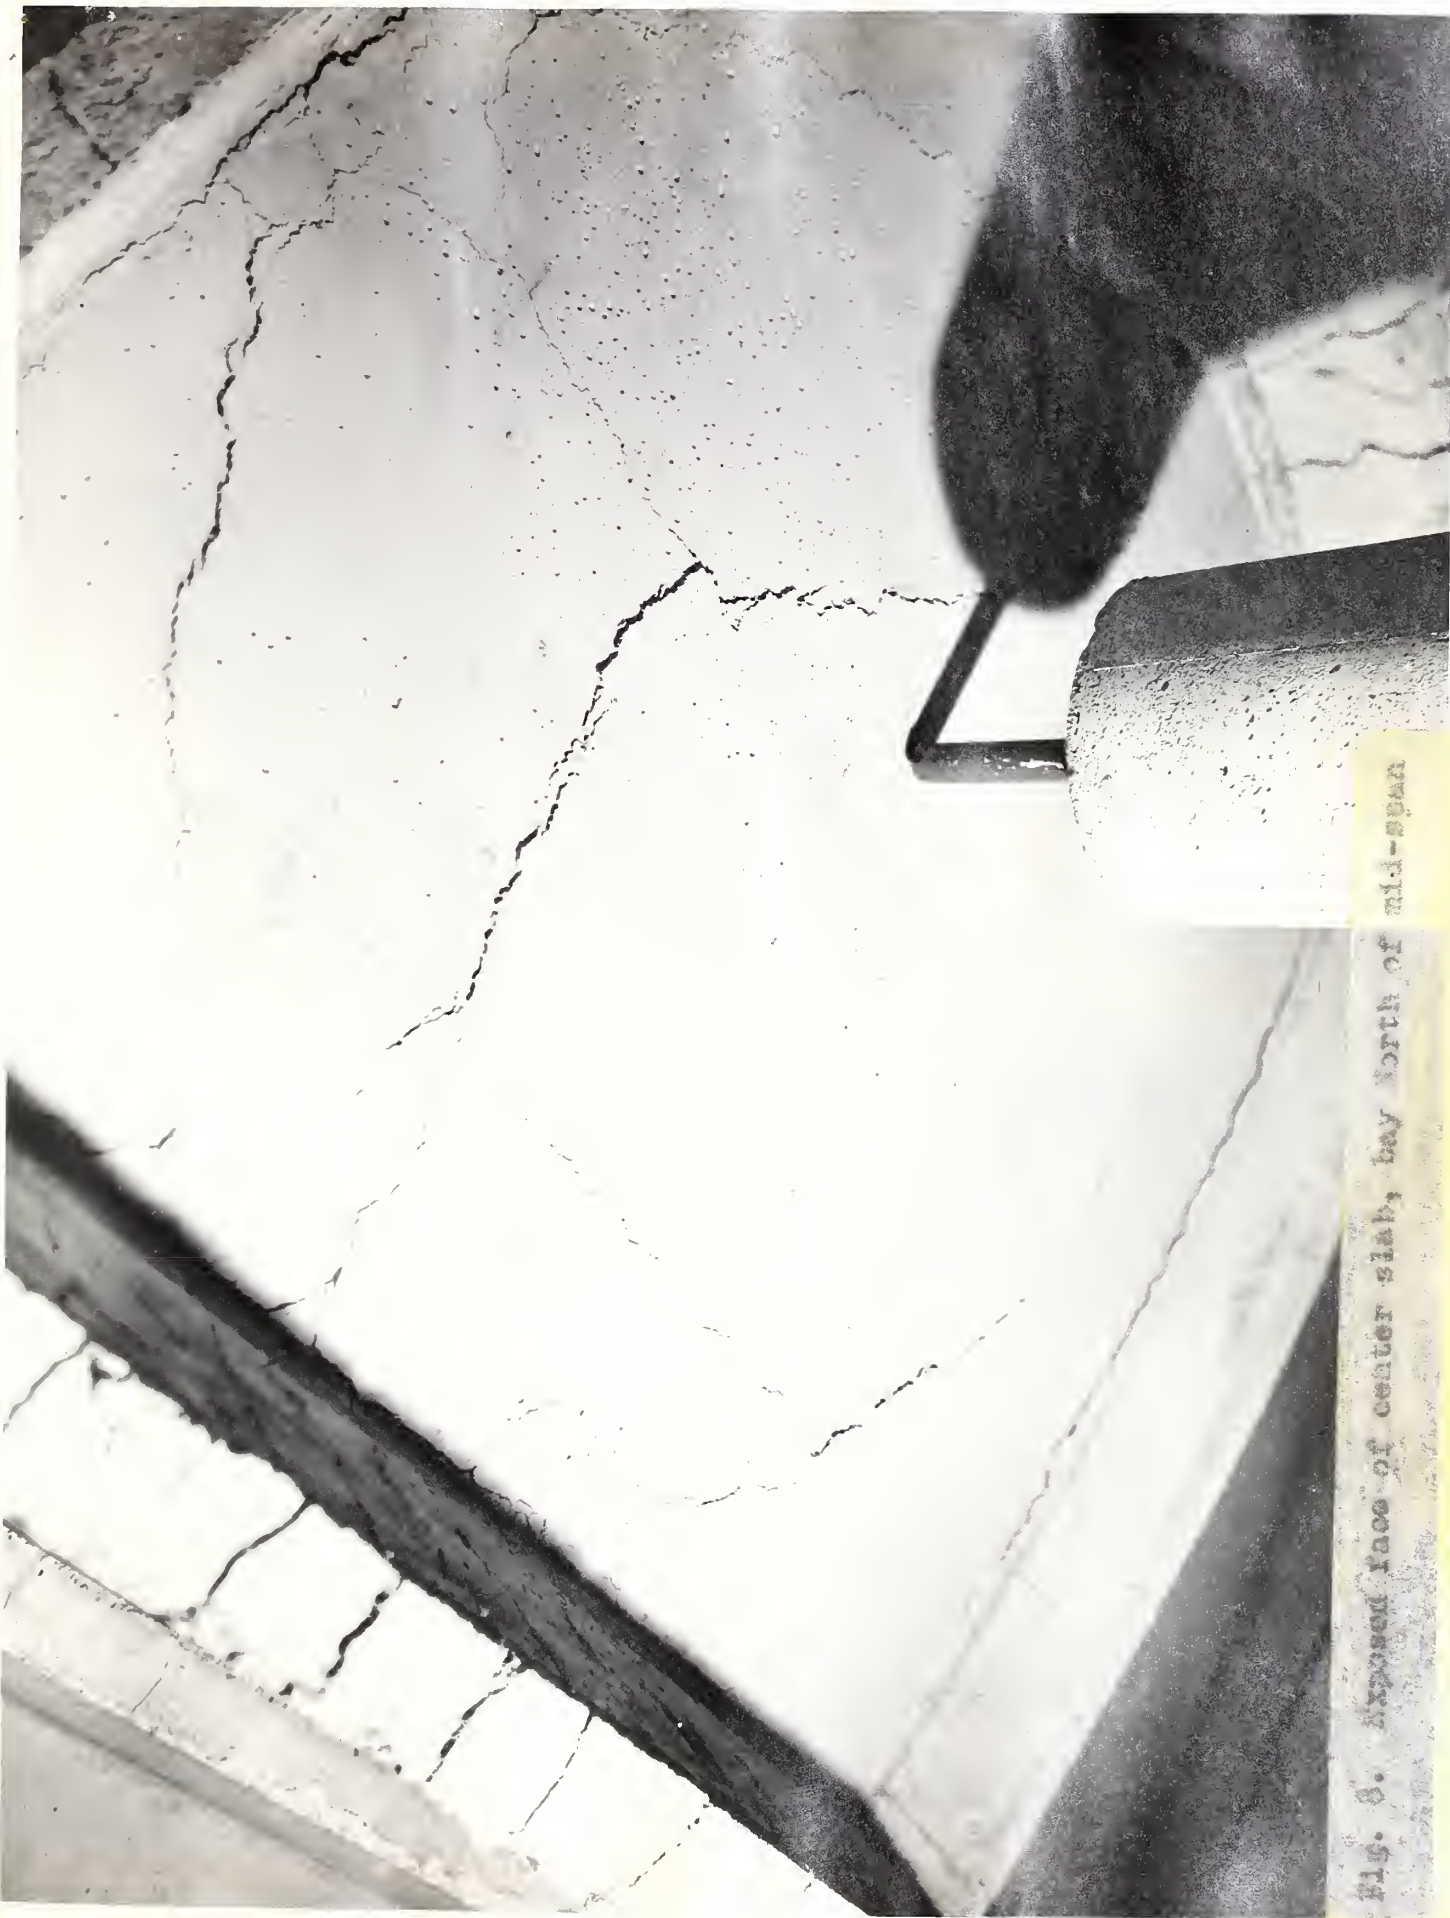


FIG. 8. Exposed face of center slab, bay north of mid-space





Fig. 9. Exposed face of center slab from South end





