

NAT'L INST. OF STAND. & TECH. RIC.



A11103 391086



NBS BUILDING SCIENCE SERIES

69

U.S. DEPARTMENT OF COMMERCE / National Bureau of Standards



**NBSLD,
the Computer Program
for Heating and Cooling Loads
in Buildings**

TA-

435

258

no. 67

C. 3

1976

The Building Science Series

The Building Science Series disseminates technical information developed at the National Bureau of Standards on building materials, components, systems, and whole structures. The Series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

These publications, similar in style and content to the NBS Building Materials and Structures Reports (1938-59), are directed toward the manufacturing, design, construction, and research segments of the building industry, standards organizations, and officials responsible for building codes.

The material for this Series originates principally in the Center for Building Technology of the NBS Institute for Applied Technology. The publications are divided into three general groups: Building Systems and Processes; Health, Safety and Comfort; and Structures and Materials. For further information regarding these publications please contact the Program Planning and Liaison Unit, Center for Building Technology, Institute for Applied Technology, National Bureau of Standards, Washington, D.C. 20234.

[See mailing list announcement on last page.]

CCC

NBSLD, the Computer Program for Heating and Cooling Loads in Buildings

NBS Building Science Series

Tamami Kusuda

Building Environment Division
Center for Building Technology
Institute for Applied Technology
National Bureau of Standards
Washington, D.C. 20234

Sponsored by

Housing and Urban Development
451 7th Street, S.W.
Washington, D.C. 20410

and

The National Bureau of Standards



U.S. DEPARTMENT OF COMMERCE, Elliot L. Richardson, Secretary

Dr. Betsy Ancker-Johnson, Assistant Secretary for Science and Technology
NATIONAL BUREAU OF STANDARDS, Ernest Ambler, Acting Director

Issued July 1976

Library of Congress Catalog Card Number: 76-600028

National Bureau of Standards Building Science Series 69

Nat. Bur. Stand. (U.S.), Bldg. Sci. Ser. 69, 398 pages (July 1975)

CODEN: BSSNBV

**U.S. GOVERNMENT PRINTING OFFICE
WASHINGTON: 1976**

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402
(Order by SD Catalog No. C13.29/2:69). Price \$4.60 (Add 25 percent additional for other than U.S. mailing).

Preface

This document comprises the engineering manual for the computer program called the National Bureau of Standards Load Determination Program hereafter referred to as NBSLD. Presented herein are the algorithms for the exact calculation methodology that was developed in the Thermal Engineering Section of the National Bureau of Standards to determine accurate heating and cooling loads for the thermal design of buildings. NBSLD, which is based upon the methodologies presented in this publication, has been available for some time for the purpose of evaluating various building constructions and systems. The program was originally developed as a research tool because none of the commercially available programs had features or the sophistication to enable the evaluation of unconventional designs. NBSLD has been an indispensable tool for studies of numerous HUD housing systems, constructions of the Defense Department and the General Services Administration where non-conventional design conditions had to be evaluated.

As the existence and the capability of NBSLD became known, numerous requests were made to NBS to release the program for public use. This publication is in response to that request. Hopefully, engineers will be able to adopt some of the computational schemes described in this publication to their own programs. A complete Fortran program is attached, although NBS does not claim that the program is optimum from the standpoint of the computer memory allocation or computational economy. It will take additional improvements before the program becomes optimum from those viewpoints. The program documentation is being made available at

this time so engineers can use it for accurate load determination as they seek to conserve energy through improved thermal design of buildings. The author would appreciate receiving reader's comments with respect to the accuracy of this text.

It should be mentioned that some of the subroutine algorithms listed in this publication have already been published in the well known ASHRAE booklet entitled "Procedure for Determining Heating and Cooling Loads for Computerized Energy Calculations". These subroutines were compiled by the author who served as the chairman of the Subcommittee on Heating and Cooling Load Calculations of the ASHRAE Task Group on Energy Requirements for Heating and Cooling of Buildings. The ASHRAE publication, however, contains several critical errors, which have been corrected for use in this volume.

The author is greatly indebted to Dr. J. E. Hill and Mr. J. P. Barnett for their thorough editing of the text, to Mrs. Sharon D. Crampton for her skill and patience in typing the manuscript and to Mr. F. J. Powell for his encouragement to produce the document.

Table of Contents

	Page
1. Introduction	1
2. Fundamentals of Heating and Cooling Load Calculation	3
2.1 A Rigorous Method of Calculating Heating and Cooling Loads	5
2.2 Approximate Methods of Calculating Heating and Cooling Loads	9
3. Unique Features of NBS Load Calculation Computer Program	15
4. General Description of NBSLD Subroutines	22
5. NBSLD Logic Diagram	31
6. References	33
7. Appendix A - ASHRAE Task Group Subroutine Algorithms	
CLIMAT - Weather data processing	1a
SUN - Basic solar position data	6a
CCF - Cloud cover factor	15a
SOLAD - Solar radiation intensity	18a
TAR - Glass transmission and absorption	22a
SHG - Solar heat gain through a window	29a
SHADOW - Sunlit area calculations	31a
FIJ - Radiation heat transfer exchange factors	48a
FI - Interior surface heat transfer coefficients	64a
FO - Outside surface heat transfer coefficients	65a
ACR - Air cavity heat transfer coefficients	68a
XYZ - Conduction transfer functions	71a
HEATW - Heat conduction through exposed surfaces	79a
SCHEDELE - Internal heat generation	86a
Fundamentals of Room Temperature and Cooling (Heating)	
Load Calculations	89a
RMTMP - Exact room load calculation	94a
ATTIC - Exact attic temperature calculation	108a
IHG - Instantaneous heat gain concept	109a
HLC - Heating/cooling load calculation by the transfer function method	115a
RMRT - Transfer functions for the room temperature calculations	122a
HEXT - Heat extraction rate calculation	128a
INFIL - Building air exchange calculation	129a

Page

Miscellaneous routines	
DST - Daylight saving time indicator	144a
WKDAY - Day of week identifier	145a
HOLIDAY - U. S. holiday identifier	149a
PSY - Psychrometric calculations	150a
8. Appendix B - Weighting Factor Method of Calculating Heating and Cooling Loads and Space Temperature	
9. Appendix C - NBSLD Data Forms	
10. Appendix D - Fortran Listing of NBSLD	
11. ASHRAE Psychrometric Chart	

National Bureau of Standards Heating and Cooling
Load Determination Program

T. Kusuda
Thermal Engineering Section
Building Environment Division
Center for Building Technology
Institute for Applied Technology

A comprehensive computer program called NBSLD, the National Bureau of Standards Load Determination program, has been developed at NBS to reflect the time change of the many building parameters which are pertinent to accurate estimation of energy usage for heating and cooling. Current status of heating and cooling load techniques is reviewed. Of general interest are unique features of NBSLD which are not available in existing computer programs. A summary of various subroutines of NBSLD is given along with the detailed procedures for them. These subroutines constitute the recommended subroutine algorithms of the ASHRAE Task Group on Energy Requirements. Complete Fortran listing of NBSLD and data preparation forms are given for those who wish to use the program. The NBSLD computation is on the basis of the detailed solution of simultaneous heat balance equations at all the interior surfaces of a room or space. Transient heat conduction through exterior walls and the interior structures is handled by using conduction transfer functions. The use of heat balance equations, although time consuming in calculation, can avoid the vagueness and uncertainties inherent in the more popularly used weighting

factor approach. In addition, it is more accurate for a specific build-
design.

Key words: ASHRAE Task Group on Energy Requirements; conduc-
tion transfer functions; heating and cooling load; National Bureau of
Standards Heating and Cooling Load Computer Program.

1. Introduction

Numerous studies in recent years on the matter of energy shortage lead one to believe that the U. S. demand for energy will very shortly outstrip her power generating capacity and fossil fuel supply. According to a recent report of the Stanford Research Institute^{1/}, space heating and cooling for residential and commercial buildings amounts to approximately 20% of the total energy consumed in the United States, which was 60 trillion Btu per year in 1968. Moreover, recent and frequent blackouts and brownouts in the east coast region of the United States are good indications that the electric power demand for summer air conditioning exceeds for certain times, the capability of supply and distribution by the power companies.

It is in this context that new and accurate methodology for energy calculations is most crucial for the design and analysis of the performance of space heating and cooling systems. This is especially true in view of the fact that the current load calculation procedures could lead to the over-design of heating and cooling equipment and imprudent use of energy.

It is generally accepted that buildings can be designed to be energy effective if their thermal insulation is increased; window size, air leakage, and lighting levels decreased; shading devices properly installed; heating and cooling systems adequately designed, installed, and maintained; and their heat storage capability most fully utilized. These energy saving features, however, must be considered with reference to numerous constraints, such as added costs for material, construction and maintenance,

conformance to local building codes, occupancy life styles, aesthetics, construction practices, and availability of equipment.

In spite of these constraints, there is sufficient engineering information and technical basis that exist today to warrant extensive studies on various design alternatives for heating and cooling the building to minimize the wasteful use of energy. Design and operation of heating and cooling systems based upon conventional steady-state calculations, for example, usually result in oversizing of equipment and overheating or cooling of the space to be controlled. An over-design system usually operates at lower efficiency and needs more material (consequently more energy) to produce it, thus creating a vicious cycle.

One effective way to design the heating and cooling systems which is optimum from the standpoint of energy consumption, peak power demand and many practical constraints mentioned above, is to study the building thermal performance by using accurate simulations. Because of the use of computer simulations make it possible to evaluate the sensitivity of various design alternatives on the net energy usage, they can be a very effective tool in the design process. In order for such design studies to be conducted on the computer however, the computer program to be used should be very comprehensive and should indicate the proper response to the change of the many parameters which are pertinent to energy usage. The intent of this document is to present a more detailed calculation methodology than is generally used to make it possible for engineers to reduce the area of approximation, where this is considered desirable, by a rigorous computer simulation of building systems, which consider and take into account most of the variables that affect the building and

system operation.

Refined and sophisticated calculation procedures unfortunately are both time consuming and expensive. Without the use of advanced computer methods, they are literally impossible. The development of such calculation procedures can only be justified on the basis that the more accurate calculation will result in overall savings in energy usage and owning and operating costs and consequently in total life cycle cost due to better design of the building systems, more precise sizing of the equipment, and more carefully controlled operation of the heating and cooling system. There are many indications that such a justification is well warranted.

2. Fundamentals of Heating and Cooling Load Calculation

Calculation of the energy requirements of the heating and cooling system of a building involves three major steps which may be carried out simply to achieve approximate results, or with increasing degrees of complexity and sophistication as more accurate and more refined determination of system performance is required. First, is the calculation of heat loss or heat gain to the space which is heated or cooled. Second, is the determination of the heating and cooling load imposed on the system. Third, is the calculation of the energy input to all of the system components to satisfy that load.

The ASHRAE Handbook of Fundamentals^{2/} contains the basic information whereby the heating and cooling load of a building may be calculated. Customarily such load calculations are made for the so-called "design conditions" for sizing the equipment and developing the design of the heating and cooling system. However, the "design conditions" normally exist only

for a very few hours, if at all, during a heating or cooling season. Consequently, the actual day-by-day and hour-by-hour heating and cooling load for energy consumption is quite different from that for the design condition. Thus the heating and cooling load calculation for the purpose of estimating "energy requirements" must reflect the actual weather conditions rather than a design condition.

Various methods have been developed in the past such as the "degree day" method or "bin" method for proportioning the design load, to obtain approximate monthly, daily, or hourly loads and consequently provide a basis for determining energy requirements. Insofar as such methods are based on valid approximation procedures and checked against actual operating experience, they provide the base for simplified determination of energy requirements acceptable for the needs of most engineers.

In this section a review of the rigorous methods of calculating heating and cooling loads by means of solving heat balance equations at all the interior surfaces of a room or space is given. Also described are approximate methods in which weighting factors are developed after the heat balance equations have been solved for one set of conditions. The NBSLD calculations follow the rigorous method while the ASHRAE Task Group procedures use the weighting factor method.

In NBSLD the transient heat conduction through exterior walls of the room or space is handled by using conduction transfer functions. The use of heat balance equations at the interior surfaces, although more time consuming, can avoid the vagueness and uncertainties inherent in the weighting factor approach. In addition, it is more accurate for a specific building design.

2.1 A Rigorous Method of Calculating Heating and Cooling Loads

A cooling (heating) load is of course the amount of energy that is transferred to (from) the room and simultaneously removed (added) by the conditioning equipment at any given time of interest. To calculate this quantity directly requires a rather laborious solution of energy balance equations involving the room air, surrounding walls, infiltrating and ventilation air, and internal energy sources. The principle of calculation can be demonstrated by considering a fictitious space that is enclosed by 4 walls, a ceiling and floor, and having infiltration air as well as normal internal energy sources. The six equations that govern energy exchange at each inside surface at a given time t are:

$$q_{i,t} = h_{ci} (t_{a,t} - t_{i,t}) + \sum_{\substack{j=1 \\ j \neq i}}^m g_{ij} (t_{j,t} - t_{i,t}) + RS_{i,t} + RL_{i,t} + RE_{i,t}$$

for $i = 1, 2, 3, 4, 5, 6$

where

m = number of surfaces in the space

$q_{i,t}$ = rate of heat conducted into surface i at the inside surface at time t

h_{ci} = convective heat transfer coefficient at interior surface i

g_{ij} = radiation heat transfer factor between interior surface i and interior surface j

$t_{a,t}$ = inside air temperature at time t

$t_{i,t}$ = average temperature of interior surface i at time t

$t_{j,t}$ = average temperature of interior surface j at time t

$RS_{i,t}$ = rate of solar energy coming through the windows and
absorbed by surface i at time t

$RL_{i,t}$ = rate of heat radiated from the lights and absorbed
by surface i at time t

$RE_{i,t}$ = rate of heat radiated from equipment and occupants
and absorbed by surface i at time t

The equations governing conduction within the six slabs cannot be solved independent of the above equations since the energy exchanges occurring within the room affect the inside surface conditions which in turn affect the internal conduction. Consequently, one is faced with solving six equations simultaneously with the governing equations of conduction within six slabs in order to calculate the cooling load at time of interest $(Q_{L,t})$ which would be given by:

$$Q_{L,t} = \sum_{i=1}^6 h_{ci} (t_{i,t} - t_{a,t}) + \rho C G_{L,t} (t_{o,t} - t_{a,t}) + \rho C G_{v,t} (t_{v,t} - t_{a,t}) + RS_{a,t} + RL_{a,t} + RE_{a,t}$$

where

ρ = air density

C = air specific heat

$G_{L,t}$ = mass flow rate of outdoor air infiltrating into the
space at time t

$t_{o,t}$ = outdoor air temperature at time t

$G_{v,t}$ = mass rate of flow of ventilation air at time t

$t_{v,t}$ = ventilation air temperature at time t

$RS_{a,t}$ = rate of solar heat coming through the windows and
conveyed into the room air at time t

$RL_{a,t}$ = rate of heat from the lights convected into the room
air at time t

$RE_{a,t}$ = rate of heat from equipment and occupants and con-
veyed into the room air at time t

A rigorous approach such as this for calculating cooling load would be practically impossible if it were not for the speed at which such computations can be done by modern digital computers. Even so, there are very few computer programs in use today where instantaneous cooling loads are calculated in this exact manner. The concept, however, has been presented previously by Stephenson and Mitalas^{3/}, and by Buchberg^{4/}.

Not to be ignored is the effect of air temperature deviation from some prescribed set point. This set point is the temperature for which the cooling (heating) load calculation is made and for which the design capacity of the cooling (heating) apparatus is usually selected. A recent study by Mitalas and Stephenson^{5/} shows that actual heat extracted from the space is considerably smaller than the cooling load calculated on the basis of a constant space temperature. This is due to the thermal storage effect of the building structure and internal furnishings. Figure 1 shows a result from that study and as can be seen, the calculated cooling load peaks at values considerably higher than the measured heat extraction rate.

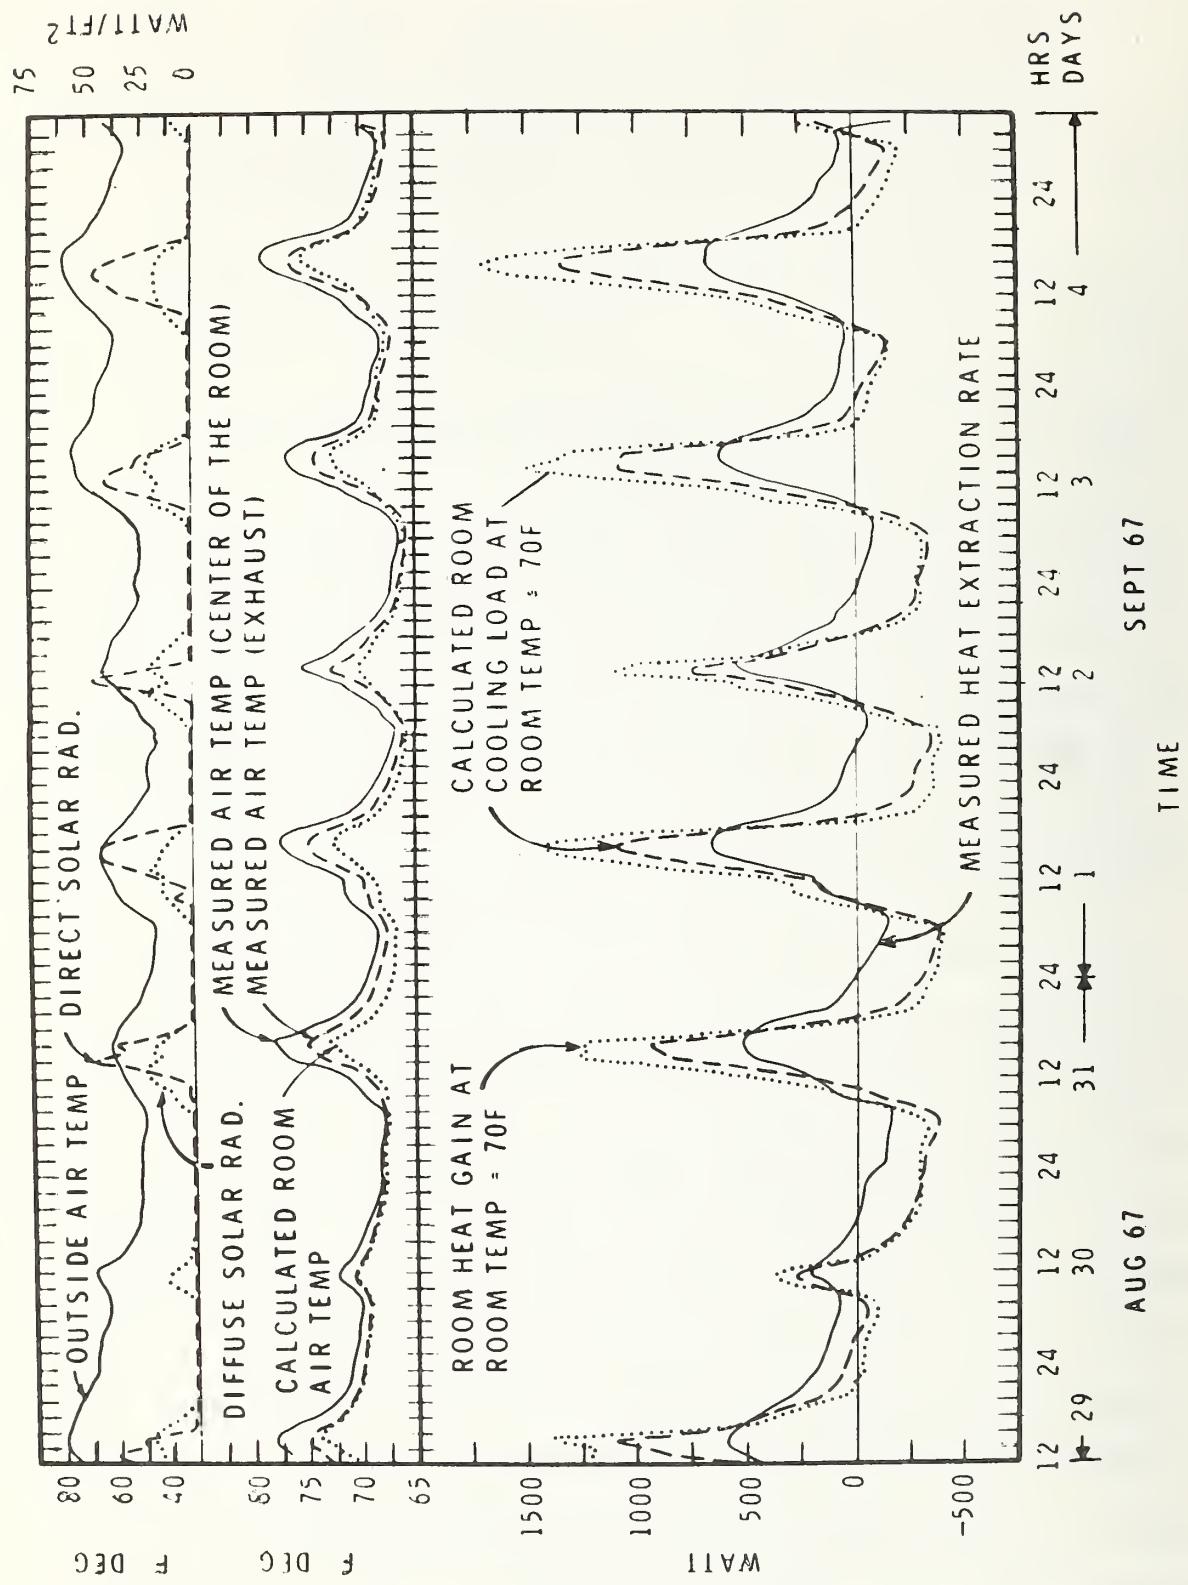


Figure 1 Measured and Calculated Thermal Performance in an Ottawa Office Building (Reference 4)

2.2 Approximate Methods of Calculating Heating and Cooling Loads

Since the exact solution technique is extremely time consuming especially for the calculations done for a period of 8760 hours (one year), the ASHRAE Task Group on Energy Requirements recommends a transfer function concept to simplify the calculation procedure. The transfer function concept was first introduced by Mitalas and Stephenson^{3/} using what they called room thermal response factors. Their procedure is as follows: the room surface temperatures and cooling or heating load are first calculated by a rigorous method as described in the previous section for several typical constructions representing offices, schools and dwellings of heavy, medium and lightweight construction. In these calculations, the components such as solar heat gain, conduction heat gain, or the heat gain from the lighting, equipment, and occupants are simulated by pulses of unit strength. The transfer functions are then calculated as numerical constants which represent the cooling load (or heating) corresponding to the input excitation pulses. Once these transfer functions are determined for a number of typical constructions, they are assumed to be independent of input pulses and the determination of cooling loads (or heating) is possible without resorting to the rigorous calculations. The calculation required is, instead, simple multiplication of the transfer functions by a time-series representation of heat gain and the subsequent summation of these products, which can be carried out on a small computer with little effort.

Another way to shorten the computational effort for energy calculations is to determine regression parameters by fitting a simple algebraic equation to the results of rigorous calculations, which had been obtained not for an entire year but for a limited period in the year, such as for the months of January and/or July. Once this regression equation is determined with sufficient accuracy, an energy estimate is made by superimposing the weather conditions of the other months onto the relationships just determined.

An example of this approach is illustrated in Figure 2, which depicts the daily total heating and cooling load plotted against the daily average outdoor air temperature. This plot is a result of a lengthy rigorous calculation performed on a typical apartment in Jersey City using the annual hourly weather conditions that occurred in 1949. The straight lines superimposed on the figures were the least square regression lines that best fit the calculated loads for January and July. It was clear from this figure that the exact calculations for other months would not be necessary, at least for the purpose of determining daily loads, since the regression relationship determined from the January and July calculations were sufficiently accurate that they could be extrapolated to the remainder of the year.

Depending upon the type of building and its heating and cooling system, a good correlation such as illustrated in Figure 2 may not be possible. Figure 3 shows, for example, a similar plot for a test office building whose heating and cooling load were measured in a research project conducted by Ohio State University. The scatter appears considerably larger than the calculated relationship obtained in the Jersey City study.

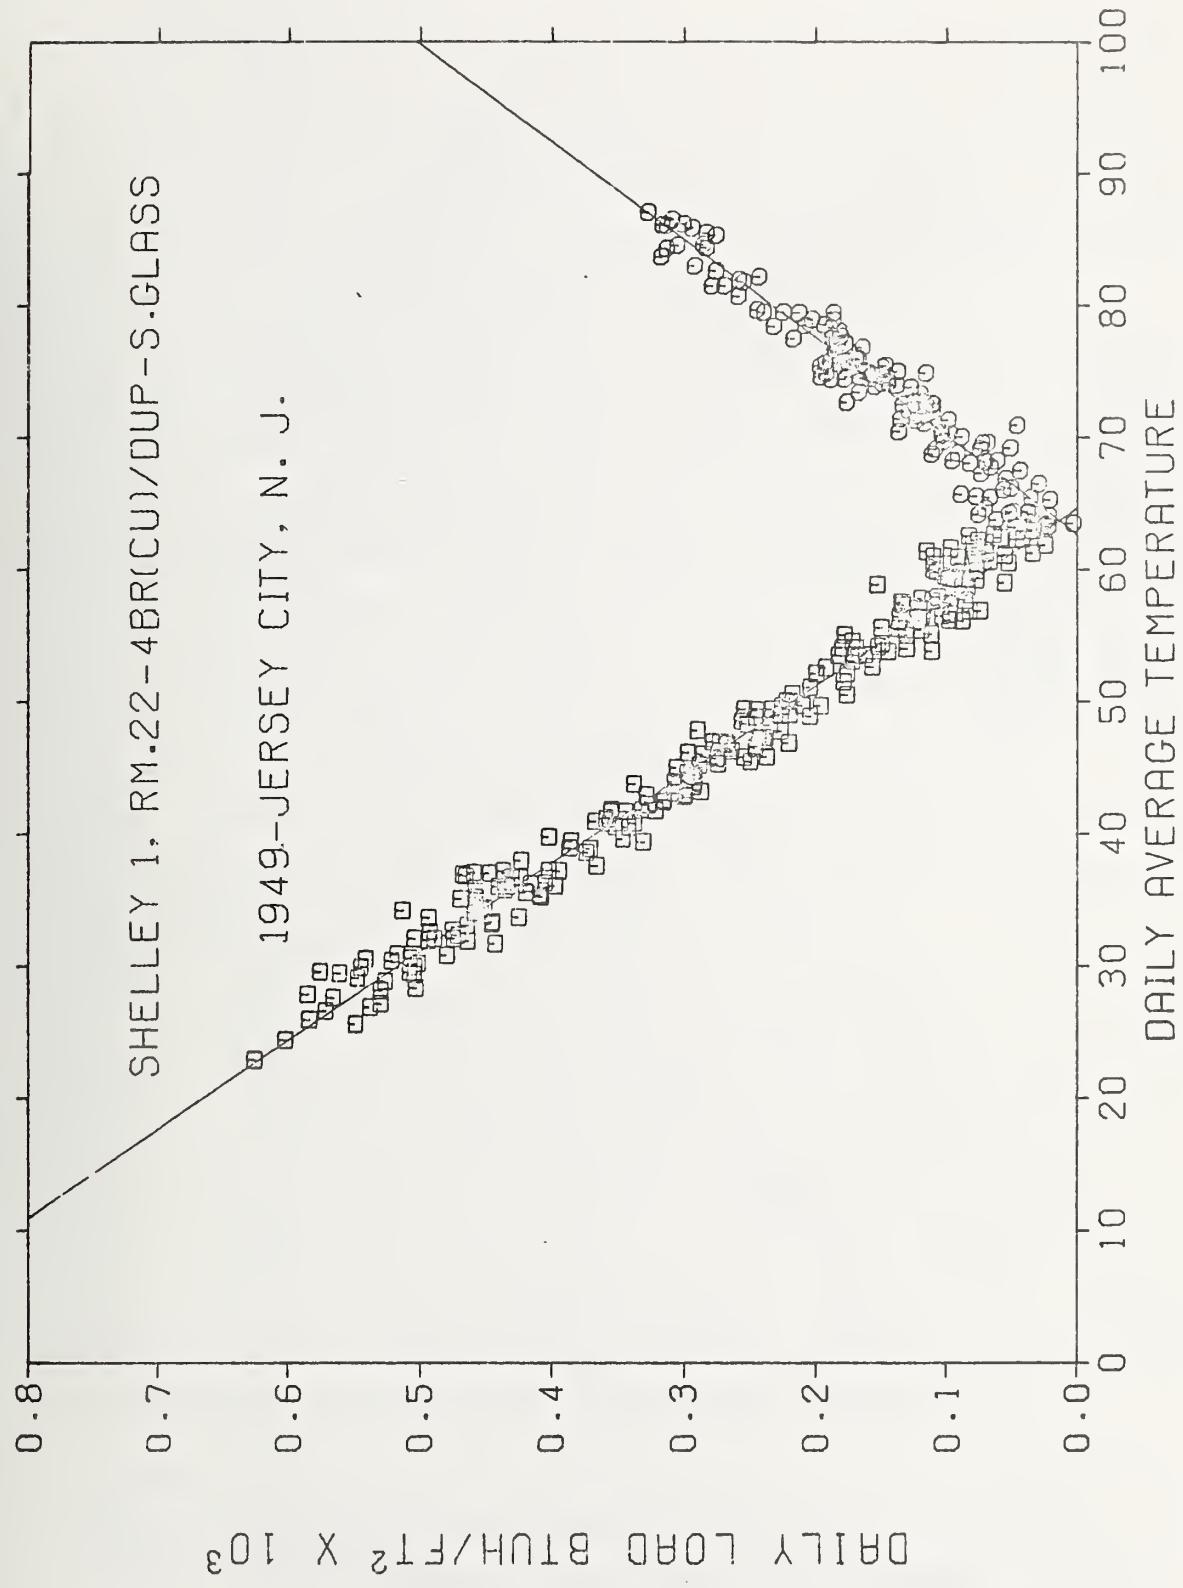


Figure 2 Calculated Daily Total Thermal Loads of a Jersey City Apartment Plotted Against Daily Average Temperatures

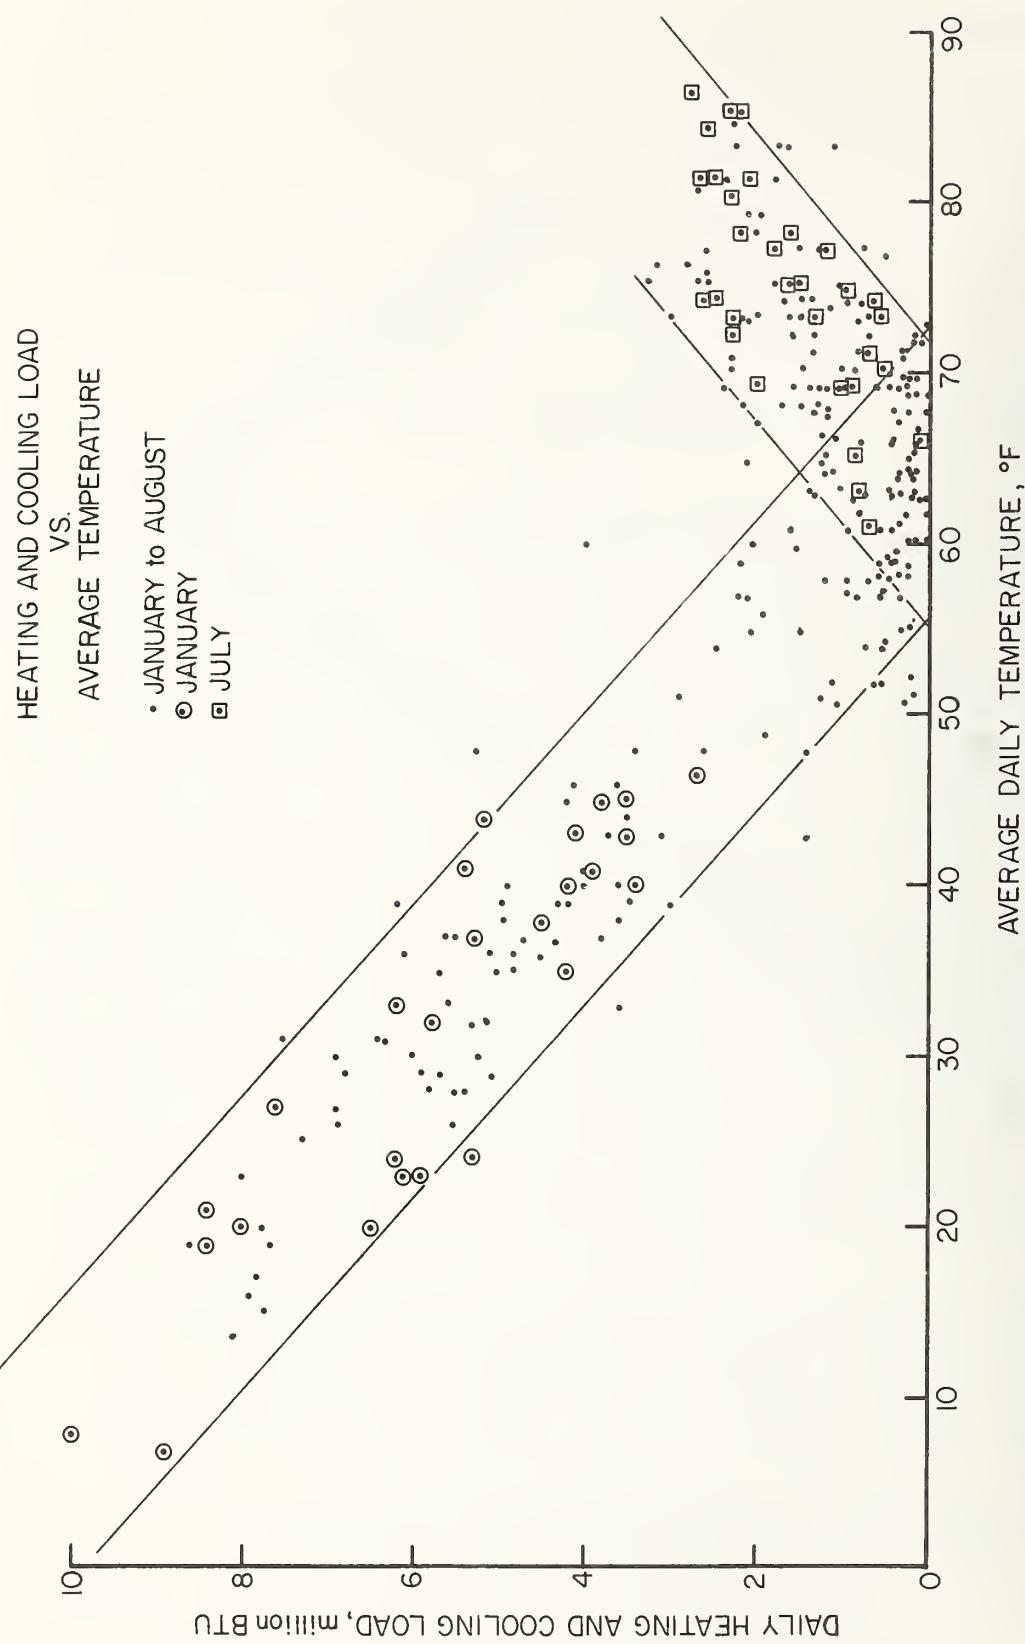


Figure 3 Measured Daily Total Thermal Loads of a Columbus Law Building Plotted Against Daily Average Temperatures

It is obvious that the thermal performance of commercial buildings are affected in a large way by the manner in which internal heat is generated in addition to the normal dependence on outdoor temperature. The inclusion of one or more additional statistical parameters dealing with these internal heat gains should improve the correlation.

Recently one additional method of predicting the heating and/or cooling load or the indoor temperature as a result of the excitation parameters such as outdoor temperature, solar radiation and internal heat generation has been demonstrated by Kusuda and Tsuchiya^{6/} and further expanded by Kimura and Ishino^{7/}. The method uses the concept of equivalent thermal mass of a building and attempts to fit the observed input and output data into a linear differential equation. The initial results are promising. Figure 4 shows a comparison of predicted and measured room temperature and heat extraction rate for a simple one room test building studied by Kimura and Ishino.

Calculated room temperature in Figure 4 is obtained by the transfer functions derived from the measured data of August 19, while the heat extraction was calculated by the transfer functions derived from the measured values of August 13. The good agreement indicated in Figure 4 implies that the detailed calculation is needed only for a limited number of days to derive accurate transfer functions based upon the equivalent thermal mass of the particular building under consideration.

* Private communication with Professor C. F. Sepsey and J. Jones of the Ohio State University.

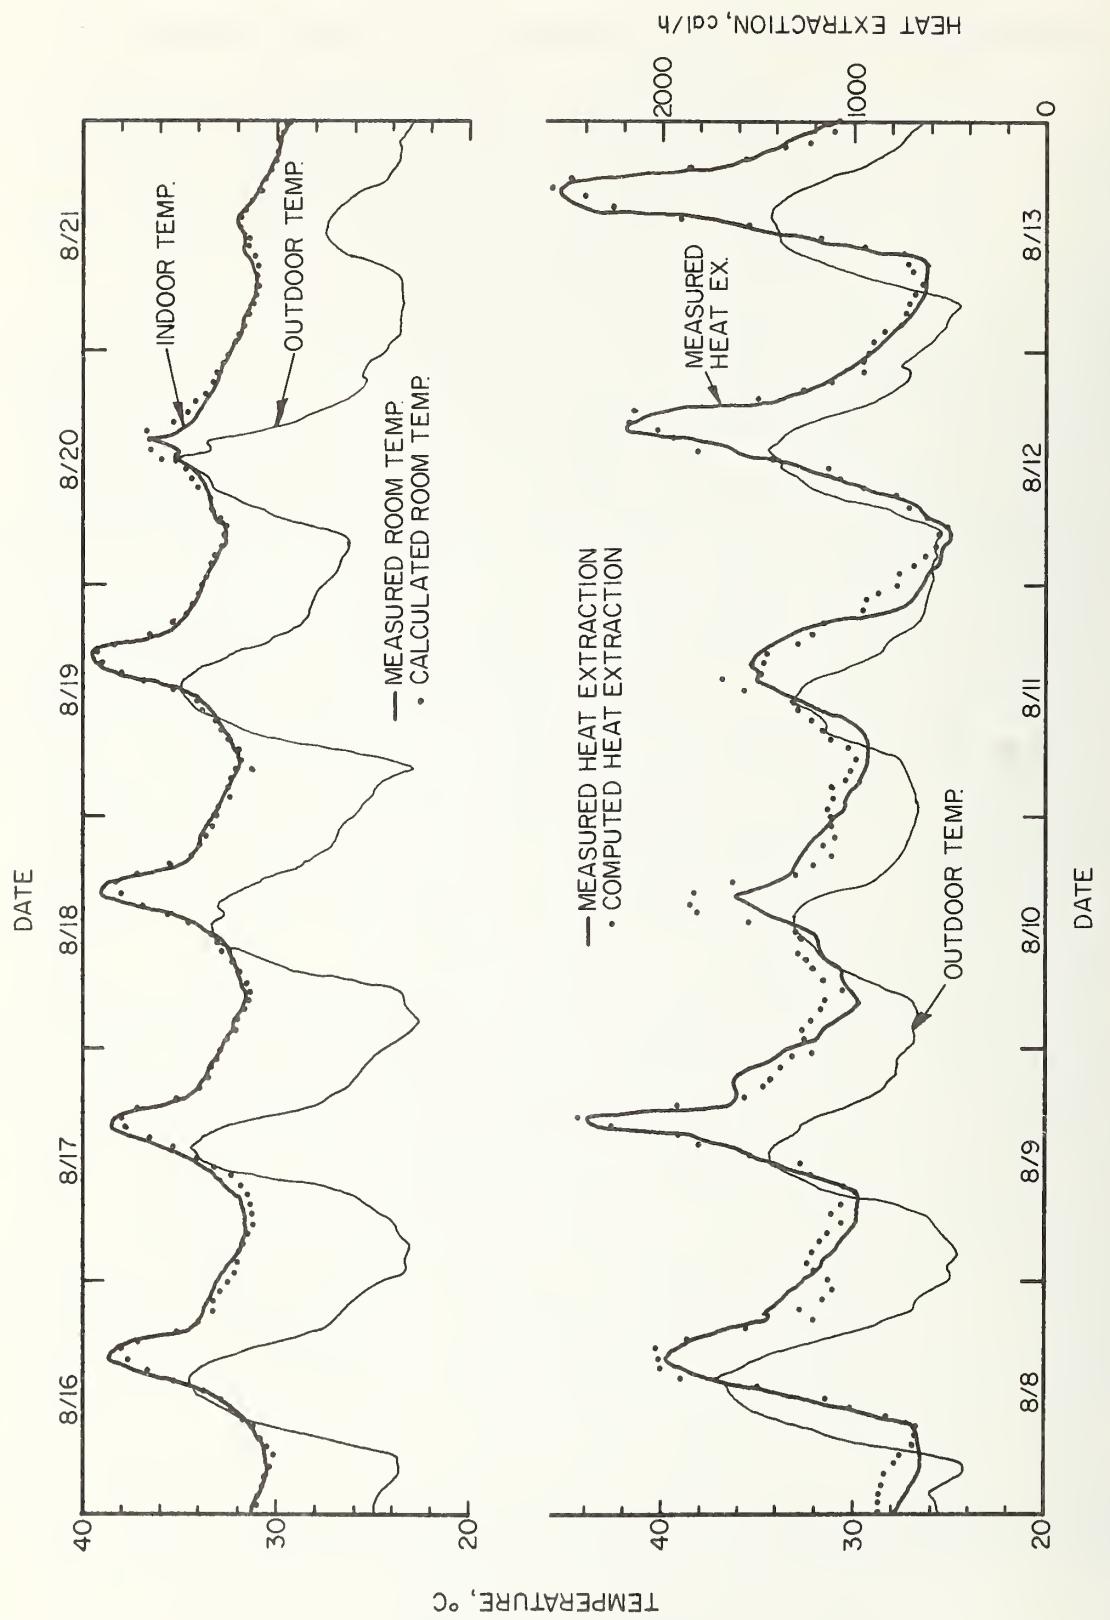


Figure 4 A Comparison of Measured and Calculated Thermal Performance of an Experimental Building (Courtesy of Professor K. Kimura)

3. Unique Features of NBS Load Calculation Computer Program

A comprehensive yet easy-to-use computer program for determining heating and cooling loads has been developed in the Thermal Engineering Section of the Center for Building Technology at the National Bureau of Standards. This computer program is based upon extensive information accumulated over the past decades in various phases of building heat transfer problems, and is intended to be used for the design of equipment and air conditioning systems as well as for estimates of building energy requirements.

The major reason why NBS developed this comprehensive program is that despite the existence of numerous load calculation programs currently available, most of them are not suitable for the analysis of building designs where non-conventional or innovative ideas on structures, heating and cooling systems and controls are employed. Some of the unique aspects of building and system design and operation that can be handled by or studied by using NBSLD are:

1. Inside-out construction of exterior walls where the thermal insulation is placed on the outside of the building shell as opposed to conventional walls having insulation on the inside. (These two walls could have the same U-value and yet their thermal response would be quite different.)
2. Effect of interior partition walls or floor-ceiling sandwich structures on the heat storage characteristics of the room,

3. Off-peak heating or cooling of buildings to shave the peak heating or cooling demand,
4. Evaluation of intentionally undersized heating and cooling equipment by calculating the room temperature and humidity deviations from a design set point. (The results would indicate whether or not the indoor conditions would remain within acceptable limits.)
5. Evaluation of indoor thermal environment of various zones during the intermediate season, such as spring and autumn, when the heating or cooling requirements for these zones may not be in phase with that of the building as a whole. (This would apply to a case where a two-pipe system would be installed for example. The central system for the entire building might be switched to heating in late autumn and yet some zones, particularly those facing south may still require cooling. NBSLD can be used to determine the indoor thermal conditions of unheated or uncooled rooms.)
6. Use of solar energy for heating and cooling buildings as it relates to the thermal storage characteristics of the building,
7. Use of attic ventilation to reduce the cooling load since NBSLD can accurately predict attic temperatures,
8. Accurate determination of the need for heating and air conditioning in basement rooms,

9. Design of heating and cooling systems and equipment on the basis of intermittent operation, such as the shutdown of air conditioning facilities during the nighttime or weekends,
10. Effective use of natural air conditioning such as ventilation, shading, increased ceiling insulation and the subsequent determination of the requirements for mechanical cooling,
11. Effective use of planned ventilation to minimize a building heating load during the winter season,
12. Accurate evaluation of indoor comfort conditions based upon air temperature, humidity and mean-radiant temperature,
13. Determination of the condition whereby moisture condensation takes place along interior surfaces of a building.

Figure 5 depicts an overall calculation sequence to attain the hour by hour heating and cooling load of buildings. Shown in the double lined boxes are input data to be supplied whereas those in single lined boxes indicate calculations to be performed. The cycle indicators show the iteration cycles for the number of buildings, the number of rooms in a given building and the number of days for which the calculations are performed. More specific identification of the types of input data needed are listed in Figures 6, 7 and 8. The exact way the input data is put into the program is specified in Appendix C.

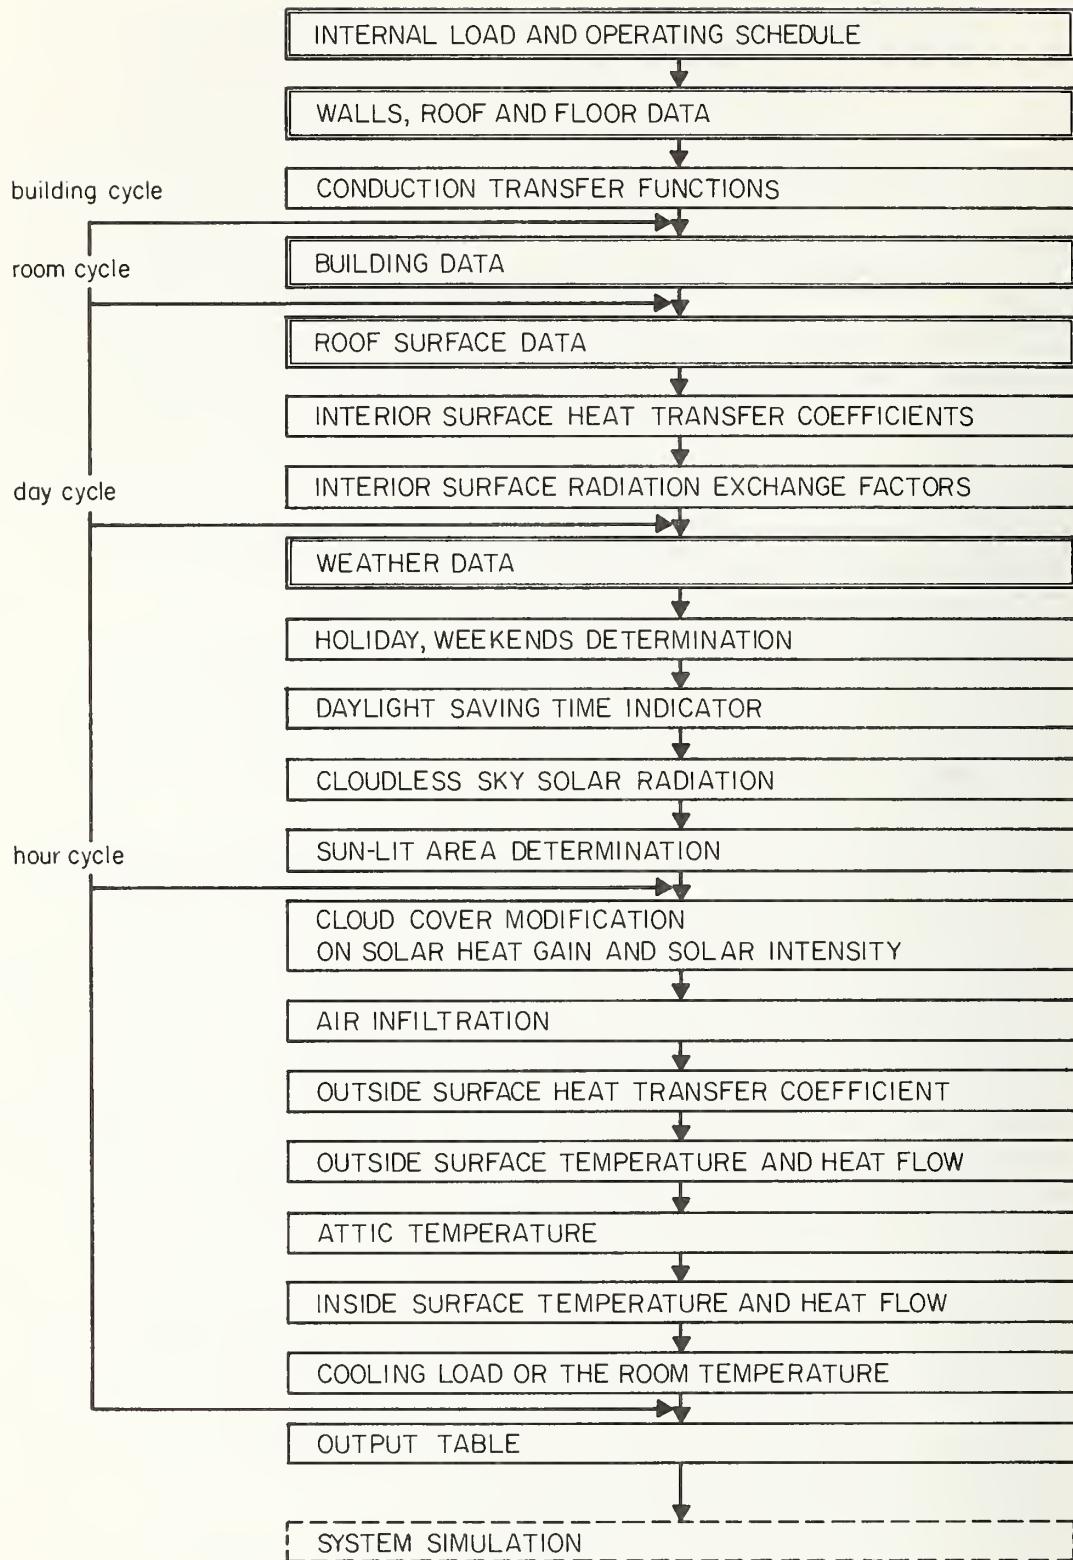


Figure 5 Calculation Sequence of NBS LD

INPUT - OPERATING DATA

- ELECTRIC POWER TO LIGHTS, WATTS PER SQUARE FOOT OF FLOOR (QLITY)
- HOUR BY HOUR LIGHTING SCHEDULE (QLITX)
- ELECTRIC POWER TO EQUIPMENT, WATTS PER SQUARE FOOT OF FLOOR (QEOPX)
- HOUR BY HOUR EQUIPMENT SCHEDULE (QEUX)
- SUPPLY AIR RATE (CFMS)
- AIR LEAKAGE RATE (CFML)
- SUPPLY AIR TEMPERATURE (TS)

Figure 6

INPUT - BUILDING DATA

- ROOM NUMBER (ROOMNO)
- CEILING HEIGHT (H)
- ROOM LENGTH (L)
- ROOM WIDTH (W)
- NUMBER OF OCCUPANTS (QCU)
- OCCUPANT SCHEDULE (QOCUP)
- WINTER WINDOW OVERALL HEAT TRANSFER COEFFICIENT (UGLAS)
- GROUND FLOOR HEAT TRANSFER COEFFICIENT (UG)
- SUMMER INFILTRATION, AIR CHANGES PER HOUR (ARCHGS)
- WINTER INFILTRATION, AIR CHANGES PER HOUR (ARCHGW)
- TYPE OF HEAT TRANSFER EXPOSURES (ITYPE)
-ROOFS-WALLS-WINDOWS-DOORS-FLOORS
- TYPE OF RESPONSE FACTORS TO BE USED (IRF)
-HEAVY/LIGHT: ROOF, EXTERIOR WALLS, CEILING/FLOOR
PARTITION
- U VALUE OF THE EXPOSURE (U) (ONLY WHEN RESPONSE FACTOR
IS NOT CALCULATED)
- AREA OF THE EXPOSURE (A)
- ORIENTATION OF THE EXPOSURE (AZW) -N,E,S,W (ONLY FOR
EXTERNALLY EXPOSED SURFACES)
- WINDOW SHADING COEFFICIENT (SHADE)
- SOLAR HEAT ABSORPTION COEFFICIENT FOR THE EXTERIOR SURFACE
(ABSP)
- TIME INCREMENT OF TEMPERATURE DATA USED
- PROPERTIES OF BUILDING MATERIALS - THICKNESS - THERMAL
CONDUCTIVITY - DENSITY - SPECIFIC HEAT
- NUMBER OF SURFACES IN EACH WALL (NS,NW,NN,NE)

Figure 7

INPUT - WEATHER DATA

- LATITUDE (LAT)
- LONGITUDE (LONG)
- TIME ZONE NUMBER (TZN)
- MONTH (MONTH)
- DAY (DAY)
- ELAPSED DAYS SINCE JANUARY 1 (ELAPS)

- MAXIMUM TEMPERATURE OF THE DESIGN DAY (DBMAX)
- DAILY TEMPERATURE RANGE OF THE DESIGN DAY (RANGE)
- DESIGN INDOOR TEMPERATURE CONDITION (DBIN)
- DESIGN OUTDOOR WET-BULB TEMPERATURE (WBMAX)
- DESIGN INDOOR WET-BULB TEMPERATURE (WBID)
- DESIGN WINTER OUTDOOR TEMPERATURE (DBMWT)
- DESIGN SUMMER GROUND TEMPERATURE (TG)
- DESIGN WINTER GROUND TEMPERATURE (TGW)

Figure 8

4. General Description of NBSLD Subroutines

In order to perform the chain of calculations depicted in Figure 5, a number of subroutines were developed at the National Bureau of Standards, the algorithms of which have already been published through the ASHRAE Task Group booklet entitled "Procedure for Determining Heating and Cooling Loads for the Computerized Energy Calculations". This booklet, however, contained several errors which have been corrected and is attached to this report as Appendix A. NBSLD incorporates most of the revised ASHRAE algorithms as they are written; however, some of them have been combined or split to fit the overall computational scheme in NBSLD. Listed below is a brief description of the NBSLD subroutines with their specific reference to the ASHRAE algorithms in parentheses.

1. ABCD, ABCDP, ABCD2, ABCDP2, DERVT, GPF, MULT, RESF, RESFX, RESPTK: These routines are parts of the conduction transfer functions calculation package and are needed for the accurate evaluation of thermal time lag, damping, heat storage in exterior facing surfaces as well as the internal furnishings. (XYZ)
2. AIRCON: This routine is used to determine instantaneous values of the physiological indices for the space being studied such as ASHRAE's New Effective Temperature, Predicted Mean Vote (Fanger), Heat Stress Index, KSU Index, Resultant Temperature, Operative Temperature, and Index of Thermal Stress (Givoni). - not included in the text

3. ATTIC: Attic space temperature and heat conduction through the ceiling into the room below are calculated by this routine for the vented or non-vented attics. (ATTIC)
4. CCM: This routine modifies the solar radiation computed for a cloudless sky by instantaneous cloud cover data. (CCF)
5. DPF: This routine calculates dew point temperature of atmospheric air when the partial vapor pressure is known. (PSY)
6. DST: This routine determines whether a given data is in a daylight saving time zone. The information is needed for the proper assignment of the energy usage schedule. (DST)
7. FCTR: This routine determines radiation exchange factors between any two surfaces which are part of a given room. For the room of six interior surfaces, for example, thirty radiation exchange factors are calculated. These factors are used in turn to determine the rate of heat exchange by radiation between all the interior surfaces. (FIJ)
8. F: This routine calculates radiation heat exchange factors (form factors) between two adjacent rectangular surfaces which are normal to each other, such as that between the floor and wall. (FIJ)

9. FO: This routine calculates the surface heat transfer coefficients for externally exposed surfaces from weather data. (FO)
10. GLASS: This routine calculates solar heat gain through glass when the shading coefficient, orientation, and type of glass are given. (SHG)
11. HOLDAY: This routine identifies the national holidays in the United States so that the proper holiday schedule can be used for the energy calculation. (HOLIDAY)
12. OUTSID: This routine calculates the outside surface temperature and heat gain into the wall or roof by taking into account solar heating, back radiation to the sky, convective heat loss to the ambient air and transient heat conduction within the wall or roof. (HEATW)
13. PSY1: This is a psychrometric routine that determines the thermodynamic properties of moist air when the dry-bulb temperature, wet-bulb temperature and barometric pressures are given. (PSY)
14. PSY2: This routine is similar to PSY1 except that the dew point temperature is required instead of the wet-bulb temperature. (PSY)
15. PVSF: This routine determines the saturated vapor pressure of atmospheric air as a function of temperature. (PSY)

16. RMTMP: This is the single most important subroutine of NBSLD since it determines the room temperature by solving matrix equations expressing a balance of heat gains, heat storage at the room surfaces, and cooling capacity of an air conditioning unit. However, the room temperature can be prescribed, in which case the routine will calculate the heating/cooling requirements to satisfy that prescribed temperature. (RMTMP)
17. ROOM: This routine reads in all the data required for the room heat transfer calculation such as dimensions, surface orientations, shading coefficients, surface solar absorptivity, etc.
18. SHG: This is the routine that calculates solar heat gain through glass. (SHG)
19. SOLVP: This routine solves the simultaneous linear algebraic equations that appear in RMTMP. (RMTMP)
20. SUN: Basic sun data such as solar angles, cloud cover, direct and diffuse radiation needed for solar heat gain and solar heating of the building exterior surfaces are calculated in this routine. (SUN, SOLAD)
21. TAR: This routine calculates transmission and absorption characteristics of glass. (TAR)
22. WBF: This is another psychrometric routine that calculates the wet-bulb temperature when the enthalpy of moist air and the barometric pressure are specified. (PSY)

23. WKDAY: This subroutine determines the day of week when the date and year are given. The information is needed for the proper selection of energy usage schedules which are dependent upon whether the day is a weekday or not.

(WKDAY)

24. WD, WDX, DECODE, ERROR, WEATHE: The weather data tape 1440 supplied by the National Climatic Center, Asheville, N. C. is prepared in a format which cannot be readily applicable in most of the Fortran programs. These routines are therefore necessary to read the 1440 tapes and decode them into meaningful weather parameters, which in turn can be used by UNIVAC 1108 Fortran of the National Bureau of Standards. If there are some data which are unreasonable, the data will be replaced by the arithmetic average of two adjacent data by the ERROR routine. (CLIMAT)

All the subroutines in the program may be used to form a separate main program for a specific job. Following are sample usages of some of the subroutines.

1. Psychrometric Calculation

CALL PSY1 (DB, WB, PB, DP, PV, W, H, V, RH)

where inputs are DB = dry-bulb temperature

WB = wet-bulb temperature

PB = barometric pressure

outputs are DP = dew point temperature

PV = vapor pressure

W = humidity ratio

H = enthalpy

V = volume

RH = relative humidity

There is also a routine called PSY2 (DB, DP, PB, WB, PV, W, H, V, RH) in which the inputs are DB, DP and PB instead of DB, WB and PB. In many cases DB and RH are the inputs and the vapor pressure and dew point temperature or the wet-bulb temperature at standard barometric pressure are the outputs. A possible algorithm that could be desired, for example, might be:

PVS = PVSF (DB)

PV = PVS*RH/100

DP = DPF (PV)

Call PSY2 (DB, DP, PB, WB, PV, W, H, V, RH)

2. Solar Radiation

Recently there has been increased interest in the application of solar energy for heating of hot water. SUN and GLASS routines should be valuable for evaluating various solar collectors at different locations in the United States at different times of the year. A sample use of these routines may be shown for a solar collector having the following characteristics (Figure 9)

location: latitude = 45° , longitude = 73°

azimuth angle = 0° south

tilt angle = 30° from horizontal surface

area = 500 ft^2

date = July 21

time = 4:00 p.m.

glass cover = double sheet - clear glass

U_R = overall heat transfer coefficient between the collector surface and the ambient, $\text{Btu/hr ft}^2 {}^\circ\text{F}^*$

U_W = overall heat transfer coefficient between the collector surface and water, which is being circulated under the collector plate, $\text{Btu/hr ft}^2 {}^\circ\text{F}$

TWI = water temperature entering the collector, ${}^\circ\text{F}$

TWL = water temperature leaving the collector, ${}^\circ\text{F}$

GPM = water circulation rate in gallons per minute

* When the collector temperature is less than $150 {}^\circ\text{F}$, the typical value of U_R for a flat black collector with double glass cover may be 0.75. The value increases to as much as 1.5 when the collector temperature is in the neighborhood of $300 {}^\circ\text{F}$. A special computer program is available for estimating the value of U_R for various types of collectors.

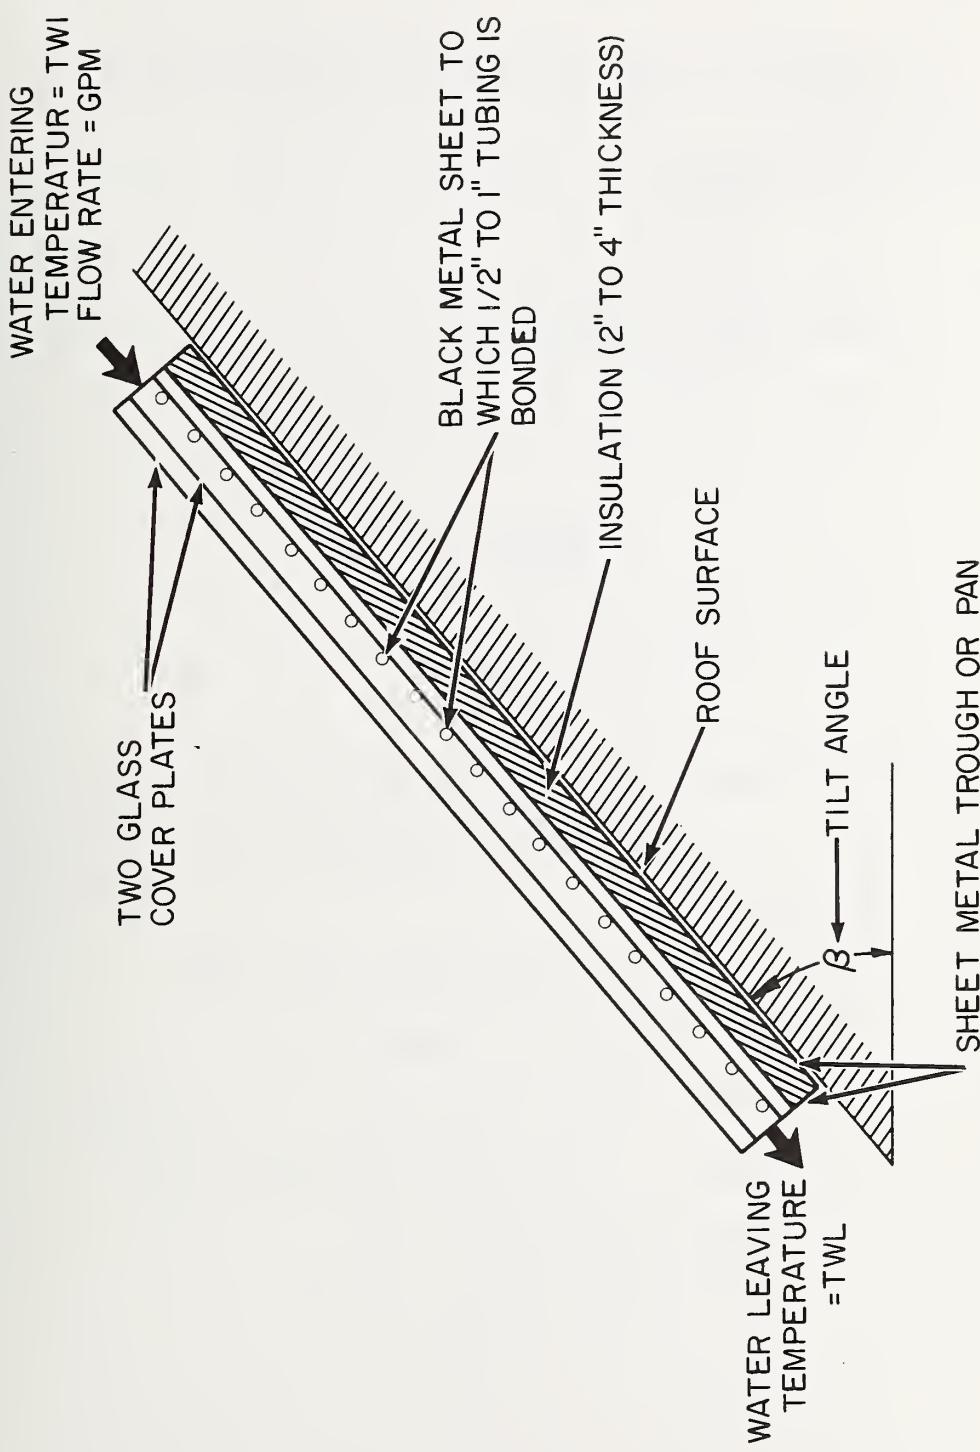


Figure 9 A Typical Flat Plate Solar Collector

It is assumed that the collector is well insulated around the edges and its bottom.

The algorithm for the use of SUN and GLASS routines would then be:

S(1) = LATITUDE = 30

S(2) = LONGITUDE = 73

S(3) = Time zone number = 5

S(4) = Elapsed days since January 1 = 202

S(5) = Time = 16

S(6) = IDST = daylight saving time index = 1

S(7) = Ground reflectivity = 0.2

S(8) = Clearness number = 1.0

S(33) = Cloud cover modifier = 1

S(9) = Azimuth angle of the collector = 0°

S(10) = Tilt angle of the collector = 30°

Call SUN

Call GLASS (SHDW, SHADE, GLASTP, GLAZE, SHG)

note: SHDW = sunlit area factor = 1

SHADE = shading coefficient = not applicable

GLASTP = 1/8" double strength glass (1)

GLAZE = double glazing (2)

SHG = solar heat gain - output

note: SUN and GLASS have S in common using the solar heat gain through the glass plate. When the edge heat loss is small, the following calculation may be used to estimate TS, collector surface and TWL, leaving water temperature from the collector:

$$TS = \frac{A * (SHG + UR * DB) + 500 * GPM * TWI * Y}{UR * A + 500 * GPM * Y}$$

where $Y = 1 - e^{-X}$

where $X = \frac{U_w * A}{500 * GPM}$

5. NBSLD Logic Diagram

Figure 10 shows the way in which the various subroutines of NBSLD fit together in the usage of the program.


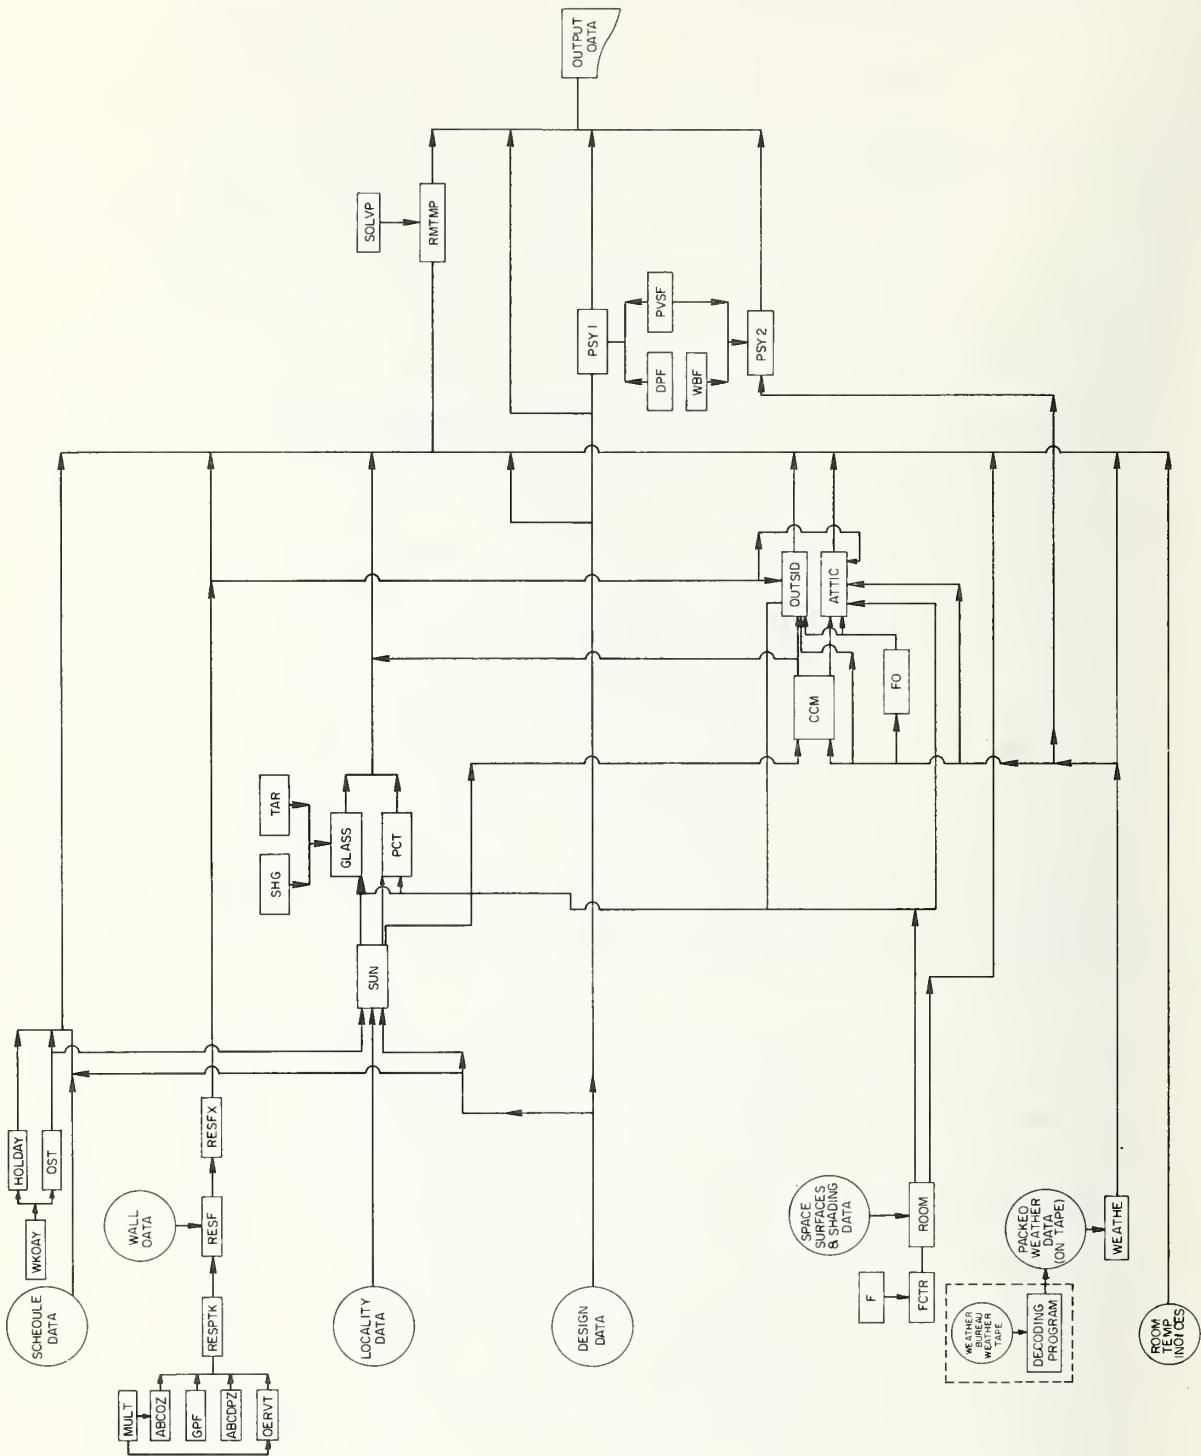


Figure 10 Interrelationship of Various Subroutines for NBSLD


6. References

1. "Pattern of Energy Consumption in the United States", Stanford Research Institute Report, pp. 6-7, January 1972.
2. "Heating Load" and "Air-Conditioning Cooling Load", ASHRAE Handbook of Fundamentals, Chapters 21 and 22, pp. 375-445, 1972.
3. Mitalas, G. P. and Stephenson, D. G., "Room Thermal Response Factors", ASHRAE Transactions, 1967, Vol. II, pp. III 2.1-2.10.
4. Buchberg, H., "Sensitivity of the Thermal Response of Buildings to Perturbations in the Climate", Building Science, Vol. 4, pp. 43-61, Pergamon Press, 1969.
5. Mitalas, G. P., "An Experimental Check on the Weighting Factor Method of Calculating Room Cooling Load", ASHRAE Transactions, 1969, pp. 222-232.
6. Kusuda, T., Tsuchiya, T. and Powell, F. J., "Prediction of Temperature by Using Equivalent Thermal Mass Response Factors", Proceedings of the 5th Symposium on Temperature, National Bureau of Standards, 1971.
7. Kimura, K. and Ishino, H., "Air Conditioning Load Calculation by the Equivalent Mass Weighting Factor Method for the Computerized Control", Proceedings of the Japanese Architectural Society, pp. 249-250, Kyushu meeting, October 1972 and Proceedings for the Second Symposium on the Use of Computers for Thermal Engineering Related to Buildings, COSTIC, 1974.



7. Appendix A

Subroutine Algorithms Prepared for the
ASHRAE Task Group on Energy Requirements



CLIMAT

A Procedure for Obtaining Climatic Weather Data

Climatic parameters needed for the hourly load calculations are:

DB: Dry-bulb temperature, F

DP or WB: Dew point or wet-bulb temperature, F

CT: Cloud type

TC: Total cloud amount

V: Wind speed, knots

DIR: Wind direction (clockwise from North), degrees

PB: Barometric Pressure, in. Hg

ID: Direct Solar Radiation, Btu per (hr) (sq ft)

$I_{d,sky}$: Sky diffuse radiation, Btu per (hr) (sq ft)

$I_{d,ground}$: Ground diffuse radiation, Btu per (hr) (sq ft)

Rain, Snowfall: Precipitation data (Optional)

Hourly observations of these weather parameters for past years are available from the National Climatic Center either on magnetic tape or in card deck form. The hourly solar radiation data has been recorded for only approximately fifty stations throughout the United States (Table A-1). These data are, moreover, limited in their durations and completeness, and scarcely useful for the comprehensive energy analysis. On the other hand, the data series 144 includes the hourly observations of all of the parameters listed above except the solar radiation for more than 300 weather stations (Table A-2) covering a period of from ten to thirty years. Since the 144 series data are very much complete, it is

recommended that hour by hour energy calculations be made with this series of data supplemented by simulated solar radiation data. A method for simulating solar radiation will be described later in this booklet.

Because of the specific coding scheme employed by the National Climatic Center for storing the hourly weather data onto the magnetic tapes, the 144 series is not directly usable by the standard Fortran programs. Different computing systems such as IBM 370, CDC 6600 and UNIVAC 1108 have their own decoding routines to read these tapes. Included in this section is a listing of a Fortran program which illustrates a decoding scheme required to make use of the weather tapes. This listing was prepared by Mr. McKay, Data Reduction Section, of the National Climatic Center, Asheville, North Carolina.

For further information on the procurement of weather tapes and possible assistance in decoding, the following office may be contacted:

Mr. G. McKay or D. Calloway
National Climatic Center
Applied Climatology Division
Federal Building
Asheville, North Carolina 28801
Tel. (704) 254-0961 x203

Table A-1 Solar Radiation Data

Albuquerque, New Mexico	Lake Charles, Louisiana
Apalachicola, Florida	Lake Charles, Louisiana
Barrow, Alaska	Lincoln, Nebraska
Bethel, Alaska	Lincoln, Nebraska
Bismarck, North Dakota	Los Angeles, California
Blue Hill/Milton, Massachusetts	Madison, Wisconsin
Boston, Massachusetts	Matanuska, Alaska
Brownsville, Texas	Medford, Oregon
Canton Island	Miami, Florida
Cape Hatteras, North Carolina	Nashville, Tennessee
Caribou, Maine	New York, New York
Charleston, South Carolina	Oak Ridge, Tennessee
Cleveland, Ohio	Omaha, Nebraska (North Omaha)
Columbia, Missouri	Phoenix, Arizona
Dodge City, Kansas	Riverside, California
El Paso, Texas	Santa Maria, California
Ely, Nevada	Santa Maria, California
Fairbanks, Alaska	Sault Ste. Marie, Michigan
Fort Worth, Texas	Seattle, Washington
Fort Worth, Texas	Sterling, Virginia
Fresno, California	Tucson, Arizona
Grand Lake/Granby, Colorado	Upton, New York
Great Falls, Montana	Wake Island
Hatteras, North Carolina	Washington, D. C.
Inyokern, California	

Table A-2

**U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
ENVIRONMENTAL DATA SERVICE**

Stations for which Local Climatological Data are issued, as of January 1, 1972

Subscription Price: Monthly Local Climatological Data \$2.00 per year including annual Summary if published. Single copy prices: 20 cents for monthly Summary; 15 cents for annual Summary. Back issues sell at single copy rates. Checks and money orders should be made payable to, and remittances and correspondence should be sent to the Superintendent of Documents, Government Printing Office, Washington, D. C., 20402.

SUBROUTINE SIGNCK(IFLD,ISGN)

C THIS SUBROUTINE WILL TEST ANY PSYCHROMETRIC WITH A SIGN
C OVER UNITS POSITION READ AS A1 AND THE HIGH ORDER POSITION
C AS AN I SPEC OF PROPER WIDTH.
C THE SIGN SHOULD ENTER THE PARAMETER LIST AS ISGN,
C THE REMAINING PORTION AS IFLD.
C UPON RETURN FROM THIS ROUTINE, THE VALUE OF THE FIELD
C WILL BE AN INTEGER WITH PROPER SIGN.
C IT WILL BE THE USER RESPONSIBILITY TO CONVERT THIS TO REAL
C FORM WITH PROPER DECIMAL ALIGNMENT.
C INVALID CONDITION CAUSED IFLD TO BE SET TO 9999

DIMENSION IP(10),MIN(10),NUM(10)

DATA IP/'A','B','C','D','E','F','G','H','I',' \emptyset '/
DATA MIN/'J','K','L','M','N','O','P','Q','R',' \emptyset '/
DATA NUM/1,2,3,4,5,6,7,8,9, \emptyset /,IAST/*'/

IF (ISGN.EQ.IAST) GO TO 16

DO 14 K=1,10

IF (ISGN.EQ. IP(K)) GO TO 20

IF (ISGN.EQ.MIN(K)) GO TO 22

14 CONTINUE

16 IFLD=9999

RETURN

20 IFLD=IFLD*10+NUM(K)

RETURN


22 IFLD= -(IFLD*10+NUM(K))

RETURN

END

SUN

An Algorithm to Find Solar Position, and Intensity of Direct Normal and Diffuse Radiation

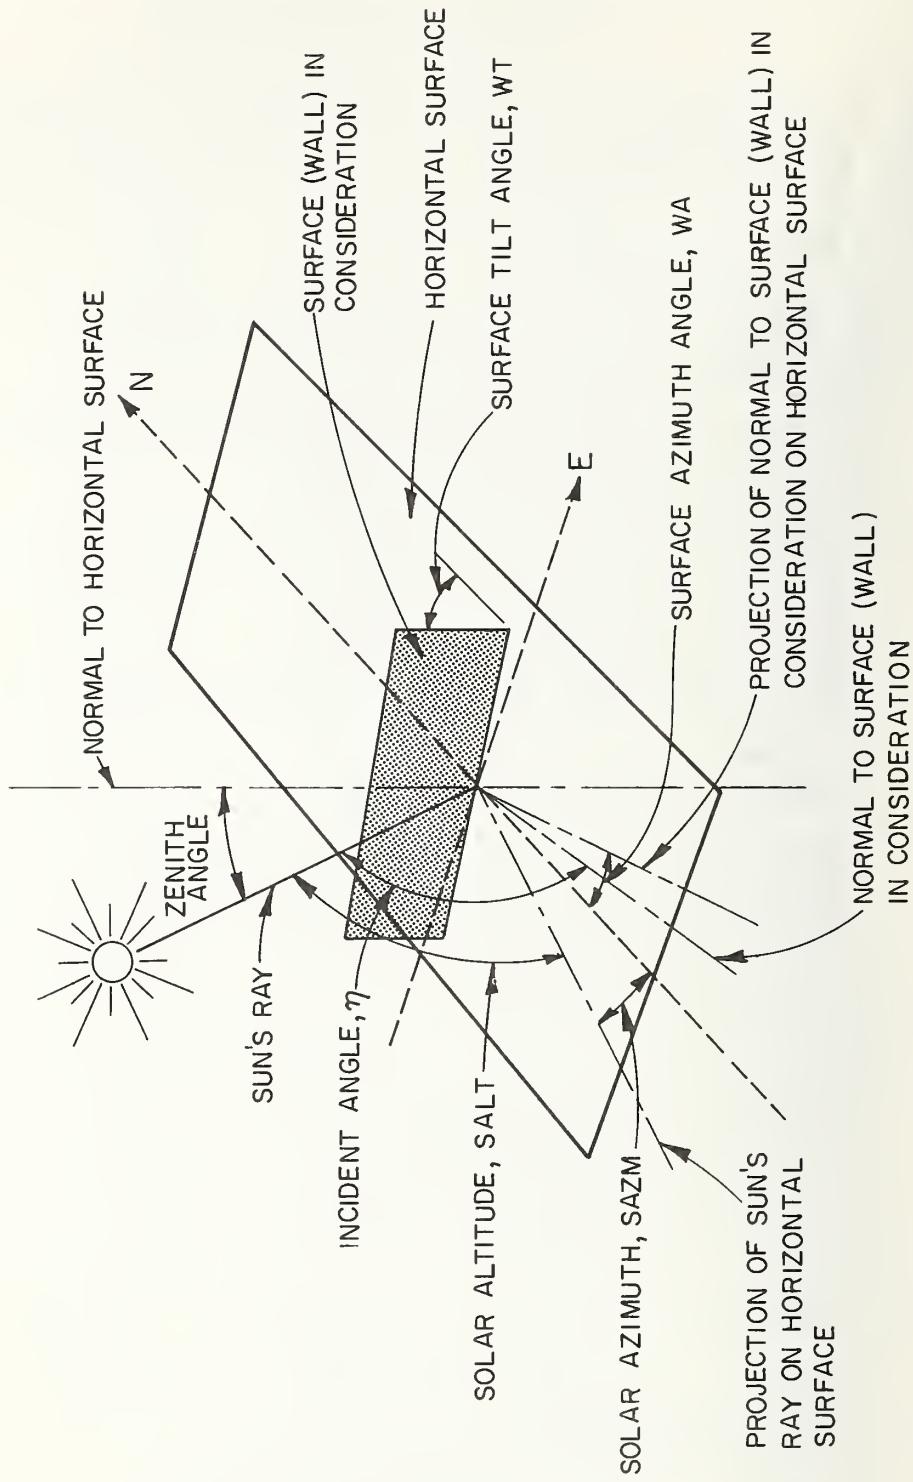

6a

Figure A-1 DEFINITIONS OF SOLAR ANGLE

Data:

L: Latitude, degrees, [+North]
[-South]

ℓ : Longitude, degrees, [+West]
[-East]

TZN: Time zone number (hours behind Greenwich mean time),
(see Figure A-3 and Table A-4)

d: Date, days (from start of year), (1 - 366)

t: Time, hours (after midnight), (0 - 24)

DST: Daylight saving time indicator (Output of DST),
0 for standard time and 1 for daylight saving time

ρ_g : Ground reflectivity

CN: Clearness number (see Figure A-4)

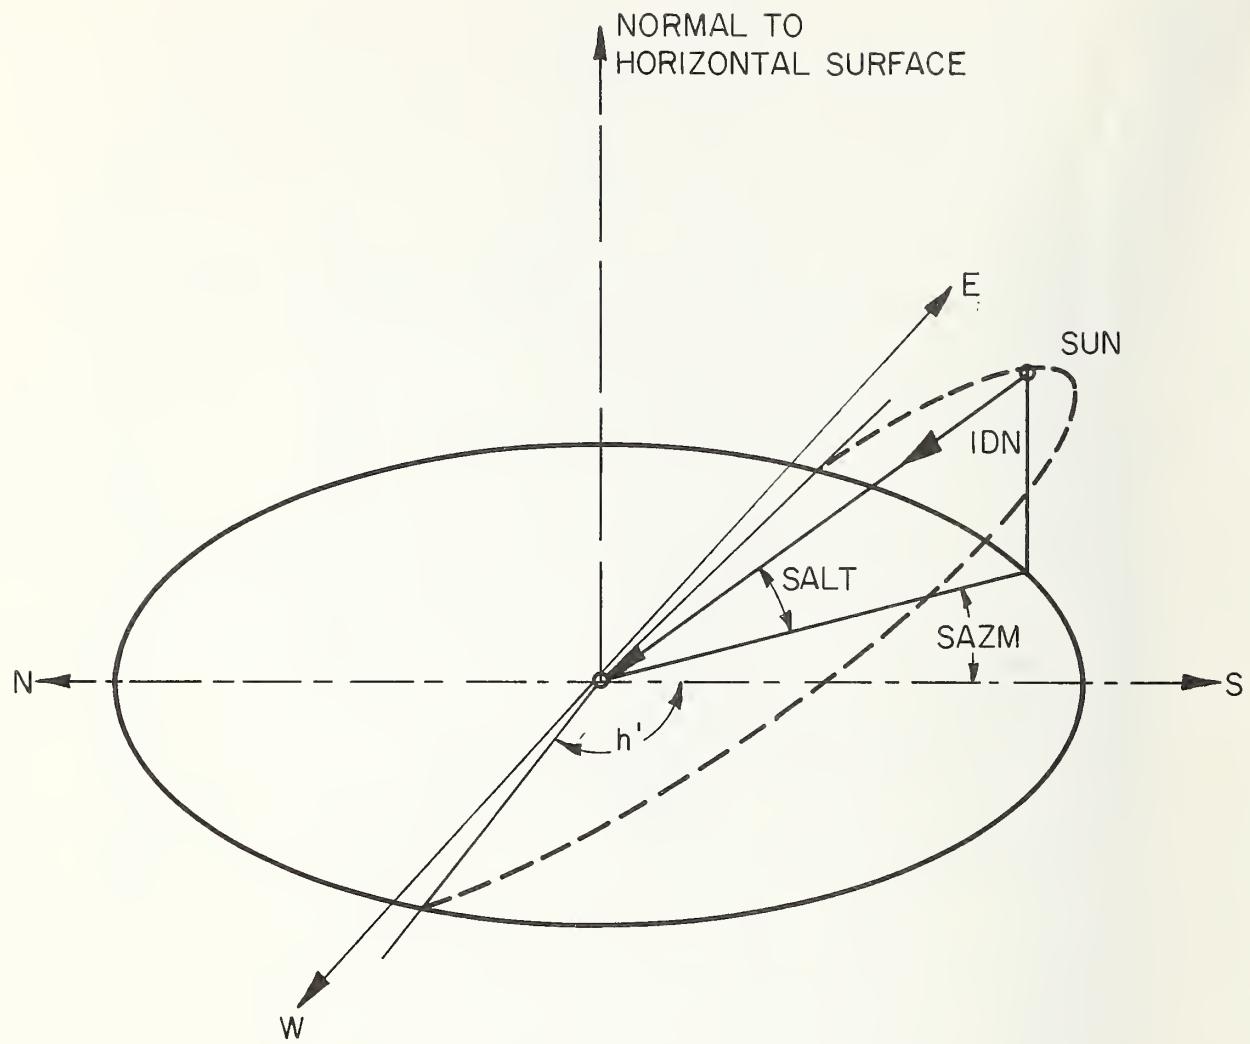


Figure A-2 Schematic Showing Apparent Path of Sun and Hour Angle

Figure A-3 Time Zones in the United States

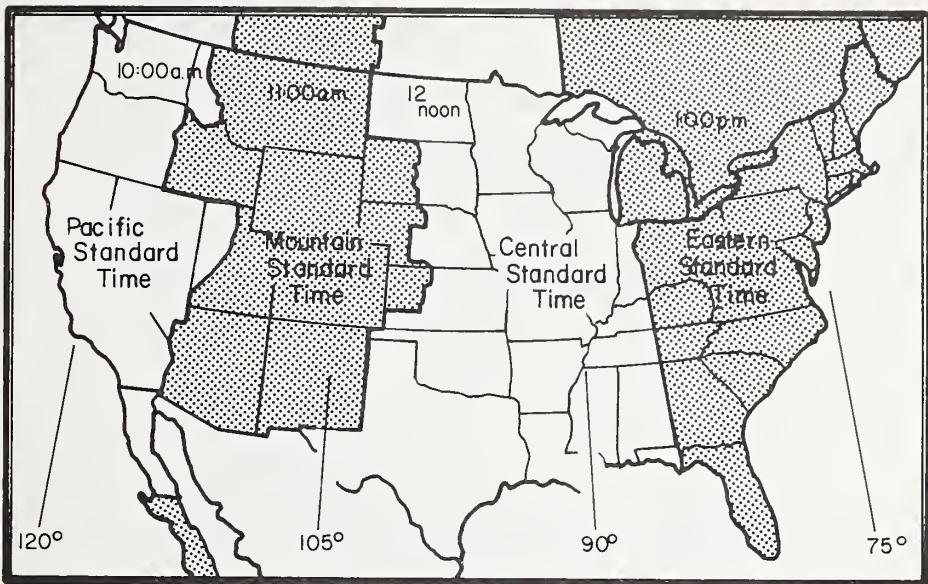


Table A-3 Time Zone Numbers in U. S. for Standard Time

TIME ZONE	TZN
Atlantic	4
Eastern	5
Central	6
Mountain	7
Pacific	8

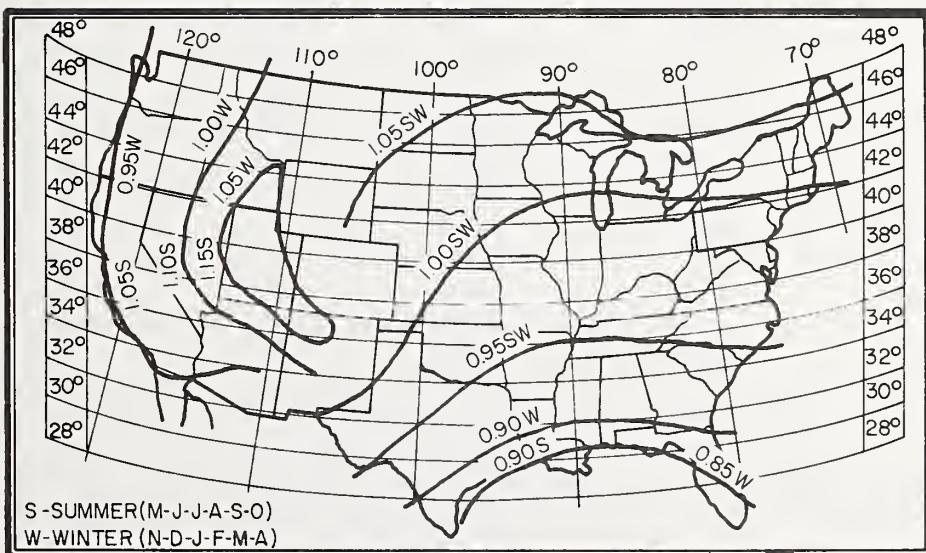


Figure A-4 Clearness Numbers of Non-Industrial Atmosphere in United States

Table A-4 lists, as function of date, five variables related to solar radiation. These variables are declination angle, δ ; the equation of time, ET; the apparent solar constant, A; the atmospheric extinction coefficient, B; the sky diffuse factor, C.

TABLE A-4 VALUES OF δ , ET, A, B AND C*

Date	δ Degrees	ET Hours	Btu Per (hr) (sq ft)	A Air Mass ⁻¹	B	C
Jan. 21	-20.0	-.190	390	0.142	0.058	
Feb. 21	-10.8	-.230	385	0.144	0.060	
Mar. 21	0.0	-.123	376	0.156	0.071	
Apr. 21	11.6	.020	360	0.180	0.097	
May 21	20.0	.060	350	0.196	0.121	
June 21	23.45	-.025	345	0.205	0.134	
July 21	20.6	-.103	344	0.207	0.136	
Aug. 21	12.3	-.051	351	0.201	0.122	
Sept. 21	0.0	.113	365	0.177	0.092	
Oct. 21	-10.5	.255	378	0.160	0.073	
Nov. 21	-19.8	.235	387	0.149	0.063	
Dec. 21	-23.45	.033	391	0.142	0.057	

* Derived from the 1972 ASHRAE Handbook of Fundamentals, Table 1, p. 387, Chapter 22.

Calculation Sequence:

1. Determine δ , ET, A, B, and C from Table A-4
2. $h' = \cos^{-1}(-\tan(L)\tan(\delta))$ (see Figure A-2)

3. $Y = h'*12/\pi$

4. Sunrise time (SRT) and sunset time (SST) in hr

$$SRT = 12 - Y - ET - TZN + \ell/15$$

$$SST = 24 - SRT$$

5. Hour angle h in degrees

$$h = 15 * (t - 12 + TZN + ET) - \ell$$

If $|h| > |h'|$ skip all the remaining calculations in this sequence and set

$$IDN = 0$$

$$BS = 0$$

$$BG = 0$$

6. Direction cosines of direct solar beam

$$\cos(Z) = \sin(L)\sin(\delta) + \cos(L)\cos(\delta)\cos(h)$$

$$\cos(W) = \cos(\delta)\sin(h)$$

$$\cos(S) = (1 - (\cos(Z))^2 - (\cos(W))^2)^{0.5}$$

If $\cos(h) > \tan(\delta)/\tan(L)$, $\cos(S)$ is positive

7. Solar altitude angle in radians

$$SALT = \sin^{-1}(\cos(Z))$$

8. Solar azimuth angle in radians

$$SAZM = \sin^{-1}(\cos(W)/\cos(SALT)), \text{ if } \cos(S) > 0$$

$$SAZM = \pi - \sin^{-1}(\cos(W)/\cos(SALT)), \text{ if } \cos(S) < 0$$

9. Intensity of direct solar radiation for a cloudless condition

$$IDN = A * CN * \exp(-B/\cos(Z))$$

10. Diffuse sky radiation (sky brightness) for a cloudless condition

$$BS = C * IDN / (CN)^{**2}$$

11. Ground reflected radiation for a cloudless condition (ground brightness)

$$BG = \rho_g * (BS + IDN * \cos(Z))$$

Calculation Modification for Southern Hemisphere:

The preceding algorithm is applicable to the northern hemisphere only. For buildings in the southern hemisphere, the following modifications are required.

1. Shift values of B and C in Table A-4 by six months.

Values of δ , ET, A, B and C for the southern hemisphere are shown in Table A-5.

TABLE A-5 VALUES OF δ , ET, A, B and C FOR SOUTHERN HEMISPHERE

Date	δ Degrees	ET Hours	A	B	C
			Btu per (hr) (sq ft)	Air Mass ⁻¹	
Jan. 21	-20.0	-.190	390	0.207	0.136
Feb. 21	-10.8	-.230	385	0.201	0.122
Mar. 21	0,0	-.123	376	0.177	0.092
Apr. 21	11.6	.020	360	0.160	0.073
May 21	20.0	.060	350	0.149	0.063
June 21	23.45	-.025	345	0.142	0.057
July 21	20.6	-.103	344	0.142	0.058
Aug. 21	12.3	-.051	351	0.144	0.060
Sept. 21	0.0	.113	365	0.156	0.071
Oct. 21	-10.5	.255	378	0.180	0.097
Nov. 21	-19.8	.235	387	0.196	0.121
Dec. 21	-23.45	.033	391	0.205	0.134

If $L \geq 0$ and if $\cos(h) > (\tan(\delta)/\tan(L))$, $\cos(s)$ is positive,
and if $\cos(h) \leq (\tan(\delta)/\tan(L))$, $\cos(s)$ is negative.

If $L < 0$ and if $\cos(h) \leq (\tan(\delta)/\tan(L))$, $\cos(s)$ is positive,
if $\cos(h) > (\tan(\delta)/\tan(L))$, $\cos(s)$ is negative.

CCF

An Algorithm for the Calculation of Cloudy Day Solar Radiation

This routine estimates the factor called CCF to modify the total solar radiation on a horizontal surface with the observed cloud cover data for a cloudy sky condition. The cloud cover observations are made every hour at major weather stations by experienced observers who estimate the amount of cloud on a scale of 0 to 10 and indicate the type of cloud in four different layers. Kimura and Stephenson^{1/} analyzed 1967 Canadian data for observed solar radiation with respect to the cloud cover data, type of cloud, and the calculated solar radiation under a cloudless condition at the same solar time. Based upon their analysis, a comprehensive methodology was developed for calculating the cloudy day solar radiation. The value of CCF, Cloud Cover Factor, is first defined as follows:

$$CCF = ITHC / ITH$$

where

ITHC: Total solar radiation on a horizontal surface
under a cloudy sky of given cloud amount and
types of cloud

ITH: Total solar radiation calculated for a horizontal surface under a cloudless sky at the same solar hour as of ITHC

Data:

IS: Season index

CA_j : Cloud amount at the j-th layer, where $j = 1, 2, 3$, and 4

TOC_j : Type of cloud at the j-th layer, where $j = 1, 2, 3$, and 4

TCA: Total cloud amount

Calculation Sequence:

1. $X = (\Sigma CA_j)_{\text{cirrus}} + (\Sigma CA_j)_{\text{cirrostratus}} + (\Sigma CA_j)_{\text{cirrocumulus}}$

2. Cloud cover

$$CC = TCA - 0.5*X$$

3. Cloud cover factor

$$CCF = P + Q*CC + R*CC^{**2}$$

where P, Q, and R are found in the following table

Table A-6

Season	P	Q	R
spring	1.06	0.012	-0.0084
summer	0.96	0.033	-0.0106
autumn	0.95	0.030	-0.0108
winter	1.14	0.003	-0.0082

The value of P, which is essentially the cloudless sky factor, depends upon the proportion of direct to diffuse sky radiation in reference to the standard ASHRAE values published in the 1972 Handbook of Fundamentals. If the value of P is unity, this proportion of direct to diffuse solar radiation is such that the solar radiation evaluated for a hori-

zontal surface under a cloudless sky should be equal to the value obtained by the method described in the 1972 ASHRAE Handbook of Fundamentals. If the value of P is different from unity, the direct to diffuse proportion is different from the standard values.

SOLAD

An Algorithm for Determining Diffuse and Direct Radiation Falling Onto a Surface

This routine determines the total as well as the diffuse and direct components of solar radiation incident on a given surface under either clear or cloudy sky by using the cloudless sky data calculated in the SUN routine and the cloud cover factor CCF calculated as described in the previous section.

Data:

- P: Cloudless sky factor shown in Table (A-6) in the
CCF routine
- C: Standard diffuse sky factor shown in Table A-4 in
the SUN routine
- CC: Cloud cover calculated in the CCF routine
- CCF: Cloud cover factor determined by the CCF routine
- WA: Azimuth angle of the surface under consideration
in radians from south; + if west and - if east
of south
- WT: Tilt angle of the surface under consideration
in radians from the horizontal surface; zero
for the horizontal surface and $\pi/2$ for the
vertical walls

COS(Z), COS(W), AND COS(S):

Direction cosines of direct radiation (Calculated
in SUN)

IDN: Intensity of the direct normal solar radiation for
a cloudless condition in Btu per (hr) (sq ft) (Cal-
culated in SUN)

BS and BG: Diffuse radiation from the cloudless sky and that
from ground in Btu per (hr) (sq ft) (Calculated in
SUN)

SALT: Solar altitude angle in radians (Calculated in SUN)

Calculation Sequence:

1. Let X = SIN (SALT)

2. $Y = 0.309 - 0.137*X + 0.394*X^2$

3. $K = X/(C+X) + (P-1)/(1-Y)$

4. Direct radiation on a horizontal surface under a cloud-
less sky

$$IDH = IDN * \cos(Z)$$

5. Diffuse radiation on a horizontal surface under a cloud-
less sky

$$IdH = BS$$

6. Total radiation on a horizontal surface under a cloud-
less sky

$$ITH = IDH + IdH$$

7. Direct radiation on a horizontal surface under a cloudy
sky

$$IDHC = ITH * K * (1 - CC/10)$$

8. Direction cosines of normal to the surface under consideration (the surface has an azimuth angle of WA and a tilt angle of WT)

$$\alpha = \cos(WT)$$

$$\beta = \sin(WA) * \sin(WT)$$

$$\gamma = \cos(WA) * \sin(WT)$$

9. Cosine of the incident radiation on the surface under consideration

$$\cos(\eta) = \alpha \cos(Z) + \beta \cos(W) + \gamma \cos(S)$$

10. Direct radiation on a surface under consideration under a cloudless sky

$$ID = IDN * \cos(\eta)$$

$$= 0 \text{ if } \cos(\eta) \leq 0$$

11. Direct radiation on a surface under a cloudy sky

$$IDC = ID * IDHC / IDH$$

12. Diffuse radiation for a cloudless sky

$$Id = BS \text{ for the horizontal surface}$$

$$Id = BS * Y + BG/2 \text{ for the vertical surfaces*}$$

$$\text{where } Y = 0.55 + 0.437 * U + 0.313 * U^{**2}$$

$$U = \cos(\eta)$$

$$\text{if } U \leq -0.2, Y = 0.45$$

13. Diffuse radiation upon a horizontal surface under a cloudy sky

$$IDHC = ITH * (CCF - K * (1 - CC/10))$$

* Diffuse radiation data for surfaces other than vertical and horizontal ones have not been analyzed sufficiently to date to provide a calculation procedure.

14. Diffuse radiation on a surface under consideration

$$IdC = Id * IdHC / IdH$$

15. Total radiation upon a surface under a cloudy sky

$$ITC = IDC + IdC$$

When the cloud cover CC is zero,

$$ITC = IT = ID + Id$$

An Algorithm for Calculating Transmission, Absorption and
Reflection Factors for Windows

Data:

$\text{Cos}(\eta)$: Cosine of angle of incidence of direct solar
radiation (Calculated in SUN)

$k*\ell$: Extinction coefficient [inches⁻¹] * thickness
[inches]

NOTE: In some cases, glass manufacturers provide
the value of transmission at normal inci-
dence. In this case, using the curve given
in Figure A-5, it is possible to obtain the
value of $k*\ell$. The data for the curve are
taken from reference 2.

Calculation Sequence:

A. Single-Pane Glass

1. Cosine of refraction angle

$$\text{COS}(\xi) = \text{SQRT} (1 - (1-\text{COS}(\eta) ** 2)/n)$$

where $n = 1.520$, which is the index of refraction for ordinary
glass

2. The fraction of radiation that is absorbed in a single pass
through a sheet of glass of extinction coefficient $k*\ell$

$$a = 1 - \text{Exp} (-k*\ell/\text{COS}(\xi))$$

3. Single glass air-glass interface reflectivity by the Fresnel's formula

vibration in parallel to the plane of glass

$$r = (\tan(\eta - \xi))^2 / \tan(\eta + \xi)$$

vibration in normal to the plane of glass

$$r' = (\sin(\eta - \xi))^2 / (\sin(\eta + \xi))^2$$

4. Absorptivity for direct radiation

$$A_\eta = 0.5 * (x + x')$$

where $x = a * (1 - r) * (1 + r * (1 - a)) / (1 - r * r * (1 - a) * (1 - a))$

$$x' = a * (1 - r') * (1 + r' * (1 - a)) / (1 - r' * r' * (1 - a) * (1 - a))$$

5. Transmissivity for direct radiation

$$T_\eta = 0.5 * (y + y')$$

where $y = (1 - r) * (1 - r) * (1 - a) / (1 - r * r * (1 - a) * (1 - a))$

$$y' = (1 - r') * (1 - r') * (1 - a) / (1 - r' * r' * (1 - a) * (1 - a))$$

6. Absorptivity and transmissivity for diffuse radiation

$$A_d = \int_0^{\pi/2} A_\eta \sin(2\eta) d\eta$$

$$T_d = \int_0^{\pi/2} T_\eta \sin(2\eta) d\eta$$

B. Double-Pane Glass

For the double-pane window, transmissivity and absorptivity for the outer and inner panes can be calculated separately first by using the single-pane procedure described above. Those calculated single glass properties can be designated here as follows:

A_1 : Absorptivity of inner pane for direct radiation

A_2 : Absorptivity of outer pane for direct radiation

T_1 : Transmissivity of inner pane for direct radiation

T_2 : Transmissivity of outer pane for direct radiation

A_{1d} : Absorptivity of inner pane for diffuse radiation

A_{2d} : Absorptivity of outer pane for diffuse radiation

T_{1d} : Transmissivity of inner pane for diffuse radiation

T_{2d} : Transmissivity of outer pane for diffuse radiation

1. Reflectivity of inner and outer panes

$$R_{1\eta} = 1 - A_{1\eta} - T_{1\eta}$$

$$R_{2\eta} = 1 - A_{2\eta} - T_{2\eta}$$

$$R_{1d} = 1 - A_{1d} - T_{1d}$$

$$R_{2d} = 1 - A_{2d} - T_{2d}$$

2. Absorptivity of the double-glazed system

a. Direct radiation

$$A_{\eta, \text{outer}} = A_{2\eta} * (1 + R_{1\eta} * T_{2\eta}) / (1 - R_{1\eta} * R_{2\eta})$$

$$A_{\eta, \text{inner}} = A_{1\eta} * T_{2\eta} / (1 - R_{1\eta} * R_{2\eta})$$

b. Diffuse radiation

$$A_{d,outer} = A_{2d} * (1 + R_{1d} * T_{2d}) / (1 - R_{1d} * R_{2d})$$

$$A_{d,inner} = A_{1d} * T_{2d} / (1 - R_{1d} * R_{2d})$$

3. Transmissivity of the double

a. Direct radiation

$$T_{\eta} = T_{1\eta} * T_{2\eta} / (1 - R_{1\eta} * R_{2\eta})$$

b. Diffuse radiation

$$T_d = T_{1d} * T_{2d} / (1 - R_{1d} * R_{2d})$$

Since the calculation of transmissivity and absorptivity are quite involved, they have been precalculated by Stephenson^{3/} for various values of COS (η) and expressed as polynomial functions of COS (η). The polynomial coefficients are shown in Table A-3 for single and double glazed windows and the equations are as follows:

Single-pane, direct radiation transmission

$$T_{\eta} = \sum_{j=0}^5 t_j * (\text{Cos } (\eta) ^{* *} j)$$

Single-pane, diffuse radiation transmission

$$T_d = 2 * \sum_{j=0}^5 t_j / (j + 2)$$

Polynomial representations of absorption factors for direct solar
and diffuse radiation.

Double-pane, direct radiation transmission

$$A_{\eta, \text{outer}} = \sum_{j=0}^5 a_{j, \text{outer}} * ((\cos(\eta))^{** j})$$

$$A_{\eta, \text{inner}} = \sum_{j=0}^5 a_{j, \text{inner}} * ((\cos(\eta))^{** j})$$

Double-pane, diffuse radiation transmission

$$A_{d, \text{outer}} = 2 * \sum_{j=0}^5 a_{j, \text{outer}} / (j + 2)$$

$$A_{d, \text{inner}} = 2 * \sum_{j=0}^5 a_{j, \text{inner}} / (j + 2)$$

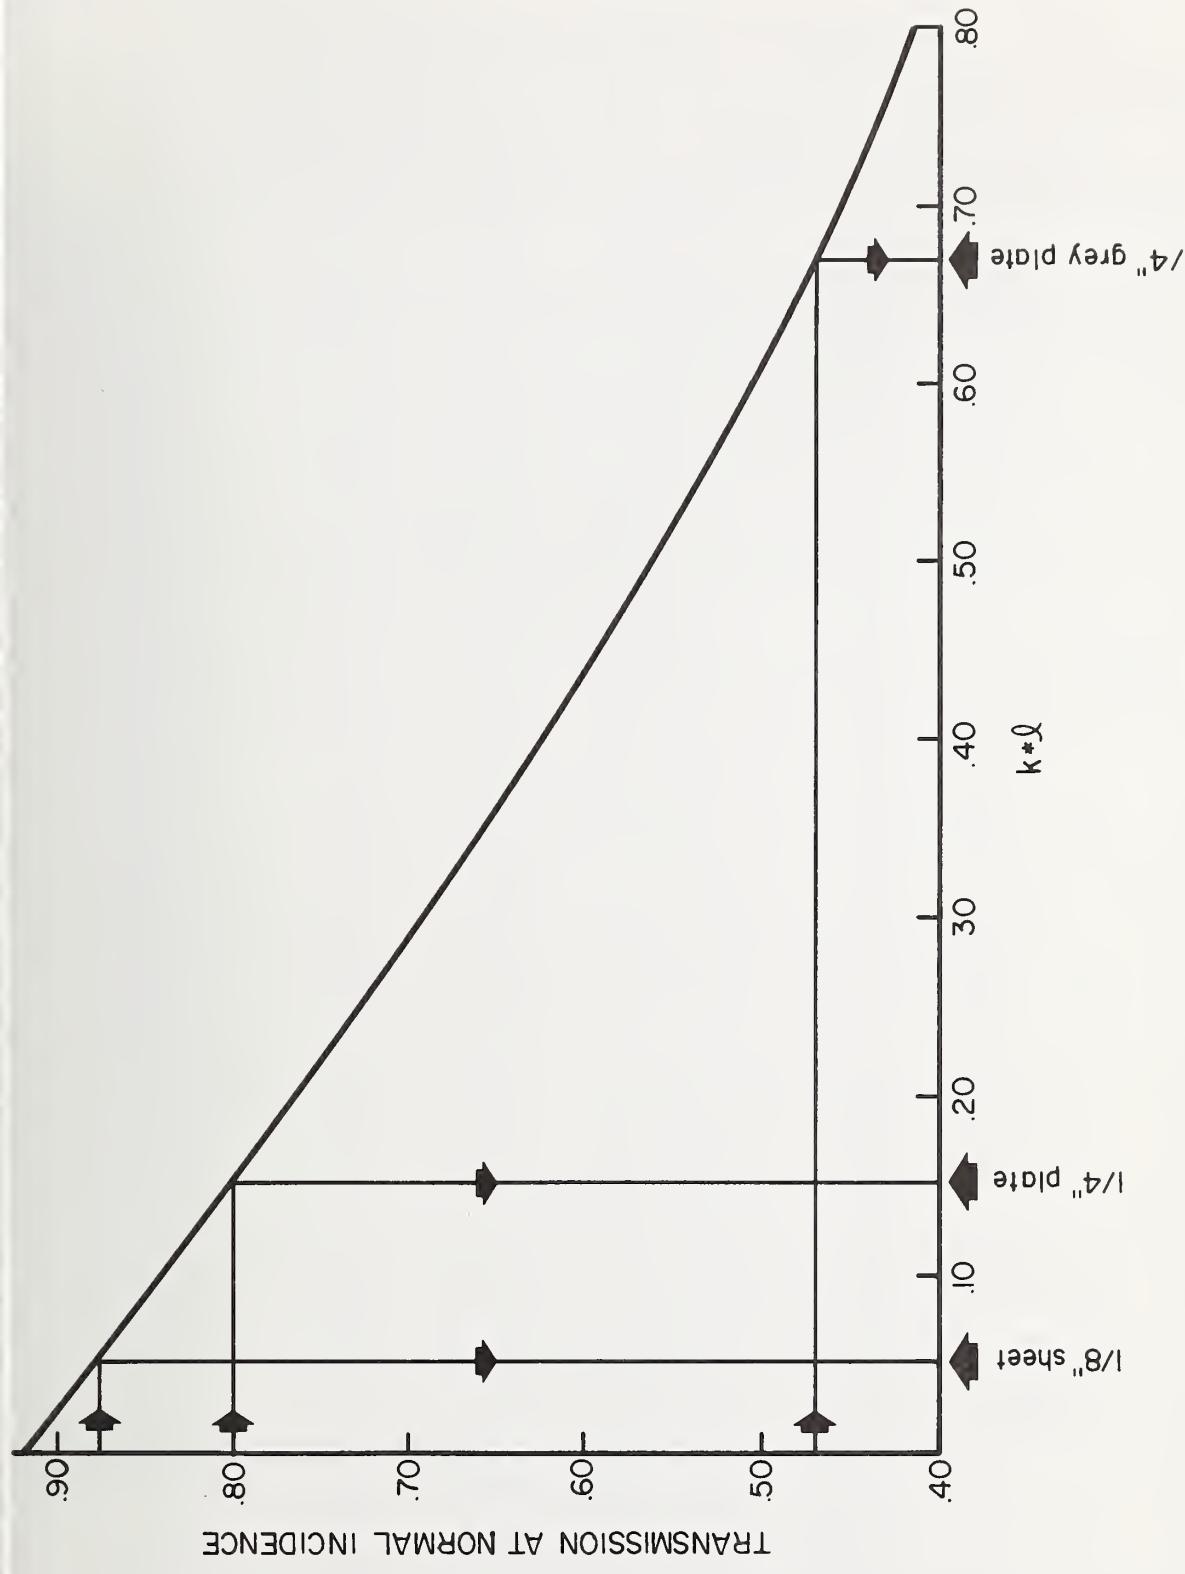


Figure A-5 Transmission at Normal Incidence Versus $k \cdot \lambda$ for
Single Sheet Glass

Table A-7 Polynomial Coefficients for Use in Calculation of Transmittance and Absorptance of Glass

k * ν	j	Single Glazing		Double Glazing		
		a _j	t _j	a _{j, outer}	a _{j, inner}	t _j
0.05 1/8" Sheet	0	0.01154	-0.00885	0.01407	0.00228	-0.00401
	1	0.77674	2.71235	1.06226	0.34559	0.74050
	2	-3.94657	-0.62062	-5.59131	-1.19908	7.20350
	3	8.57881	-7.07329	12.15034	2.22366	-20.11763
	4	-8.38135	9.75995	-11.78092	-2.05287	19.68824
	5	3.01188	-3.89922	4.20070	0.72376	-6.74585
0.10	0	0.01636	-0.01114	0.01819	0.00123	-0.00438
	1	1.40783	2.39371	1.86277	0.29788	0.57818
	2	-6.79030	0.42978	-9.24831	-0.92256	7.42065
	3	14.37378	-8.98262	19.49443	1.58171	-20.26848
	4	-13.83357	11.51798	-18.56094	-1.40040	19.79706
	5	4.92439	-4.52064	6.53940	0.48316	-6.79619
0.15 1/4" Reg. Plate	0	0.01837	-0.01200	0.01905	0.00067	-0.00428
	1	1.92497	2.13036	2.47900	0.26017	0.45797
	2	-8.89134	1.13833	-11.74226	-0.72713	7.41367
	3	18.40197	-10.07925	24.14037	1.14950	-19.92004
	4	-17.48648	12.44161	-22.64299	-0.97138	19.40969
	5	6.17544	-4.83285	7.89954	0.32705	-6.66603
0.20	0	0.01902	-0.01218	0.01862	0.00035	-0.00401
	1	2.35417	1.90950	2.96400	0.22974	0.36698
	2	-10.47151	1.61391	-13.48701	-0.58381	7.27324
	3	21.24322	-10.64872	27.13020	0.84626	-19.29364
	4	-19.95978	12.83698	-25.11877	-0.67666	18.75408
	5	6.99964	-4.95199	8.68895	0.22102	-6.43968
0.40	0	0.01712	-0.01056	0.01423	-0.00009	-0.00279
	1	3.50839	1.29711	4.14384	0.15049	0.16468
	2	-13.86390	2.28615	-16.66709	-0.27590	6.17715
	3	26.34330	-10.37132	31.30484	0.25618	-15.84811
	4	-23.84846	11.95884	-27.81955	-0.12919	15.28302
	5	8.17372	-4.54880	9.36959	0.02859	-5.23666
0.60	0	0.01406	-0.00835	0.01056	-0.00016	-0.00192
	1	4.15958	0.92766	4.71447	0.10579	0.08180
	2	-15.06279	2.15721	-17.33454	-0.15035	4.94753
	3	27.18492	-8.71429	30.91781	0.06487	-12.43481
	4	-23.88518	9.87152	-26.63898	0.02759	11.92495
	5	8.03650	-3.73328	8.79495	-0.02317	-4.07787
0.80 50% Trans. H.A. Plate	0	0.01153	-0.00646	0.00819	-0.00015	-0.00136
	1	4.55946	0.68256	5.01768	0.07717	0.04419
	2	-15.43294	1.82449	-17.21228	-0.09059	3.87529
	3	26.70568	-6.95325	29.46388	0.00050	-9.59069
	4	-22.87993	7.80647	-24.76915	0.06711	9.16022
	5	7.57795	-2.94454	8.05040	-0.03394	-3.12776
1.00	0	0.00962	-0.00496	0.00670	-0.00012	-0.00098
	1	4.81911	0.51403	5.18781	0.05746	0.02576
	2	-15.47137	1.47607	-16.84820	-0.05878	3.00400
	3	25.86516	-5.41985	27.90292	-0.01855	-7.33834
	4	-21.69106	6.05546	-22.99619	0.06837	6.98747
	5	7.08714	-2.28162	7.38140	-0.03191	-2.38328

An Algorithm for Calculating Solar Heat Gain Through Windows

Data:

IDN: Intensity of direct normal solar radiation,
Btu per (hr) (sq ft), (Calculated in SUN)

BS: Sky brightness, Btu per (hr) (sq ft), (Cal-
culated in SUN)

BG: Ground brightness, Btu per (hr) (sq ft),
(Calculated in SUN)

Cos(η): Cosine of the angle of incidence of direct
solar radiation, (Calculated in SUN)

FWS: Form factor between the window and the
sky*

FWG: Form factor between the window and the
ground*

RO, RA, RI: Thermal resistances at outside surface,
air space, and inside surface respectively,
(sq ft) (hr) (F) per Btu

SLA: Sunlit area factor (Calculated in SHADOW)

SC: Shading coefficient if the window is shaded
by drapes or blinds or if it has an inter-
pane separation of more than 1 inch

* If more accurate data are not available, use FWS = FWG = 0.5.

NOTE: When the value of SC is given, these transmission and absorption factors should be for the standard 1/8" thick double strength glass (or $k*\ell = 0.05$ of TAR) regardless of the type of glass used.

T_η, T_d : Transmission factors for direct and diffuse solar radiation for windows (Calculated in TAR)

$A_{\eta, \text{outer}}, A_{\eta, \text{inner}}, A_{d, \text{outer}}, A_{d, \text{inner}}$: Absorption factors for direct and diffuse solar radiation through outer and inner window panes (Calculated in TAR), respectively

Calculation Sequence:

1. Inward flowing fraction of the radiation absorbed by the inner and the outer pane, respectively

$$NI = (RO + RA) / (RO + RA + RI)$$

$$NO = RO / (RO + RA + RI)$$

2. Let

$$D = SLA * IDN * \text{Cos}(\eta) * (T_\eta + NO * A_{\eta, \text{outer}} + NI * A_{\eta, \text{inner}})$$

$$d = (BS * FWS + BG * FWG) * (T_d + NO * A_{d, \text{outer}} + NI * A_{d, \text{inner}})$$

3. Solar heat gain through window

$$\text{If } SC = 0, \text{ SHG} = D + d$$

$$\text{If } SC \neq 0, \text{ SHG} = (SC) * (D + d)_{k*\ell=0.05}$$

SHADOW

A Brief Description of the Procedures for Calculating External Shadows on a Building

A major portion of the air conditioning load on modern commercial buildings comes from solar radiation. To improve the accuracy of load assessment, it is necessary to know how much of a building is shaded and how much lies exposed to the sun's rays.

A new technique developed by Groth and Lokmanhekim^{4/} employs the representation of all architectural forms as a series of plane polygons. Even curved surfaces can be so represented. For example, a sphere may be approximated by the 20 sides of a regular icosohedron. This approximation gives a maximum error of only 3% in the shadow area cast by the sphere.

The output of the algorithm is not only the sunlit area, but also a pictorial display of the shadows and the surface upon which they are cast.

Coordinate Transformation:

Designate the polygons which cast shadows as shading polygons (SP) and those upon which shadows are cast as receiving polygons (RP). The vertex coordinates of each RP, and its relevant SP's, are transformed from a base coordinate system, xyz, to a new coordinate system, x'y'z', with origin 0 attached to the plane of the RP. The first three vertices,

V_1 , V_2 , and V_3 , of the RP being examined are used to define this new coordinate system. The x' axis passes through V_2 and V_3 , while the y' axis passes through V_1 . In order that the z' axis point outward from the surface, angle $V_1 V_2 V_3$ must be convex and the vertices must be numbered counterclockwise. The equation of transformation is written in matrix form as

$$\vec{x}' = A (\vec{x} - \vec{x}_0)$$

where

$$\vec{x}_0 = \vec{x}_2 + \gamma(\vec{x}_3 - \vec{x}_2)$$

$$\gamma, \text{ A Scaler} = (\vec{x}_1 - \vec{x}_2) \cdot (\vec{x}_3 - \vec{x}_2) / (\vec{x}_3 - \vec{x}_2) \cdot (\vec{x}_3 - \vec{x}_2)$$

$$1\text{st row of } A = (\vec{x}_3 - \vec{x}_0) / |\vec{x}_3 - \vec{x}_0|$$

$$2\text{nd row of } A = (\vec{x}_1 - \vec{x}_0) / |\vec{x}_1 - \vec{x}_0|$$

$$3\text{rd row of } A = 1\text{st row of } A \times 2\text{nd row of } A$$

Solar altitude, α , and azimuth, β , must also be transformed, into the solar direction vector, as

$$\vec{x}_s' = \begin{pmatrix} \sin\beta \cdot \cos\alpha \\ \sin\alpha \\ \cos\beta \cdot \cos\alpha \end{pmatrix}$$

Clipping Transformation:

Any part of an SP whose z' is negative cannot cast a shadow on the RP. These "submerged" portions of the SP's must be clipped off, prior to projection, lest they project "false" shadows (see Figure A-6). This

is done by finding, through linear interpolation, the points A and B, on the perimeter of the SP, which pierce the plane of the RP, and taking these points as new vertices. All submerged vertices are deleted. This results in a new polygon with line AB as a side, which will project only real shadows.

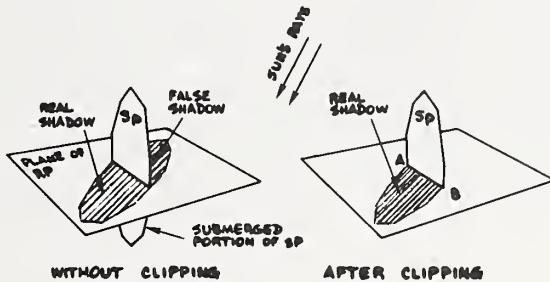


Figure A-6 Clipping

Projection Transformation:

To simulate the actual casting of a shadow, the following transformation projects, along the sun's rays, all the vertex points of the transformed and clipped RP's.

$$X = x' - \frac{x'_s}{z'_s} z'$$

$$Y = y' - \frac{y'_s}{z'_s} z'$$

Enclosure Test:

The coordinate, clipping and projection transformation have converted all RP and SP's in space into two dimensional figures in the RP plane. It remains only to find the points in the RP plane which lie inside the RP and inside one or more of the SP projections, i.e., points of the RP which are shaded. At this point, the two-space XY is divided into a grid and the center of each element of this grid is tested for enclosure by the RP and the SP projections. A point, P, whose coordinates are $X_P Y_P$, is inside of polygon V_1, V_2, \dots, V_n if the following inequality holds.

$$\sum_{i=1}^n \Delta\theta_i \neq 0$$

The angular change, $\Delta\theta_i$, subtended at P by the *i*th side, and counted positive counterclockwise, is given by the following formulae.

$$\Delta\theta_i = \begin{cases} \theta_j - \theta_i & \text{if } |\theta_j - \theta_i| < 2 \\ \frac{(\theta_i - \theta_j)(4 - |\theta_j - \theta_i|)}{|\theta_j - \theta_i|} & \text{if } |\theta_j - \theta_i| \geq 2 \end{cases}$$

$$\begin{array}{ll}
 \frac{Y_i - Y_p}{X_i - X_p + Y_i - Y_p} & \text{in 1st quadrant} \\
 1 + \frac{X_p - X_i}{X_p - X_i + Y_i - Y_p} & \text{in 2nd quadrant} \\
 \theta_i \sim 2 + \frac{Y_p - Y_i}{X_p - X_i + Y_p - Y_i} & \text{in 3rd quadrant} \\
 3 + \frac{X_i - X_p}{X_i - X_p + Y_p - Y_i} & \text{in 4th quadrant}
 \end{array}$$

These approximate formulae, which express $\Delta\theta_i$ in right angles, replace the time-consuming square root and are cosine computer library routines. They have, by set theory, been proved adequate for the purpose.

Display Matrix and Sample Problem:

An alphameric matrix is created corresponding to the grid elements in the RP plane. A blank component represents a grid element either outside the RP or exposed to the sun. An asterisk component represents a shaded grid element or one on the RP's boundary. Grid elements shaded by a transmissive structure are randomly asterisked with a probability equal to the fraction of incident light stopped by the shading structure.

Figure A-7 shows the solution of a typical problem involving a transmissive structure.

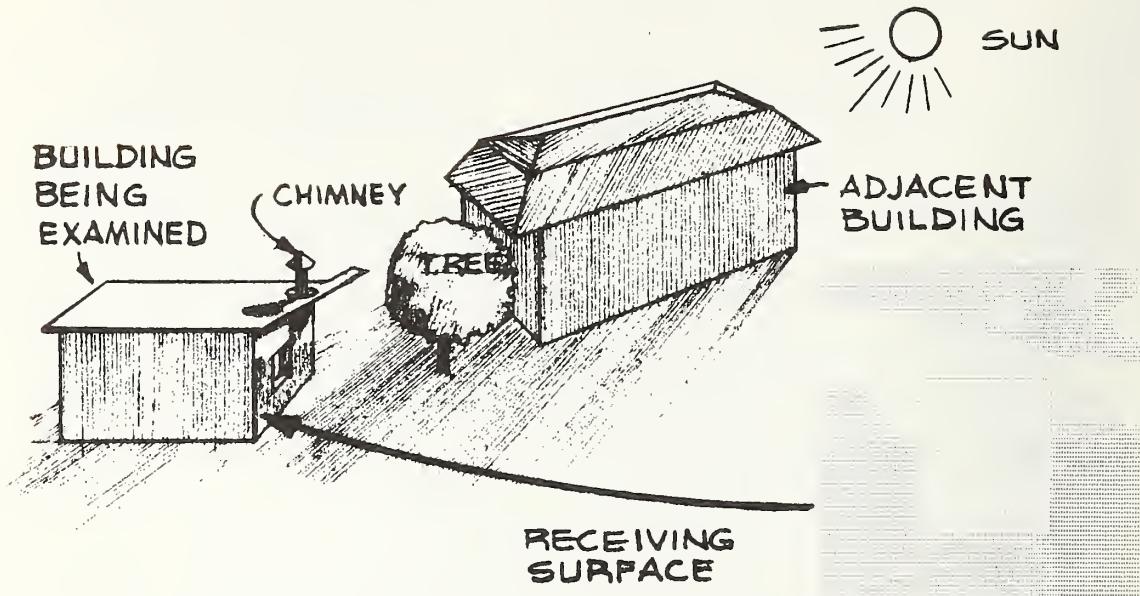


Figure A-7 The Computer Output of a Typical Problem

SHADOW 1*

An Algorithm to Find the Ratio of the Sunlit and Shaded Area
of a Given Window Where the Shadows are Cast by Various
Combinations of Overhang and Side Fins

Data: (Variable names corresponding to the FORTRAN listing
included in this section. Right and left is determined
facing the window from outside - see Figure A-8).

HT: Window height

FL: Window width

FP: Depth of the overhang

AW: Distance from top of the window to the overhang

BWL: Distance of the overhang extended beyond the left edge
of the window

BWR: Distance of the overhang extended beyond the right edge
of the window

D: Depth of vertical projection at the end of the overhang

FP1: Depth of the left fin

A1: Distance of the left fin extended above the top of the
window

B1: Distance from the left edge of the window to the left
fin

C1: Distance of the left fin stop short above the bottom
of the window

FP2: Depth of the right fin

* This section was contributed by Tseng-Yao Sun; Ayres and Hayakawa,
Los Angeles, California.

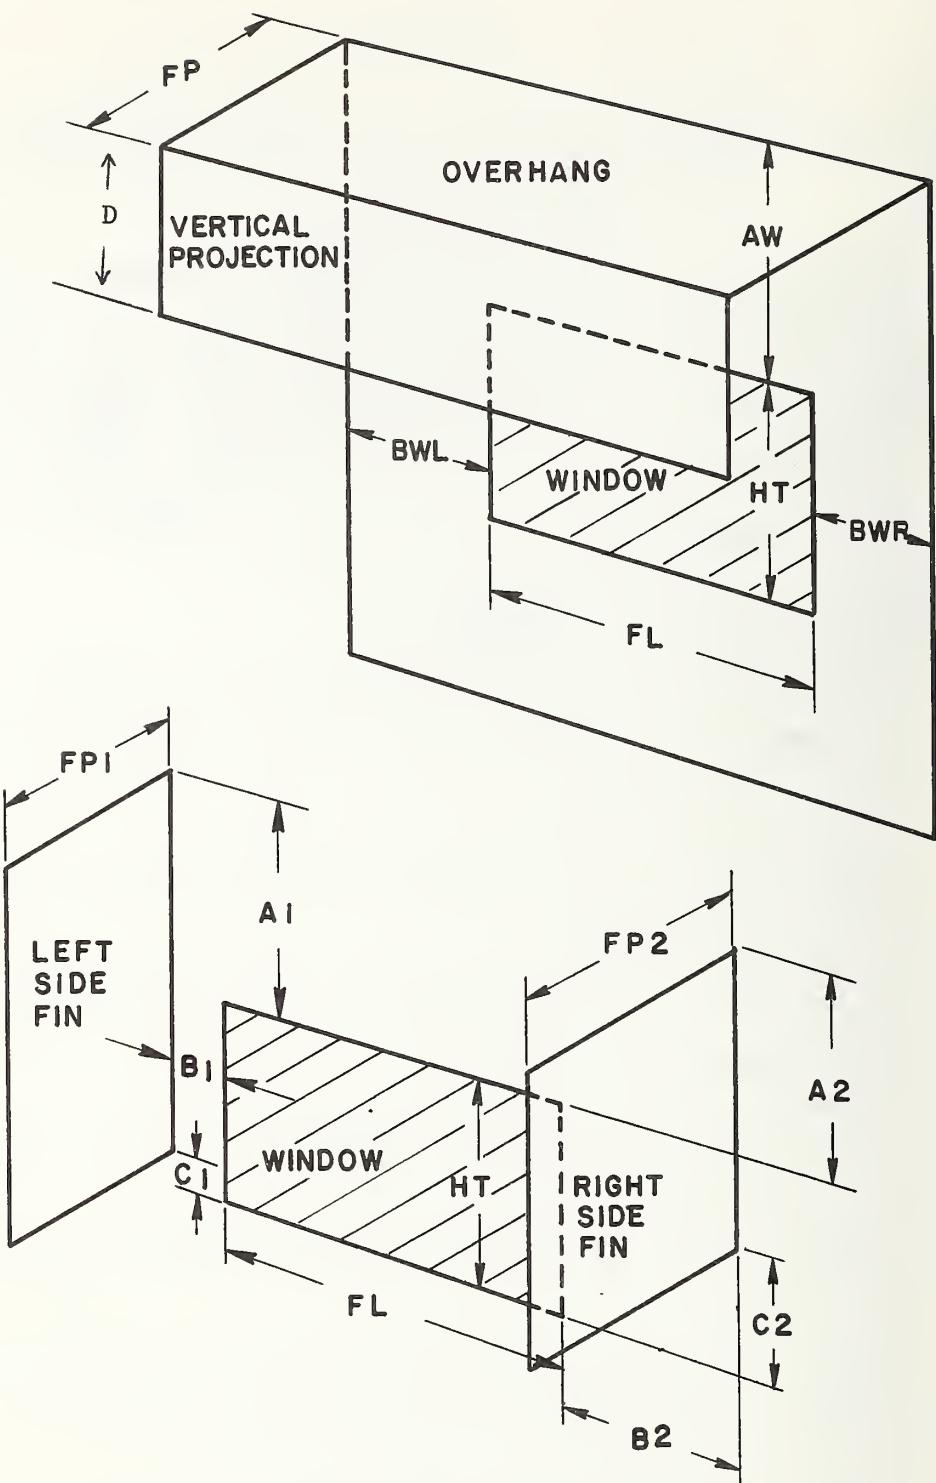


Figure A-8 Shadow 1 Input Data

A2: Distance of the right fin extended above the top of
the window

B2: Distance from the right edge of the window to the
right fin

C2: Distance of the right fin stop short above the bottom
of the window

PHI: Solar azimuth angle

WAZI: Window azimuth angle

COSZ: Cosine of solar zenith angle

Calculation Sequence:

The principle calculation sequence of this subroutine is described in reference 5 and the principle output of the subroutine is the variable SHRAT--the shade ratio or ratio of sunlit area to the total window area. The treatment of shadow overlapping cast by various shading devices is not discussed in the reference but is included in the FORTRAN listing.

```

SUBROUTINE SHADOW(SHDX,PHI,COSZ,SHRAT)
DIMENSION SHDX(20)
FL=SHDX(1)
HT=SHDX(2)
FP=SHDX(3)
AW=SHDX(4)
BWL=SHDX(5)
BWR=SHDX(6)
D=SHDX(7)
FP1=SHDX(8)
A1=SHDX(9)
B1=SHDX(10)
C1=SHDX(11)
FP2=SHDX(12)
A2=SHDX(13)
B2=SHDX(14)
C2=SHDX(15)
WAZI=SHDX(16)
% THIS PROGRAM CALCULATES SHADOW CAST BY OVERHANG AND SIDE FINS
% PHI....SOLAR AZIMUTH ANGLE
% COSZ...COSINE OF SOLAR ZENITH ANGLE
% SHRAT..SHADE RATIO:RATIO OF THE SUNLIT AREA TO THE TOTAL WINDOW AREA
% HT.....WINDOW HEIGHT
% FL.....WINDOW WIDTH
% FP.....DEPTH OF THE OVERHUNG
% AW.....DISTANCE FROM TOP OF THE WINDOW TO THE OVERHUNG
% BWL....DISTANCE OF THE OVERHUNG EXTENDED BEYOND THE LEFT EDGE OF THE WINDOW
% BWR....DISTANCE OF THE OVERHUNG EXTENDED BEYOND THE RIGHT EDGE OF THE WINDOW
% D.....DEPTH OF VERTICAL PROJECTION AT THE END OF THE OVERHUNG
% FP1....DEPTH OF THE LEFT FIN
% A1.....DISTANCE OF THE LEFT FIN EXTENDED ABOVE THE TOP OF THE WINDOW
% B1.....DISTANCE FROM THE LEFT EDGE OF THE WINDOW TO THE LEFT FIN
% C1.....DISTANCE OF THE LEFT FIN STOP SHORT ABOVE THE BOTTOM OF THE WINDOW
% FP2....DEPTH OF THE RIGHT FIN
% A2.....DISTANCE OF THE RIGHT FIN EXTENDED ABOVE THE TOP OF THE WINDOW
% B2.....DISTANCE FROM THE RIGHT EDGE OF THE WINDOW TO THE RIGHT FIN
% C2.....DISTANCE OF THE RIGHT FIN STOP SHORT ABOVE THE BOTTOM OF THE WINDOW
% WAZI...WINDOW AZIMUTH ANGLE
% SHRAT=1.
1103 A=AW
H=HT
GAMMA=PHI-WAZI
COSG=COS(GAMMA)
IF(COSG)100,100,104
100 SHRAT=0.
GO TO 2000
104 CONTINUE
SBETA=COSZ
IF(SBETA)100,100,152
152 SING=SIN(GAMMA)
VERT=SBETA/SQRT(1.-SBETA*SBETA)/COSG
HORIZ=ABS(SING)/COSG
TCETA=VERT/HORIZ

```

```

        IF(GAMMA) 155,154,154
%
154    -----SUN ON LEFT
        B=BWL
        GO TO 156
%
%      -----SUN ON RIGHT
155    B=RWR
156    ARSHF=0.
        AREAIV=0.
        ARSIF=0.
        AREA0=0.
        AREA1=0.
        ARSH1=0.
        FL3=0.
        H3=0.
        H1=H
        FL1=FL
        K=1
        L=1
        T1=FP*VERT
        FM1=FP*HORIZ
        IF(FP) 37,37,153
153    T=T1
        FM=FM1
        AB=B*TCETA
        UG=(FL+B)*TCETA
        DE=(H+A)/TCETA
%
%      -----HORIZONTAL OVERHUNG "AREA0"
        IF(T-A) 27,27,2
2       IF(AB-A) 14,14,3
3       IF(DE-B) 12,12,4
4       IF(FM-B) 11,11,5
5       IF(DE-(FL+B)) 8,8,6
6       IF(FM-(FL+B)) 9,9,7
%
%      -----HORIZ 9
7       AREA0=FL*(0.5*(AB+UG)-A)
        GO TO 37
8       IF(T-(H+A)) 9,10,10
%
%      -----HORIZ 7
9       AREA0=(T-A)*FL-((FM-B)**2)*TCETA*0.5
        L=2
        GO TO 21
%
%      -----HORIZ 8
10      AREA0=H*FL-(DE-B)**2*TCETA*0.5
        GO TO 37
%
%      -----HORIZ 3
11      AREA0=FL*(T-A)
        L=2
        GO TO 24
12      IF(T-(H+A)) 11,13,13
%
%      -----HORIZ 2
13      AREA0=H*FL
        GO TO 68
14      IF(UG-A) 27,27,15
15      IF(DE-(FL+B)) 18,18,16

```

```

16    IF (FM-(FL+B)) 20,17,17
%
%-----HORIZ 6
17    AREA0=(UG-A)**2/TCETA*0.5
GO TO 37
18    IF (T-(H+A)) 20,19,19
%
%-----HORIZ 5
19    AREA0=H+(FL-(A+0.5*H)/TCETA+B)
GO TO 37
%
%-----HORIZ 4
20    AREA0=(T-A)*(FL+B-FM*(1.+A/T)*0.5)
L=2
%
%-----VERT PROJ "AREAV"
21    FL3=FL+B-FM
IF (T+D-(H+A)) 22,22,23
%
%-----VERT 8
22    H3=D
GO TO 3700
%
%-----VERT 9
23    H3=H+A-T
GO TO 3700
24    FL3=FL
IF (T+D-(H+A)) 26,26,25
%
%-----VERT 7
25    H3=H+A-T
AREAV=H3*FL3
GO TO 68
%
%-----VERT 6
26    H3=D
GO TO 3700
27    IF (T+D-A) 37,37,28
28    IF (FM-B) 34,34,29
29    IF (FM-(FL+B)) 31,37,37
31    FL3=FL+B-FM
IF (T+D-(H+A)) 33,33,32
%
%-----VERT 5
32    H3=H
GO TO 3700
%
%-----VERT 4
33    H3=T+D-A
GO TO 3700
34    IF (T+D-(H+A)) 36,35,35
%
%-----VERT 2
35    AREAV=H*FL
GO TO 68
%
%-----VERT 3
36    H3=T+D-A
FL3=FL
3700  AREAV=FL3*H3
%
%-----SIDE FIN AND SHORT SIDE FIN
%
%-----SIDE FIN "AREA1" "ARSIF"
37    IF (GAMMA) 66,68,74
74    FPF=FP1
AF=A1
BF=B1

```

```

CX=C1
GO TO 84
66 FPF=FP2
AF=A2
BF=B2
CX=C2
84 IF (FPF) 68,68,67
67 T=FPF*VERT
FM=FPF*HORIZ
AF1=AF
IF (AREAO) 73,73,88
% -----TEST FOR OVERLAP OF FIN AND OVERHUNG SHADOW
88 AT=A+(BF-B)*TCETA
IF (AT-AF) 711,73,73
% -----OVERLAP EXISTS..L=2 IF OVERHUNG SHADOW HAS HORIZ EDGE IN WINDOW
711 GO TO (621,712),L
% -----TEST FOR TYPE OF OVERLAP
712 IF ((FM-BF)-(FM1-B)) 621,622,622
% -----SET L=1,SHADOW INTERSECT ON INCLINED EDGE OF OVERHUNG SHADOW
% -----FIN SHADOW IS BELOW INCLINED EDGE OF OVERHUNG SHADOW
621 AF=AT
L=1
GO TO 73
% -----L IS 2, HORIZ EDGE OF OVERHUNG SHADOW-PORTION ABOVE HORIZ EDGE
% -----NOT IN OVERHUNG SHADOW IS FIN SHADOW
622 AREA1=FL*(T1-A)-AREAO
% -----RESET TO CALC FIN SHADOW BELOW HORIZ EDGE OF OVHNG SHADOW
AF=T1-A+AF1
H=H+AF1-AF
% -----SHADOW OF FIN (K=1 ON GLASS K=2 ON VERT PROJ SHADOW)
73 AB=BF*TCETA
UG=(FL+BF)*TCETA
DE=(H+AF)/TCETA
DJ=CX/TCETA
IF (FM-BF) 69,69,38
38 IF (AB-AF) 39,50,50
39 IF (UG-AF) 48,48,40
40 IF (T-AF) 47,47,41
41 IF (UG-(H+AF)) 44,44,42
42 IF (T-(H+AF)) 91,80,80
% -----FIN 9
80 AREA1=H*((AF+H*0.5)/TCETA-BF)+AREA1
GO TO 58
44 IF (FM-(FL+BF)) 91,89,89
% -----FIN8
89 AREA1=H*FL-(UG-AF)**2/TCETA*0.5+AREA1
GO TO 58
% -----FIN 7
91 AREA1=(FM-BF)*H-(T-AF)**2/TCETA*0.5+AREA1
GO TO 63
48 IF (FM-(FL+BF)) 47,47,49
% -----FIN 3
47 AREA1=H*(FM-BF)+AREA1
GO TO 63

```

```

% -----FIN 2
49  AREA1=H*FL+AREA1
    GO TO 58
50  IF(DE-BF)69,69,51
51  IF(UG-(H+AF))55,55,52
52  IF(T-(H+AF))93,94,94
%
% -----FIN 6
94  AREA1=(DE-BF)**2*TCETA*0.5+AREA1
    GO TO 58
%
% -----FIN 4
93  AREA1=(FM-BF)*(H+AF-(T+AB)*0.5)+AREA1
    GO TO 63
55  IF(FM-(FL+BF))93,99,99
%
% -----FIN 5
99  AREA1=FL*(H-(BF+FL*0.5)*TCETA+AF)+AREA1
%
% -----SHORT SIDE FIN "ARSH1","ARSHF"
58  IF(DJ-BF)69,69,59
59  IF(DJ-(FL+BF))61,61,60
%
% -----SHORT 3
60  ARSH1=-FL*(CX-(BF+FL/2.)*TCETA)
    GO TO 69
%
% -----SHORT 4
61  ARSH1=-(CX-AB)**2/TCETA*0.5
    GO TO 69
63  IF(DJ-BF)69,69,64
64  IF(DJ-FM)61,61,65
%
% -----SHORT 2
65  ARSH1=-(FM-BF)*(CX-(T+AB)*0.5)
69  GO TO (77,76),K
76  ARSH1=-ARSH1
    AREA1=-AREA1
77  ARSHF=ARSHF+ARSH1
    ARSIF=ARSIF+AREA1
    GO TO(78,68),K
78  IF(AREA1)68,68,72
%
% -----RESET PARAMETERS TO DEDUCT FIN SHADOW OVERLAP ON VERT PROJ SHADOW
72  K=2
    AREA1=0.
    ARSH1=0.
    BBF=BF
    BF=FM1-B+BF
    IF(BF)186,185,185
186  BF=BBF
185  IF(HT+A-T1-D)87,87,188
188  CX=CX-(HT+A-T1-D)
    IF(CX)85,87,87
85  CX=0.
87  AF=T1-A+AF
    H=H3
    FL=FL3
    GO TO 73
%
% ----- SHADED AREA "ARSHA"
68  ARSHA=AREA0+AREA1+ARSHF+ARSIF
    SHRAT=(FL1*H1-ARSHA)/(FL1*H1)

```

2000 FL=FL1
 CONTINUE
 RETURN
 END

SHADOW 2*

An Algorithm to Determine Whether or Not a Given Window is Shaded by a Remote Object Such as an Adjacent Building

This algorithm is approximate and is applicable only where the window is relatively small in comparison to the shading object. Large windows may be subdivided into smaller segments for this consideration. The window is considered either completely shaded or completely in sun. Partially shaded window can be considered in either case depending on the location of the window reference point. Figure A-9 shows a typical window-shading object relationship.

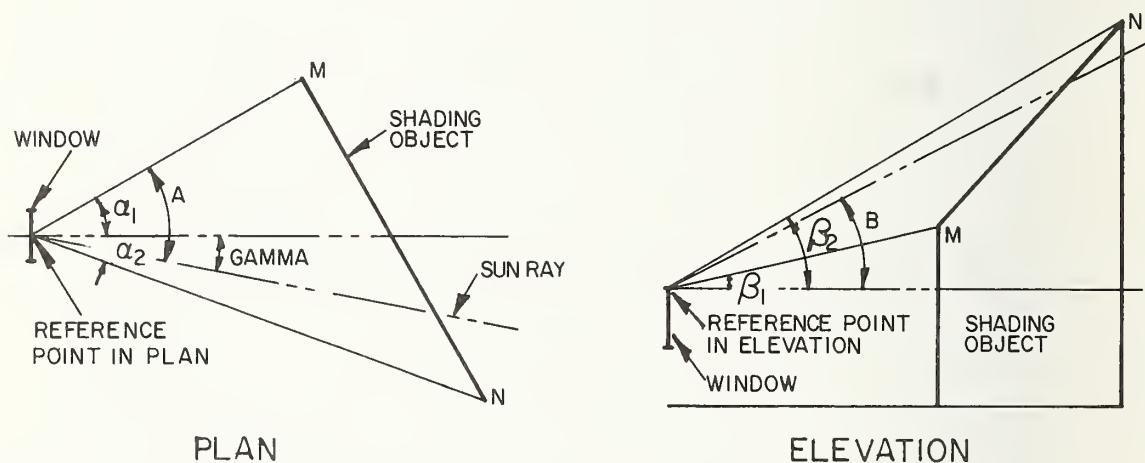


Figure A-9 A Typical Window-Shading Object Relationship

Note that the reference point can be located at any point on the window. Locating the reference point at the top of the window as shown in the elevation in Figure A-9 is slightly conservative as compared to if the reference point is located at the center of the window.

* This section was contributed by Tseng-Yao Sun; Ayres, Cohen and Hayakawa, Los Angeles, California.

Data:

α_1, α_2 : Azimuth shadow limit angles. Right +, Left -
 β_1, β_2 : Altitude shadow limit angles
WAZI: Window azimuth angle
PHI: Solar azimuth angle
BETA: Solar altitude angle

Calculation Sequence:

This subroutine determines whether the window is sunlit or shaded for the given position of the sun.

1. Wall-solar azimuth angle

$$\text{GAMMA} = \text{PHI} - \text{WAZI}$$

2. If $\text{GAMMA} < \alpha_1$ or $\text{GAMMA} > \alpha_2$, the window is in sun

3. If $\alpha_2 > \text{GAMMA} > \alpha_1$,

$$A = \text{GAMMA} - \alpha_1$$

$$B = \beta_1 + A * (\beta_2 - \beta_1)$$

4. If $\text{BETA} > B$, the window is in sun. Otherwise, the window is in shade.

An Algorithm for Calculating Radiation Shape Factors
Between Inside Surfaces of a Room

Definition of Room

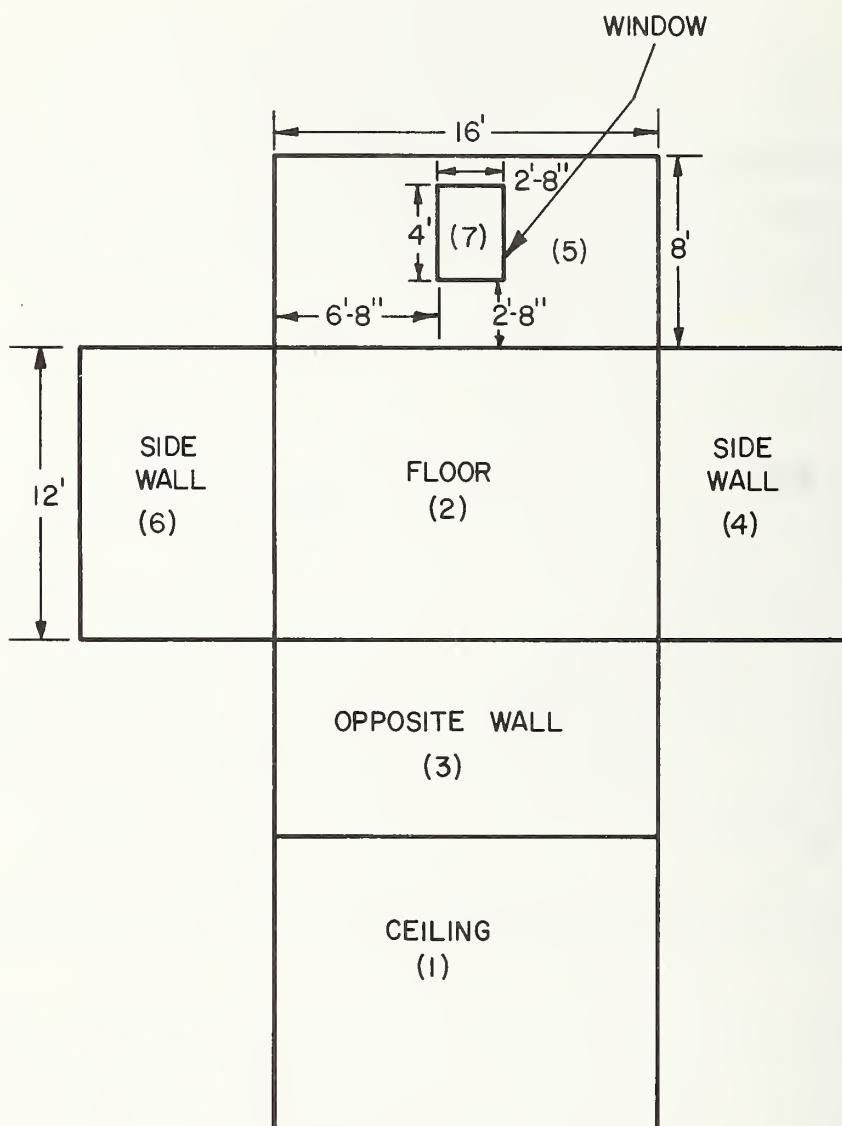


Figure A-10 Room Layout

* This section was contributed by D. M. Burch and B. A. Peavy; Thermal Engineering Section, Center for Building Technology, National Bureau of Standards, Washington, D.C.

Data:

L: Length of room

W: Width of room

H: Height of room

A: Height of windows or doors

B: Width of windows or doors

C: Distance of left edge of window from left wall

D: Height of lower edge of window from floor

The primary variables determined by this subroutine are:

F_{m-n} : An array giving radiation shape factors between the
various inside surfaces of a room

m,n = 1 Ceiling

2 Floor

3 Wall No. 1 (length by height)

4 Wall No. 2 (side wall)

5 Wall No. 3 (opposite wall)

6 Wall No. 4 (side wall)

7-14 Provision for windows and doors in walls

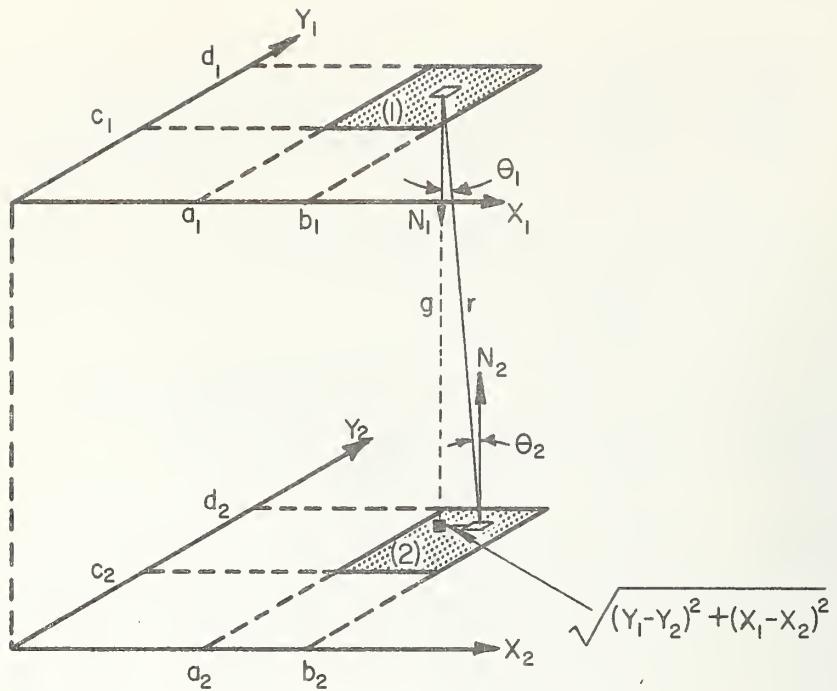


Figure A-11 Radiation Heat Exchange Between Ceiling and Floor Surfaces

Radiation shape factor, F_{1-2} , between two parallel room surfaces

$$2\pi(b_i - a_1)(d_1 - c_1)F_{1-2} = [P(b_2 - b_1) + P(a_2 - a_1)][Q(c_2 - c_1) + Q(d_2 - d_1) - Q(c_2 - d_1) - Q(d_2 - c_1)] \\ + [P(b_2 - a_1) + P(a_2 - b_1)][Q(c_2 - d_1) + Q(d_2 - c_1) - Q(c_2 - c_1) - Q(d_2 - d_1)]$$

where

$$P(z_1)Q(z_2) = z_1^W \tan^{-1} \frac{z_1}{W} + z_2^V \tan^{-1} \frac{z_2}{V} - \frac{g^2}{2} \ln \frac{(W^2 + z_1^2)}{W^2}$$

$$V^2 = g^2 + z_1^2, \quad W^2 = g^2 + z_2^2$$

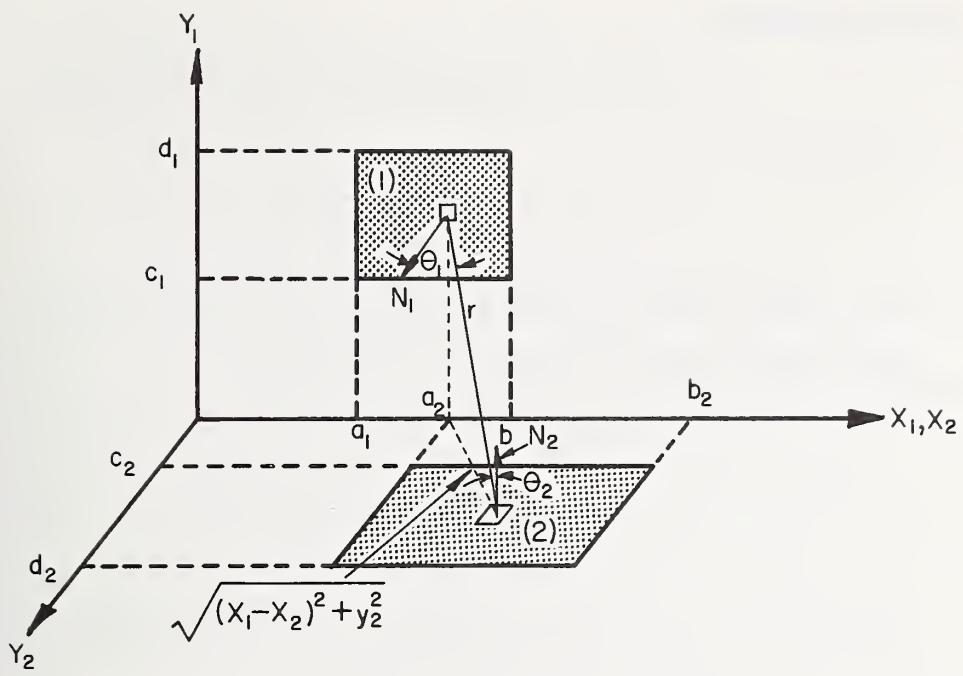


Figure A-12 Radiation Heat Exchange Between Wall and Floor Surfaces

Radiation Shape Factor, F_{1-2} , between two perpendicular room surfaces

$$2\pi(b_1 - a_1)(d_1 - c_1)F_{1-2} = [R(b_2 - b_1) + R(a_2 - a_1)][S(c_2 + c_1) + S(d_2 + d_1) - S(c_2 + d_1) - S(d_2 + c_1)] \\ + [R(b_2 - a_1) + R(a_2 - b_1)][S(c_2 + d_1) + S(d_2 + c_1) - S(c_2 + c_1) - S(d_2 + d_1)]$$

where

$$R(z_1)S(y_2 + y_1) = TZ_1 \tan^{-1} \frac{z_1}{T} + \frac{1}{4} (Z_1^2 T^2) \ln (T^2 + Z_1^2)$$

$$T^2 = y_2^2 + y_1^2$$

Calculation Sequence:

1. Determine areas of ceiling, floor, and walls (no windows or doors),

$$A_m, m = 1, 2, 3, 4, 5, 6$$

2. Calculate radiation shape factor F_{m-n} for these surfaces using equations, and reciprocal relation

$$F_{m-n} = \frac{A_n}{A_m} F_{n-m}$$

3. Determine area of windows and doors and subtract from pertinent wall areas to give net wall areas
4. Calculate radiation shape factors from windows and/or doors to ceiling and/or floor using the above shape factor equations and the reciprocal relation. The radiation shape factors from a ceiling or floor surface to a window, door, or a wall area is given by

$$F_{m-n_k} = F_{m-n} - F_{m-n_1} - F_{m-n_2}$$

where k denotes the surface which is applicable for a receiving surface, A_n that has been subdivided into 2 or more surfaces.

5. Calculate radiation shape factors from windows and doors to walls using equations, above defined angle factor algebra and

$$A_{m_k} F_{m_k-n} = A_m F_{m-n} - A_{m_1} F_{m_1-n} - A_{m_2} F_{m_2-n}$$

which is applicable for a transmitting surface A_m that has been subdivided into 2 or more surfaces.

6. The resulting array F_{m-n} must be satisfied by the identity

$$\sum_{k=1}^p F_{m-k} = 1$$

where p is the number of surfaces visible to the transmitting surface A_m

C THIS PROGRAM DETERMINES THE RADIATION SHAPE FACTORS FOR A ROOM
 C OF ARBITRARY DIMENSIONS WITH THE PROVISION FOR TWO WINDOWS OR
 C DOORS OF ANY SIZE AND POSITION ON EACH OF THE FOUR WALLS
 C INPUT TO THE PROGRAM IS READ IN FIELDS OF NINE AND FIRST CARD IS
 C
 LENGTH WIDTH HEIGHT
 C
 C THIS CARD IS FOLLOWED BY FOUR CARDS GIVING PERTINENT DIMENSIONS
 C FOR WINDOWS AND DOORS - FIRST CARD IS FOR WINDOWS OR DOORS ON A
 C WALL DEFINED ON THE LENGTH OF ROOM - SECOND CARD ON WIDTH, ETC.
 C LEAVE SPACES BLANK IF THERE IS NO WINDOW OR DOOR
 C
 C A B C D A B C D
 C A B C D A B C D
 C A B C D A B C D
 C A B C D A B C D
 C
 C WHERE A=HEIGHT OF WINDOW, C=CORNER OF WALL TO LEFT EDGE OF WINDOW
 C B=WIDTH OF WINDOW, D=HEIGHT FROM FLOOR TO LOWER EDGE OF WINDOW
 C OUTPUT CONSISTS OF ASSIGNMENT OF NUMBERS TO THE VARIOUS SURFACES
 C OF THE ROOM
 C
 C 1 CEILING LENGTH X WIDTH
 C 2 FLOOR LENGTH X WIDTH
 C 3 WALL NO.1 LENGTH X HEIGHT
 C 4 WALL NO.2 WIDTH X HEIGHT
 C 5 WALL NO.3 LENGTH X HEIGHT
 C 6 WALL NO.4 WIDTH X HEIGHT
 C 7-14 WINDOW OR DOOR ON WALL NO.X
 C
 C THIS IS FOLLOWED BY A PRINTOUT OF AN ARRAY OF RADIATION SHAPE FACTORS
 C DIMENSION SF(14,14),A(8),B(8),C(8),D(8),S(14),X(5)
 C DIMENSION IFIL(14),VF(14,14)
 C REAL L
 C READ(5,1)L,W,H
 C READ(5,1)(B(I),D(I),A(I),C(I),I=1,8)
 C FORMAT(8F9.2)
 1 FORMAT(6X,2H LEGEND FOR ROOM ARRANGEMENT/40H0ASSUME WALL NO. 1 I
 301 15 ON THE ROOM LENGTH/7H0M OR N/4H 1,6X,10H CEILING ,F6.2,4H BY
 2,F6.2/4H 2,6X,10H FLOOR ,F6.2,4H BY ,F6.2/4H 3,6X,10H WALL
 3NO.1,F6.2,4H BY ,F6.2/4H 4,6X,10H WALL NO.2,F6.2,4H BY ,F6.2/4H
 4 5,6X,10H WALL NO.3,F6.2,4H BY ,F6.2/4H 6,6X,10H WALL NO.4,F6.2
 5,4H BY ,F6.2)
 403 FORMAT(14,6X,15H DOOR ON WALL,I2,4F11.2)
 302 FORMAT(14,6X,15H WINDOW ON WALL,I2,4F11.2)
 303 FORMAT(6X,17H WINDOWS OR DOORS,13X,2H A,9X,2H B,9X,2H C,9X,2H D)
 304 FORMAT(1H /8X,18H A - WINDOW HEIGHT/8X,17H B - WINDOW WIDTH/9X,4H
 1C - DISTANCE OF LEFT EDGE OF WINDOW TO LEFT WALL/8X,4H D - HEIGHT
 2 FROM FLOOR TO LOWER EDGE OF WINDOW)
 WRITE(6,301) L,W,L,W,L,H,W,H,L,H,W,H
 WRITE(6,303)
 K=7
 DO 305 I=1,8
 IF(D(I).LT.1.E-8) GO TO 305
 J=(I+1)/2
 IC=C(I)*100.
 IF(IC.EQ.0)GO TO 401
 WRITE(6,302)K,J,D(I),B(I),A(I),C(I)
 GO TO 402
 401 WRITE(6,403)K,J,D(I),B(I),A(I),C(I)
 402 CONTINUE
 K=K+1

```

305  CONTINUE
      WRITE(6,304)
      DO 26 I=1,8
      B(I)=A(I)+B(I)
      D(I)=C(I)+D(I)
26    S(1)=W*L
      S(2)=S(1)
      DO 15 I=1,8
      S(I+6)=(B(I)-A(I))*(D(I)-C(I))
      IA=S(I+6)
      IF(IA.EQ.0)S(I+6)=1.0E-08
15    CONTINUE
      DO 14 I=1,5
      VAR=L
      IF(I.EQ.2.OR.I.EQ.4)VAR=W
14    X(I)=VAR
      DO 25 I=1,4
      IW=(I-1)*2+7
25    S(I+2)=X(I)*H
      DO 2 I=1,14
      DO 2 J=1,14
2     SF(I,J)=0.0
      SF(1,2)=PF(0.0,L,0.0,W,0.0,L,0.0,W,H)
      SF(1,3)=AF(0.0,L,0.0,W,0.0,L,0.0,W,H)
      SF(1,4)=AF(0.0,W,0.0,L,0.0,W,0.0,W,H)
      SF(1,5)=SF(1,3)
      SF(1,6)=SF(1,4)
      SF(2,1)=SF(1,2)*S(1)/S(2)
      SF(2,3)=SF(1,3)
      SF(2,4)=SF(1,4)
      SF(2,5)=SF(2,3)
      SF(2,6)=SF(2,4)
      SF(3,1)=SF(1,3)*S(1)/S(3)
      SF(3,2)=SF(2,3)*S(2)/S(3)
      SF(3,4)=AF(0.0,H,0.0,L,0.0,H,0.0,W)
      SF(3,5)=PF(0.0,L,0.0,H,0.0,L,0.0,H,W)
      SF(3,6)=SF(3,4)
      SF(4,1)=SF(1,4)*S(1)/S(4)
      SF(4,2)=SF(2,4)*S(2)/S(4)
      SF(4,3)=SF(3,4)*S(3)/S(4)
      SF(4,5)=SF(4,3)
      SF(4,6)=PF(0.0,W,0.0,H,0.0,W,0.0,H,L)
      SF(5,1)=SF(1,5)*S(1)/S(5)
      SF(5,2)=SF(2,5)*S(2)/S(5)
      SF(5,3)=SF(3,5)*S(3)/S(5)
      SF(5,4)=SF(4,5)*S(4)/S(5)
      SF(5,6)=SF(5,4)
      SF(6,1)=SF(1,6)*S(1)/S(6)
      SF(6,2)=SF(2,6)*S(2)/S(6)
      SF(6,3)=SF(3,6)*S(3)/S(6)
      SF(6,4)=SF(4,6)*S(4)/S(6)
      SF(6,5)=SF(5,6)*S(5)/S(6)
      DO 250 I=1,4
      IW=(I-1)*2+7
250   S(I+2)=S(I+2)-S(IW)-S(IW+1)
      DO 3 K=1,4
      J=(K-1)*2
      DO 5 I=1,2
      N=I+J
      N6=N+6
      SF(N6,2)=AF(A(N),B(N),C(N),D(N),0.0,X(K),0.0,X(K+1))
      SF(N6,1)=AF(A(N),B(N),H-D(N),H-C(N),0.0,X(K),0.0,X(K+1))

```

```

SF(2,N6)=SF(N6,2)*S(N6)/S(2)
5 SF(1,N6)=SF(N6,1)*S(N6)/S(1)
SF(2,2+K)=SF(2,2+K)-SF(2,J+7)-SF(2,J+8)
SF(1,2+K)=SF(1,2+K)-SF(1,J+7)-SF(1,J+8)
SF(2+K,2)=SF(2,2+K)*S(2)/S(2+K)
3 SF(2+K,1)=SF(1,2+K)*S(1)/S(2+K)
DO 8 K=1,2
N=(K-1)*2
SUM=0.0
DO 6 J=1,2
NJ=N+J
NJ6=NJ+6
SF(NJ6,K+4)=PF(A(NJ),B(NJ),C(NJ),D(NJ),0.0,X(K)+0.0,H,X(K+1))
SUM=SUM+S(NJ6)*SF(NJ6,K+4)
DO 6 I=1,2
NI=N+I+4
NI6=NI+6
SF(NJ6,NI6)=PF(A(NJ),B(NJ),C(NJ),D(NJ),X(K)-B(NI),X(K)-A(NI),C(NI)
1,D(NI),X(K+1))
6 SF(NI6,NJ6)=SF(NJ6,NI6)*S(NJ6)/S(NI6)
DO 7 I=1,2
NI=N+I+4
NI6=NI+6
7 SF(NI6,K+2)=PF(A(NI),B(NI),C(NI),D(NI),0.0,X(K)+0.0,H,X(K+1))
SF(N+7,K+4)=SF(N+7,K+4)-SF(N+7,N+11)-SF(N+7,N+12)
SF(N+8,K+4)=SF(N+8,K+4)-SF(N+8,N+11)-SF(N+8,N+12)
SF(N+11,K+2)=SF(N+11,K+2)-SF(N+11,N+7)-SF(N+11,N+8)
SF(N+12,K+2)=SF(N+12,K+2)-SF(N+12,N+7)-SF(N+12,N+8)
SF(K+4,N+7)=SF(N+7,K+4)*S(N+7)/S(K+4)
SF(K+4,N+8)=SF(N+8,K+4)*S(N+8)/S(K+4)
SF(K+2,N+11)=SF(N+11,K+2)*S(N+11)/S(K+2)
SF(K+2,N+12)=SF(N+12,K+2)*S(N+12)/S(K+2)
SF(K+2,K+4)=(X(K)*H*SF(K+2,K+4)-SUM)/S(K+2)
SF(K+2,K+4)=SF(K+2,K+4)-SF(K+2,N+11)-SF(K+2,N+12)
SF(K+4,K+2)=SF(K+2,K+4)*S(K+2)/S(K+4)
8 DO 9 K=1,4
IT=K+3
IF(K.EQ.4) IT=3
IW=(K-1)*2
SUM=0.0
DO 10 I=1,2
IK=IW+I
IK6=IK+6
SF(IK6,IT)=AF(C(IK),D(IK),X(K)-B(IT),X(K)-A(IK),0.0,H,0.0,X(K+1))
SUM=SUM+S(IK6)*SF(IK6,IT)
DO 10 J=1,2
IM=J+IW+2
IF(K.EQ.4) IM=J
IM6=IM+6
SF(IK6,IM6)=AF(C(IK),D(IK),X(K)-B(IK),X(K)-A(IK),C(IM),D(IM),A(IM)
1,B(IM))
10 SF(IM6,IK6)=SF(IK6,IM6)*S(IK6)/S(IM6)
DO 11 I=1,2
IL=IW+2+I
IF(K.EQ.4) IL=I
IL6=IL+6
SF(IL6,K+2)=AF(C(IL),D(IL),A(IL),B(IL),0.0,H,0.0,X(K))
IW7=IW+7
IAC=IW7+2
IWL=K+3
IF(K.NE.4) GO TO 12
IWL=3
IAC=7

```

```

12 IK=K+2
SF(IW7,IWL)=SF(IW7,IWL)-SF(IW7,IAC)-SF(IW7,IAC+1)
SF(IW7+1,IWL)=SF(IW7+1,IWL)-SF(IW7+1,IAC)-SF(IW7+1,IAC+1)
SF(IAC,IK)=SF(IAC,IK)-SF(IAC,IW7)-SF(IAC,IW7+1)
SF(IAC+1,IK)=SF(IAC+1,IK)-SF(IAC+1,IW7)-SF(IAC+1,IW7+1)
SF(IWL,IW7)=SF(IW7,IWL)*S(IW7)/S(IWL)
SF(IWL,IW7+1)=SF(IW7+1,IWL)*S(IW7+1)/S(IWL)
SF(IK,IAC)=SF(IAC,IK)*S(IAC)/S(IK)
SF(IK,IAC+1)=SF(IAC+1,IK)*S(IAC+1)/S(IK)
KAC=IK+1
IF(K.EQ.4)KAC=3
SF(IK,KAC)=(X(K)*H*SF(IK,KAC)-SUM)/S(IK)
SF(IK,KAC)=SF(IK,KAC)-SF(IK,IAC)-SF(IK,IAC+1)
9 SF(IK,KAC)=SF(IK,KAC)*S(IK)/S(KAC)
NP=0
DO 52 I=1,14
IB=SF(I,1)*1000.
IF(I.EQ.1)IB=1
IF(IB.EQ.0)GO TO 52
NP=NP+1
IFIL(NP)=I
52 CONTINUE
DO 16 I=1,NP
DO 16 J=1,NP
NI=IFIL(I)
NJ=IFIL(J)
16 VF(I,J)=SF(NI,NJ)
WRITE(6,307)
307 FORMAT(1H /4X,44H ARRAY FOR SHAPE FACTORS FROM SURFACE M TO N/1H )
WRITE(6,17)(I,I=1,NP)
17 FORMAT(4H M/N,I5,13I7)
DO 18 I=1,NP
18 WRITE(6,19)(I,(VF(I,J),J=1,NP))
19 FORMAT(1X,I2,1X,14F7.5)
STOP
END

```

```

C FUNCTION PF(A1,B1,C1,D1,A2,B2,C2,D2,G)
C THIS FUNCTION SUBPROGRAM CALCULATES THE SHAPE FACTOR FROM A
C PLANE RECTANGULAR SURFACE TO ANOTHER PARALLEL PLANE
C RECTANGULAR SURFACE.
C S=(B1-A1)*(D1-C1)
C IP=S*10.
C IF(IP.NE.0)GO TO 1
C PF=0.0
C RETURN
1 F=F1(B1,D1,B2,D2,G)-F1(B1,D1,B2,C2,G)
1-F1(B1,D1,A2,D2,G)+F1(B1,D1,A2,C2,G)
2-F1(B1,C1,B2,D2,G)+F1(B1,C1,B2,C2,G)
3+F1(B1,C1,A2,D2,G)-F1(B1,C1,A2,C2,G)
4-F1(A1,D1,B2,D2,G)+F1(A1,D1,B2,C2,G)
5+F1(A1,D1,A2,D2,G)-F1(A1,D1,A2,C2,G)
6+F1(A1,C1,B2,D2,G)-F1(A1,C1,B2,C2,G)
7-F1(A1,C1,A2,D2,G)+F1(A1,C1,A2,C2,G)
PF=F/(3.1415927*S)
RETURN
END

```

```

FUNCTION F1(X1,Y1,X2,Y2,G)
U=X2-X1
V=Y2-Y1
UU=SQRT(G*G+U*U)
VV=SQRT(G*G+V*V)
WW=(G*G+U*U+V*V)/(G*G+V*V)
FI=U*VV*ATAN(U/VV)+V*UU*ATAN(V/UU)-G*G*LOG(WW)/2.
F1=FI/2.
RETURN
END

```

```

FUNCTION AF(A1,B1,C1,D1,A2,B2,C2,D2)
C THIS FUNCTION SUBPROGRAM CALCULATES THE SHAPE FACTOR FROM A
C PLANE RECTANGULAR SURFACE OF A ROOM TO ANOTHER PERPENDICULAR
C PLANE RECTANGULAR SURFACE.
S=(B1-A1)*(D1-C1)
IP=S*10.
IF(IP.NE.0) GO TO 1
AF=0.0
RETURN
1 F=F2(A1,C1,A2,C2)+F2(B1,D1,B2,D2)
1-F2(A1,D1,B2,D2)-F2(B1,D1,B2,C2)
2+F2(A1,D1,B2,C2)-F2(B1,D1,A2,D2)
3+F2(A1,D1,A2,D2)+F2(B1,D1,A2,C2)
4-F2(A1,D1,A2,C2)-F2(B1,C1,B2,D2)
5+F2(A1,C1,B2,D2)+F2(B1,C1,B2,C2)
6-F2(A1,C1,B2,C2)+F2(B1,C1,A2,D2)
7-F2(A1,C1,A2,D2)-F2(B1,C1,A2,C2)
AF=F/(3.1415927*S)
RETURN
END

```

```

FUNCTION F2(X1,Y1,X2,Y2)
U=X2-X1
V=Y1**2+Y2**2
IF(ABS(U**2+V).LE.1.0E-7) GO TO 1
GO TO 2
1 F2=0.0
GO TO 3
2 IF(V.LE.1.0E-7) GO TO 4
GO TO 5
4 F2=.5*U**2*LOG(U**2)
GO TO 3
5 F2=.5*(U**2-V)*LOG(U**2+V)+2*U*SQRT(V)*ATAN(U/SQRT(V))
3 F2=F2/4.
RETURN
END

```

LEGEND FOR ROOM ARRANGEMENT

ASSUME WALL NO. 1 IS ON THE ROOM LENGTH

M OR N

1	CEILING	16.00 BY	12.00					
2	FLOOR	16.00 BY	12.00					
3	WALL NO.1	16.00 BY	8.00					
4	WALL NO.2	12.00 BY	8.00					
5	WALL NO.3	16.00 BY	8.00					
6	WALL NO.4	12.00 BY	8.00					
	WINDOWS OR DOORS			A	B	C	D	
7	WINDOW ON WALL 2		4.00		2.67	6.67		2.67
8	WINDOW ON WALL 3		4.00		2.67	6.67		2.67

A - WINDOW HEIGHT

B - WINDOW WIDTH

C - DISTANCE OF LEFT EDGE OF WINDOW TO LEFT WALL

D - HEIGHT FROM FLOOR TO LOWER EDGE OF WINDOW

ARRAY FOR SHAPE FACTORS FROM SURFACE M TO N

M/N	1	2	3	4	5	6	7	8
1	.00000	.36405	.18326	.11766	.16504	.13472	.01706	.01822
2	.36405	.00000	.18326	.12078	.16824	.13472	.01394	.01501
3	.27488	.27488	.00000	.12759	.15887	.13715	.00956	.01706
4	.26473	.27176	.19139	.00000	.16715	.09464	.00000	.01033
5	.27006	.27531	.17332	.12157	.00000	.14066	.01909	.00000
6	.26944	.26944	.18286	.08412	.17192	.00000	.01127	.01095
7	.30709	.25086	.11468	.00000	.21001	.10144	.00000	.01592
8	.32793	.27026	.20474	.08261	.00000	.09853	.01592	.00000

An Algorithm for Calculating Radiation Shape Factors Between
Attic Surfaces Where the Attic Has a Gabled Room

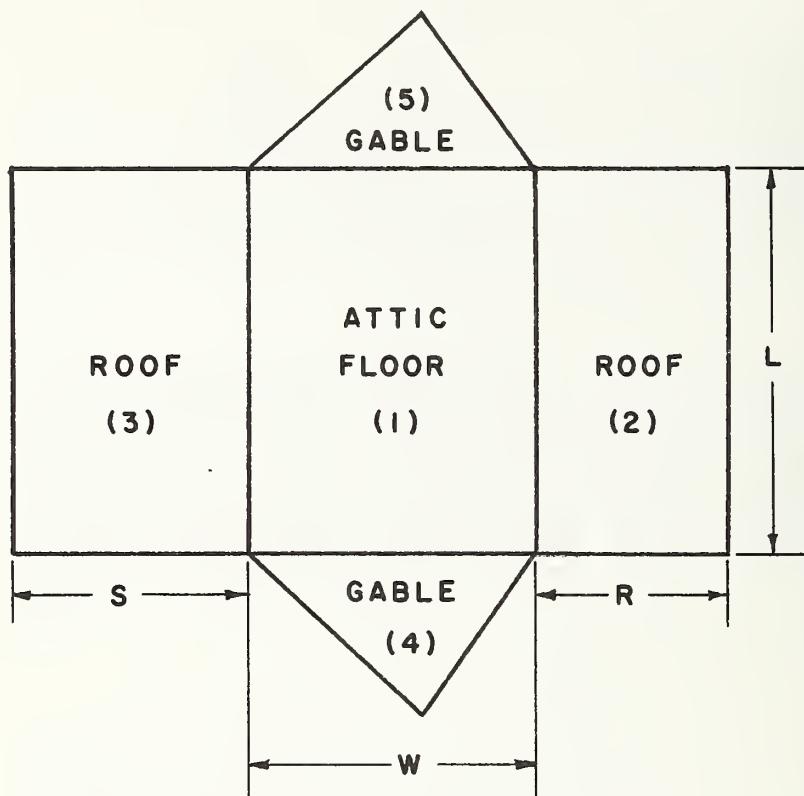


Figure A-13 Definitions of Attic Enclosure

Data:

L = Length of attic floor

W = Width of attic

* This section was contributed by B. A. Peavy and D. M. Burch, Thermal Engineering Systems Section, Center for Building Technology, National Bureau of Standards, Washington, D. C. 20234.

The primary variables determined by this subroutine are:

F_{m-n} = An array giving radiation shape factors between
the various inside surfaces of an attic with a
gabled roof

$m, n = 1$ attic floor (1)

2 roof area (2)

3 roof area (3)

4 front gable (4)

5 rear gable (5)

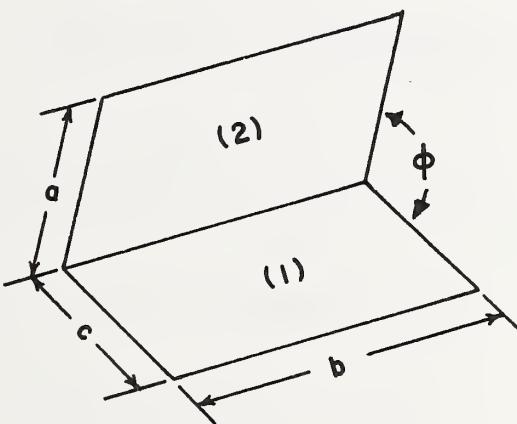


Figure A-14 Radiation Heat Ex-
change Between Two
Adjacent Surfaces

$$X = \frac{a}{b}, Y = \frac{c}{b}, Z^2 = X^2 + Y^2 - 2XY \cos \phi$$

$$\begin{aligned}
\pi Y F_{1-2} = & - \frac{\sin 2\phi}{4} \left\{ XY \sin\phi + \left(\frac{\pi}{2} - \phi\right) (X^2 + Y^2) \right. \\
& + Y^2 \tan^{-1} \left(\frac{X - Y \cos\phi}{Y \sin\phi} \right) + X^2 \tan^{-1} \left(\frac{Y - X \cos\phi}{X \sin\phi} \right) \} \\
& + \frac{\sin^2 \phi}{4} \left\{ \left(\frac{2}{\sin^2 \phi} - 1 \right) \ln \left[\frac{(1 + X^2)(1 + Y^2)}{1 + Z^2} \right] \right. \\
& + Y^2 \ln \left[\frac{Y^2 (1 + Z^2)}{(1 + Y^2) Z^2} \right] + X^2 \cos 2\phi \ln \left[\frac{1 + X^2}{1 + Z^2} \right] + 2X^2 \ln \frac{X}{Z} \} \\
& + Y \tan^{-1} \left(\frac{1}{Y} \right) + X \tan^{-1} \left(\frac{1}{X} \right) - Z \tan^{-1} \left(\frac{1}{Z} \right) \\
& + \frac{\sin\phi \sin 2\phi}{2} X \sqrt{1 + X^2 \sin^2 \phi} \left\{ \tan^{-1} \left[\frac{Y (1 + X^2 \sin^2 \phi)}{1 + X^2 - XY \cos\phi} \right] \right\} \\
& + \cos\phi \int_0^Y \sqrt{1 + \lambda^2 \sin^2 \phi} \left\{ \tan^{-1} \left[\frac{X (1 + \lambda^2 \sin^2 \phi)}{1 + \lambda^2 - \lambda X \cos\phi} \right] \right\} d\lambda
\end{aligned}$$

(1)

$$\sum_{m=1}^5 F_{n-m} = 1 \quad (2)$$

$$F_{n-m} = \frac{A_m F_{m-n}}{A_n} \quad (3)$$

A_m is area of surface m

Calculation Sequence:

1. $X = R/L, Y = W/L, \phi_1 = \cos^{-1} \left(\frac{W^2 + R^2 - S^2}{2WR} \right)$

Compute F_{1-2}, F_{2-1} [Equations (1) and (3)]

2. If $S = R, \phi_2 = \phi_1, F_{1-3} = F_{1-2}, F_{3-1} = F_{2-1}$, skip stage 3

3. $X = S/L, Y = W/L, \phi_2 = \cos^{-1} \left(\frac{W^2 + S^2 - R^2}{2WS} \right)$

Compute F_{1-3}, F_{3-1} [Equations (1) and (3)]

4. $X = S/L, Y = R/L, \phi_3 = \pi - \phi_1 - \phi_2$

Compute F_{2-3}, F_{3-2} [Equations (1) and (3)]

5. $F_{m-4}, F_{m-5}, m = 1, 2, 3$ [Equation (2)]

6. $F_{4-m}, F_{5-m}, m = 1, 2, 3$ [Equation (3)]

7. F_{4-5}, F_{5-4} [Equation (2)]

FI

An Algorithm for Approximating Inside Surface Heat Transfer Coefficients Tabulated in Table 1, Page 357 of the 1972 ASHRAE Handbook of Fundamentals

Data:

IDIR: Heat flow direction index

1 Upward

2 45° upward

IDIR = 3 Horizontal

4 45° downward

5 Downward

ϵ : Emittance of the surface

IV: Moving air index (IV = 0 corresponds to still air)

Calculation Sequence:

1. If IV = 0, FI = $h_c + 1.02*\epsilon$

where

.712 1

.682 2

$h_c = .542$ for IDIR = 3

.402 4

.162 5

2. If IV ≠ 0, FI = 2.0 Btu per (hr) (sq ft) (F)

An Algorithm for Determining Outside Surface Heat Transfer
Coefficient As a Function of Air Velocity and the Type
of Surface Constructions

Data:

V: Wind velocity, knots (Determined in CLIMATE)

DIR: Wind direction (Determined in CLIMATE)

IS: Outside surface index

- IS =
- 1 Stucco
 - 2 Brick and rough plaster
 - 3 Concrete
 - 4 Clear pine
 - 5 Smooth plaster
 - 6 Glass, white paint on pine

WA: Wall azimuth angle, degree

Calculation Sequence:

1. Conversion of the unit of wind velocity from knots into mph

$$V' = 1.153 \times V$$

2. Outside surface heat transfer coefficient

$$FO = A \times (V'^2) + B \times V' + C$$

where A, B and C are given in Table A-8

Table A-8
Value of Coefficients For Calculation
of Outside Heat Transfer Coefficient

IS	A	B	C
1	0.0	0.464	2.04
2	0.001	0.320	2.20
3	0.0	0.330	1.90
4	-0.002	0.315	1.45
5	0.0	0.244	1.80
6	-0.00125	0.262	1.45

3. Relative wind direction to the wall surface

$$RWD = WA + 180 - DIR$$

$$\text{If } |RWD| > 180, RWD = 360 - RWD$$

4. Conversion of the unit of wind velocity into m per sec

$$VV = 0.51479 \cdot V$$

5. Air velocity close to wall surface

$$\text{If } |RWD| < 90 \text{ (windward)}$$

$$VC = 0.25 \cdot VV \text{ for } VV > 2$$

$$VC = 0.5 \text{ for } VV \leq 2$$

$$\text{If } |RWD| \geq 90 \text{ (leeward)}$$

$$VC = 0.3 + 0.05 \cdot VV$$

6. Convection component of the outside surface heat transfer

coefficient

$$FOC = 3.28 * ((VC)^{**} 0.605) *$$

* This equation was derived by K. Kimura based upon the recent data published in Reference 6.

ACR*

An Algorithm for Determining Thermal Resistance
Across the Air Cavity in Walls and Roofs

Data:

DT: Temperature difference across the air space, F

L: Thickness of the air space, in.

IDIR: Heat flow direction index

1 upward

2 45° upward

IDIR = 3 horizontal

4 45° downward

5 downward

ϵ_1, ϵ_2 : Emittance of the surfaces facing the air cavity

ATC: Average temperature of the air cavity, F

Calculation Sequence:

1. Let $x = \log(DT * (L^{**3}))$

Then using the values for A_0, A_1, A_2, A_3 , and A_4 which are given in Table A-9, calculate

$$y = A_0 + A_1 * x + A_2 * (x^{** 2}) + A_3 * (x^{** 3}) + A_4 * (x^{** 4})^{*/}$$

* This polynomial has been derived to represent experimental data presented in Figure 6 of Reference 7 and shown here in Figure A-15.

Table A-9 VALUES OF A_0 , A_1 , A_2 , A_3 , and A_4 FOR CALCULATION OF
RESISTANCE ACROSS THE AIR SPACE

IDIR	Range of DT* (L**3)	A_0	A_1	A_2	A_3	A_4
11	All the range	-1.5904	0.2824	0.0	0.0	0.0
22	$1 \leq DT^*(L^{**3}) \leq 10$	-1.7125	-0.0875	0.2437	-0.0420	0.0
	$10 < DT^*(L^{**3}) \leq 100$	-1.8546	0.3124	0.0	0.0	0.0
	$100 < DT^*(L^{**3})$	-1.7380	0.2910	0.0	0.0	0.0
3	$1 \leq DT^*(L^{**3}) \leq 10$	-1.7410	-0.0331	0.0198	-0.0146	0.0
	$10 < DT^*(L^{**3}) \leq 100$	1.0460	-3.4660	1.5482	-0.2669	0.01673
	$100 < DT^*(L^{**3})$	-0.2141	-0.6577	0.1693	-0.0095	0.0
4	$1 < DT^*(L^{**3}) \leq 10$	-1.7420	0.0163	-0.0409	0.0204	0.0
	$10 < DT^*(L^{**3}) \leq 100$	-6.5410	5.5710	-2.3690	0.4467	-0.0300
	$100 < DT^*(L^{**3})$	-0.1914	6.1610	-1.3390	0.1339	-0.0050
5	$1 < DT^*(L^{**3}) \leq 10$	-1.770	0.0	0.0	0.0	0.0
	$10 < DT^*(L^{**3})$	-1.745	0.0028	0.0029	0.0008	0.0

2. Let $z = \text{Exp} (y)$

$$\text{If } z > 0.3 \quad h_c = z * (1 - 0.001 * (DT-50)) / L$$

$$\text{If } 0.2 \leq z \leq 0.3 \quad h_c = z * (1 + 0.00035 * (DT-50)) / L$$

$$\text{If } z < 0.2 \quad h_c = z * (1 + 0.0017 * (DT-50)) / L$$

3. $h_r = 0.00686 * (((ATC + 460) / 100) ** 3)^*$

4. $\text{RES} = 1 / (h_c + (1 / (1 / \epsilon_1 + 1 / \epsilon_2 - 1)) * h_r)$

* This polynomial has been derived to represent the curve presented in Figure 5 of Reference 7 and shown here in Figure A-16.

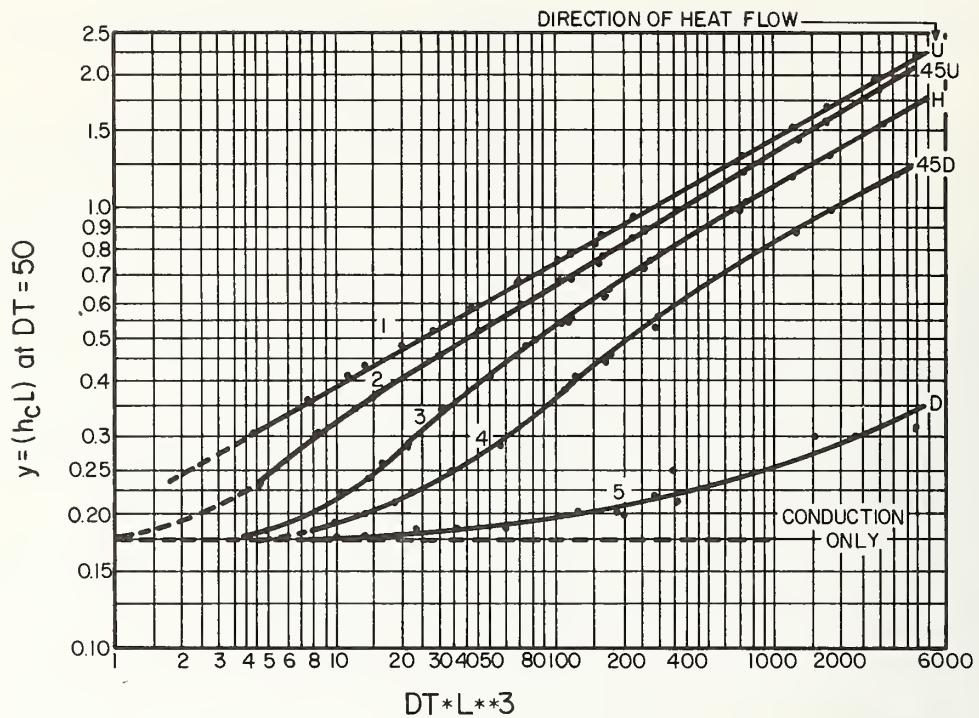


Figure A-15 Convection-Conduction Coefficient for Heat Transfer Across an Air Space for Five Orientations of the Air Space and Directions of Heat Flow

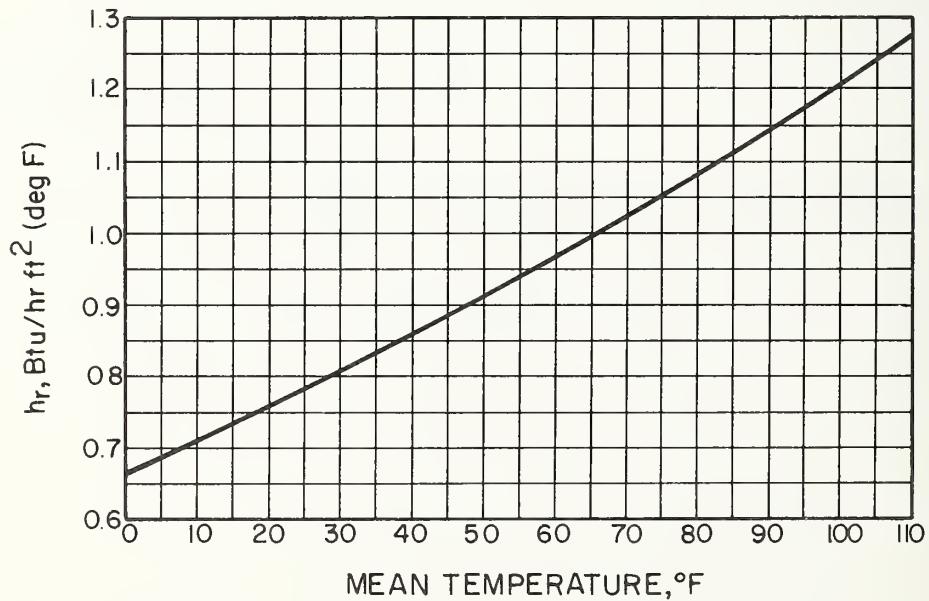


Figure A-16 Linear Radiation Coefficient for Heat Transfer Across an Air Space for a Radiation Interchange Factor

A Description of the Calculation Procedure for Transient Heat Conduction Using Conduction Transfer Functions

Conduction transfer functions are used widely and considered as a convenient and effective tool for the evaluation of transient heat transfer in building construction components. The conventional steady state heat transfer equation for calculating heat loss:

$$Q = U * (T_a - T_o) \quad (1)$$

where

U : overall heat transfer coefficient of roof or wall

T_a : inside air temperature

T_o : outside air temperature

is not sufficient for evaluating transient heat transfer. This equation becomes invalid because the outdoor temperature T_o usually varies as affected by solar radiation, cloud cover and wind effect. The effect of the rapid change of the outdoor temperature will not be accounted for unless the structure is extremely lightweight, such as galvanized steel.

Approximate calculation for a more accurate determination of the instantaneous heat transfer can be made by replacing $T_a - T_o$ of equation (1) by a Total Equivalent Temperature Difference (TETD) which is usually precalculated for typical building construction components and takes into account the thermal storage effect. Although very useful, the TETD concept is only valid when the outside temperature T_o undergoes steady periodic changes. The TETD concept is therefore especially useful computing design heat transfer rates for the building where very warm or very cold

conditions are assumed to occur for several successive days.

A more accurate formulation for conduction heat transfer from a room to randomly fluctuating outdoor conditions is to use the hourly history of temperatures in conjunction with Conduction Transfer Functions (CTF). For example, in calculating the energy transfer from a room at an inside surface, the equation would be:

$$Q_{i,t} = \sum_{j=0}^N X_j * T_{a,t-j} - \sum_{j=0}^N Y_j * T_{o,t-j} + R * Q_{t-1} \quad (2)$$

where X_j , Y_j (for $j = 0, 1, 2 \dots N$), and R are the Conduction Transfer Functions. In equation (2), $T_{o,t-j}$ and $T_{a,t-j}$ represent outdoor and room air temperatures respectively at j th hour prior to the time for which the value of Q_t is needed. And Q_{t-1} is the heat loss Q_t , from the room at the previous hour. By having a record of $T_{o,t-1}$, $T_{o,t-2}$, $T_{o,t-3} \dots T_{o,t-j}$; and $T_{a,t-1}$, $T_{a,t-2} \dots T_{a,t-j}$; it is possible to determine the instantaneous conduction transfer, provided that the values for X_j and Y_j , and R are available.

The number of terms involved for the calculation of Q_t (or the value of N in equation (2)) depends upon the type of roof or wall construction. Generally heavy constructions require a large value, although for most conventional constructions, it seldom exceeds 20. Stephenson and Mitalas^{8/} have shown that the value of N can be further decreased by employing more than one past record of Q_t (or Q_{t-j} with j being more than 1) in the following manner:

$$Q_{i,t} = \sum_{j=0}^{N'} A_j * T_{a,t-j} - \sum_{j=0}^{N'} B_j * T_{o,t-j} - \sum_{j=1}^N D_j * Q_{i,t-j} \quad (3)$$

where A_j , B_j , and D_j are the Modified Conduction Transfer Functions according to Stephenson and Mitalas^{8/}. Table A-10 gives values of Conduction Transfer Functions calculated for a brick wall having an overall heat transfer coefficient of 0.418. In this table, the factors designated by Z_j and C_j are the additional transfer function to be used for evaluating the instantaneous heat loss $Q_{o,t}$ at the exterior side of the structure. The applicable equations for this side of the structure are then:

$$Q_{o,t} = \sum_{j=0}^N Y_j * T_{a,t-j} - \sum_{j=0}^N Z_j * T_{o,t-j} + R * Q_{o,t-1} \quad (4)$$

or

$$Q_{o,t} = \sum_{j=0}^{N'} B_j * T_{a,t-j} - \sum_{j=0}^{N'} C_j * T_{o,t-j} - \sum_{j=1}^{N'} D_j * Q_{o,t-j} \quad (5)$$

The table also shows that for the calculation of $Q_{o,t}$ the use of Stephenson type transfer functions would permit the reduction of N from 10 to $N' = 4$ with a corresponding increase of three terms in the past record of $Q_{o,t}$.

Table A-10

Construction Data	Thickness (f)	Thermal		Specific Heat Btu/lb °F	Thermal Resistance sq ft hr F/Btu
		Conductivity Btuh/ft	Density lb/ft ³		
Inside Surface	0.000	--	--	--	.830
4-in common brick	0.333	.420	100.42	.220	.793
4-in face brick	0.333	.770	125.00	.220	0.432
Outside surface	0.000	--	--	--	.330
					2.385

Time increment: 1 hour

Overall heat transfer coefficient U = 0.418

Conduction Transfer Functions (CTF)

j	X _j	Y _j	Z _j	R
0	.9194	.0001	1.9833	0.8398
1	-.9391	.0080	-2.1785	
2	.0606	.0243	.1983	
3	.0153	.0186	.0387	
4	.0061	.0090	.0144	
5	.0026	.0039	.0060	
6	.0011	.0017	.0026	
7	.0005	.0007	.0011	
8	.0002	.0003	.0005	
9	.0001	.0001	.0002	
10	.0000	.0001	.0001	

Stephenson Type Transfer Functions

j	A _j	B _j	C _j	D _j
0	0.9194	0.0001	1.9833	1.000
1	-1.4128	0.0079	-3.2002	-1.3552
2	0.5785	0.0202	1.3942	0.4699
3	-0.0511	0.0064	-0.1448	0.0315
4	0.0007	0.0002	0.0024	0.0002

Data:

NL: Number of layers to be considered for the analysis of a given structure: the number of layers should include surface resistance or air cavity resistance if they contribute significantly to the overall heat transfer of that particular structure

K_i : Thermal conductivity of i-th layer in Btu per (hr) (ft) (F). This value is not needed for air cavities or for the surface resistance layers.

ρ_i : Density of i-th layer in lb per (cu. ft). This value is not needed for air cavities or for the surface resistance layers.

C_i : Specific heat of i-th layer material in Btu per (lb) (F). This value is not needed for air cavities or for the surface resistance layers.

L_i : Thickness of the i-th layer in ft. This value is not needed for the air cavities or for the surface resistance layers.

RES_i : Thermal resistance of air cavities and surface resistance layers in (hr) (sq ft) (F) per Btu. This value is not needed whenever all of the remaining values such as K_i , ρ_i , C_i and L_i are given.

DT: Time increment for the conduction transfer functions
in hr (usually one hour for the building heat trans-
fer calculations)

Subscript i refers to i-th layer and it varies from 1
to NL.

The sequence of inputing the above property values for each layer is very important and must be consistent with the particular convention adopted for the specific calculation routine. The sequence must follow in order from the inside layer to the outside layer or vice versa. It should be noted that the inclusion of the surface thermal resistance as independent layers is optional depending upon the end use of the conduction transfer functions. If the inside surface temperature is to be computed as a balance of all the heat flow involved at that surface, the thermal resistance of the inside surface should not be included in the calculation of the conduction transfer functions. The same comment applies for the outside surface.

An algorithm for the calculation of the conduction heat transfer functions will not be given here, since it involves lengthy mathematical solutions to the standard transient heat conduction differential equation. Reference (9) provides an excellent background for this calculation. Several computer programs^{10, 11/} are available for the calculation of conduction transfer functions for multi-layer walls, roofs and floor constructions. The program developed by the National Research Council of Canada^{10/} requires the layer input to be placed in order from outside toward inside. It calculates the Stephenson type conduction transfer

functions directly. The program of the National Bureau of Standards^{11/} requires the input to be placed from the inside layer first and calculates the conduction transfer functions of plane, cylindrical and spherical walls. It also calculates the transfer functions for solid objects of plane, cylindrical and spherical shapes as well as the heat conduction systems involving semi-infinite solids, approximated by basement floors and underground constructions.

Under non-steady heat conduction, the heat lost from one side of a surface is not equal to the rate of heat entry at another side. Equations (2) and (3), however, must be valid also for the steady state heat transfer problems. One of the best ways to check the consistency of the conduction transfer functions is to use them in the solution of steady state problems and see if the following criteria is met: The room side surface temperature and the outdoor side surface temperature are maintained constant for many hours so that

$$TOS_t = TOS_{t-1} = \dots \quad TOS_{t-N}$$

$$TIS_t = TIS_{t-1} = \dots \quad TIS_{t-N}$$

$$QI_t = QO_t = QO_{t-1} = QI_{t-1}$$

Thus

$$QO_t = TIS_t * \sum_j^N Y_j - TOS_t * \sum_j^N Z_j + R * QO_t$$

$$QI_t = TIS_t * \sum_j^N X_j - TOS_t * \sum_j^N Y_j + R * QI_t$$

In order to satisfy these two equations simultaneously, it is necessary that

$$\sum_{j=1}^N X_j = \sum_{j=1}^N Y_j = \sum_{j=1}^N Z_j = U*(1 - R)$$

In fact, the conduction transfer functions of the sample wall shown in Table A-10 can be shown to satisfy this requirement

$$\sum_{j=1}^N X_j = \sum_{j=1}^N Y_j = \sum_{j=1}^N Z_j = 0.0668$$

and

$$U*(1 - R) = 0.418*(1 - 0.8398) = 0.0669$$

HEATW

An Algorithm for Calculating Transient Heat Conduction
Through Opaque Walls or Roofs Using Conduction Transfer Functions

Data:

X_j , Y_j and Z_j got $j = 0, 1, 2, \dots N$: Conduction trans-
fer functions in Btu per (hr) (sq ft), (Calculated
as outlined in XYZ for the system that excludes the
inside and outside heat resistance layers)

R: Common ratio of the response factors X' , Y' and Z'^*
(Calculated as outlined in XYZ),

$$R = \frac{X'_{j+1}}{X'_j} = \frac{Y'_{j+1}}{Y'_j} = \frac{Z'_{j+1}}{Z'_j} \text{ for } j \geq N$$

N: Number of the significant terms to be used for the
conduction heat transfer calculation, (Calculated
as outlined in XYZ)

$F_0 t$: Outside surface heat transfer coefficient at time
 t , Btu per (hr) (sq ft) (F)

I_{T_t} : Total solar radiation intensity on the outside sur-
face at time t , Btu per (hr) (sq ft), (Calculated
in SOLAD)

$$^* X_j = X'_j - R * X'_{j-1}$$

$$Y_j = Y'_j - R * Y'_{j-1}$$

$$Z_j = Z'_j - R * Z'_{j-1}$$

TIS_{t-j} : History of inside surface temperature at times $t-1$,
 $t-2$, ... and $(t-N)$ th hour, F

TOS_{t-j} : History of outside surface temperature at times $t-1$,
 $t-2$, $t-3$, ... and $(t-N)$ th hour, F

DB_t : Outdoor air dry-bulb temperature at time t , F

$HEAT_{t-1}$: Heat loss at the interior surface to the outdoor environment at the previous hour, Btu per (hr) (sq ft)

QO_{t-1} : Heat loss at the exterior surface to the outdoor environment at the previous hour, Btu per (hr) (sq ft)

a : Solar absorption coefficient at the exterior surface

α : Cosine of the angle subtended by a vertical line and the surface normal ... (Calculated in SUN)

TC_t : Total cloud amount ... (Calculated in CLIMATE)

TM : A reference temperature (usually the inside design temperature), F

Calculation Sequence:

A. Exterior walls and roof

1. The heat balance equation at the exterior surface is given by

$$QR_t + QA_t + QO_t - QS_t = 0$$

where

- a) Incident solar radiation

$$QR_t = a * IT_t$$

- b) Convection heat transfer from the outdoor air

$$QA_t = FO_t * (DB_t - TOS_t)$$

c) Conduction heat flow from the inside surface

$$Q_0^t = \sum_{j=0}^N Y_j * (TIS_{t-j} - TM) - \sum_{j=0}^N Z_j * (TOS_{t-j} - TM) \\ + R * Q_0^*_{t-1}$$

d) Heat loss to the sky

$$QS_t = 2 * \alpha * (10 - TC_t)^{**}$$

2. Let

$$SUM1 = \sum_{j=0}^N Y_j * (TIS_{t-j} - TM) + CR * Q_0^*_{t-1}$$

$$SUM2 = \sum_{j=1}^N Z_j * (TOS_{t-j} - TM)$$

3. Outside surface temperature

$$TOS_t = (QR_t - QS_t + FO_t * DB_t + SUM1 - SUM2 + Z_0 * TM) / (FO_t + Z_0)$$

4. Using this new TOS_t , the heat loss at the interior surface is

then determined as follows:

$$HEAT_t = \sum_{j=0}^N X_j * (TIS_{t-j} - TM) - \sum_{j=0}^N Y_j * (TOS_{t-j} - TM) \\ + R * HEAT_{t-1}$$

* Throughout this discussion a value of TM is always subtracted from the interior surface and exterior surface temperatures. This subtraction usually helps to minimize the digital errors which occur and are sometimes significant when a large number of numerical data are multiplied and added. Since $\sum_{j=0}^N X_j = \sum_{j=0}^N Y_j$, the net effect of the subtraction is zero.

** This expression was developed to yield a roof sky radiation of 20 Btu per (hr) (sq ft) for a cloudless condition, which was reported in Reference (12).

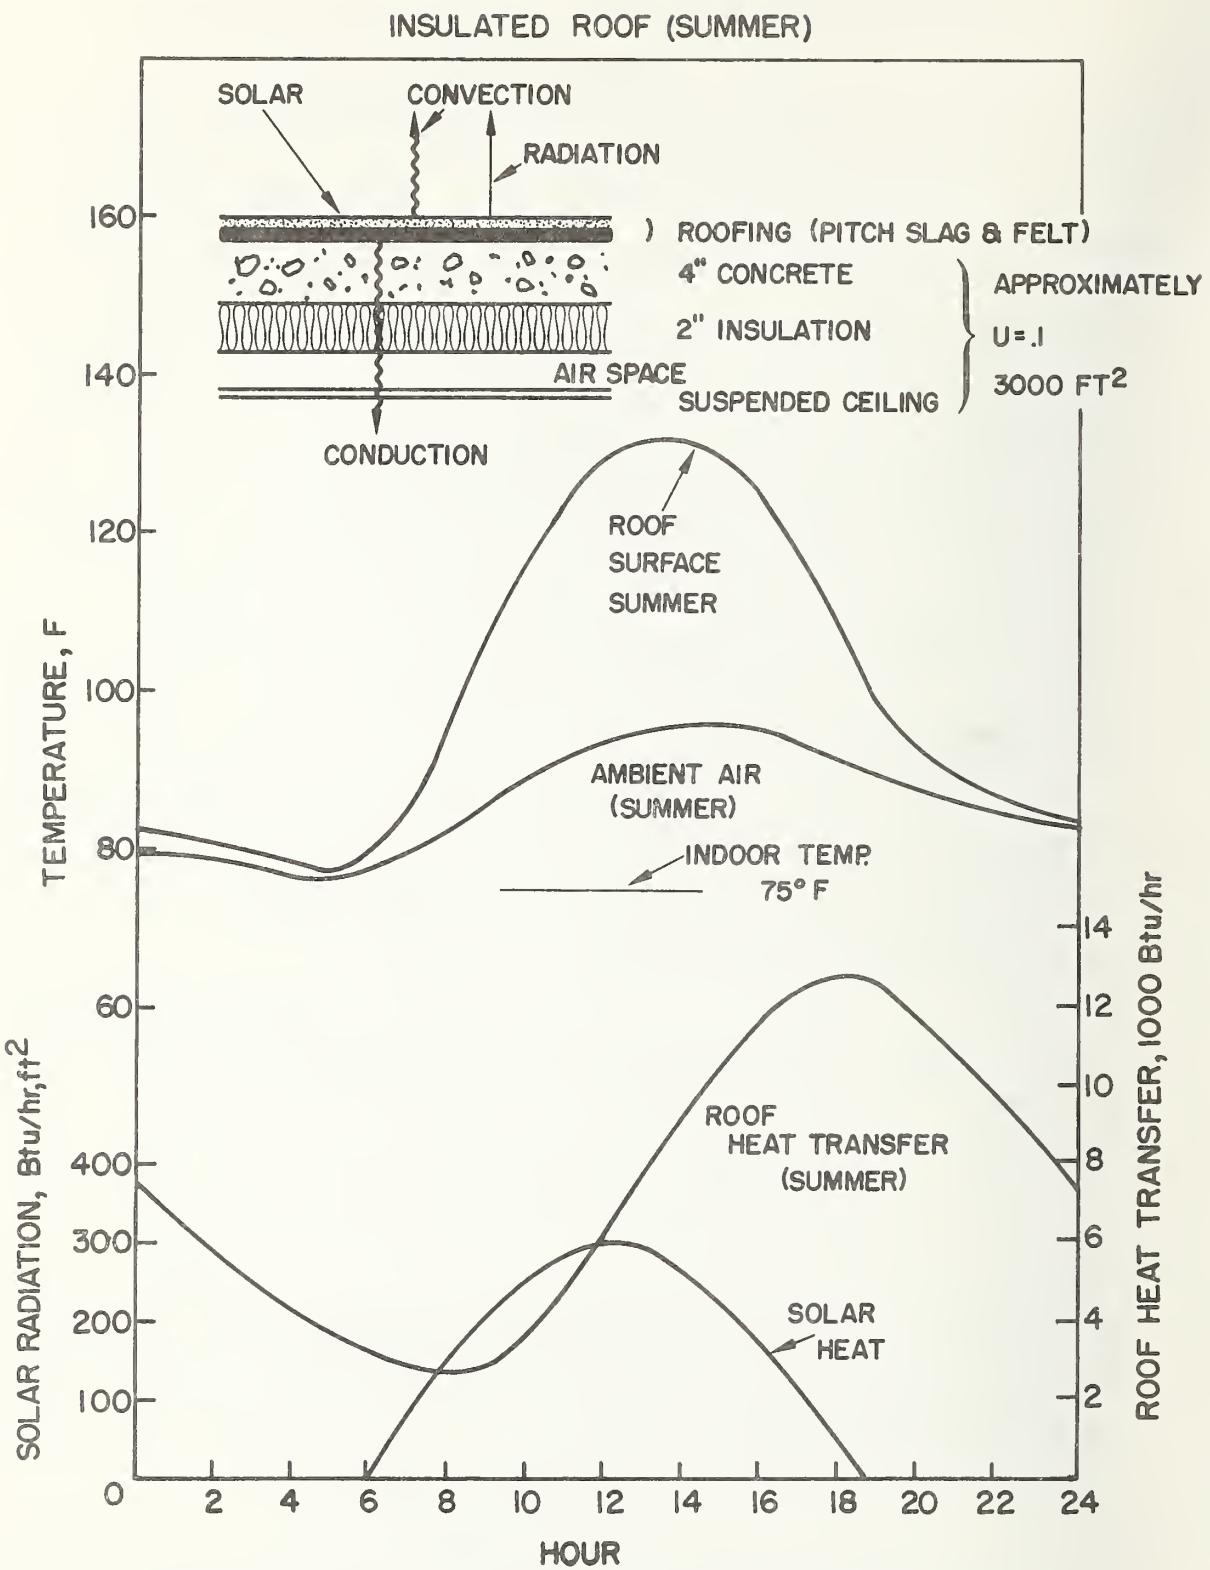


Figure A-17 Transient Heat Transfer in a Typical Roof

Table A-11

Layer No.	L(I)	K(I)	ρ (I)	C(I)	RES(I)	Description of Layers
1	0.	0.	0.	0.	2.04	Suspended Ceiling
2	.167	.025	13.	.320	0.	2-in. Insulation
3	.333	1.000	140.	.200	0.	4-in. Concrete
4	.031	.110	70.	.400	0.	3/4-in. Felt
5	.042	.830	55.	.400	0.	1/2-in. Pitch Slag

Time Increment DT = 1.

Conduction Transfer Functions

j	X _j	Y _j	Z _j	R
0	.21934	.00011	3.30513	.78793
1	-.25485	.00504	-4.27082	
2	.04650	.01060	.97885	
3	.00857	.00493	.00808	
4	.00224	.00140	.00104	
5	.00059	.00037	.00024	
6	.00016	.00010	.00006	
7	.00004	.00003	.00002	
8	.00001	.00001	.00000	
9	.00000	.00000	.00000	

Figure A-17 shows the energy balance that is involved in the above calculation sequence and the results of a typical calculation. Table A-11 gives the conduction transfer functions for the roof used in the calculations.

B. Interior walls and floor/ceiling sandwich

The calculation sequence for the partition wall and floor/ceiling sandwich is completely different from that of the exterior wall or roof. The difference is due to the fact that the air temperature at the exterior side of the construction can be assumed the same as at the interior side, at least for a climate controlled building. In order to take advantage of this fact, conduction transfer functions should be determined with the surface thermal resistance layer added at the exterior side of the structure. The heat loss through a partition wall is then calculated by

$$\text{HEAT}_t = \sum_{j=0}^N X_j * (T_{I,t-j} - TM) - \sum_{j=0}^N Y_j * (T_{A,t-j} - TM) + R * \text{HEAT}_{t-1}$$

where $T_{A,t-j}$ = room temperature at time $(t-j)$ th hour

If the room temperature were maintained constant at TM, which is usually the case, the terms involving the Y_j 's would then drop out of the equation.

C. Slab on grade floor

The heat loss to the ground through the floor on grade can be calculated by using conduction transfer functions determined on the basis of flooring, concrete, and 12 inches of ground layer

$$\text{HEAT}_t = \sum_{j=0}^N X_j * (\text{TI}_{t-j} - \text{TM}) - \sum_{j=0}^N Y_j * (\text{TG} - \text{TM}) + R * \text{HEAT}_{t-1}$$

Since usually TG is constant and

$$\sum_{j=0}^N Y_j = U_G * (1 - R),$$

then

$$\text{HEAT}_t = \sum_{j=0}^N X_j * (\text{TI}_{t-j} - \text{TM}) - U_G * (1 - R) * (\text{TG} - \text{TM}) + R * \text{HEAT}_{t-1}$$

The same method is applicable to a floor with a crawl space as long as the space is not vented. The conduction transfer functions for the floor with an unvented crawl space simply has an additional air resistance layer to account for the dead air space between the floor and the ground. In many cases it is safe to assume that TG = TM, and then the term involving U_G would drop out of the equation.

D. Floor over the vented crawl space

The floor over a vented crawl space can be treated in the same manner as an exterior wall or roof except that the solar radiation and sky radiation terms would not be included in the energy balance and that the outside surface heat transfer coefficient is replaced by a value similar in magnitude to the inside surface heat transfer coefficient. If the conduction transfer functions include the outside surface heat transfer resistance, the calculation is simply

$$\text{HEAT}_t = \sum_{j=0}^N X_j * (\text{TI}_{t-j} - \text{TM}) - \sum_{j=0}^N Y_j * (\text{DB}_{t-j} - \text{TM}) + R * \text{HEAT}_{t-1}$$

SCHEDULE

An Algorithm to Determine Heat Gains From Lighting, Equipment, Occupancy and Ventilation

Data:

1. Normalized 24 hour profiles ($j = 1, 2, 3 \dots 24$) of operational schedules for weekdays ($i = 1$) and weekends and holidays ($i = 2$) are given for lighting, equipment use, occupancy, ventilation, indoor temperature setting, and humidity setting as follows:

$QLITE_{i,j}$: Lighting schedules (fraction of some maximum)

$QEQUIP_{i,j}$: Equipment use schedules (fraction of some maximum)

$QOCUP_{i,j}$: Occupancy schedule (fraction of some maximum)

$QVENT_{i,j}$: Ventilation fan operating schedule (fraction of some maximum)

$ROOMDB_{i,j}$: Space thermostat setting schedule

$ROOMRH_{i,j}$: Space humidistat setting schedule

2. Maximum values of the parameters to be used with the schedules

$QLITX$: Maximum electric power demand for lighting
for the 24 hour period

$QEQUIPX$: Maximum electric power demand for appliances for the 24 hour period, KW

QOCUPX: Maximum number of equivalent sedentary adult occupants during the 24 hour period

QVENTX: Maximum amount of ventilation air supply during the 24 hour period, cu. ft per min.

QHTWTX: Maximum amount of hot water demand during the 24 hour period, gallons per hour

3. YEAR, MONTH AND DAY

These data are needed to determine whether the day is a weekday, weekend, or holiday, and whether the day falls within daylight savings time.

4. QOS(TA): Sensible heat loss of a sedentary adult at the room temperature TA, Btu per (hr) (occupant)

QOL(TA): Latent heat loss of a sedentary adult at the room temperature TA, Btu per (hr) (occupant)

WO(DB,WB): Humidity ratio of the outdoor air for a given outdoor air dry-bulb and wet-bulb temperature, lb of water vapor per (lb of dry air)

WI(TA,WGA): Humidity ratio of the indoor air for a given dry-bulb temperature and wet-bulb temperature, lb of water vapor per (lb of dry air)

QWT: Heat needed to generate one gallon of hot water, Btu per gallon of water

Calculation Sequence:

1. Determine the weekday indicator IWK from WKDAY
2. Determine the holiday indicator IHOL from HOLIDAY
3. If IWK = 1 or 7 i = 2
If IHOL = 1 i = 2
Otherwise i = 1
4. Heat generated from lights (for j = 1 ... 24), Btu per hr

$$QS_{i,j} = QLITX * 3413 * QLITE_{i,j}$$

5. Heat generated from equipment and occupants, Btu per hr
(for j = 1, 2 ... 24)

Sensible heat

$$QS'_{i,j} = QEUPX * 3413 * QEUP_{i,j} + QOCUPX * QOS(TA) * QOCUP_{i,j}$$

Latent heat

$$QL_{i,j} = QOCUPX * QOL(TA) * QOCUP_{i,j}^*$$

6. Heat gain due to ventilation air, Btu per hr

Sensible heat

$$LEAK_{i,j} = QVENTX * C_p * 60 * (DB_j - ROOMDB_{i,j}) * QVENT_{i,j} * \rho$$

Latent heat

Determine WI_j from PSY using ROOMDB_{i,j} and ROOMRH_{i,j}

$$LEAK'_{i,j} = QVENTX * 60 * (WO_j - WI_j) * 1060 * QVENT_{i,j} * \rho$$

C_p and ρ on this page depict specific heat and density of air in the English units.

* It has been assumed that there is no latent portion of the equipment heat gain. There can be exceptions to this.

Fundamentals of Room Temperature and Cooling
(Heating) Load Calculations

The basic energy transfer process that occurs in a room can best be illustrated by an electrical circuit network as shown in Figure A-18. The figure represents the phenomenon in a typical room having two exterior walls, each of which contains a window, and two interior partition walls, in addition to the roof and floor (see Figure A-19). Heat conduction paths through the walls, roof, and floor are depicted by resistance and capacitance circuits and these through windows are represented by resistance circuits, implying that the windows do not have significant thermal mass. Points T_{S1} through T_{S8} in Figure A-18 indicate interior surfaces of the walls, roof, floor and windows, all of which receive conduction heat through solid material, solar radiation (represented by  q) through transparent surface and long wavelength radiation from other solid surfaces indicated by solid lines connecting the surface nodes; and they lose heat to the room air (represented by a point called TA) by the convection process (dashed lines).

At the top of Figure A-18, the radiation heat exchange between the room surfaces, the surfaces of lighting fixtures, equipment such as business machines, and occupants is depicted. Also indicated in this same location is the convective heat exchange between these items and the room air. Actual heat or power input to these internal heat sources are indicated by  Q. Although not indicated in this figure, it is possible to represent the conduction heat gain from the inner core of lighting fixtures and equipment if they have sufficient thermal mass. This equipment could of course include the unit heaters or air conditioners

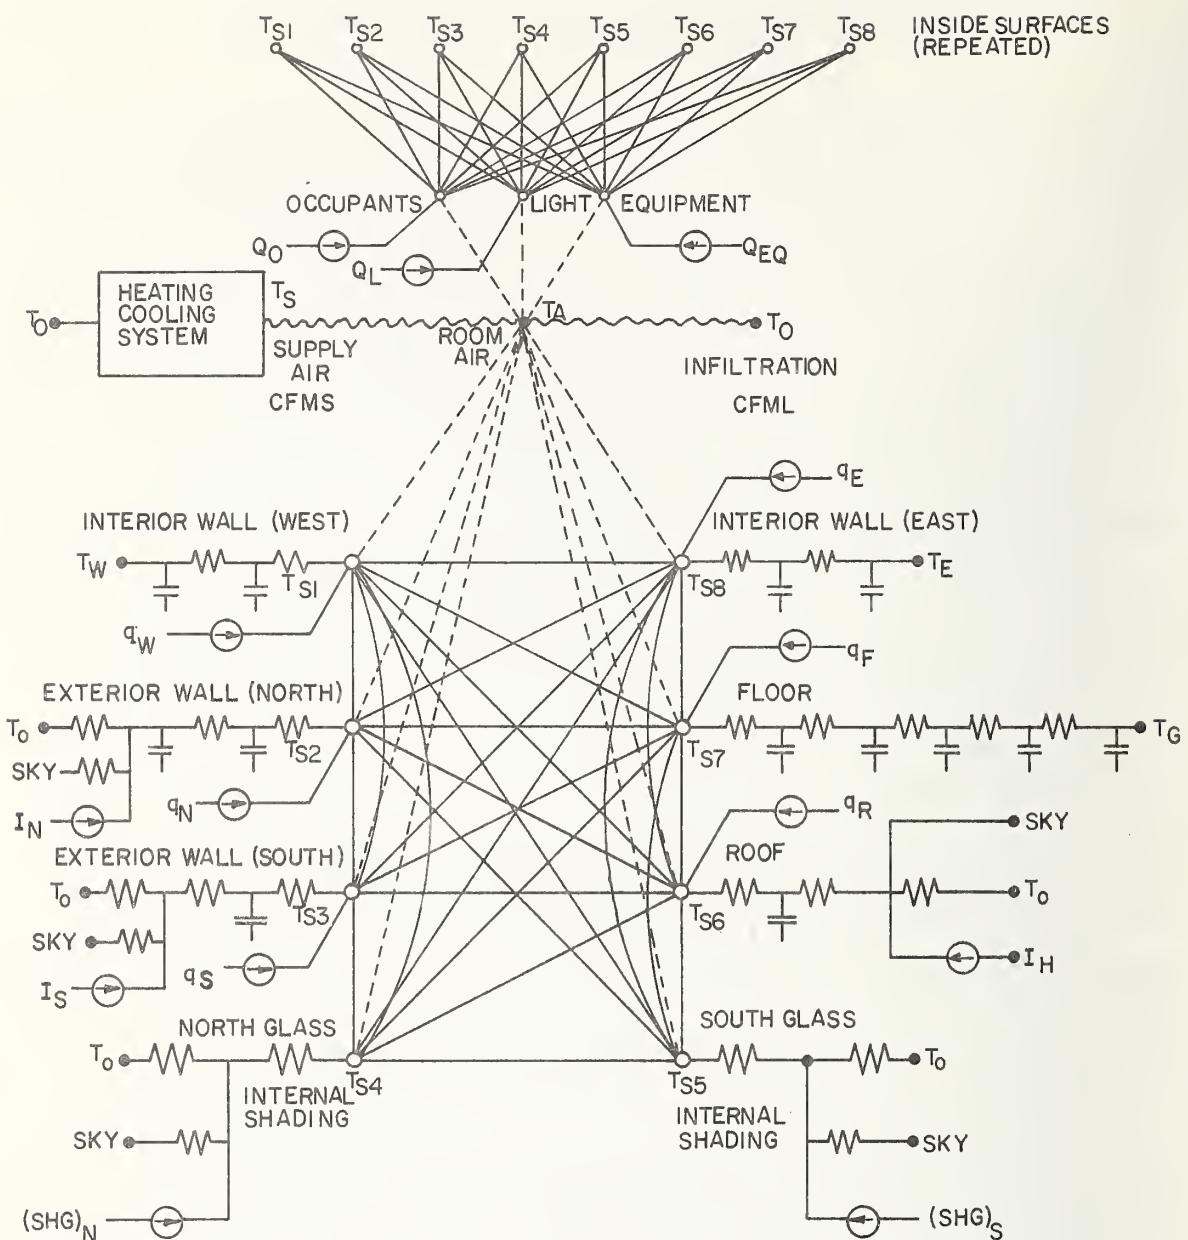


Figure A-18 Analogous Electric Circuit for Heat Exchange Process in a Room

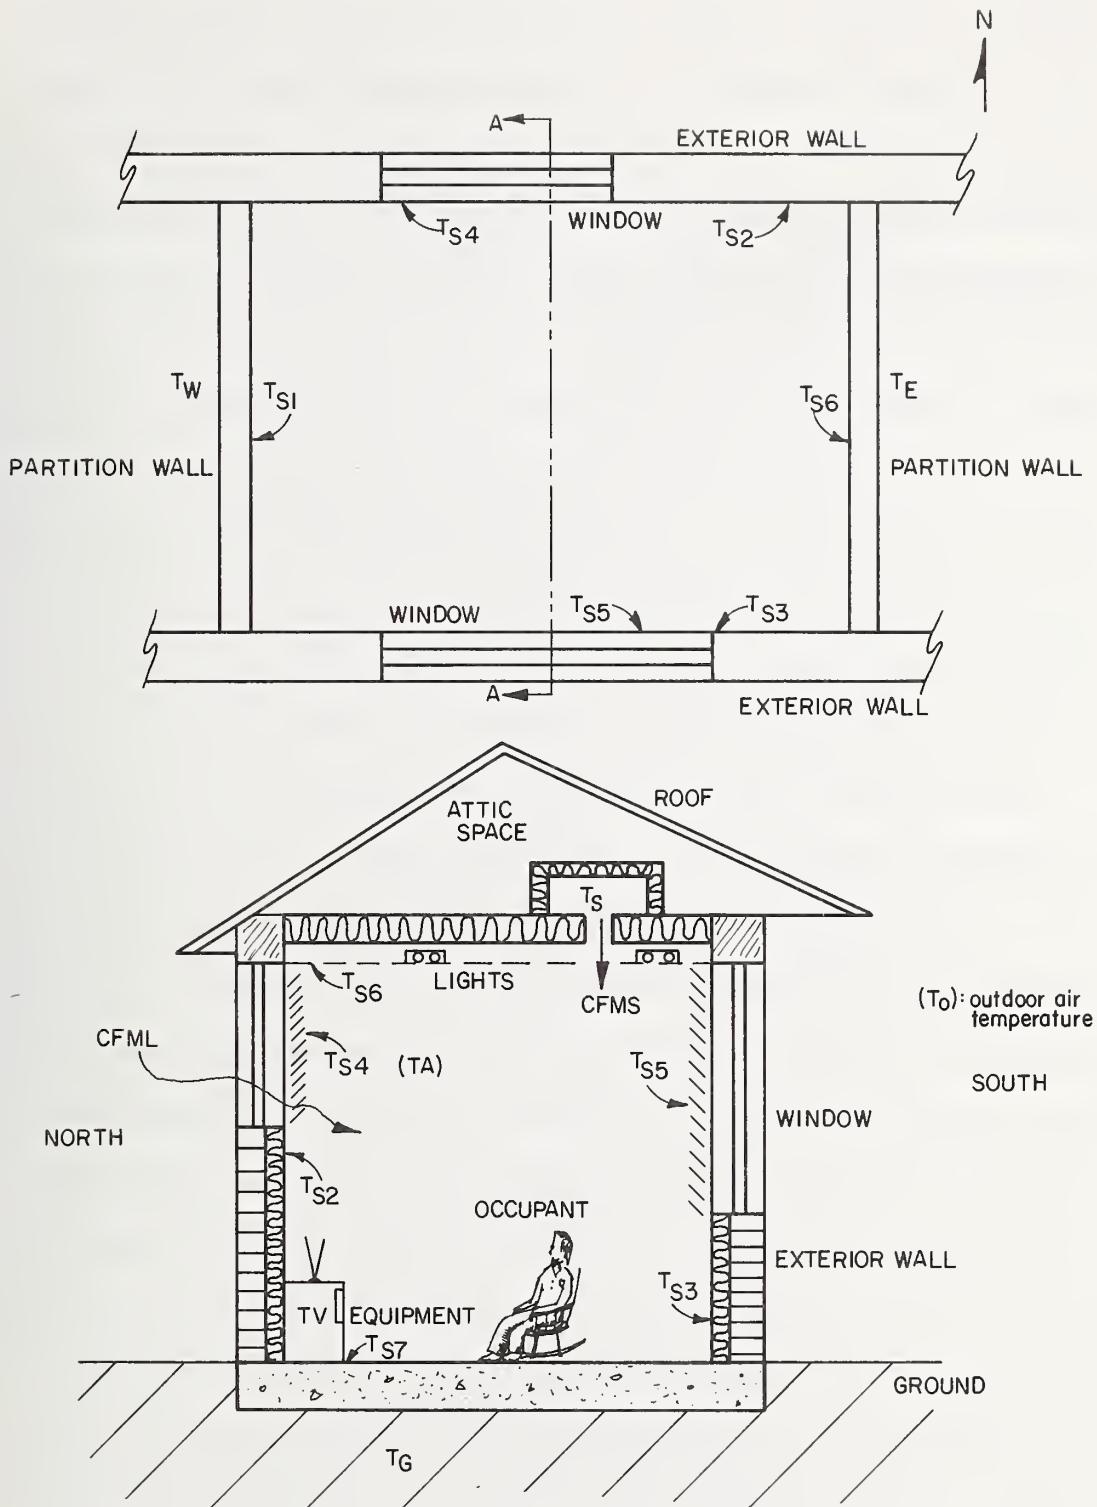


Figure A-19 Physical Model of a Typical Room Used in Figure A-18

if they are the part of the room heat exchange system. The room air changes energy with outdoor air or with the conditioned air from the central climate control system (or the forced ventilation system) and is depicted in this figure by lines $\overline{T_s T_a}$ and $\overline{T_o T_a}$. The heat exchange at the exterior surfaces with outdoor air, sky and sun (except for the partition walls and floor on grade) are also indicated using a normal design calculation procedure, the temperature or heat flow at the exterior sides of the room surfaces are usually available either by calculation or as input data. The exception occurs when two or more rooms adjacent one another are treated simultaneously. This latter case is commonly referred to as a "multi-room problem" and is very complex.

No satisfactory solution for this case is presently available.

This electrical network problem can be solved and the corresponding calculation algorithm is called RMTMP (given in the following section). The solution can be obtained in two different modes: room temperature calculation mode or the room load calculation mode. The room temperature calculation mode requires the simultaneous solution of heat balance equations in order to determine all the surface temperatures together with the air temperature. On the other hand, the room cooling load calculation mode requires that the room temperature be prescribed and only the room surface temperatures are solved for. The convective heat exchange between the room air and the heat emitting surfaces is then the cooling load (or the heating load if the heat is lost to the surfaces). These two modes of computation can be combined to simulate the actual thermal behavior of a room and its environment where the temperature fluctuates. The floating temperature would be calculated

as long as it remained between prescribed limits. A heating load would be computed when the room temperature fell to the lower limit and a cooling load would be calculated when the temperature rose to the upper limit. In this manner, the calculation of load and subsequent energy requirement would more closely correspond to actual building and system operation.

An Algorithm to Calculate Thermal Load or Room Temperature

This routine calculates heating and cooling loads or room temperature by solving heat balance equations involving each of the room surfaces. A room surface receives conduction heat flow through the solid wall, roof or floor material from behind, convection heat flow from the air and radiation heat flow from other surfaces and internal heat sources such as occupants, equipment and lighting fixtures.

Data:

NS: Total number of heat transfer surfaces contributing
to the room heat balance

S_i : Area of i-th heat transfer surface, sq ft, where
 $i = 1, 2, 3, \dots NS$

$X_{i,j}$, $Y_{i,j}$ and $Z_{i,j}$:

Where $i = 1, 2, 3, \dots NS$

$j = 1, 2, \dots N_i$

Conduction transfer functions of i-th surface in
Btu per (hr) (sq ft) ... (Calculated in XYZ).

These conduction transfer functions are usually
evaluated without the interior or room side sur-
face thermal resistance. The thermal resistance
layer of exterior surface is also omitted if the
exterior surface temperature is to be computed as
a result of a heat balance involving solar radia-

tion, sky radiation and convective loss to the outdoor air.

N_i : Number of conduction transfer function terms to be used for the calculation of the i -th surface conduction heat gain

R_i : Common ratio for the conduction transfer function of the i -th surface

$TOS_{i,t-j}^*$: for $i = 1, 2, 3, \dots NS$ and $j = 0, 1, 2, \dots N_i$
Outside surface temperature history from present hour to that of N_i hours ago for i -th surface, F.

(This information is available from HEATW routine.)

$TIS_{i,t-j}$: for $i = 1, 2, 3, \dots NS$ and $j = 1, 2, 3, \dots N_i$
Inside surface temperature history from one hour ago to N_i hours ago for i -th surface, F. The present value (for $j = 0$) will be computed in this routine and stored for future use.

TA_t : Air temperature of the room at time t , F

DB_t : Outdoor air temperature at time t , F

TS_t : Supply air temperature from the central system at time t , F

H_i : Inside surface convection heat transfer coefficient for i -th surface, Btu per (hr) (sq ft) (F)

* Subscript t refers to the present time t and $t-j$ refers to the present time minus j hours.

$F_{i,k}$: Radiation heat exchange view factor between the i-th surface and k-th surface

$$F_{i,k} = F_{k,i} = 0$$

E_i : Emissivity of the i-th surface

$R_{i,t}$: Radiant heat flux impinging upon i-th surface at time t from various sources, which include solar radiation, radiation from lights, occupants and equipment, Btu per (hr) (sq ft)

$Q_{i,t}$: Heat conducted into i-th surface at time t, Btu per (hr) (sq ft)

GL_t : Mass air flow rate due to air leakage at time t, lb per hr

GS_t : Mass air flow rate of the supply air from the central system at time t, lb per hr

QEUP: Internal heat generated from equipment such as business machines and computers, Btu per hr

QOCPs: Internal heat (sensible) generated from occupants (a function of room air temperature), Btu per hr

QLITE: Heat from lights, Btu per hr

RE: Fraction of internal heat gain from equipment that can be assumed to be convective

RO: Fraction of internal heat gain from occupants that can be assumed to be convective

RL: Fraction of heat gain from lights that can be assumed to be convective

$SHG_{i,t}$: Solar incident radiation on i -th surface at time t ,
 Btu per (hr) (sq ft)

Calculation Sequence:

1. Heat balance equation at the i -th surface at time t

$$\begin{aligned} Q_{i,t} &= \sum_{j=0}^{N_i} X_{i,j} * TIS_{i,t-j} - \sum_{j=0}^{N_i} Y_{i,j} * TOS_{i,t-j} + R_i * Q_{i,t-1} \\ &= H_i * (TA_t - TIS_{i,t}) + \sum_{k=1}^{NS} G_{i,k} * (TIS_{k,t} - TIS_{i,t}) + R_{i,t} \end{aligned}$$

where $G_{i,k} = 4 * E_i * F_{i,k} * (TA_t + 460) ** 3 * 0.1714 * 10 ** -8$

$$R_{i,t} = SHG_{i,t} + \frac{((1-RE)*QEQU + (1-RO)*QOCPS + (1-RL)*QLITE)}{\sum_{i=1}^{N_s} S_i}$$

2. Heat balance for the room air

$$\begin{aligned} \sum_{i=1}^{N_s} S_i * (TIS_{i,t} - TA_t) + GL_t * C_p * (DB - TA_t) + GS_t * C_p * \\ (TS_t - TA_t) + QEQU * RE + QOCPS * RO + QLITE * RL = 0 \end{aligned}$$

where C_p is the specific heat of air in Btu per (lb) (F)

The values of GS_t and TS_t , supply air flow rate and its temperature, are the link between the load calculation and the system simulation. (More detailed explanation of this aspect is given in the final portion of this section.)

3. Assigning matrix elements for $i = 1, 2, 3, \dots, NS$ and for
 $k = 1, 2, 3, \dots, NS$

$$A_{i,i} = X_{i,1} + H_i + \sum_{k=1}^{NS} G_{i,k}$$

$$A_{i,k} = -G_{i,k} = A_{k,i} = -G_{k,i}$$

$$A_{i,NS+1} = -H_i$$

$$B_i = -\sum_{j=1}^{N_i} X_{i,j} * TIS_{i,t-j} + \sum_{j=0}^{N_i} Y_{i,j} * TOS_{i,t-j} - R * Q_{i,t-1} + R_{i,t}$$

$$A_{NS+1,k} = S_k * H_k$$

$$A_{NS+1,NS+1} = -(GL_t + GS_t) * C_p - \sum_{k=1}^{NS} H_k * S_k$$

$$B_{NS+1} = -QEQU*RE + -QOCPS*RO - QLITE*RL - GL_t * C_p * DB_t - GS_t * C_p * TS_t$$

4. Using these matrix elements, the following NS+1 equation
should be solved simultaneously for $TIS_{i,t}$ ($i = 1, 2, \dots, NS$) and for TA_t

$$\begin{bmatrix} A_{1,1} & A_{1,2} & A_{1,NS+1} \\ A_{2,1} & A_{2,2} & A_{2,NS+1} \\ \vdots & \vdots & \vdots \\ A_{NS,1} & A_{NS,2} & A_{NS,NS+1} \\ A_{NS+1,1} & A_{NS+1,2} & A_{NS+1,NS+1} \end{bmatrix} * \begin{bmatrix} TIS_{1,t} \\ TIS_{2,t} \\ \vdots \\ TIS_{NS,t} \\ TA_t \end{bmatrix} = \begin{bmatrix} B_1 \\ B_2 \\ \vdots \\ B_{NS} \\ B_{NS+1} \end{bmatrix}$$

5. When the value of TA_t has been specified, as in the case of a controlled condition, the following NS equations should be solved instead of the NS+1 equations given above

$$\begin{bmatrix} A_{1,1} & A_{1,2} & \cdots & A_{1,NS} \\ A_{2,1} & A_{2,2} & & A_{2,NS} \\ \vdots & & & \vdots \\ \cdots & & \cdots & \cdots \\ A_{NS,1} & A_{NS,2} & & A_{NS,NS} \end{bmatrix} * \begin{bmatrix} TIS_{1,t} \\ TIS_{2,t} \\ \vdots \\ \cdots \\ TIS_{NS,t} \end{bmatrix} = \begin{bmatrix} B'_1 \\ B'_2 \\ \vdots \\ B'_{NS} \end{bmatrix}$$

where

$$B'_i = B_i - A_{i,NS+1} * TA_t$$

* Remark: The matrix type solution is not required if it is assumed that

$$\sum_{k=1}^{NS} G_{i,k} * (TIS_{k,t} - TIS_{i,t}) = HR * (TA_t - TIS_{i,t})$$

or

$$A_{i,k} = 0 \text{ when } i \neq k$$

6. Calculate the sensible load by

$$QLS_t = \sum_{i=1}^{N_s} S_i * (TIS_{i,t} - TA_t) + GL_t * C_p * (DB_t - TA_t) \\ + QEQU * RE + QOCPS * RO + QLITE * RL$$

In this expression, QL is a cooling load if positive and it is a heating load if negative. This is the heat picked up by the room air (or that lost by the room air) which has to be removed (or added) by the central air conditioning system.

Note that for ordinary load calculations, GS_t and TS_t are not used as long as the following condition is satisfied:

$$| QLS_t | \leq | GS_t * C_p * (TA_t - TS_t) | \dots \text{Maximum capacity of the heating or cooling system}$$

In other words, the desired or prescribed room temperature can be maintained as long as the calculated load is less than the maximum capacity of the central system. When the above condition is not satisfied because of the inadequate values for either the air supply rate or the supply air temperature, the room temperature used for the load calculation is no longer valid. The calculation must then be revised, first calculating the room temperature as outlined in 3 above.

7. Latent Load

If moisture condensation and absorption by room walls, or drying of the wall panels can be neglected, the latent load is the same as the latent heat gain or loss, provided the following condition is met:

$$QLL_t \leq GS_t * \lambda * (WA - WS), \text{ where } \lambda = \text{latent heat}$$

of vaporization $\approx 1061 \text{ Btu per lb of water}$

In other words, the desired moisture level can be maintained as long as the latent load of the room or the building is less than the capacity of the central system to remove (add) water vapor. When the above condition is not satisfied because of the inadequate air flow rate of the air supply system or the value of WS, the room humidity ratio would change according to

$$WI = \frac{GS_t * WS + GL_t * WA + QLL/\lambda}{GS_t + GL_t}$$

This equation becomes indeterminate when there is no air supply or air leakage to or from the room. Theoretically the room relative humidity would reach 100% soon after the air supply or air leakage is stopped provided normal internal sources were still present. Under those conditions, seasonal value of WI to be used would be that corresponding to the dew point temperature which would be approximately equal to the average

wall surface temperature of the space.

The most important application of RMTMP is for taking into account some of the performance characteristics of the room's (or space's) heating and cooling systems where the evaluation of heating and cooling load is linked to the system capacity. Presented in this section is a sample algorithm to illustrate how RMTMP can be used to account for the type of occupancy, temperature control scheme, and the system capacity. In this illustration, the heating/cooling load will be set equal to the maximum capacity of the system when the calculated load at a given time is greater than the maximum system capacity. The space or room temperature is then calculated on the basis of net load, which is the difference between the calculated load at a given design temperature and the maximum system capacity. If, on the other hand, the space temperature falls within the prescribed upper and the lower limits, the load is set equal to zero. The same procedure is applied to the latent load calculation. The details of the algorithm is depicted in the flow diagram (Figure A-20). The nomenclature for the figure is given in Table A-12.


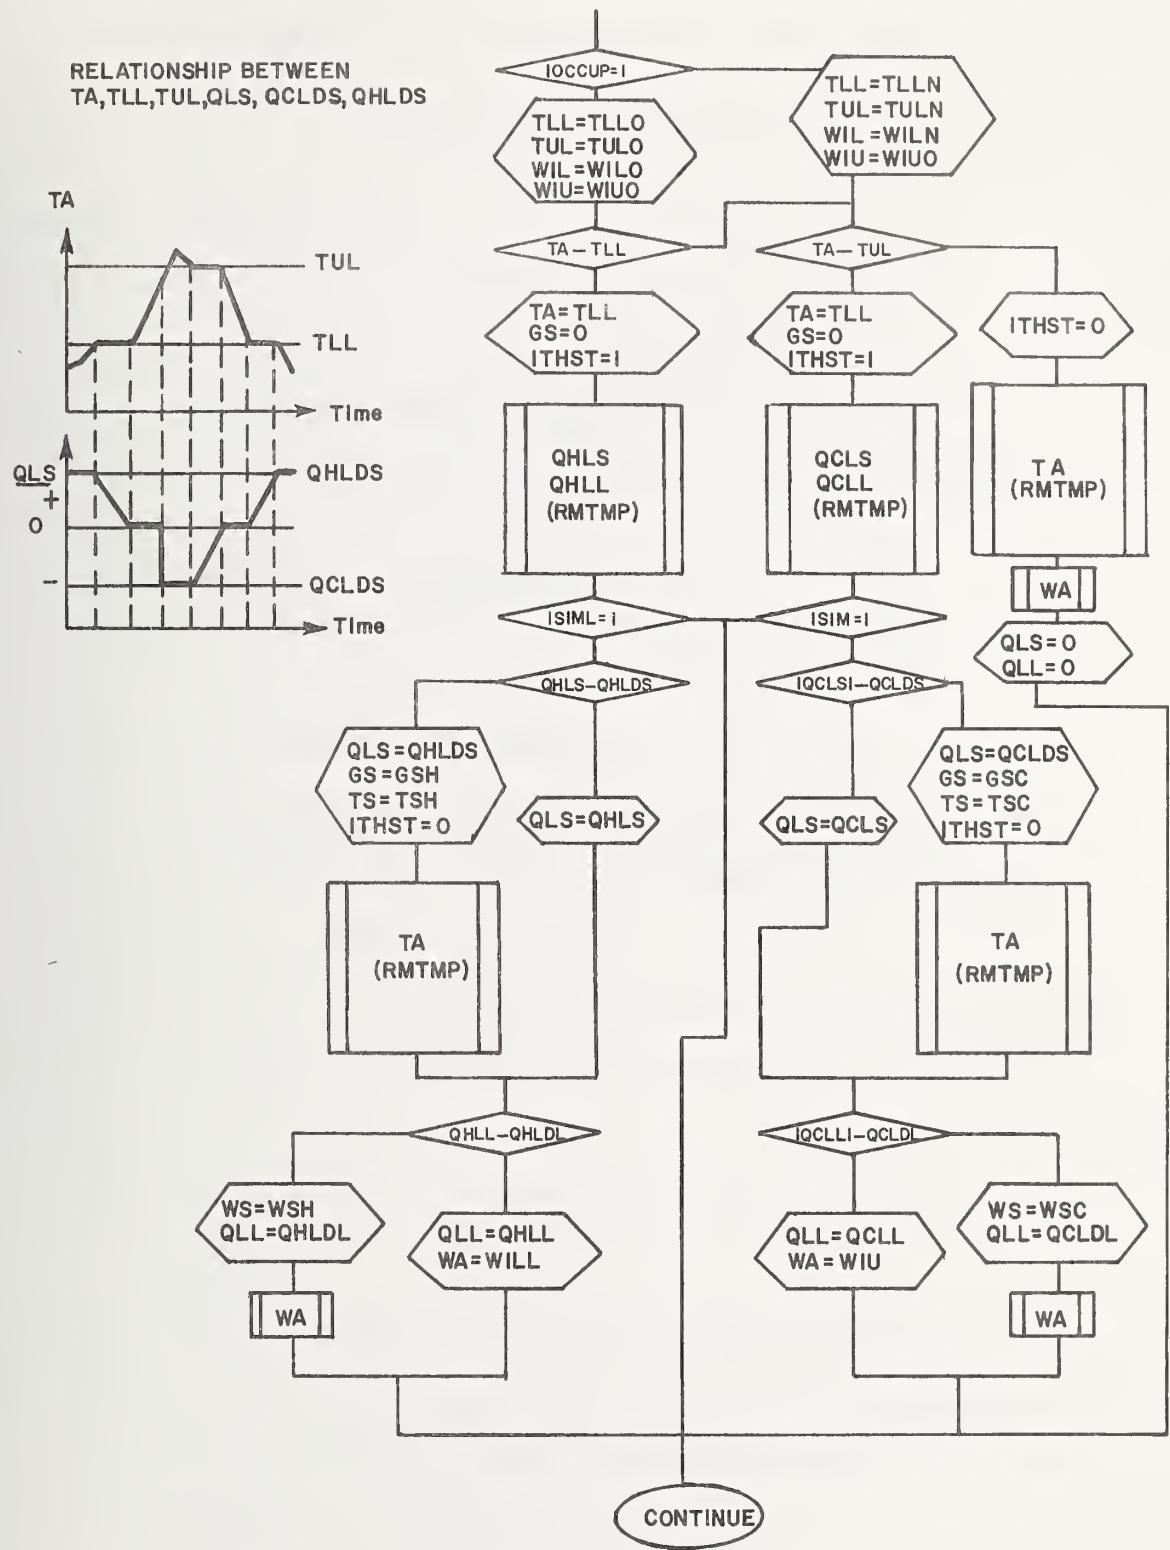


Figure A-20 Flow Diagram of the Room Temperature and the Room Thermal Load Calculation Steps

Symbols used in the flow diagram, Figure A-20



Setting of the variables

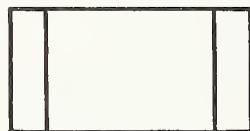

Calculation by RMTMP



Calculation of WA

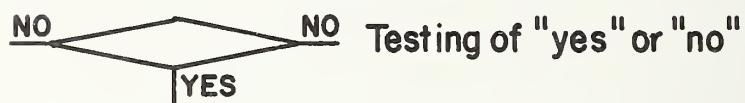


Table A-12

Nomenclature for Figure A-20

IOCCUP: Occupancy index

1 if during the occupied period

0 if during the unoccupied period

ISIML: System capacity consideration index

1 if the calculated load is to be compared with the maximum capacity of the system

0 if the load is to be estimated without regard to the installed system capacity

ITHST: Room temperature control index

1 if a space temperature is prescribed at a given level and the heating and cooling load is to be calculated to meet this prescribed condition

0 if the space temperature is to be determined as a balance between the required load and the available capacity of the system

TLL: The lower limit of temperature, below which heating must be supplied

TLLO: The lower limit of temperature during the occupied period

TLLN: The lower limit of temperature during the unoccupied period

TUL: The upper limit of temperature, above which cooling must be provided

TULO: The upper limit of temperature during the occupied period

TULN: The upper limit of temperature during the unoccupied period

WIL: The lower limit of humidity ratio, below which the room requires humidification

WILO: The lower limit of humidity ratio during the occupied period

WILN: The lower limit of humidity ratio during the unoccupied period

WIU: The upper limit of humidity ratio, above which the room requires dehumidification

WIUO: The upper limit of humidity ratio during the occupied period

WIUN: The upper limit of humidity ratio during the unoccupied period

GS: Mass flow rate of air from the supply system

GSH: Maximum mass flow rate of air from the supply system during heating

GSC: Maximum mass flow rate of air from the supply system during cooling

TS: Air temperature of the supply air system

TSH: Maximum temperature of air from the supply system during heating

TSC: Minimum temperature of air from the supply system during cooling

WS: Humidity ratio of the air from the supply system

WSH: Maximum humidity ratio of air from the supply system during a period when heating and humidification occur

WSC: Minimum humidity ratio of air from the supply system during a period when cooling and dehumidification occur

C_p : Specific heat of air

λ : Latent heat of vaporization

QHLDs: Maximum system capacity for heating, Btu per hr

$$QHLDs = GSH * C_p * (TSH - TA)$$

QHLdL: Maximum system capacity for humidification

$$QHLdL = GSH * \lambda * (WSH - WA)$$

QCLDs: Maximum system capacity for cooling, Btu per hr

$$QCLDs = GSC * C_p * (TA - TSC)$$

QCLdL: Maximum system capacity for dehumidification

$$QCLdL = GSC * \lambda * (WA - WSC)$$

The primary variables that are determined by this mode of calculation
are:

QHLS: Sensible heating load of the space

QHLL: Latent heating load of the space

QCLS: Sensible cooling load of the space

QCLL: Latent cooling load of the space

TA: Space temperature

WA: Space humidity ratio

ATTIC

A Description of the Load Calculation for an Attic Space

In many cases the heating and cooling load in an attic space is affected strongly by the manner in which the attic conditions are maintained. The non-ventilated attic space may be treated as a simple air space within a roof structure and accounted for in the calculation of the conduction transfer functions. Where the attic space is ventilated during the summer to take advantage of the resulting natural cooling effect of the outdoor air, it has to be treated somewhat differently. Since it is reasonable to assume that the radiation heat exchange between the underside of the roof surface and the attic is as significant as the ventilation air rate in determining the attic thermal condition, RMTMP should be used. No additional algorithms are then required since all aspects covered in RMTMP apply directly to the attic heat transfer calculation. Of course, the solar radiation through windows, and internal heat gain from lighting and occupants would most likely be omitted. The floor should be treated as having its exterior surface exposed to the environmental conditions of the room below. The heat loss at the "exterior" surface of the floor then becomes the heat gain to the room beneath the ceiling.

FIG 1 outlines the calculation procedure for obtaining the necessary shape factors where the attic has a gabled roof.

IHG

An Algorithm to Calculate Instantaneous Heat Gain of a Space at Time t

Data:

Windows:

NY: Number of windows

AY_k: Area of each window, sq ft

UY_k: Overall heat transfer coefficient for each
window, Btu per (hr) (sq ft) (f)

SHG_k: Solar heat gain through each window, Btu per
(hr) (sq ft) (Calculated in SHG)

Exterior Walls and Roofs:

NX: Number of exterior walls and roofs

AX_k: Area of each exterior wall and roof, sq ft

HEAT_k: Heat gain through each exterior wall and roof,
Btu per (hr) (sq ft) (Calculated in HEATW)
where k = 1, 2, ... NX

Lights:

NS: Number of different types of lights

QS_k: Power input to each type of light, Btu per hr
where k = 1, 2, ... NS

Internal Heat Source Other than Lights:

NS[']: Number of different types of internal sensible heat sources other than lights

QS_k[']: Heat generation from each internal sensible heat source, where k = 1, 2, ... NS[']

NL: Number of different types of internal latent heat sources

QL_k: Latent heat gain from each internal latent heat source, Btu per hr, where k = 1, 2, ... NL

Inside Doors:

ND: Number of inside doors

AD_k: Area of each inside door, sq ft

UD_k: Overall heat transfer coefficient of each inside door, where k = 1, 2, ... ND[']

Outside Doors:

ND[']: Number of outside doors

AD_k[']: Area of each outside door, sq ft

UD_k[']: Overall heat transfer coefficient of each outside door, Btu per (hr) (sq ft) (F), where k = 1, 2, ... ND[']

Partitions:

NP: Number of partitions which separate the space from other spaces at different temperatures

AP_k: Area of each of these partitions, sq ft

UP_k: Overall heat transfer coefficient for each of these partition walls, Btu per (hr) (sq ft) (F), where k = 1, 2, ... NP

Underground Walls:

NG: Number of underground walls

AG_k: Area of each underground wall, sq ft

UG_k: Overall heat transfer coefficient of each underground wall, Btu per (hr) (sq ft) (F), where k = 1, 2, ...

NG

Underground Floors:

NGF: Number of underground floors

AGF_k: Area of each underground floor, sq ft

UGF_k: Overall heat transfer coefficient of each underground floor, Btu per (hr) (sq ft) (F), where k = 1, 2, ...

NGF

Internal Infiltration

NLK: Number of internal air leakage sources

LEAK_k: Air leakage from each source, cfm (Calculated in INFIL), where k = 1, 2, ... NLK

External Infiltration:

NLK': Number of external air leakage sources

LEAK_k': Air leakage from each external source, cfm

(Calculated in INFIL), where k = 1, 2, ...

NLK'

Temperatures:

TA_k: Dry-bulb temperature of each adjacent space,

F, where k = 1, 2, ... ND, NP or NLK

DB: Outside air dry-bulb temperature, F (Obtained
from CLIMATE)

TG: Average ground water temperature at half under-
ground basement depth, F

TGW: Ground water temperature, F

TZ: Space dry-bulb temperature, F

Humidity Ratios:

WA_k: Humidity ratio of adjacent space, 1b water per
1b dry air, where k = 1, 2, ... ND, NP or NLK

WO: Outside air humidity ratio, 1b water per 1b
dry air (Calculated in PSY)

WZ: Space humidity ratio, 1b water per 1b dry air

The following heat gains are calculated in this subroutine:

HEATG Total hourly solar heat gain through windows, Btu
or :
HEATG' per hr

HEATX: Total hourly heat gain through exterior walls and
roofs, Btu per hr

HEATIS: Total power input to lights, Btu per hr

HEATDP: Total sensible heat gain due to heat transfer through
doors, partitions, underground walls and floors, and
internal heat sources other than lights, Btu per hr

HEATVS: Total hourly sensible heat gain due to infiltration,
Btu per hr

HEATL: Total hourly latent heat gain due to infiltration and
internal heat sources, Btu per hr

Calculation Sequence:

1. HEATG = $\sum_{k=1}^{NY} AY_k * SHG_k$

2. HEATX = $\sum_{k=1}^{NX} AX_k * HEAT_k$

3. HEATIS = $\sum_{k=1}^{NS} QS_k$

4. HEATDP = $\sum_{k=1}^{ND} AD_k * UD_k * (TA_k - TZ) + \sum_{k=1}^{ND'} AD'_k * UK'_k (DB - TZ)$

$$+ \sum_{k=1}^{NY} AY_k * UY_k * (DB - TZ) + \sum_{k=1}^{NG} AG_k * UG_k * (TG - TZ)^*$$

$$+ \sum_{k=1}^{NGF} AGF_k * UGF_k * (TGW - TZ) + \sum_{k=1}^{NP} AP_k * UP_k * (TA_k - TZ)$$

$$+ \sum_{k=1}^{NS} QS_k^*$$

$$5. HEATVS = 1.08 * (\sum_{k=1}^{NLK} LEAK_k * (TA_k - TZ) + \sum_{k=1}^{NLK'} LEAK_k' * (DB - TZ))^{**}$$

$$6. HEATL = 4775 * (\sum_{k=1}^{NLK} LEAK_k * (WA_k - WZ) + \sum_{k=1}^{NLK'} LEAK_k' * (WO - WZ))$$

$$+ \sum_{k=1}^{NL} QL_k^{**}/$$

* The values of UG given in the 1972 ASHRAE Handbook of Fundamentals are based on TGW. A program for calculating basement wall losses using TC has been developed at the National Bureau of Standards. When using present ASHRAE values for UG, use TGW instead of TG.

** The coefficients 1.08 and 4775 in these equations are valid for the standard air density. If desired, they can be adjusted to actual conditions by multiplying both of them by $\frac{\rho}{0.075}$, where ρ is the actual density of the air expressed in lb per cu ft.

A Simplified Procedure for Obtaining Approximate Cooling Load by the Use of Weighting Factors

The procedure presented here was developed by Mitalas and Stephenson of National Research Council of Canada^{13, 14/} in order to expedite the otherwise complex and time-consuming solution of the heat balance simultaneous equations. The rigorous solution similar to that described in RMTMP was first obtained for typical rooms in commercial buildings with pulse type excitations that simulate various heat gains. The solution for these pulse excitations were then converted into new types of transfer functions called Weighting Factors. Weighting Factors developed for typical office spaces of light, medium, and heavy constructions are shown in Tables A-13, A-14, and A-15 for solar heat gain with no internal shading devices; heat gain conduction through interior and exterior structure components, solar heat gain with interior shading devices and all internal sources except lighting; and the heat gain due to lighting. By multiplying these Weighting Factors to the history of respective heat gains in a convolution scheme, similar to the way the conduction transfer functions are multiplied to the temperature history, it is possible to calculate an approximate cooling load.

Data:

AG_j for $j = 0, 1, 2 \dots MG$ and BG_j for $j = 1, 2, 3 \dots MG'$

Weighting Factors for the solar heat gain HEATG
(no internal shading devices)

AX_j for $j = 0, 1, 2 \dots MX$ and BX_j for $j = 1, 2 \dots MX'$

Weighting factors for

HEATX: Conduction heat gain

HEATG: Solar heat gain where there are internal shading devices

HEATDP: Heat gain due to air leakage and internal sources except
lighting

AIS_j for $j = 0, 1, 2 \dots MIX$ and BIS_j for $j = 1, 2, 3 \dots MIS'$

Weighting factors for the heat gain from lighting HEATIS

In order to make use of the weighting factor concept, it is necessary to have previous values of heat gains as well as values of cooling loads. By denoting the cooling load due to HEATG as HLCG, due to HEATX, HEATG', and HEATDP as HLCX and that due to HEATIS as HLCIS, the following set of the previous data are needed:

$HEATG_{t-j}$	for $j = 0, 1, 2 \dots MG$
$HEATX_{t-j}; HEATG'_{t-j}; HEATDP_{t-j}$	for $j = 0, 1, 2 \dots MX$
$HEATIS_{t-j}$	for $j = 0, 1, 2, 3 \dots MIS$
$HLCG_{t-j}$	for $j = 1, 2, 3 \dots MG'$
$HLCX_{t-j}$	for $j = 1, 2, 3 \dots MX'$
$HLCIS_{t-j}$	for $j = 1, 2, 3 \dots MIS'$

Calculation Sequence:

1. Using the Weighting Factors* given in Tables A-13, A-14, and

* The Weighting Factors given in Tables A-13, A-14, and A-15 are for typical office construction. They are obtained using the method described in Appendix B.

A-15 and factor Fc defined by equation "d", calculate load components corresponding to the heat gains

$$a. \quad HLCG_t = Fc \sum_{j=0}^{MG} AG_j * HEATG_{t-j} - \sum_{j=1}^{MG'} BG_j * HLCG_{t-j}$$

$$b. \quad HLCX_t = Fc \sum_{j=0}^{MX} AX_j * (HEATX_{t-j} + HEATG'_{t-j} + HEATDP_{t-j})$$

$$- \sum_{j=1}^{MX'} BX_j * HLCX_{t-j}$$

$$c. \quad HLCIS_t = Fc \sum_{j=0}^{MIS} AIS_j * HEATIS_{t-j} - \sum_{j=1}^{MIS'} BIS_j * HLCIS_{t-j}$$

The coefficients given in Tables A-13, A-14, and A-15 are for the case where all the heat gain energy appears eventually as cooling load. In most cases, a fraction of the input is lost to the surroundings. This fraction depends on the thermal conductance between the room air and the surroundings. One estimate of this fraction Fc, is given by

$$d. \quad Fc = 1 - 0.02 K_T \dots$$

for the range $1.0 > Fc > 0.7$

$$\text{where } K_T = \frac{1}{L_F} (U_{\text{window}} A_{\text{window}} + U_{\text{exterior wall}} A_{\text{exterior wall}*} + U_{\text{corridor wall}} A_{\text{corridor wall}})$$

* A U*A product should also be included for walls that adjoin unconditioned spaces even though the walls are not exterior ones.

L_F = Length of room exterior perimeter

U = U value of the room enclosure element

A = Area of the room enclosure element

2. Hourly load

a. Sensible load

$$SCL_t = HLCG_t + HLCX_t + HLCIS_t + HEATVS_t$$

b. Latent load

$$= HEATL_t$$

Table A-13

WEIGHTING FACTORS FOR HEATG

	Weighting Factor Symbol	Heavy* Structure	Medium* Structure	Light* Structure
MG = 1	AG ₀	0.187	0.197	0.224
	AG ₁	-0.097	-0.067	-0.044
MG' = 1	BG ₀	1.00	1.00	1.00
	BG ₁	-0.91	-0.87	-0.82

* Heavy Structure - 6" concrete floor slab, 6" concrete exterior wall, approximately 130 lb of building material per sq ft of floor area.

Medium Structure - 4" concrete floor slab, 4" concrete exterior wall, approximately 70 lb of building material per sq ft of floor area.

Light Structure - 2" concrete floor slab, exterior frame wall approximately 30 lb of building material per sq ft of floor area.

Table A-14

NORMALIZED WEIGHTING FACTORS FOR HEATX + HEATG' + HEATDP

	Weighting Factor Symbol	Heavy Structure	Medium Structure	Light Structure
MX = 1	AX ₀	0.676	0.681	0.703
	AX ₁	-0.586	-0.551	-0.523
MX' = 1	BX ₀	1.00	1.00	1.00
	BX ₁	-0.91	-0.87	-0.82

Table A-15
WEIGHTING FACTORS FOR HEATIS

Weighting Factor Symbol	Heavy Structure	Medium Structure	Light Structure
Fluorescent fixtures recessed into a suspended ceiling, ceiling plenum not vented.			
MIS = 2 AIS ₀	0.00	0.00	0.00
			;
MIS = 2 AIS ₁	0.53	0.53	0.53
	AIS ₂	-0.44	-0.40
			-0.35
* Fluorescent fixtures recessed into a suspended ceiling, return air through ceiling plenum.			
MIS = 2 AIS ₀	0.00	0.00	0.00
MIS = 2 AIS ₁	0.59	0.59	0.59
	AIS ₂	-0.50	-0.46
			-0.41
Fluorescent fixtures recessed into a suspended ceiling, supply and return air through fixtures.			
MIS = 2 AIS ₀	0.00	0.00	0.00
MIS = 2 AIS ₁	0.87	0.87	0.87
	AIS ₂	-0.78	-0.74
			-0.69

* Manufacturer's data sheet must be consulted to obtain the fractions of light input energy that are picked up by the room air and by ventilation air in the ceiling plenum.

Table A-15 continued

Weighting Factor Symbol	Heavy Structure	Medium Structure	Light Structure
Incandescent lights exposed in the room air.			
MIS = 2	AIS ₀	0.00	0.00
	AIS ₁	0.50	0.50
	AIS ₂	-0.41	-0.37
	The "BIS" Coefficients.		
MIS' = 1	BIS ₀	1.00	1.00
	BIS ₁	-0.91	-0.87

RMRT

An Algorithm for Calculating Weighting
Factors for Space Air Temperature

This algorithm provides a sample calculation method for obtaining the weighting factors for deviation of space temperature for the design value; the value at which the space heating/cooling loads are obtained for by the HLC routine.

This general algorithm illustrated here is for a space enclosure surrounded with spaces on both sides as well as above and below that are thermally at the same conditions. The space enclosure consists of an external wall, interior partition walls, corridor partition wall, ceiling, floor, furnishings, an outside door and a window.

Data:

AF: Floor area, sq ft

AC: Ceiling area, sq ft

AP: Interior partition wall area, sq ft

AK: Corridor wall area, sq ft

AW: Exterior wall area, sq ft

AG: Window glass area, sq ft

AD: Door area, sq ft

AFN: Internal furnishings area, sq ft

BF_j : Transfer functions for floor, Btu per (hr) (sq ft)

CF_j : (F), (Calculated in XYZ)

DF_j

BC_j Transfer functions for ceiling, Btu per (hr) (sq ft)
 CC_j : (F), (Calculated in XYZ)
 DC_j
 BK_j : Transfer functions for corridor wall, Btu per (hr)
 DK_j : (sq ft) (F), (Calculated in XYZ)
 BP_j Transfer functions for interior partition walls, Btu
 CP_j : per (hr) (sq ft) (F), (Calculated in XYZ)
 DP_j
 CW_j : Transfer functions for exterior walls, Btu per (hr)
 DW_j : (sq ft) (F), (Calculated in XYZ)
 CD_j : Transfer functions for outside door, Btu per (hr)
 DD_j : (sq ft) (F), (Calculated in XYZ)
 CFN_j : Transfer functions for internal furnishings, Btu per
 DFN_j : (hr) (sq ft) (F), (Calculated in XYZ)

where $j = 0, 1, \dots, M$

UG: Heat transmission coefficient of window glass, Btu
per (hr) (sq ft) (F)

CFM: Rate of air flow through the room, cu. ft per min.
(Ventilation rate)

Calculation Sequence:

1. Conversion of the given transfer functions into single series x_j , y_j , and z_j . This calculation is a polynomial division*, i.e.,

$$x_0 z^0 + x_1 z^{-1} + x_2 z^{-2} + x_3 z^{-3} + \dots$$

$$= \frac{a_0 z^0 + a_1 z^{-1} + a_2 z^{-2} + \dots}{1 + b_1 z^{-1} + b_2 z^{-2} + b_3 z^{-3} + \dots}$$

where

$x_0, x_1, x_2 \dots$ = single series response factor set

$a_0, a_1, a_2 \dots$ and

$b_1, b_2, b_3 \dots$ = coefficient of the given numerator
and denominator series respectively

For example, using given notation in this section for the outside wall, the x 's, a 's and b 's are

$x_0 = sCW_0$	$a_0 = CW_0$	$b_0 = 1.0$
$x_1 = sCW_1$	$a_1 = CW_1$	$b_1 = DW_1$
$x_2 = sCW_2$	$a_2 = CW_2$	$b_2 = DW_2$
.	.	$b_3 = DW_3$
.	.	.
.	.	.

* The rules of polynomial division can be obtained from any standard textbooks on numerical analysis.

where the letter "s" in front of CW_j denotes coefficients of the single series

2. Calculation of the single series of Room Air Response Factors, sRMRT. The factors in this series are given by

$$\begin{aligned}sRMRT_j = & AF[sBF_j + sCF_j] \\& + AC[sDC_j + sCC_j] \\& + AP[sBP_j + sCP_j] \\& + AW[sCW_j] \\& + AD[sCD_j] \\& + AFN[sCFN_j] \\& + AG[UG_j]^* \\& + 1.08[CFM_j]^*\end{aligned}$$

where $j > 10$ calculate the ratio R_j

$$R_j = \frac{sRMRT_{j+1}}{sRMRT_j}$$

and when $|R_j - R_{j+1}| \leq 0.001$ terminate sRMRT_j calculations.

3. Calculation of RMRT

The calculation of RMRT as a ratio of two series consists of three steps:

(a) Calculation of denominator, D(z),

$$D(z) = 1.0 - Rz^{-1}$$

where R is the last value of the ratio calculated in the sRMRT_j calculations

* Note that $UG_{j=1} = UG$, $CFM_{j=1} = CFM$, $UG_{j>1} = 0.0$ and $CFM_{j>1} = 0.0$.

(b) Calculation of numerator, $N(z)$,

$$N(z) = sRMRT_0 z^0 + (sRMRT_1 - (R)sRMRT_0) z^{-1} \\ + (sRMRT_2 - (R)sRMRT_1) z^{-2} \\ + (sRMRT_3 - (R)sRMRT_2) z^{-3}$$

(c) The RMRT's are then evaluated by equating the following equation to the one in (b) above

$$N(z) = \frac{X_0 + X_1 z^{-1} + X_2 z^{-2}}{Y_0 + Y_1 z^{-1}}$$

Typical values are shown in Table A-16.

Table A-16

WEIGHTING FACTORS FOR THE DEVIATION OF SPACE
TEMPERATURE, RMRT'S^{*}/

Weighting Factor Symbol	Heavy Structure	Medium Structure	Light Structure
X_0	-1.85	-1.81	-1.68
X_1	+1.95	+1.89	+1.73
MX = 2	X_2	-0.10	-0.08
			-0.05
Y_0	1.00	1.00	1.00
MY = 1	Y_1	-0.91	-0.87
			-0.82

* The X coefficients given in this Table are for a room with zero heat conductance to surrounding spaces and are normalized to unit floor area. To get the X_j coefficients for a room with a total conductance K between room air and surroundings, ventilation rate V_t and infiltration rate VI_t , it is necessary to multiply each X_j value by room floor area and then add $[K + (V_t + VI_t) 1.08] (1.00 - Y_j)$ to the resulting X_0 value (where V_t and VI_t are in cfm and K is in Btu/hr °F).

Note: That X_0 value changes with the changes of V_t and VI_t values.

HEXT

An Algorithm for Calculating the Rate at Which
Sensible Heat is Extracted From the Space

Data:

SCL_t : Sensible cooling load at time t , which is calculated for
a constant space design temperature of TM , Btu per hr
(Calculated in HCL)

X_j : Weighting factors for use with θ_{t-j} , for $j = 0, 1, \dots$,
 Y_j : (Calculated in RMRT with typical values shown in Table
A-16)

θ_{t-j} : History of hourly space air temperature deviation from
the assumed constant value TM , for $j = 1, 2 \dots, F$

C: Average heat extraction rate of the apparatus in a space
when the space air temperature is TM , Btu per hr

D: Change in the rate of heat extraction of the apparatus
caused by one degree change in space air temperature,
Btu per (hr) (F)

HE_{t-j} : History of heat extracted from the space, for $j = 1, 2$
..., Btu per hr

INFIL

An Algorithm for Calculating Air Infiltration

It is well recognized that the air infiltration constitutes as much as 30% of home heating load and a significant part of the load of non-pressurized commercial buildings. The air leakage of a building depends upon the tightness of its exterior walls, windows, and doors; the wind characteristics and temperature difference between the inside and outside, and to some extent how the building is operated with respect to the opening and closing of its door.

The rate of air infiltration can be empirically expressed by

$$Q = C \cdot A \cdot \Delta P^{N}$$

where

Q: air flow rate

C: flow coefficient

A: flow opening area

N: pressure exponent

ΔP : pressure difference

Unfortunately it is very difficult to determine accurate values of flow opening area and pressure difference for actual buildings, which consist of complex air leakage passages. A limited amount of data are given in the 1972 ASHRAE Handbook of Fundamentals for equivalent opening area of typical windows, doors and walls. The pressure difference depends upon the wind characteristics around the building and the temperature differ-

ence between the inside and the outside of the building.

Compiled in this section is a methodology to approximately calculate the pressure difference between a given space and its adjacent space including the outdoor. The basic mathematical principle involved is to attain a solution to a set of pressure difference equations of the following type:

$$Q_i = \sum Q_{i,k} = 0$$

$$Q_{i,k} = \sum A_{i,k} * C_{i,k} * (P_i - P_k)^{N_{i,k}}$$

where

Q_i : net air flow out of space i

$Q_{i,k}$: air exchange between space i and space k

$A_{i,k}$: flow opening area between space i and k

$C_{i,k}$: flow coefficient applicable to the air
flow between the spaces i and k

$N_{i,k}$: pressure exponent applicable to the flow
between the spaces i and k

A special computational routine is required to solve this set of simultaneous, non-linear equations.

As mentioned previously, air leakage through various openings such as doors, windows, window frames, pinholes in the wall and service shafts may be approximated by an equation of the following type:

$$\text{LEAK} = 4000 * A * K * (\text{DP})^{** N}$$

$$= C * (\text{DP})^{** N}$$

where

LEAK = air leakage in cu. ft per min.

A = opening area, sq ft

K = flow coefficient, dimensionless

DP = pressure difference across the opening, inches of water

N = pressure exponent, dimensionless

C = equivalent flow coefficient (EFC)

The values of K and N vary depending upon the type of opening. Moreover, the exact value of A is not well known for many types of openings, such as wall pinholes or cracks around the windows. Table A-17 lists the values of Equivalent Flow Coefficient C and the flow exponent N for various types of openings common to many buildings. These values are derived from the air leakage data compiled in Chapter 19 "Infiltration and Natural Ventilation" of the 1972 ASHRAE Handbook of Fundamentals.

Table A-17

	<u>C</u>	<u>N</u>
1. Double-hung wooden windows (locked)*		
non-weatherstripped loose fit	6	0.66
average fit	2	0.66
weatherstripped loose fit	2	0.66
average fit	1	0.66
2. Window frames*		
masonry frame with no caulking	1.2	0.66
masonry frame with caulking	0.2	0.66
wooden frame	1	0.66
3. Swinging doors* 1/2" crack	160	0.5
1/4" crack	80	0.5
1/8" crack	40	0.5
4. Walls** 8" plain brick	1	0.8
8" brick and plaster	0.01	0.8
13" brick	0.8	0.8
13" brick and plaster	0.004	0.7
13" brick, furring, lath and plaster	0.03	0.9
frame wall, lath and plaster	0.01	0.55
24" shingles on 1 x 6 boards on 14" center	9	0.66
16" shingles on 1 x 4 boards on 5" center	5	0.66
24" shingles on shiplap	3.6	0.7
16" shingles on shiplap	1.2	0.66

* Values of C listed for these openings are per ft of linear crack length.

** Values of C listed for the walls are per unit area of the wall surface.

In many instances, detailed information of air leakage characteristics is not available, but it is still possible to make a calculation. For a modern office building of 120 ft x 120 ft plan dimension with the floor height of 12 ft, Tamura^{15/} lumped together all the leakage area for a given floor as follows:

Table A-18

outside wall	2.5 sq. ft per story
4 elevator shaft doors	4.5 " " " "
2 stair shaft doors	0.5 " " " "
floor	3.7 " " " "
brench perimeter and interior air duct	7.0 " " " "
return duct	14.0 " " " "
vertical shafts (elevator or stairwell)	1/3 of the cross-sectional area*

The value of C corresponding to these data can be obtained by multiplying them by 2400 which corresponds to K = 0.6.

Data:

V: Wind speed measured at a 40 ft elevation as taken from the weather tape, knots

DIR: Wind direction measured clockwise from North, degrees
(see Figure A-21)

* This particular data were derived from a recent and unpublished experiment of the National Bureau of Standards conducted on two high-rise buildings.

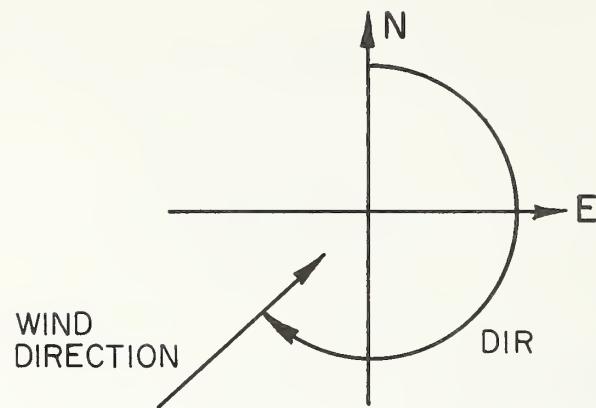


Figure A-21 Definition of Wind Direction Angle

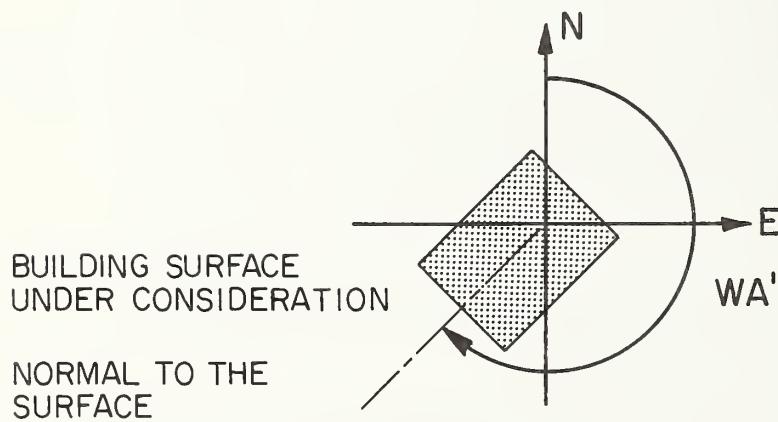


Figure A-22 Definition of the Angle Between North and Normal of the surface Under Consideration

DB: Outdoor air dry-bulb temperature, F
PB: Barometric pressure, in. Hg.
NF: Number of above-grade floors
HTT: Total height of building (from above-grade), ft
TZ: Indoor air temperature, F
TS: Elevator and service shaft temperature
WA': Direction angle of the building as defined with respect to North and the normal of the principal surface of the building (see Figure A-22)
HT_k: Height of the floor, ft, for k = 1, 2, 3, NF
CFMSP_k: Ventilation air supplied to the floor, cu ft per min, for k = 1, 2, 3, ... NF
CFMEX_k: Ventilation air exhausted from the floor, cu ft per min, for k = 1, 2, 3, ... NF

Calculation Sequence:

1. $V' = 1.153 * V$

$$TO = 460 + DB$$

$$TI = 460 + TZ$$

$$PO = 0.4910 * PB$$

$$x = DIR - WA'$$

2. Wind velocity, VH, at height HT on the building, mph

$$VH = V' * 0.117 * (1 + 2.81 * \text{Log} (0.305 * HT + 4.75))$$

3. Theoretical wind velocity pressure, PTWV on the building, in. H₂O

$$PTWV = 0.000482 * (V' ** 2)$$

4. Wind direction, BWD, relative to building surfaces

BWD = 1 surface on windward side if,

$$-45^\circ < x < +45^\circ$$

BWD = 2 surface on leeward side if,

$$90^\circ < x < 270^\circ$$

or, $-90^\circ < x < -270^\circ$

BWD = 3 surface on side if,

$$45^\circ < x < 90^\circ$$

or, $-45^\circ < x < 90^\circ$

5. Using Table A-19, determine the normal wind velocity pressure

correction factor, PTKN

Table A-19 Values of PTKN

NSB	TB = 1			TB = 2			TB = 3		
	BWD = 1	BWD = 2	BWD = 3	BWD = 1	BWD = 2	BWD = 3	BWD = 1	BWD = 2	BWD = 3
0.5	.1	-.3	-.8	-.5	-.25	-.45	.5	.45	.45
1.0	-.1	-.25	-.5	-.5	-.2	-.3	.45	.3	.3
2.0	.1	-.25	-.4	.0	-.2	-.3	.45	.1	.1
3.0	.1	-.25	-.4	.1	-.2	-.35	.45	.0	.0
5.0	.25	-.35	-.6	.25	-.25	-.45	.5	-.1	-.1
∞	.6	-.35	-.7	.6	-.35	-.7	.6	-.35	-.7

where

TB = 1: Shorter building on windward side

TB = 2: Equals taller building on windward side

TB = 3: Taller building on leeward side

NSB: Ratio of the distance between the adjacent buildings and the width of the building in the direction of wind

6. Wind velocity pressure correction factor, PTKO, for winds obliquely to the wall surface

If BWD = 1 (windward side of building)

$$(PTKO)_m = \cos(|x|)$$

If BWD = 2 (leeward side of building)

$$(PTKO)_l = 1.0$$

If BWD = 3 (side of building)

$$(PTKO)_s = \cos(|x|)$$

Example:

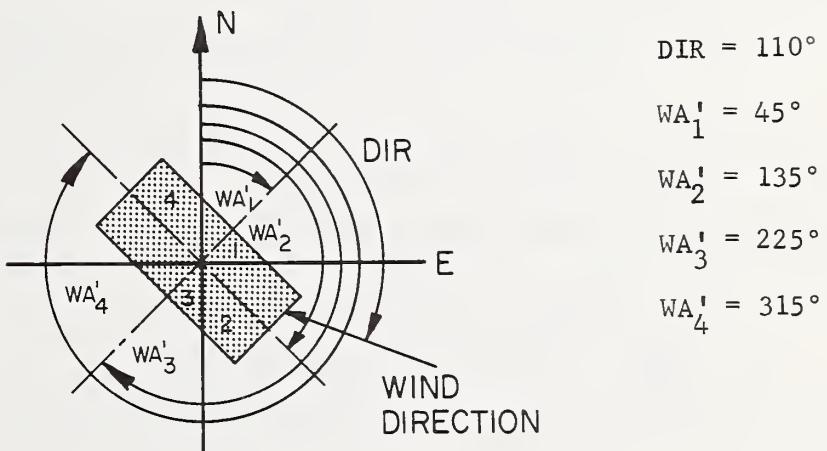


Figure A-23 DIR and WA' Angles of Example

Side 1, DIR-WA₁¹ = 110° - 45° = 65° (therefore, BWD = 3)

Side 2, DIR-WA₂¹ = 110° - 135° = -25° (therefore, BWD = 1)

Side 3, DIR-WA₃¹ = 110° - 225° = 115° (therefore, BWD = 2)

Side 4, DIR-WA₄¹ = 110° - 205° = 205° (therefore, BWD = 2)

Side 1, (PTKO)_s = Cos (+65°)

Side 2, (PTKO)_m = Cos (+25°)

Side 3, (PTKO)₁ = 1.0

Side 4, (PTKO)₁ = 1.0

7. Actual wind pressure on the building at height (HT) corresponding to floor (k): (PAVV)_k

$$(PAVV)_k = (PTKO)_k * (PTKN)_k * (PTWV),$$

8. Stack effect pressure (PSE) on the outside of the building at building height (HT) and floor (k), in. H₂O

$$(PSE)_k = -0.52 * PO * HT/TO$$

9. Total pressure on the outside of the building (PCO) at floor (k), in. H₂O

$$(PCO)_k = (PAVV)_k + (PSE)_k$$

10. Pressure in the elevator and serve shafts (PSE) at height (HT) corresponding to floor (k), in. H₂O

$$(PSE)_k = -0.52 * PO * HT/TI + (PSE)_1$$

11. Choose appropriate flow coefficients and pressure exponents for air leakage paths of each floor as follows:

Flow coefficients

CWD: Value of C for appropriate window in Table A-17

multiplied by the total crack length of all the windows

CFM: Value of C for appropriate window frame in Table A-17 multiplied by the total crack length of all the window frames

CDR: Value of C for appropriate door in Table A-17 multiplied by the total crack length of all the doors

CWL: Value of C for appropriate walls in Table A-17 multiplied by the total wall area

CCL: Value of A for the ceiling from Table A-18 multiplied by 2400

CFL: Value of A for the floor from Table A-18 multiplied by 2400

CEL: Value of C for elevator doors

CSS: Value of C for the doors to the service shaft

CFS and CES: Value of the cross section of the shaft multiplied by 800

Pressure exponent

NWD: Value of N for the appropriate window in Table A-17

NFM: Value of N for the appropriate window frame in Table A-17

NDR: Value of N for the appropriate door in Table A-17

NWL: Value of N for the appropriate wall in Table A-17

NCL: 0.5

NFL: 0.5

NEL: 0.5

NSS: 0.5

NFS: 0.5

NSE: 0.5

12. Solution of 2 * NF equations

Outdoor air leakage to k-th floor rooms* (see Figure A-23)

Window k leakage

$$\text{LEAKWD}_{k,j} = \text{CWD}_{k,j} * (\text{PCO}_{k,j} - \text{PI}_k) ** \text{NWD}_{k,j} \quad (1)$$

Window frame leakage

$$\text{LEAKFM}_{k,j} = \text{CFM}_{k,j} * (\text{PCO}_{k,j} - \text{PI}_k) ** \text{NFM}_{k,j} \quad (2)$$

Door leakage

$$\text{LEAKDR}_{k,j} = \text{CDR}_{k,j} * (\text{PCO}_{k,j} - \text{PI}_k) ** \text{NDR}_{k,j} \quad (3)$$

Wall leakage

$$\text{LEAKWL}_{k,j} = \text{CWL}_{k,j} * (\text{PCO}_{k,j} - \text{PI}_k) ** \text{NWL}_{k,j} \quad (4)$$

Ceiling leakage

$$\text{LEAKCL}_k = \text{CCL}_k * (\text{PI}_{k+1} - \text{PI}_k) ** \text{NCL}_k \quad (5)$$

Floor leakage

$$\text{LEAKFL}_k = \text{CFL}_k * (\text{PI}_{k-1} - \text{PI}_k) ** \text{NFL}_k \quad (6)$$

* In all of above expressions, subscript k refers to the k-th floor and subscript j refers to the j-th side of the building where the convention is j = 1 (south), 2 (west), 3 (north), and 4 (east).

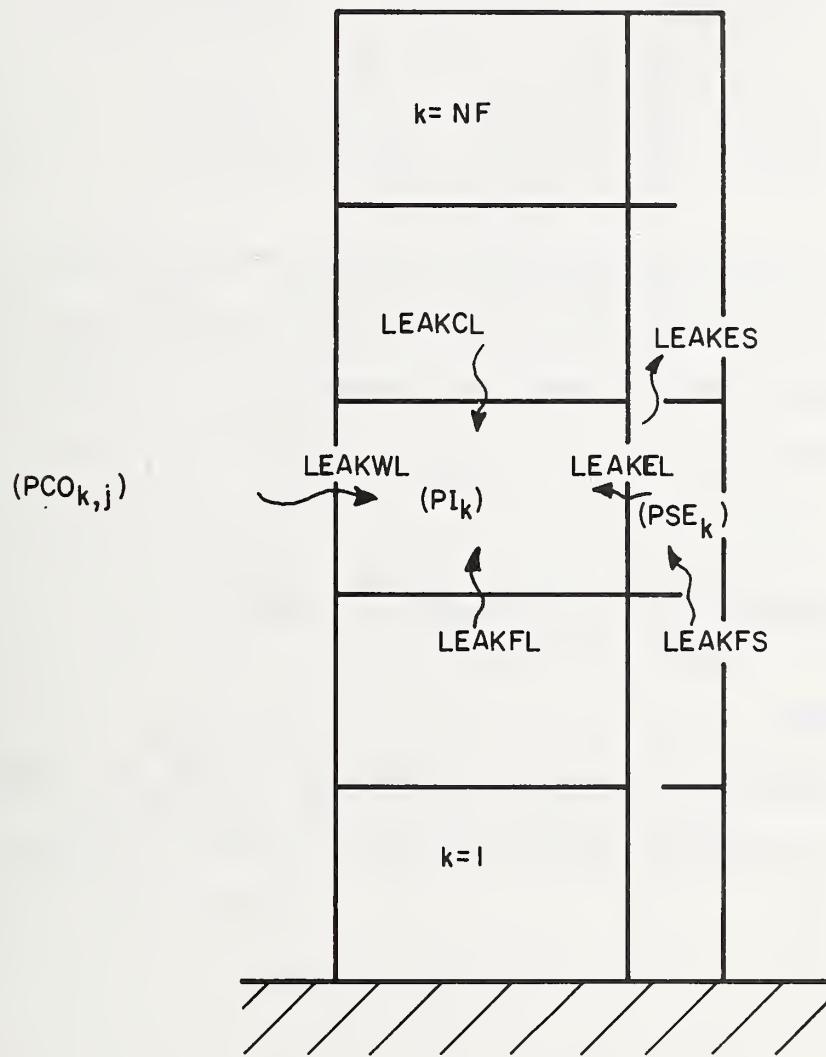


Figure A-23 Air Leakage Pattern of a High-Rise Building

Leakage from the elevator and service shafts*

$$\text{LEAKEL}_k = \text{CEL}_k * (\text{PSE}_k - \text{PI}_k) ** \text{NEL}_k \quad (7)$$

$$\text{LEAKSS}_k = \text{CSS}_k * (\text{PSE}_k - \text{PI}_k) ** \text{NSS}_k \quad (8)$$

Air leakage between the floor levels within the shafts*/

$$\text{LEAKFS}_k = \text{CFS}_k * (\text{PSE}_{k-1} - \text{PSE}_k) ** \text{NFS}_k \quad (9)$$

$$\text{LEAKES}_k = \text{CES}_k * (\text{PSE}_{k-1} - \text{PSE}_k) ** \text{NSE}_k \quad (10)$$

In the previous equations, unknowns are PI_k for $k = 1, 2, 3, \dots, NF$ and PSE_k for $k=1, 2, 3 \dots NF$ provided that the pressures in all the shafts are assumed equal at a given floor level.

Flow balance equations at the k-th floor (the individual quantities come from equations 1-10 above)

Rooms

$$\begin{aligned} \text{LEAKWD}_{k,j} + \text{LEAKFM}_{k,j} + \text{LEAKDR}_{k,j} + \text{LEAKWL}_{k,j} + \text{LEAKCL}_k \\ + \text{LEAKFL}_k + \text{LEAKEL}_k + \text{LEAKSS}_k + \text{CFMSP}_k - \text{CFMEX}_k = 0 \end{aligned}$$

* In all of above expressions, subscript k refers to the k-th floor and subscript j refers to the j-th side of the building where the convention is $j = 1$ (south), 2 (west), 3 (north), and 4 (east).

Elevator Shaft or Service Shaft

$$\text{LEAKFS}_k + \text{LEAKES}_k - \text{LEAKEL}_k^* + \text{CFMSPS}_k - \text{CFMEXS}_k = 0$$

where CFMSPS_k : ventilation air supplied at the
k-th floor in the shaft

CFMEXS_k : air exhausted from the shaft at
the k-th floor

These $2 * NF$ sets of flow balance equations must be solved by an appropriate iteration technique to obtain the pressure profiles in the building and in the shafts. Then the calculated pressure values are used to determine the air leakage of the building.

Recently a comprehensive computer program that embodies the basic algorithm described in this section was published by D. M. Sander and G. T. Tamura of the National Research Council of Canada. The details of the program are given in an NRC booklet entitled "A Fortran IV Program to Simulate Air Movement in Multi-Storey Buildings", DBR Computer Program No. 35, (March 1973).

* If this equation were for a service shaft, LEAKEL_k would be replaced by LEAKES_k .

DST

An Algorithm for Determining the Dates of the Daylight Savings Time

Data:

YR: Year AD

MO: Month of the year

DAY: Day of the month

The main variables calculated in this subroutine are:

DSTX: The day when daylight savings time commences

DSTY: The day when standard time resumes

DST: The daylight savings time indicator

DST =
 0 during the standard time period
 1 during the daylight savings time period

Calculation Sequence:

1. If MO is less than 4 or greater than 10, DST = 0

If MO is greater than 4 and less than 10, DST = 1

2. If MO = 4, DAY is less than 25, DST = 0

If DAY is greater than 23, call WKDAY subroutine

If DAY is Sunday, DSTX = DAY

If DAY is less than DSTX, DST = 0, otherwise DST = 1

3. If MO = 10, DAY is less than 25, DST = 1

If DAY is greater than 24, call WKDAY subroutine

If DAY is Sunday, DSTY = DAY

If DAY is less than DSTY, DST = 1, otherwise DST = 0

WKDAY

An Algorithm Used to Identify the Day of the Week for Any Given Date of the Year From 1901 to 2000

Data:

YR: Year AD

MO: Month of the year

DAY: Day of the month

The variable calculated in this subroutine is WKDAY, the weekday indicator.

```
1 if Sunday  
2 if Monday  
3 if Tuesday  
WKDAY = 4 if Wednesday  
5 if Thursday  
6 if Friday  
7 if Saturday
```

Calculation Sequence:

1. Let FSTDAY(1) = 31, FSTDAY(2) = 59, FSTDAY(3) = 90, FSTDAY(4) = 120
FSTDAY(5) = 151, FSTDAY(6) = 181, FSTDAY(7) = 212, FSTDAY(8) = 243
FSTDAY(9) = 273, FSTDAY(10) = 304, FSTDAY(11) = 334, FSTDAY(12) = 365

2. Let N = Integer part of YR/4

ND = N - 485

IY = 2, IADD = 2

If ND = 0, Go to (4)

If ND is less than 0, ND = -ND and IADD = -2

3. Repeat the following steps for ND times

IY = IY - IADD

If IY is greater than 7, IY = IY - 7

If IY is equal to 0, IY = 7

If IY is less than 0, IY = IY + 7

4. Let MD = YR - N * 4

If MD is equal to 0 IWK = IY

If MD is equal to 1 IWK = IY + 2

If MD is equal to 2 IWK = IY + 3

If MD is equal to 3 IWK = IY + 4

If IWK is greater than 7, IWK = IWK - 7

If MO is not equal to 1 go to 5

TDAY = DAY - 1

Go to 7

5. Repeat the following for j = 2 through 12

If MO is equal to j, let TDAY = FSTDAY (j-1) + Day - 1

Otherwise Go to 6

6. If MD is equal to 0 and MO is greater than 2, TDAY = TDAY + 1

7. Let NTX = Integer part of TDAY/7

NDX = TDAY - 7 * NTX + IWK

If NDX is greater than 7, let NDX = NDX - 7

8. Let WKDAY = NDX

9. If this routine is going to be applied for the period outside
1901-2000, the following additional algorithms must be added

KV = First two digits of YR

KTEST = Last two digits of YR
 If MO \leq 2 or KTEST = 0, KV = KV - 1
 LTEST = Remainder of KV/4
 KV = 4*LV + LTEST
 If LTEST = 2, WKDAY = WKDAY + 1
 = 1, WKDAY = WKDAY + 2
 = 0, WKDAY = WKDAY + 3
 Otherwise WKDAY = WKDAY - 3*(LV - 4)
 If WKDAY < 0, WKDAY = WKDAY + 7
 If WKDAY > 7, WKDAY = WKDAY - 7

An alternate calculation sequence for WKDAY has been suggested*
 ***** ALL INTEGER ARITHMETIC *****

- 1 MDAY=30*(MO-1)+(MO-2)*58/100-1
IF(MO.LE.2) MDAY=MDAY+MO
- 2 NIVC=IYR-(IYR/400)*400
NLYR=NIVC/4
NCEN=NIVC/100
NIC=NIVC-100*NCEN
- 3 IY=6-2*NLYR
- 4 MD=NIVC-NLYR*4
IF(MD.GE.1) IY=IY+1+MD
IY=IY-NCEN
IF(NIC.EQ.0.AND.NIVC.GT.0) IY=IY+1
- 5 IDAYR=MDAY+IDA
- 6 IF(NIC.EQ.0.AND.NCEN.GE.1) GO TO 7
IF(MD.EQ.0.AND.MO.GT.2) IDAYR=IDAYR+1

* This was contributed by A. W. Courtney, Scientific Programming,
Box 508, Bloomfield Hills, Michigan 48013.

7 JWK=IDAYR+IY
NDX=JWK-(JWK/7)*7
IF(NDX .LE .0) NDX=NDX+7

8 WKDAY=NDX

NOTE: IDA FORMERLY CALLED "DAY"
IYR FORMERLY CALLED "YR"
IDAYR = NUMBER OF THE DAY OF THE YEAR
0 = NUMERICAL ZERO

HOLIDAY

An Algorithm to Identify the National Holidays of the United States of America

Simple modifications allow the identification of any holidays or any special days in any country as long as the Gregorian Calendar system is employed.

Data:

YR: Year AD

MO: Month

DAY: Day of the month

The primary variable calculated in this subroutine is HOL, the holiday indicator; it is 1 if the date is a holiday and zero if it is a non-holiday.

Calculation Sequence:

HOL = 1

If MO = 1 and DAY = 1

MO = 12, DAY = 31 and WKDAY = 6

MO = 1, DAY = 2 and WKDAY = 2

MO = 2, 22 > DAY \geq 15 and WKDAY = 2

MO = 5, DAY \geq 25 and WKDAY = 2

MO = 7 and DAY = 4

MO = 7, DAY = 3 and WKDAY = 6

MO = 7, DAY = 5 and WKDAY = 2

MO = 9, 7 > DAY and WKDAY = 2

MO = 10, 15 > DAY \geq 8 and WKDAY = 2

MO = 10, 29 > DAY \geq 22 and WKDAY = 2

MO = 11, 29 > DAY > 21 and WKDAY = 5

MO = 12, DAY = 24 and WKDAY = 6

MO = 12, DAY = 26 and WKDAY = 2

otherwise HOL = 0

PSY*

Various Algorithms for Approximate Psychrometric Calculations

The following symbols are used throughout the PSY subroutines:

DB: Dry-bulb temperature, F (determined in CLIMATE)

DP: Dewpoint temperature, F (determined in CLIMATE)

WB: Wet-bulb temperature, F (determined in CLIMATE)

t: Temperature, either DB, WB, or DP, F

PB: Barometric pressure, in. Hg (determined in CLIMATE)

H: Enthalpy of moist air, Btu per lb of dry air

HS: Enthalpy of moist air saturated with water vapor,
Btu per lb of dry air

PV: Partial pressure of water vapor in moist air, in. Hg

PVS: Partial pressure of water vapor in moisture saturated
air, in. Hg

V: Volume of moist air, cu ft per lb of dry air

W: Humidity ratio of moist air, lb of water vapor per
lb dry air

log(x): Natural logarithm of x

log10(x): Common logarithm of x

* When the exact Goff-Gratch method is required, algorithms described in Reference 17 should be used. Tables A-19 and A-20 taken from that reference list that the psychrometric properties calculated by the PSY routines and the exact Goff-Gratch method, respectively. From examination of these tables it can be seen that the values calculated by the PSY subroutines are in very good agreement with the values calculated by the exact Goff-Gratch method.

The following algorithms are used for calculating the psychrometric properties of moist air. All of these are not required for load calculations but are presented here in a package and can be applied in a variety of engineering applications.

a. PVS (t)

1. Let $A(1) = -7.90298$ $B(1) = -9.09718$
 $A(2) = 5.02808$ $B(2) = -3.56654$
 $A(3) = -1.3816 \times 10^{-7}$ $B(3) = 0.876793$
 $A(4) = 11.344$ $B(4) = 0.0060273$
 $A(5) = 8.1328 \times 10^{-3}$
 $A(6) = -3.49149$

2. Let $T = (t + 459.688)/1.8$
if T is less than 273.16, go to 3

Otherwise

Let $z = 373.16/T$
 $P1 = A(1) * (z-1)$
 $P2 = A(2) * \log_{10}(z)$
 $P3 = A(3) * (10^{A(4)} * (1-1/z))^{-1}$
 $P4 = A(5) * (10^{A(6)} * (z-1))^{-1}$

Go to 4.

3. Let $z = 273.16/T$
 $P1 = B(1) * (z-1)$
 $P2 = B(2) * \log_{10}(z)$
 $P3 = B(3) * (1-1/z)$
 $P4 = \log_{10}(B(4))$

4. $PVS = 29.921 * (10^{P1 + P2 + P3 + P4})$

b. PV (DB, WB, PB)

1. $PVP = PVS(WB)$
 $WS = 0.622 * PVP / (PB - PVP)$
IF $(WB \leq 32)$ go to 3
 $HL = 1093.049 + 0.441 * DB - WB$
 $CH = 0.24 + 0.441 * WS$
 $WH = WS - CH * (DB - WB) / HL$

2. $PV = PB * WH / (0.622 + WH)$

3. $PV = PVP - 5.704 * 10^{-4} * PB * (DB - WB) / 1.8$

c. W (DB, WB, PB)

1. $VP = PV (DB, WB, PB)$

2. $W = 0.622 + VP / (PB - VP)$

d. H (DB, WB, PB)

$H = 0.24 * DB + (1061 + 0.444 * DB) * W (DB, WB, PB)$

e. V (DB, WB, PB)

1. $WV = W (DB, WB, PB)$

2. $V = 0.754 * (DB + 459.7) * (1 + 7000 * WV / 4360) / PB$

f. H (DB, DP, PB)

1. $W = 0.622 * PVS(DP) / (PB - PVS(DP))$

2. $H = 0.24 * DB + (1061 + 0.444 * DB) * W$

g. WB (H, PB)

1. If $PB = 29.92$ and $H > 0$

Let $Y = \log(H)$

For $H < 11.758$

$$WB = 0.6040 + 3.4841 * Y + 1.3601 * (Y^{**2}) + 0.9731 * (Y^{**3})$$

For $H > 11.758$

$$WB = 30.9185 - 39.682 * Y + 20.5841 * (Y^{**2}) - 1.758 * (Y^{**3})$$

If $PB \neq 29.92$, or $H \leq 0$ solve the following equation by iterating WB

$$H = 0.24 * WB + (1061 + 0.444 * WB) * W (WB, WB, PB)$$

h. DP (PV)

1. Let $Y = \text{Log}(PV)$

If PV is less than 0.18036

$$DP = 71.98 + 24.873 * Y + 0.8927 * (Y^{**2})$$

Otherwise

$$DP = 79.047 + 20.579 * Y + 1.8893 * (Y^{**2})$$

Attached to this section are the Fortran listings of subroutines developed at the National Bureau of Standards which incorporate the psychrometric algorithms described above.

PVSF(X) corresponds to PVS (t)

DPF(PV) corresponds to DP (PV)

WBSF(H,PB) corresponds to WB (H, PB)

The routine entitled PSY1 generates dewpoint temperature, vapor pressure, humidity ratio, enthalpy, specific volume, and relative humidity when the dry-bulb temperature, wet-bulb temperature and the barometric pressure are provided as input. This subroutine essentially combines all the algorithms described in this section. PSY2 is similar to PSY1 except that the dewpoint temperature is given in lieu of the wet-bulb temperature.

```

SUBROUTINE PSY1(DB,WB,PB,DP,PV,W,H,V,RH)
THIS SUBROUTINE CALCULATES VAPOR PRESSURE(PV), HUMIDITY RATIO (W)
ENTHALPY(H), VOLUME(V), RELATIVE HUMIDITY(RH) AND DEW-POINT
TEMPERATURE WHEN THE DRY-BULB TEMPERATURE(DB), WET-BULB TEMPERATURE
(WB) AND BAROMETRIC PRESSURE(PB) ARE GIVEN
PVP=PVSF(WB)
IF(DB-WB)4,4,5
5 WSTAR=0.622*PVP/(PB-PVP)
IF(WB-32.)1,1,2
1 PV=PVP-5.704E-4*PB*(DB-WB)/1.8
GO TO 3
4 PV=PVP
GO TO 3
2 CDB=(DB-32.)/1.8
CWB=(WB-32.)/1.8
HL=597.31+0.4409*CDB-CWB
CH=0.2402+0.4409*WSTAR
EX=(WSTAR-CH*(CDB-CWB)/HL)/0.622
PV=PB*EX/(1.+EX)
3 W=0.622*PV/(PB-PV)
V=0.754*(DB+459.7)*(1+7000.*W/4360)/PB
H=0.24*DB+(1061+0.444*DB)*W
DP=DPF(PV)
RH=PV/PVSF(DB)
RETURN
END

```

```

SUBROUTINE PSY2(DB,DP,PR,WB,PV,W,H,V,RH)
THIS SUBROUTINE CALCULATES THE FOLLOWINGS WHEN DRY-BULB TEMPERATURE
(DB), DEW-POINT TEMPERATURE(DP), AND BAROMETRIC PRESSURE(PB) ARE GIVEN
WB    WET-BULB TEMPERATURE
W    HUMIDITY RATIO
H    ENTHALPY
V    VOLUME
PV    VAPOR PRESSURE
RH    RELATIVE HUMIDITY
PV=PVSF(DP)
PVS=PVSF(DB)
RH=PV/PVS
W=0.622*PV/(PB-PV)
V=0.754*(DB+459.7)*(1+7000.*W/4360)/PB
H=0.24*DB+(1061+0.444*DB)*W
WB=WBF(H,PB)
RETURN
END

```

FUNCTION WBF(H,PB)
THIS PROGRAM APPROXIMATES THE WET-BULB TEMPERATURE WHEN
ENTHALPY AND BAROMETRIC PRESSURE ARE GIVEN

```
IF(PB.NE.29.92) GO TO 2
Y=LOG(H)
IF(H.GT.11.758) GO TO 3
WBF=0.6041+3.4841*Y+1.3601*Y*Y+0.97307*Y*Y*Y
GO TO 4
3 WBF=30.9185-39.68200*Y+20.5841*Y*Y-1.758*Y*Y*Y
GO TO 4
2 WB1=150.
PV1=PVSF(WB1)
W1=0.622*PV1/(PR-PV1)
X1=0.24*WB1+(1061+0.444*WB1)*W1
Y1=H-X1
9 WB2=WB1-1
PV2=PVSF(WB2)
W2=0.622*PV2/(PR-PV2)
X2=0.24*WB2+(1061+0.444*WB2)*W2
Y2=H-X2
IF(Y1*Y2) 6,7,8
8 WB1=WB2
Y1=Y2
GO TO 9
7 IF(Y1) 10,11,10
11 WBF=WB1
GO TO 4
10 WBF=WB2
GO TO 4
6 Z=ABS(Y1/Y2)
WBF=(WB2*Z+WB1)/(1+Z)
4 RETURN
END
```

FUNCTION DPF(PV)
THIS SUBROUTINE CALCULATES DEW-POINT TEMPERATURE FOR GIVEN VAPOR PRESSURE
Y=LOG(PV)
IF(PV.GT.0.1836) GO TO 1
DPF=71.98+24.873*Y+0.8927*Y*Y
GO TO 2
1 DPF=79.047+30.579*Y+1.8893*Y*Y
2 RETURN
END

```

FUNCTION PVSF(X)
DIMENSION A(6)/-7.90298,5.02808,-1.3816E-7,11.344,8.1328E-3,-3.491
149/,B(4)/-9.09718,-3.56654,0.876793,0.0060273/,P(4)
T=(X+459.688)/1.8
IF(T.LT.273.16) GO TO 3
Z=273.16/T
P(1)=A(1)*(Z-1)
P(2)=A(2)*LOG10(Z)
Z1=A(4)*(1-1/Z)
P(3)=A(3)*(10**Z1-1)
Z1=A(6)*(Z-1)
P(4)=A(5)*(10**Z1-1)
GO TO 4
3 Z=273.16/T
P(1)=B(1)*(Z-1)
P(2)=B(2)*LOG10(Z)
P(3)=B(3)*(1-1/Z)
P(4)=LOG10(B(4))
4 SUM=0
DO 5 I=1,4
5 SUM=SUM+P(I)
PVSF=29.921*10**SUM
RETURN
END

```

Table A-19

PR = 29.92 in. Hg.

DB	WR	DP	RH (%)	PV	W	H	V
80.0	80.0	80.0	100.0	1.0323	.02223	43.57	14.09
80.0	79.0	78.7	95.7	.9883	.02125	42.50	14.06
80.0	78.0	77.3	91.6	.9453	.02029	41.45	14.04
80.0	77.0	76.0	87.5	.9031	.01936	40.43	14.02
80.0	76.0	74.5	83.5	.8619	.01845	39.43	14.00
80.0	75.0	73.1	79.6	.8215	.01756	38.45	13.98
80.0	74.0	71.6	75.8	.7820	.01669	37.50	13.97
80.0	73.0	70.1	72.0	.7433	.01584	36.57	13.95
80.0	72.0	68.6	68.3	.7054	.01502	35.67	13.93
80.0	71.0	67.0	64.7	.6682	.01421	34.78	13.91
80.0	70.0	65.4	61.2	.6319	.01342	33.92	13.89
80.0	69.0	63.7	57.8	.5963	.01265	33.07	13.88
80.0	68.0	62.0	54.4	.5615	.01190	32.24	13.86
80.0	67.0	60.3	51.1	.5273	.01116	31.44	13.84
80.0	66.0	58.4	47.8	.4939	.01044	30.65	13.83
80.0	65.0	56.5	44.7	.4611	.00974	29.88	13.81
80.0	64.0	54.5	41.6	.4290	.00905	29.12	13.80
80.0	63.0	52.5	38.5	.3976	.00839	28.39	13.78
80.0	62.0	50.3	35.5	.3668	.00772	27.66	13.77
80.0	61.0	48.0	32.6	.3366	.00708	26.96	13.76
80.0	60.0	45.6	29.7	.3070	.00645	26.27	13.74
80.0	59.0	43.0	26.9	.2780	.00583	25.60	13.73
80.0	58.0	40.2	24.2	.2495	.00523	24.94	13.71
80.0	57.0	37.3	21.5	.2216	.00464	24.29	13.70
80.0	56.0	34.0	18.8	.1943	.00407	23.66	13.69
80.0	55.0	30.4	16.2	.1675	.00350	23.04	13.68
80.0	54.0	26.7	13.7	.1412	.00295	22.43	13.67
80.0	53.0	22.4	11.2	.1154	.00241	21.84	13.65
80.0	52.0	17.3	8.7	.0900	.00188	21.26	13.64
80.0	51.0	10.7	6.3	.0652	.00136	20.69	13.63
80.0	50.0	1.6	4.0	.0408	.00085	20.13	13.62
80.0	49.0	-14.6	1.6	.0169	.00035	19.59	13.61

Table A-20

Moist Air Properties Calculated by the
Exact Goff-Gratch Method

PB = 29.92 in. Hg

DB	WB	DP	RH (%)	PV	W	H	S	V
80.0	80.0	80.0	100.0	1.0323	.02233	43.69	.0864	14.09
80.0	79.0	78.7	95.7	.9883	.02135	42.61	.0843	14.07
80.0	78.0	77.3	91.6	.9453	.02039	41.56	.0822	14.05
80.0	77.0	76.0	87.5	.9032	.01945	40.53	.0802	14.03
80.0	76.0	74.6	83.5	.8620	.01854	39.53	.0783	14.01
80.0	75.0	73.1	79.6	.8217	.01764	38.55	.0764	13.99
80.0	74.0	71.7	75.8	.7822	.01677	37.60	.0745	13.97
80.0	73.0	70.2	72.0	.7435	.01592	36.67	.0727	13.95
80.0	72.0	68.6	68.4	.7057	.01509	35.76	.0709	13.93
80.0	71.0	67.1	64.8	.6686	.01428	34.87	.0692	13.91
80.0	70.0	65.5	61.2	.6323	.01349	34.00	.0675	13.90
80.0	69.0	63.8	57.8	.5967	.01271	33.15	.0658	13.88
80.0	68.0	62.1	54.4	.5619	.01196	32.32	.0642	13.86
80.0	67.0	60.3	51.1	.5278	.01122	31.51	.0626	13.85
80.0	66.0	58.5	47.9	.4944	.01050	30.72	.0610	13.83
80.0	65.0	56.6	44.7	.4617	.00979	29.95	.0595	13.81
80.0	64.0	54.6	41.6	.4296	.00910	29.19	.0581	13.80
80.0	63.0	52.5	38.6	.3982	.00843	28.45	.0566	13.78
80.0	62.0	50.4	35.6	.3674	.00777	27.73	.0552	13.77
80.0	61.0	48.1	32.7	.3372	.00712	27.02	.0538	13.76
80.0	60.0	45.6	29.8	.3077	.00649	26.33	.0525	13.74
80.0	59.0	43.1	27.0	.2787	.00587	25.66	.0511	13.73
80.0	58.0	40.3	24.2	.2503	.00527	24.99	.0498	13.72
80.0	57.0	37.3	21.5	.2224	.00468	24.35	.0486	13.70
80.0	56.0	34.0	18.9	.1951	.00410	23.71	.0473	13.69
80.0	55.0	30.5	16.3	.1683	.00353	23.09	.0461	13.68
80.0	54.0	26.8	13.8	.1420	.00293	22.49	.0449	13.67
80.0	53.0	22.6	11.3	.1162	.00244	21.89	.0438	13.65
80.0	52.0	17.5	8.8	.0910	.00191	21.31	.0426	13.64
80.0	51.0	11.0	6.4	.0662	.00138	20.74	.0415	13.63
80.0	50.0	2.0	4.1	.0418	.00087	20.18	.0404	13.62

References

1. Kimura, K., and Stephenson, D. G., "Solar Radiation on Cloudy Days", ASHRAE Transaction, pp. 227-233, Part I, 1969.
2. Mitalas, G. P., and Stephenson, D. G., "Absorption and Transmission of Thermal Radiation by Single and Double Glazed Windows", National Research Council of Canada Report 7104, December 1962.
3. Stephenson, D. G., "Tables of Solar Altitude, Azimuth, Intensity, and Heat Gain Factors for Latitudes from 43 to 55 Degrees North", National Research Council of Canada, Division of Building Research, Technical Paper No. 243, April 1967.
4. Groth, C. C., and Lokmanhekim, M., "Shadow - A New Technique for the Calculation of Shadow Shapes and Areas by Digital Computer", Second Hawaii International Conference on System Sciences, Honolulu, Hawaii, January 22-24, 1969.
5. Sun, Tseng-Yao, "Shadow Area Equations for Window Overhangs and Side Fins and Their Application in Computer Calculation", ASHRAE Semiannual meeting, Columbus, Ohio, February 5-8, 1968, Paper No. 2059.
6. Ito, N., and Kimura, K., "Convection Heat Transfer Coefficient at the Exterior Surface of Buildings Exposed to Natural Wind", (Japanese), Transaction of Japanese Society of Architectural Engineering, 1968.
7. Robinson, H. E. and F. J. Powell, "Thermal Resistance of Air Spaces and Fibrous Insulation Bounded by Reflective Surfaces", Building Material and Structures Report 151, National Bureau of Standards, 1957.

8. Stephenson, D. G., and Mitalas, G. P., "Calculation of Heat Conduction Transfer Functions for Multi-Layer Slabs", ASHRAE Transactions, Vol. 77, Part II, 1971.
9. Carslaw, H. S., and Jaeger, J. C., Conduction of Heat in Solids, Second Edition, 1959, page 326, Oxford at the Clarendon Press.
10. Mitalas, G. P. and J. G. Arseneault, "Fortran IV Program to Calculate Heat Flux Response Factors for Multi-layer Slabs, DBR Computer Program No. 23, National Research Council of Canada, 1967.
11. Kusuda, T., "Thermal Response Factors for Multi-layer Structures of Various Heat Conduction Systems", ASHRAE Transactions, pp. 250-269, Part I, 1969.
12. Hoglund, B. I., Mitalas, G. P., and Stephenson, D. G., "Surface Temperatures and Heat Fluxes for Flat Roofs", Journal of Building Science, Vol. 2, No. 1, pp. 29-36, January 1967.
13. Stephenson, D. G. and Mitalas, G. P., "Cooling Load Calculations by Thermal Response Factor Method", ASHRAE Semiannual Meeting, Detroit, Michigan, January 20 - February 2, 1967, Paper No. 2018.
14. Mitalas, G. P. and Stephenson, D. G., "Room Thermal Response Factors", ASHRAE Transactions, P III 2.1 - 2.10, Part I, 1967.
15. Tamura, G., "Computer Analysis of Smoke Control with Building Air Handling Systems", ASHRAE Journal, pp. 46-54, August 1972.
16. Bailey, A., and Vincent, N. D. G., "Wind-Pressure on Buildings Including Effects of Adjacent Buildings", Journal, Institute of Civil Engineers, Vol. 20, No. 8, October, 1943.


17. Kusuda, T., "Algorithms for Psychrometric Calculations", Building Science Series 21, National Bureau of Standards, January 1970.
18. Tamura, G. T. and Wilson, A. G., "Building Pressures Caused by Chimney Action and Mechanical Ventilation", ASHRAE 74th Annual Meeting, Minneapolis, Minnesota, June 26-28, 1967, Paper No. 2047.
19. Brown, G., "Heat Transfer at Exterior Surfaces of Buildings", (Swedish), Transactions of National Swedish Coun. Building Res., Stockholm 27, 1956.
20. Brown, K. M., and Conte, S. D., "The Solution of Simultaneous Non-linear Equations", Proceedings of 22nd National Conference, Association for Computing Machinery, pp. 111-114, 1967.
21. Haurwitz, B., "Insolation in Relation to Cloudiness and Cloud Density", Journal of Meteorology, Vol. 9, No. 4, September 1946.
22. Kimura, K. and Stephenson, D. G., "Theoretical Study of Cooling Load Caused by Lights", ASHRAE Annual Meeting, Lake Placid, New York, June 24-26, 1968, Paper No. 2087.
23. Mitalas, G. P., "An Experimental Check on the Weighting Factor Method of Calculating Room Cooling Load", ASHRAE Transactions, 1969.
24. Mitalas, G. P., "Calculation of Transient Heat Flow Through Walls and Roofs", ASHRAE Annual Meeting, Lake Placid, New York, June 24-26, 1968, Paper No. 2086.
25. Sun, Tseng-Yao, "Computer Evaluation of the Shadow Area on a Window Cast by the Adjacent Building", prepared for submission as a paper in the future.
26. Threlkeld, J. L., "Thermal Environmental Engineering", Prentice Hall, 1970.



8. Appendix B

Weighting Factor Method of Calculating
Heating and Cooling Loads and Space Temperature*

* This section was prepared by D. G. Stephenson and G. Mitalas of the National Research Council of Canada for the ASHRAE Task Group on Energy Requirements for Heating and Cooling.



The weighting factor method is based on the assumption that the heat transfer processes occurring in a room can be described by linear equations; and thus that the superposition principle can be used for the calculation of cooling load and space temperature. This means that the relationship between any excitation (e.g., power input to lights) and the corresponding component of the cooling load can be expressed in the form of a characteristic transfer function. Once all the transfer functions have been determined for a room, they can be used to calculate the response to any excitation. The weighting factors are a convenient way of representing these characteristic transfer functions for a room: they relate the Z-transforms of the excitations to the Z-transforms of the corresponding cooling load components.

The Z-transform^{1, 2/}

When a continuous signal, $f(t)$, is sampled at regular intervals of Δ , the output of the sampling device is a train of pulses as shown in Figure B1. The Laplace transform of this output signal is

$$f(0) + f(\Delta)e^{-s\Delta} + f(2\Delta)e^{-2s\Delta} + \dots \quad (1)$$

If Z is substituted for $e^{-s\Delta}$, the transform of the output from the sampler is

$$f(0) + f(\Delta)Z^{-1} + f(2\Delta)Z^{-2} + \dots \quad (2)$$

This polynomial in Z^{-1} is the Z-transform of the function $f(t)$. The chief advantage of this type of transform is that it can be obtained just by sampling the function at regular intervals: the successive outputs being the coefficients of successive powers of Z^{-1} in the Z-transform.

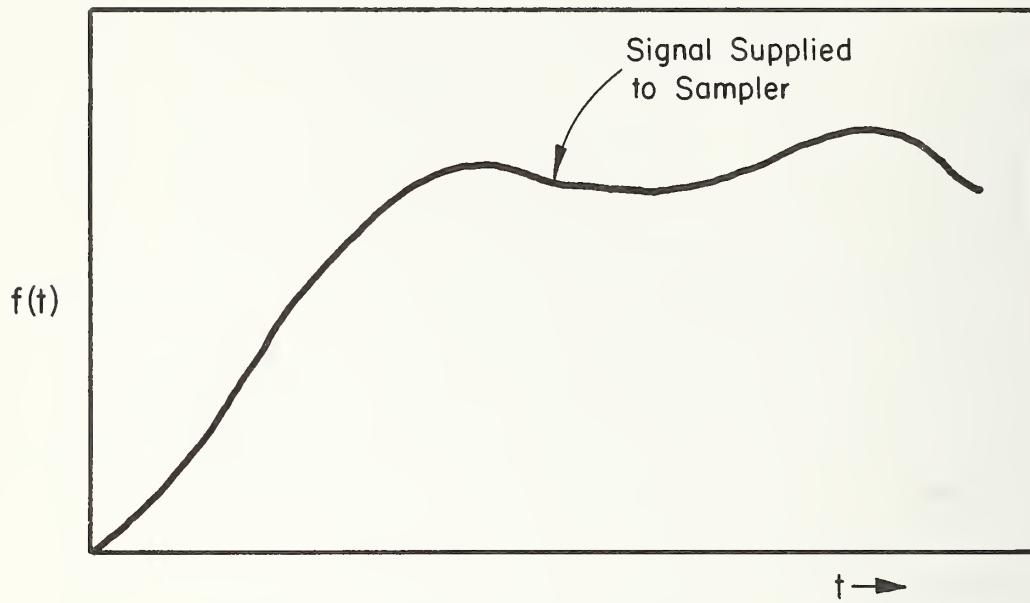


Figure B-1 Pulse Representation of a Continuous Function

If both the input and output of a system are expressed in terms of their Z-transforms, the ratio of the output/input is a Z-transfer function for the system. Assuming that such a transfer function, $K(Z)$, can be found, and that it can be expressed as the ratio of two polynomials in Z^{-1}

$$\text{i.e., } K(Z) = \frac{a_0 + a_1 Z^{-1} + a_2 Z^{-2} + \dots}{b_0 + b_1 Z^{-1} + b_2 Z^{-2} + \dots} \quad (3)$$

it follows that $O(Z)$, the Z-transform of the output that results from an input represented by $I(Z)$ is

$$O(Z) = K(Z) \cdot I(Z) \quad (4)$$

Both sides of this equation are polynomials so the coefficients of the various powers of Z^{-1} must be the same on the two sides of the equation. Thus, equating the coefficients of Z^{-n} gives

$$O_n \cdot b_0 = I_n \cdot a_0 + I_{n-1} \cdot a_1 + I_{n-2} \cdot a_2 + \dots - \{ O_{n-1} \cdot b_1 + O_{n-2} \cdot b_2 + \dots \} \quad (5)$$

where the subscript n on O and I indicates the value of the function at $t = n\Delta$, i.e., O_n is the coefficient of Z^{-n} in the Z-transform $O(Z)$. This expression relates the output at any time $t = n\Delta$ to the input at that time and the values of the input and output at earlier times. The coefficients a_0, a_1, \dots and $b_0, b_1 \dots$, contain all the characteristics of the system.

Cooling Load, Heat Extraction and Room Temperature

Using the Z-transfer functions approach, the cooling load is the output that results from the input, which is the heat gain. The weighting factor sets are the transfer functions relating the cooling loads to heat gains. The procedure for calculating cooling load is, therefore, first to calculate the various components of the heat gain, and then to combine them with the appropriate weighting factor sets to obtain the cooling load. An expression like equation (5) is used to compute each component of the cooling load.

The cooling load of a space depends on both the magnitude and the nature of its excitations (i.e., outside air temperature, direct and diffuse solar radiation, electric energy input to lights, etc.). The resulting cooling load also depends on the location of the element that absorbs the energy of the excitation. For example, the cooling load profile resulting from one unit of solar radiation absorbed by the window glass is quite different from that of one unit of solar radiation absorbed by the floor surface. To shorten the computation of cooling load, the heat gain must be subdivided into a limited number of components. For example, the total heat gain by a space can be represented by the following components:

- (1) Heat gain through window. (HEATG and HEATG¹)
- (2) Heat gain through exterior walls and roofs. (HEATX)
- (3) Total power input to lights. (HEATIS)
- (4) Heat gain through doors, partitions, underground walls and floors, and due to internal heat sources other than lights. (HEATDP)

(5) Sensible heat gain due to infiltration. (HEATVS)

Each of these heat gain components is calculated on the basis of a constant air temperature in the space. The actual air temperature generally deviates from this reference value, and consequently the rate of heat extraction from the space, HE, differs from the cooling load. The calculation of actual room air temperature and heat extraction rate is the final step in the sequence of calculation: in this case, the previously calculated cooling load is the input along with the characteristics of the air conditioning unit; and heat extraction rate and air temperature are the outputs. If this transfer function is expressed in the form

$$\frac{HE - CL}{\delta} = \sum_0^V x_j z^{-j} / 1 + \sum_1^W y_j z^{-j},$$

or

$$HE_n = CL_n + \sum_0^V x_j * \delta_{n-j} - \sum_1^W y_j * (HE_{n-j} - CL_{n-j}) \quad (6)$$

where δ is the deviation of actual air temperature from the reference value used to calculate the heat gains.

The heat extraction rate given by equation (6) must match the rate given by the characteristic of the air conditioning unit. For example, a cooling unit with a simple proportional control system has a characteristic of the form

$$HE_n = C + D * \delta_n \quad (7)$$

where

C = heat extraction rate of the unit operating in a room
at the reference temperature

D = change in the rate of heat extraction caused by one
degree rise in room air temperature

Equations (6) and (7) can be combined to give an explicit expression
for δ_n

$$\delta_n = \frac{CL_n - C + \sum_1^V x_j * \delta_{n-j} - \sum_1^W y_j * (HE_{n-j} - CL_{n-j})}{D - x_o} \quad (8)$$

and then equation (7) can be used to evaluate HE_n .

Equation (8) can be used to calculate δ_n even if the cooling equipment is off: when the equipment is not operating, C and D are both zero.

Calculation of Room Weighting Factors

The calculation of the room weighting factors is based on the solution of a set of heat balance equations for all the room air^{3, 4/} (RMTMP). A computer program for evaluating weighting factors has been developed by the National Research Council of Canada^{5/}, based on the procedure given in Reference 4.

Three different groups of room weighting factor sets are computed by this program:

- (1) The first group is very large, consisting of a set of factors for each excitation at each surface.
- (2) The second group combines all of the sets in group 1 that pertain to diffuse solar radiation into a single set; it combines all of the sets for direct solar radiation incident on the room surfaces other than inside window pane, floor, and furniture into another combined set; and lastly, it combines all the sets that

pertain to excitation by the power supplied to the lights into a single set.

- (3) The third group of factors carry the consolidation of the various sets of the limit: there is just one set of factors for each component of heat gain.

It is not intended that the first group should be used directly for room cooling or heating load calculations, as the second group give essentially the same results with considerably less computation^{6/}. The further simplification provided by the use of the third group require that the following assumptions be made:

- (1) That the heat gain through room envelope components can be calculated with sufficient accuracy using combined inside surface heat transfer coefficient and that the room weighting factors are the same for heat gain through window, opaque outside wall, corridor wall and a roof.
- (2) That the fraction of the solar radiation absorbed by the window glass and shade, and transmitted directly into the room as well as the portions absorbed by various room surfaces and furniture are constant during the day.

It is probable that the first assumption will not introduce significant errors; however, the second assumption is questionable. At this time, research information is lacking to establish the possible magnitude of the error introduced by this assumption.

The procedures given in this report to convert room excitation to cooling load and heat extraction are based on the third group of room weighting factors, i.e., RMRG, RMRX, RMRT and RMRTS. In addition, simplified procedures are given for the calculation of the RMRT and RMRTS sets. If the highest possible precision is important, weighting factors in the second group should be used.

References

- (1) T. R. Ragazzini and G. F. Franklin, "Sampled-Data Control Systems", McGraw-Hill Book Company, Inc., 1958.
- (2) E. I. Jury, "Theory and Application of the Z-transform Method", Wiley, 1964.
- (3) D. G. Stephenson and G. P. Mitalas, "Cooling Load Calculations by Thermal Response Factor Method", ASHRAE Transactions, Vol. 73, Part 1, 1967.
- (4) G. P. Mitalas and D. G. Stephenson, "Room Thermal Response Factors", ASHRAE Transactions, Vol. 33, Part 1, 1967.
- (5) G. P. Mitalas and J. G. Arseneault, "Fortran IV Program to Calculate Weighting Factors for a Room".
- (6) G. P. Mitalas, "An Experimental Check on the Weighting Factor Method of Calculating Room Cooling Load", presented at ASHRAE Denver Meeting, 1969.
- (7) G. P. Mitalas, "Calculations of Transient Heat Flow Through Walls and Roofs, ASHRAE Transactions, Vol. 74, Part II, 1968.

- (8) D. G. Stephenson and G. P. Mitalas, "Transient Heat Conduction Through Walls and Roofs, prepared for submission to the International Journal of Heat and Mass Transfer.
- (9) T. Kusuda, "Thermal Response Factors for Multi-layer Structures of Various Heat Conduction Systems", presented at ASHRAE Chicago Meeting, 1969.
- (10) G. P. Mitalas and J. G. Arseneault, "Fortran IV Program to Calculate Heat Flux Response Factors for Multi-layer Slabs, DBR Computer Program No. 23, National Research Council of Canada, 1967.



9. Appendix C

NBSLD Data Forms



NBSLD in a Time-Sharing System

Recently, the General Services Administration of the federal government has subscribed to a time-sharing system called INFONET, which has in turn made the use of NBSLD practical on a time-sharing system (see figure on page 3c).

Entire subroutines and several main programs, which are parts of NBSLD, have all been placed into INFONET and are now accessible to the various government agencies through teletype terminals.


Some of the attractive features of the INFONET system are:

1. Data files for input and output can be created separately from the execution of a main program such that computer time does not have to be sacrificed by the slowness of handling these data. (This is a common problem for heating/cooling load calculation programs.) An input data file can be created, edited and stored for use by a main program, while an output file of intermediate and detailed results can be created in mass storage for later inspection without prolonging the computation time. When a final output is questionable, the analyst can examine the input as well as the intermediate output in detail simply by calling these data files independently.
2. After the execution of a program, the analyst can call for specific values of variables without adding special instructions in the main program to type out these variables.

3. The editing of a program as well as the data files can be made in such a manner that the deletion, addition, or alteration of statements or lines can be made without retying the entire line.
4. All sub-programs are independently filed, compiled and available to any main program in the same library by an elaborate linking routine. Psychrometric routines, solar heat gain routines, transient heat conduction routines and weather data decoding routines can thus be used by many different main programs.

This time-sharing system is therefore very well suited for design calculations where many different alternatives for building construction such as the area of glass, shading of the windows and thermal mass of the internal structures are to be evaluated as to how they affect heating/cooling loads or energy requirements.

NBSLD on INFONET

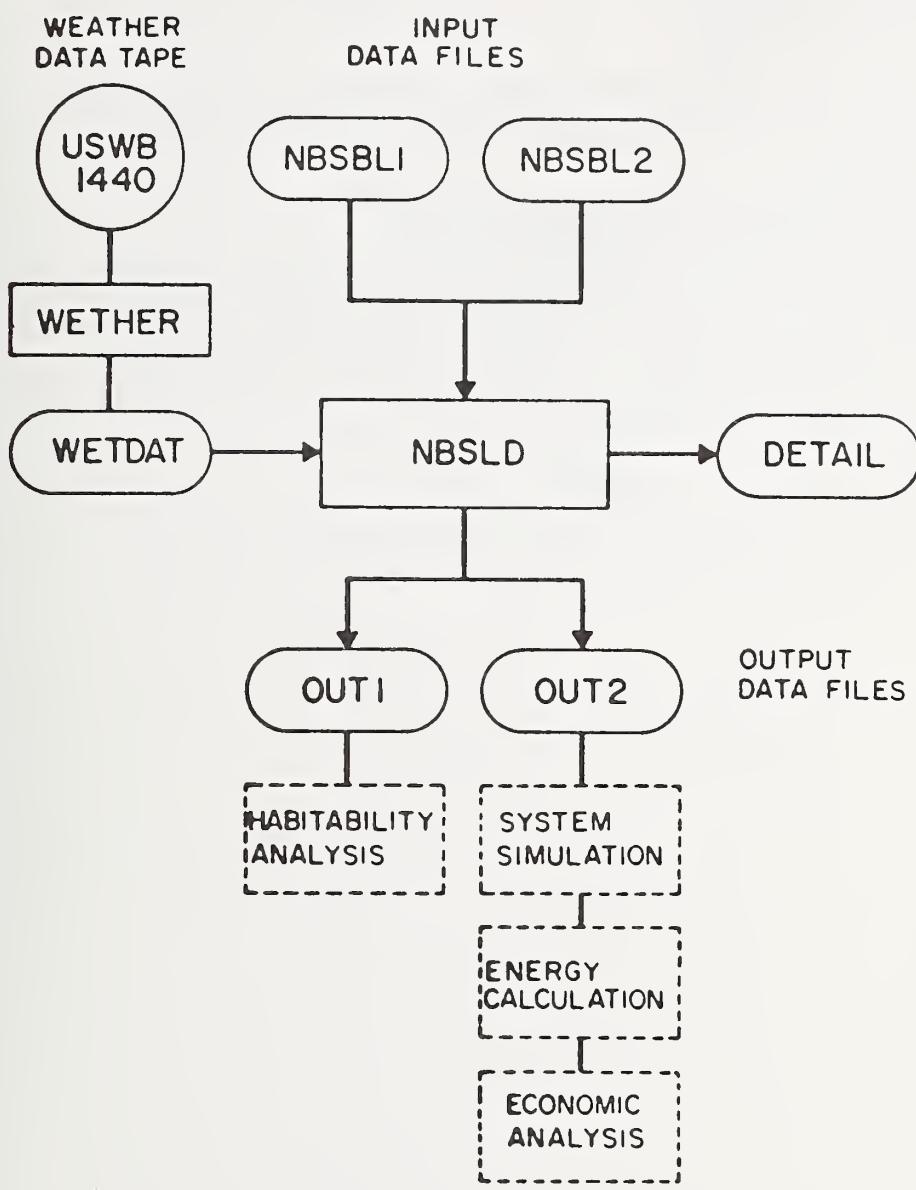

A copy of the NBSLD subroutines and main program may be obtained through the INFONET system as follows:

!U\$TDEF,SAVE_△ RT0105 (_△: space)

!DEVICES,QUEUE_△ 1

(Wait for allocation if REQUEST QUEUED by periodically typing
!DEVICES)

!COPY,IN,EVERY_△ RT0105_△ -PNC,-REL,-XQT

RT0105 is the transportable tape containing all the subroutines and the NBSLD main program, sample data, and sample output.

Sample data file: NBSBLL

Output file: RESULT

The tape also contains the weather decoding routines.

Introduction

This manual contains the input data forms with instructions for preparing data needed to perform heating and cooling load calculations using NBSLD.

In addition, the manual contains engineering data needed for the computations so that the use of other handbooks or references are generally unnecessary. The required numerical data are to be filled into blank spaces provided on each DATA SHEET and then each sheet can be used directly at a computer terminal or to produce a data card if the program is being run in "batch mode" at a central facility.

General Instruction

Figure C-1 shows the flow diagram or sequence for the data preparation.


Schedule Profile data sheets A, B, C and D are prepared for a building and are assumed the same for all zones or rooms within the building.

DATA SHEETS 1 through 3 are prepared for each different building, thus need not be repeated for the analysis of rooms within the same building.

DATA SHEETS 6 and 7 usually need to be prepared only for the first room of the building, because other rooms that follow in the same building usually employ the same wall, roof, and floor constructions.

When two rooms have identical shape and construction and differ only in orientation, the second room is considered to be rotated with respect to the first room and requires only DATA SHEETS 4 and 5.

DATA SHEET PREPARATION GUIDE

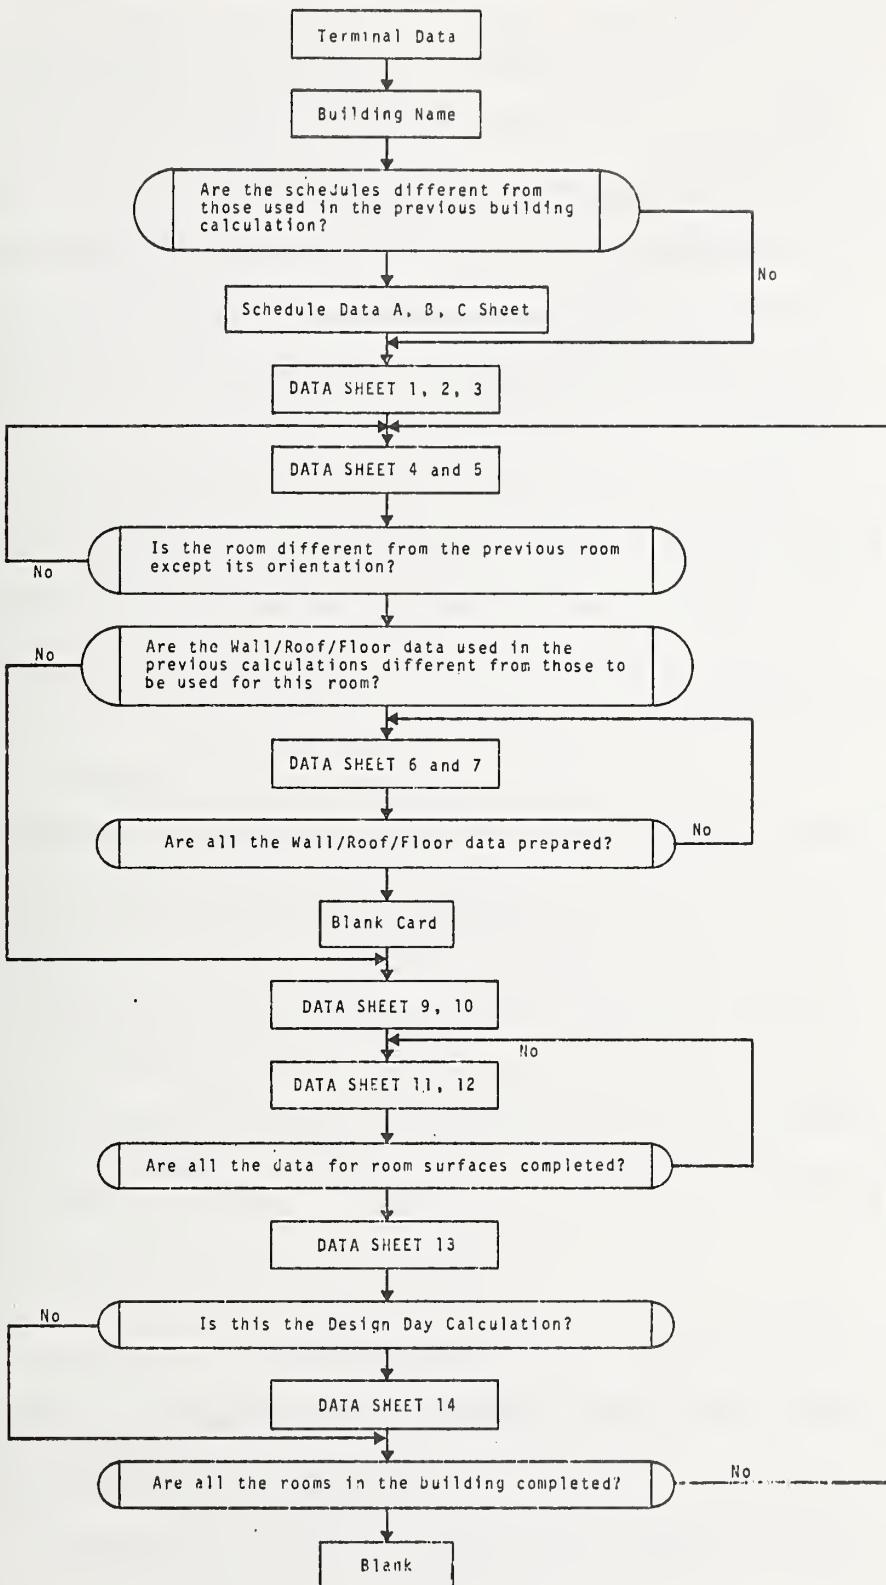

Operational Data

RUNID: Index for the calculation of Conduction Transfer Functions:

RUNID = 1 if the load calculation being made for this particular run requires the generation of Conduction Transfer Functions for the walls, roof, ceilings and floors in the building. The Conduction Transfer Functions generated during the run will be stored in tape unit 8 for the future rerun.

RUNID = 2 if the Conduction Transfer Functions have already been calculated and stored in tape unit 8 and this particular run does not require the generation of new Conduction Transfer Functions.

RUNTYP: Index for the types of calculations to be performed:

RUNTYP = 1 if the calculation is for the hour by hour determination of heating and cooling load for a specified period by making use of weather data tape (unit 7).

RUNTYP = 2 if the calculation is for the design heating and cooling load. A weather data tape is not required for this run.

ASHRAE: Index for the weighting factor usage:

ASHRAE = 0 if the Weighting Factor Method of the ASHRAE Task Group is replaced by a more exact calculation procedure developed at the National Bureau of Standards.

ASHRAE = 1 if the Weighting Factor Method of the ASHRAE Task Group is used to convert the heat gains and losses to loads. (incomplete)

IDETAL: Index for the output specification:

IDETAL = 0 if output of the run is only the daily maximum and the daily total heating and cooling loads.

IDETAL = 1, output of the run will display input data and details of intermediate results such as Conduction Transfer Functions, Radiation heat exchange factors, solar radiation and solar heat gain.

METHOD: Index for the treatment of room surface radiation heat exchange calculation:

METHOD = 0 if the radiation exchange among the room surfaces are treated individually on room by room basis.

METHOD = 1 if a building zone is treated as a box and all the interior partition walls and floor/ceiling sandwich constructions are treated as a single slab to be distributed uniformly on the floor of the box as an extra layer for that floor. (incomplete)

RFMTAP: Tape drive unit number for the tape to be used by the system simulation program of Ross F. Meriwether. If no tape is needed, RFMTAP = 0.

(integer variables)

RUNID	RUNTYP	ASHRAE	IDETAL	METHOD	RFMTAP

Building Name

NAME BD

Identification of the job, name of the building, address or other pertinent information may be used within the limit of 34 alphabetical/numerical characters.

Schedule Profile-A

QLITX: Normalized* daily schedule (24-hour profile) or power input for lighting during the weekdays.

QEQUX: Normalized* daily schedule (24-hour profile) of power input for electrical appliances and other equipment (other than those involved for heating/cooling equipment) during the weekdays.

QOCUP: Normalized* daily schedule (24-hour profile) of occupancy (number of adults) during the weekdays.

QLITX

QEQUX

* Having a value between 0 and 1.

QOCUP

Schedule Profile-B*

QLITX', QEQUX', QOCUP' are the same as QLITX, QEQUX and QOCUP respectively except that these data are for the weekends.

QLITX'

QEQUX'

QOCUP'

* These data should be all zero for the design day calculation.

Schedule Profile-C*

QLITX", QEQUX", QOCUP" are the same as QLITX, QEQUX, and QOCUP respectively except that these data are for the holidays.

QLITX"

QEQUX"

QOCUP"

* These data should be all zero for the design day calculations.

Schedule Profile-D

Room Temperature and Humidity Schedule

RMDBS: 24 hour profile of room thermostat setting during the occupied cooling day, °F.

RMDBW: 24 hour profile of room thermostat setting during the occupied heating day, °F.

RMDBWO: Lower limit on room thermostat setting during the unoccupied heating day, °F. (See Figure C4 in Data Sheet 11.)

RMDBSO: Upper limit on room thermostat setting during the unoccupied cooling day, °F. (See Figure C4 in Data Sheet 11.)

RHW: Lower limit on room relative humidity setting during the heating days, %.

RHS: Upper limit on room relative humidity setting during the cooling days, %.

RMDBS

RMDBW

Data Sheet 1*

NDAY: Number of days for which the calculations are to be performed.

NSKIP: Number of days to be skipped in case the computation does not start from the first day of the weather tape, which is usually 00 hour, of January 1 if standard NCC 1440 tape is used.

TAPE 2: Tape unit or file number for the output tape, if 0 an output tape or file is not produced. The output tape or file contains the hourly load and weather data needed for the system simulation.

NDAY	NSKIP	TAPE 2							

(integer data)

* For the design calculation or when RUNTYP is 2, all three variables listed here can be input as 0.

Data Sheet 2*

Month: Month for which the calculation is to be done.

Day: Day of the month on which the calculation is to be done.

ELAPS: Number of days elapsed from January 1 to reach the design day. For example, it is 201 for July 21 of a non-leap year.

DBMAX: Maximum outdoor temperature of the design day for cooling (see Table C1 which has been taken from the 1972 ASHRAE Handbook of Fundamentals).

RANGE: Daily range of the outdoor temperature during the design day, °F, (see Table C1).

WBMAX: Summer design wet-bulb temperature, °F, (see Table C1).

DBMWT: Design outdoor air temperature for the heating load calculation, °F, (see Table C1).

TGS: Summer design ground temperature, °F, (see Table C1).

TGW: Winter design ground temperature, °F, (see Table C1).

* If a weather tape is being used and a conventional design calculation is not being done, all variables listed here can be input as 0 except TGS, TGW and UG.

UG: Ground heat transfer coefficient for design heating load
calculations based upon Chapter 21, 1972 ASHRAE Handbook
of Fundamentals, Btuh*, (use 0.1 if uncertain).

MONTH	DAY	ELAPS	DBMAX	RANGE	WBMAX	DBMW _T	TGS	TGW	UG

* Btuh = Btu per (hr) (sq. ft.) ($^{\circ}$ F).

Data Sheet 3

LONG: Longitude of the building location, degrees.

LAT: Latitude of the building location, degrees (see Table C1).

TZN: Time zone number:

- 5 Eastern Standard time zone.
- 6 Central Standard time zone.
- 7 Mountain Standard time zone.
- 8 Pacific Standard time zone.

ZLF: Building exterior wall perimeter, ft.*

RHOW: Outdoor air relative humidity for a design heating load calculation, %.

(real variable)

LONG	LAT	TZN	ZLF	RHOW					

* For interior space, use the perimeter bounded by non-air conditioned spaces.

The value of ZLF is needed only when ASHRAE = 1. If the value is unknown use ZLF = 10. For the case ASHRAE = 0 use ZLF = 0.

Data Sheet 4

NAMERM

After this card, the data that follow will refer to this specific room or space in the building.

Start from Column 3

(Alphanumeric data; 34 columns maximum)

Data Sheet 5

IROT: Room rotation index:

= 0: if the room load is to be calculated without reference to any previously described room.

= number of degrees: if this room is to be the same as the previous room except for rotation clockwise a specified number of integer degrees.

ISKIP: Wall/Roof/Floor construction data skip:

= 0: if the room requires a new set of wall/roof/floor construction data.

= 1: if the wall/roof/floor data used by the previous room is reused for this room. If ISKIP = 1, data sheets 6 and 7 should be omitted.

INCLUD: Space load summation index:

= 1: space load not included in the summation.

= 0: space load included in a summation of the space load of the previous room.

(integer variables)

IROT	ISKIP	INCLUD							

Data Sheet 6

Wall/Roof/Floor-A

N: Number of layers of composition in a given wall/roof/floor construction.

By referring to the data of Table C3 (taken from the 1972 ASHRAE Handbook of Fundamentals), give the following information for each of the layers starting from the innermost layer to the Nth layer, which is the outermost layer.

L: Thickness of the layer, ft.

K: Thermal conductivity of the layer, Btu h per (hr) (ft) ($^{\circ}$ F).

P: Density of the layer material, lb per cu. ft.

C: Specific heat of the layer material, Btu per (lb) ($^{\circ}$ F).

R: Thermal resistance value of the layer in (hr) (sq. ft.) ($^{\circ}$ F) per Btu.

For the calculation where the ASHRAE weighting factor method is used (ASHRAE = 1), the innermost layer is always the inside surface thermal resistance. If ASHRAE = 0, omit the inside surface thermal resistance. Outside surface thermal resistance is never used in all cases.

The value of R is to be given only when the layer has no apparent thermal mass. If the value of L, K, P, and C are given, R should be zero. If R is given, L, K, P, and C should all be zero, in particular, L should be zero even if it is physically non-zero. For the ground floor, add a finite thickness slab consisting of a 12" thick earth layer.

Note:

- (1) At least one of the N layers should have non-zero values of L, K, P, and C.
- (2) If two or more consecutive layers have no thermal mass, their thermal resistance values should be combined.
- (3) If a particular wall is considered to have no appreciable thermal mass, or if it is desired not to consider the thermal mass effect, data for this particular wall should not be included in the data sheets.
- (4) If roof is over attic space the innermost (first) layer should be inside thermal resistance in all cases.

IRF*

(integer)

(real number)

* IRF is not the input data in this data sheet. It is the identifier of the particular wall in the sheet.

Data Sheet 7

Wall/Roof/Floor-B

Twenty-four characters are allowed for the brief description of each layer, such as "common brick" or "1/2" plaster board", etc.

The description should identify the corresponding layer given on Data Sheet 6.

The set of wall/roof/floor data and accompanying description will be repeated as many times as there are number of different wall/roof/floor constructions (with an upper limit of 9) pertinent to the room under consideration. Each new set of wall/roof/floor construction will be identified by the IRF number on DATA SHEET 6 (upper right hand corner).

After the last wall/roof/floor has been given, provide a line with 0 or a blank card to indicate that fact.

Blank card if this is the last wall/roof/floor

A horizontal row of 20 empty white squares arranged in a single row, intended for handwritten responses.

(Alphanumeric information)

Data Sheet 6

IRF
2

N								

Data Sheet 7

DESCRIPTION FOR LAYER 1 THROUGH LAYER N

Blank card if this is the last wall/roof/floor



(Alphanumeric information)

Data Sheet 6

IRF
3

N							

Data Sheet 7

Blank card if this is the last wall/roof/floor

(Alphanumeric information)

Data Sheet 6

IRF
4

Data Sheet 7

DESCRIPTION FOR LAYER 1 THROUGH LAYER N

Blank card if this is the last wall/roof/floor

A horizontal row of 20 small, light gray rectangular blocks arranged in a single row.

(Alphanumeric information)

Data Sheet 6

IRF
5

N								
---	--	--	--	--	--	--	--	--

Data Sheet 7

Blank card if this is the last wall/roof/floor

(Alphanumeric information)

Data Sheet 6

IRF
6

Data Sheet 7

Blank card if this is the last wall/roof/floor

(Alphanumeric information)

Data Sheet 6

IRF
7

N								

L	K	P	C	R	
					1st LAYER - innermost
					2nd LAYER
					3rd LAYER
					4th LAYER
					Nth LAYER

Data Sheet 7

DESCRIPTION FOR LAYER 1 THROUGH LAYER N

Blank card if this is the last wall/roof/floor

PRINT NAME IN THIS SECTION

(Alphanumeric information)


Data Sheet 6

Wall/Roof/Floor-A

IRF
8

Data Sheet 7

DESCRIPTION FOR LAYER 1 THROUGH LAYER N

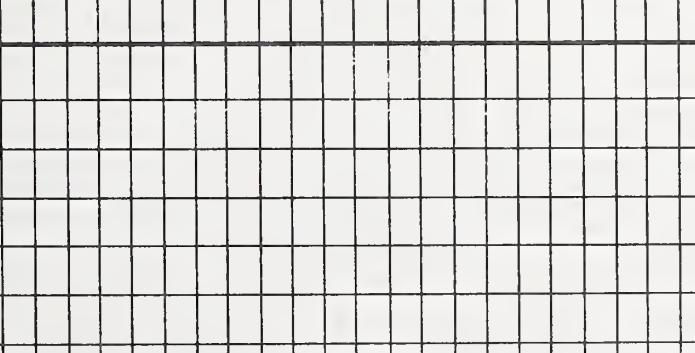

Blank card if this is the last wall/roof/floor

BRIGHT SIDE IT THIS IS THE FEAST OF WISDOM ON EARTH

(Alphanumeric information)

Data Sheet 6

IRF*

N								

Data Sheet 7

Blank card if this is the last wall/roof/floor

A horizontal row of 20 small, empty white rectangles arranged in a single row.

(Alphanumeric information)

* IRF should not exceed 9 since IRF = 10 is reserved for very lightweight walls, doors and windows in Data Sheet 11.

Data Sheet 8

ROOMNO: Room identification number.

QLITY: Maximum lighting power input to the room, expressed as watts per sq. ft. of floor area (see Table C4).

QEOPX: Maximum electric power input for the appliances and other equipment in the room exclusive of the heating and air conditioning equipment, expressed as watts per sq. ft. of floor area (see Table C4).

QCU: Maximum number of adult occupants in the room during the day (count a child as 0.5).

FLCG: Fraction of electric power for lighting which can be assumed to go directly to the return air.

FRAS: Fraction of internal heat gains which can be assumed to be absorbed by the room surfaces instantaneously (as a result of radiation).

TS: Upper temperature limit on outdoor air which can be brought in during the occupied period to reduce the cooling load (NVENT = 1). (See Data Sheet 16.)

CFMS: Flow rate of outdoor air introduced for natural cooling purposes, cu. ft. per minute, when ambient temperature is less than TS (NVENT = 1). This data should be zero when RUNTYP (page 8c) = 1. (See Data Sheet 16.)

ARCHGS: Infiltration in terms of number of air changes per hour
during the summer* months.

ARCHGW: Infiltration in terms of number of air changes per hour
during the winter** months.

ARCHGM: Minimum infiltration in terms of air changes per hour
when ARCHGS = 0 and ARCHGW = 0.

ZNORM: Number of rooms of the same type being described in the
building.

* June through September.

** October through May.

ROOMNO	QLITY	QEQPX	QCU	FLCG	FRAS	TS	CFMS	ARCHGS	ARCHGW
ARCHGM	ZNORM								

IW: Building weight index:

IW = 1 Heavy structure (approximately 70 lb per sq. ft.
of floor use or above).


IW = 2 Medium weight structure (between 30 and 70 lb per
sq. ft. of floor area).

IW = 3 Lightweight structure (below 30 lb per sq. ft. of
floor area).

IL: Lighting fixture index.

ISTART: Starting hour of occupancy.

ILEAVE: Ending hour of occupancy.

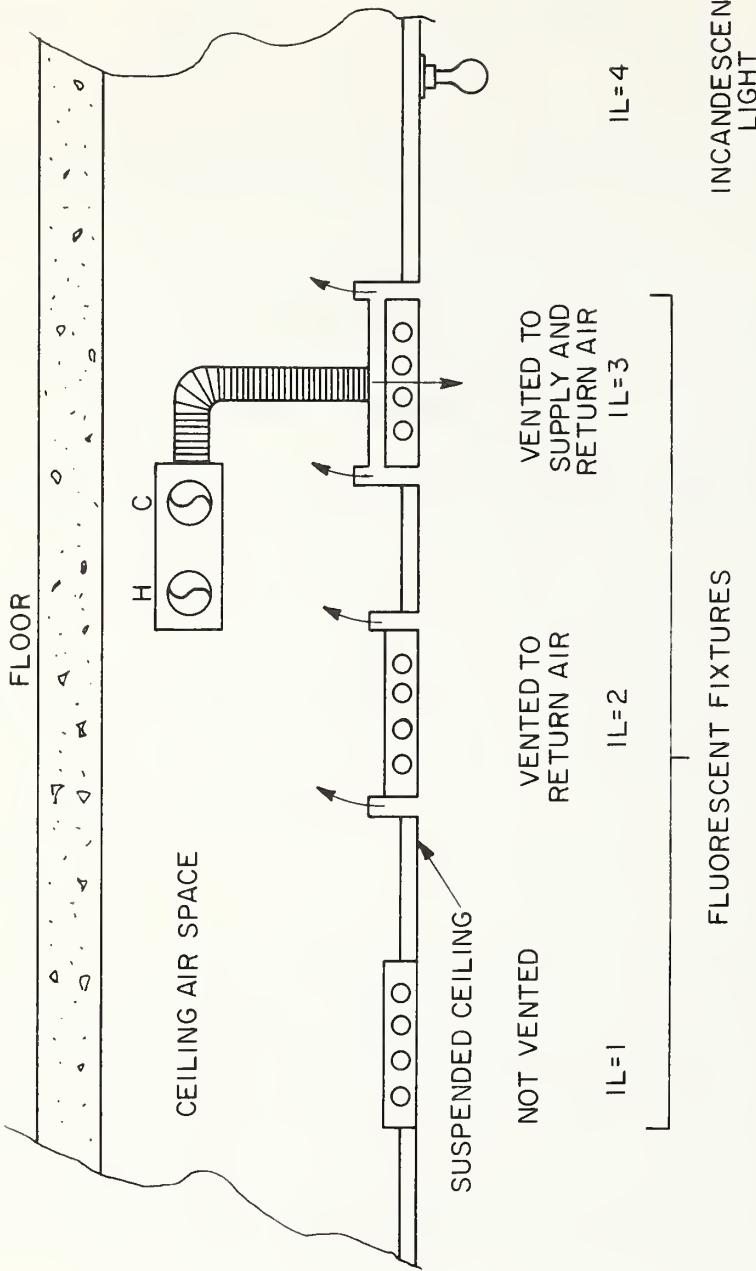

IW	IL	ISTART	ILEAVE				

Data Sheet 10

Temperature Control Data

TUL: Upper limit of thermostat, above which the room requires cooling, °F, during occupied period.

TLL: Lower limit of thermostat, below which the room requires heating, °F, during occupied period.

QCMAX: Maximum sensible cooling capacity of the room air supply system, Btu per hour (for the design load calculation this data should be sufficiently large so that it will not be exceeded by the peak cooling load ... non-negative value when ITHST = 0 and ITK = 0 on Sheet 11).

QHMAX: Maximum sensible heating capacity of the room air supply system, Btu per hour (for the design load calculation this data should be sufficiently large so that it will not be exceeded by the peak heating load ... non-negative value when ITHST = 0 and ITK = 0 on Sheet 11).

DBVMAX: Maximum outdoor temperature when the natural cooling by ventilation is used.

DBVMIN: Minimum outdoor temperature, below which the natural cooling cycle is disengaged.

TUL	TLL	QCMAX	QHMAX	DBVMAX	DBVMIN				

Temperature Control Indices, ITHST and ITK

ITHST = 1, ITK = 0: The hourly profile of room temperature, either constant or night setback, is prescribed ...

Figure C2.

ITHST = 0, ITK = 1: The room temperature is to be calculated for the room which is neither heated nor cooled ... Figure C3.

ITHST = 1, ITK = 1: The upper and lower limit of the room temperature are given. The room will be heated if the room temperature falls below the lower limit TLL and the room is cooled if the room temperature rises above the upper limit TUL. As long as the room temperature is between these two limits, the room is neither heated nor cooled ... Figure C4.

ITHST = 0, ITK = 0: The same as above except that the maximum capacities of heating and cooling systems are introduced. If the room heating and cooling loads exceed the system heating and cooling capacities respectively, the room temperature drift from the set points TLL and TUL is calculated ... Figure C5.

ITHST	ITK								

(1) CONSTANT TEMPERATURE MODE
(ITHST=1)
ITK=0

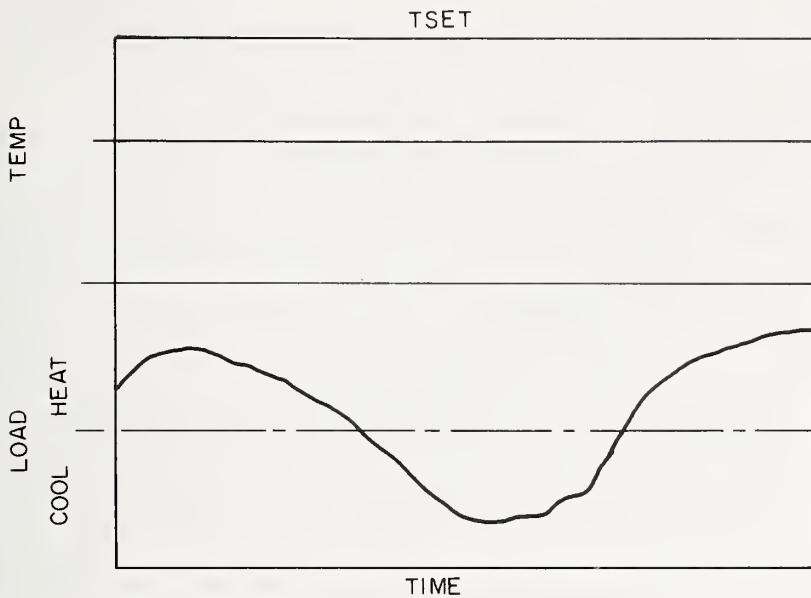


Figure C2

(2) FLOATING TEMPERATURE MODE
(ITHST=0
ITK=1


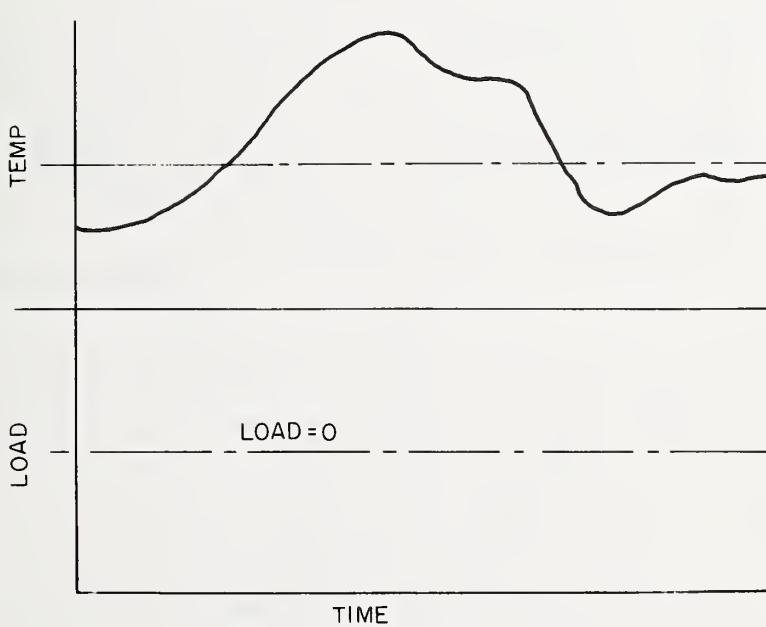


Figure C3

(3) PRESCRIBE TEMPERATURE LIMIT MODE

(ITHST = 1)

(ITK = 1)

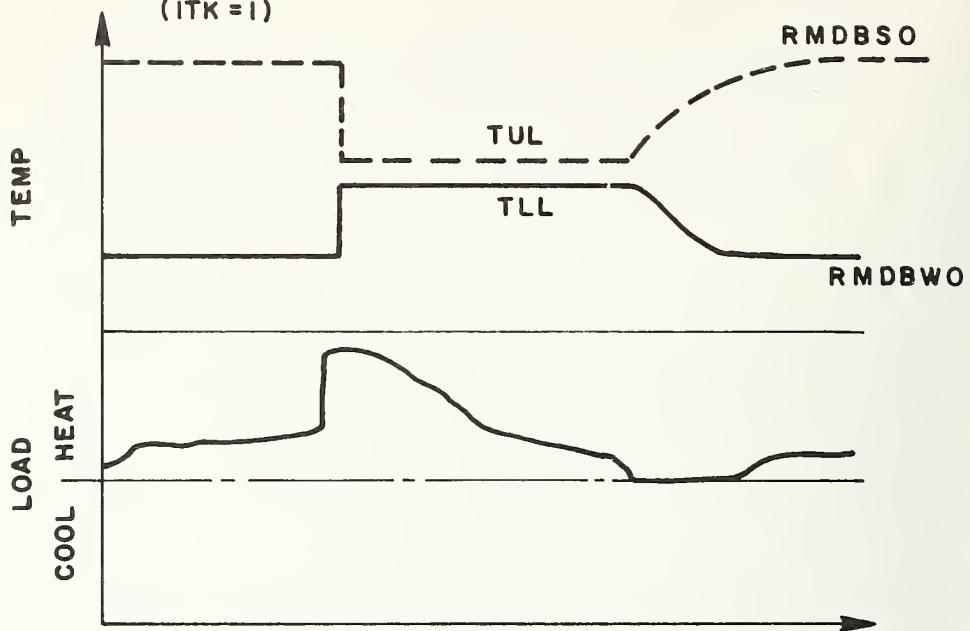

(4) CONTROL SIMULATION MODE

(ITHST = 0)

(ITK = 0)

Figure C4

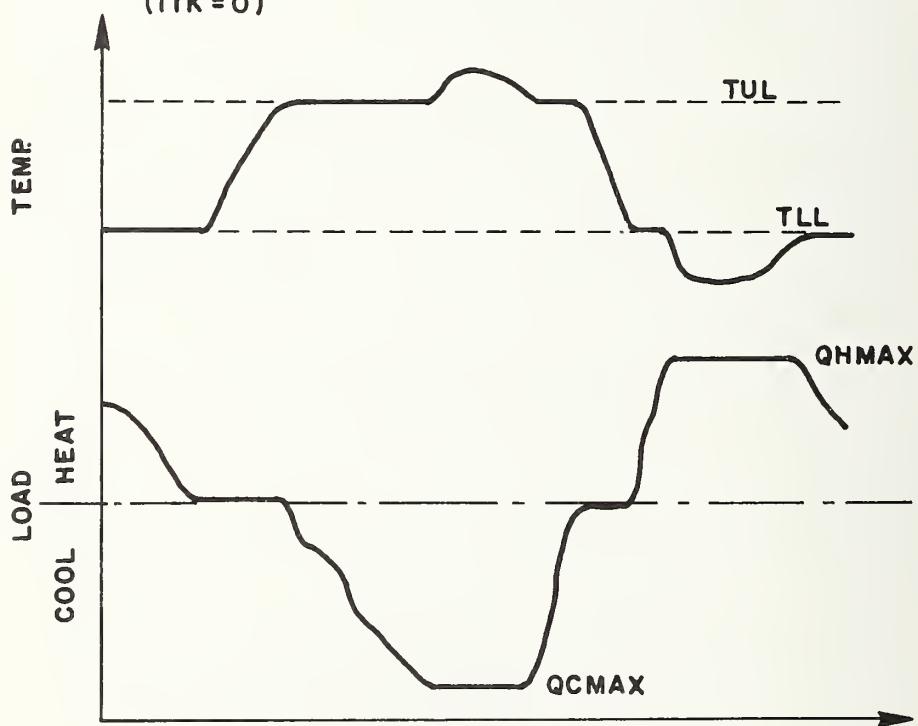


Figure C5

Data Sheet 12

NS: Number of different type heat transfer surfaces in the south wall.

NW: Number of different type heat transfer surfaces in the west wall.



NN: Number of different type heat transfer surfaces in the north wall.

NE: Number of different type heat transfer surfaces in the east wall.

L: Length of the room along the south wall, ft.

W: Width of the room along the west wall, ft.

H: Height of the room ft.

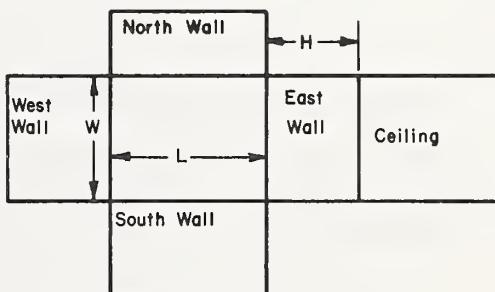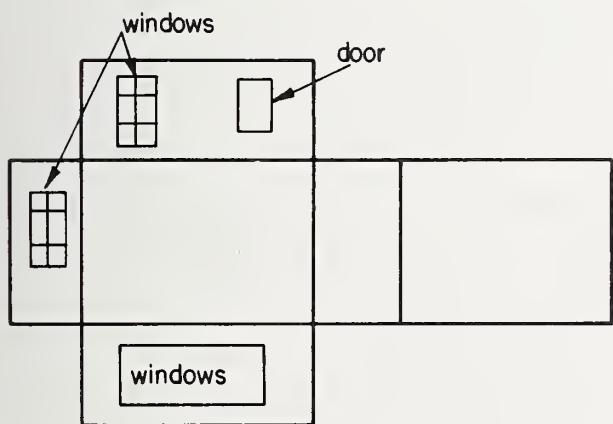

Note: Number of heat transfer surfaces should not exceed 1 for the ceiling and for the floor.

(integers)*

NS	NW	NN	NE							
L	W	H								

(real values)

* NS + NW + NN + NE should not exceed 28.

ITYPE : Exposure surface type index:

- = 1 if roof.
- = 2 if exterior wall.
- = 3 if window or glass door.
- = 4 if door.
- = 5 if floor on ground or basement wall.
- = 6 if partition walls, party walls, floor/ceiling, furnishings and other internal mass.
- = 7 if completely open.
- = 8 if the adjacent space is not air conditioned and will be considered as having a temperature the same as the outdoors.

IRF: Roof/wall/floor construction identifier index shown in the upper right corner of the roof/wall/floor data sheet 6. If not applicable (such as the cases for lightweight walls, doors and windows), which are not specified in data sheets 6 and 7. IRF = 10.

A: Area of the surface, sq. ft.

AZW: Surface orientation angle, degrees clockwise from south:

- 0 for south facing surface, roof/ceiling or floor.
- 45 for southwest facing surface.

* See note on data sheet 14.

90 for west facing surface.
135 for northwest facing surface.
180 for north facing surface.
-135 for northeast facing surface.
-90 for east facing surface.

U: Overall heat transfer coefficient of a surface (Btu/h) for which the data for roof/wall/floor are not provided (IRF = 10). For the surface for which roof/wall/floor data are provided (IRF ≠ 10), U should be zero because it will be computed in the program.

SHADE: Shading coefficient for the ITYPE = 3 surface (window or glass door) (see Table C5 which has been taken from the 1972 ASHRAE Handbook of Fundamentals). For all other types of surfaces, this parameter should be zero.

ABSP: Solar absorption coefficient for the exterior surface (see Table C6 which has been taken from Thermal Radiation Properties Survey, G. G. Gubareff, J. E. Jansen, and R. H. Torborg, Honeywell Research Center, 1960). This value should be zero for the surfaces of ITYPE = 3, 5, 6 and 7, and 8.

SHDW: Shadow parameter = 1 if completely shaded by an adjacent building or an external shading device; = 0 if otherwise.

integer

real variable


ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHD		

Data Sheet 14*

Room Surfaces-B

(Exterior Shading Device Data)

Data are given in ft. and as dictated by the figure below.

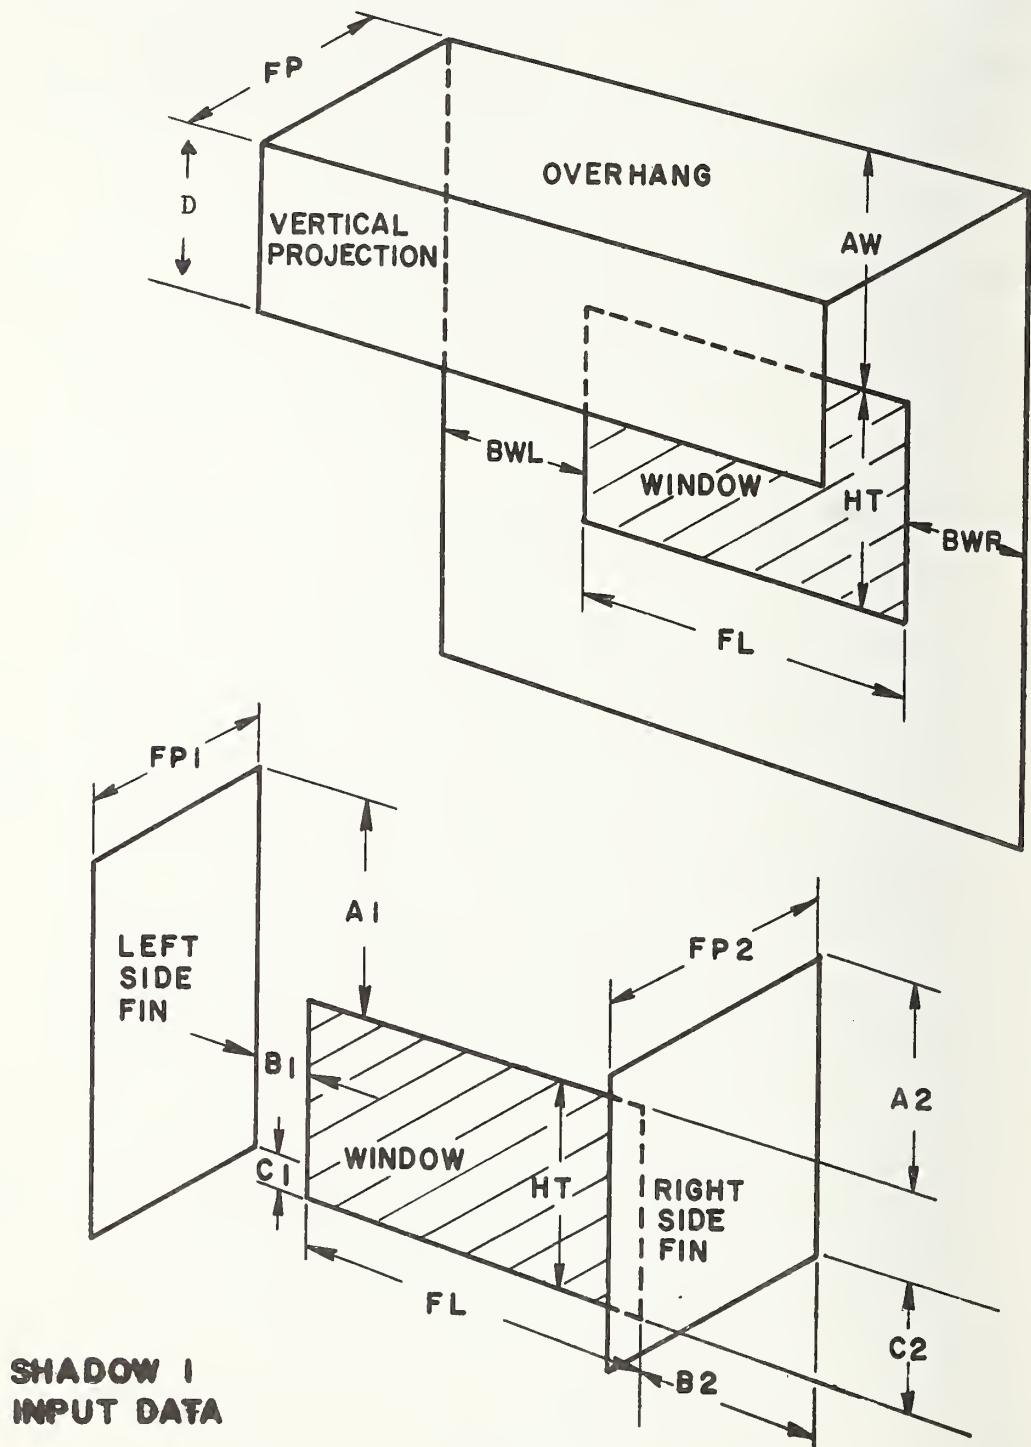

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

* The sequence of input should be roof/ceiling, south facing surfaces, west facing surfaces, north facing surfaces, east facing surfaces and floor. While each vertical exposure can accommodate more than one type of surface such as wall, door and window, only one surface should be given for floor and roof/ceiling.

Data Sheets 13 and 14 are to be repeated for each of all the surfaces of the room.

Repetition of Data Sheets 13 and 14

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

Repetition of Data Sheets 13 and 14

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

Repetition of Data Sheets 13 and 14

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

Repetition of Data Sheets 13 and 14

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

ITYPE	IRF	A	AZW	U	SHADE	ABSP	SHDW		

FL	HT	FP	AW	BWL	BWR	D			

FPI	AI	BI	CI	FP2	A2	B2	C2		

Data Sheet 15*

UENDW: Overall heat transfer coefficient of the end walls (gables) of the attic space, Btuh.

UCELNG: Overall heat transfer coefficient of the ceiling under the attic, Btuh.

AENDW: Area of the attic end walls, sq. ft.

ATCHT: Attic space height, ft.

ARCHGA: Air change per hr. for attic.

AIRNT: Nighttime air change multiplier with respect to ARCHGA.

UENDW	UCELNG	AENDW	ATCHT	ARCHGA	AIRNT				

* This data sheet provides information for the attic space with a flat roof. If gabled roof, it must be treated as an equivalent flat roof.

IEXTED: Exterior shading control index:

IEXTED = 1 if the exterior shading device is controlled
to cut down the direct solar heat gain.

IEXTED = 0 if the exterior shading device is not con-
trolled.

IEXMS: The month at which the exterior shading device control
starts.

IEXME: The month at which the exterior shading device control
ends.

NTVNT: Outdoor air change per hour (nearest integer value) dur-
ing the unoccupied period to precool the building. The
ventilation system is assumed on only during the cooling
hours when DBVMIN < DB < DBVMAX (Data Sheet 10).

NVENT: Natural ventilation index

NVENT = 1 if outdoor air is brought in during the occu-
pied period and when the outdoor air temperature is less
than TS of Data Sheet 8 to minimize the cooling load.

NVENT = 0 otherwise.

(integer data)

IEXTED	IEXMS	IEXME	NTVNT	NVENT					

Run Sequence

The step by step procedure to perform the heating and cooling load calculation by using NBSLD on the INFONET system is as follows:

1. Complete the data forms described in this manual.
2. Check the data for probable errors.
3. Turn the computer terminal on.
4. Dial the computer center and listen to the high-pitched tone.
5. Place the telephone receiver onto the acoustic coupler of the terminal.
6. Hit the key "T".

The computer responds with

"PORT:" Port number

"CENTER:"

Type in after "CENTER:" BB

The computer responds then with

"LOGON:"

Type in your identification number after "LOGON:".

7. The computer then returns the carriage of the terminal and types!
8. Every time the computer waits for your command, it responds with ! at the first position of the carriage. Following in the sequence of the commands needed to perform the load calculations.

: EDIT NBSBLI

↑ 1

2

60

61

↑ Q

SRU'S: .9

: EQUATE 7 WETDAT

: EQUATE 9 SPACE 1

: EQUATE 10 SPACE 2

Type in the data from your data forms
as illustrated in Figure C1.

... all the data are completed.

close the data file.

computer time unit used in the data
preparation.

Weather tape file name.

Output tape No. 1.

Output tape No. 2.

9. Instruction for the terminal data input

Type in the following terminal data:

RUNID, RUNTYP, ASHRAE, IDETAL, METHOD

At this point, the computer starts the load calculation and output such as shown in P103 will be typed out on the terminal.

Weather Tape Handling

The use of Weather Data Tape 1440 provided by the National Climatic Center may be made as follows:

1. Request the tape containing data for specified years from the National Climatic Center

G. McKay or D. Calloway
Environmental Data Services
Asheville, North Carolina 28801
Telephone: (704) 254-0961

Remember that beginning January 1, 1965 a new program was initiated for most Weather Bureau Stations reducing the number of hourly observations being recorded from 24 to 8 per day. This format is not compatible with NBSLD as it is presently written since it requires hourly weather data. Note that the tape is 7 channel, 556 BPI density and of even parity.

2. Have the tape mailed to INFONET computing center at the following address:

Mr. K. Walls
Center 1
INFONET Division
Computer Science Corporation
650 North Sepulveda Blvd.
El Segundo, California 90245

3. Ask INFONET to assign a Volume number such as US001.
4. The tape 1440 is then decoded and stored into a weather data file name of which may be obtained by the following INFONET commands:

! DEVICES, QUEUE 0,0,1

! EQUATE 9 WETDAT

! WETHER

VOL, DENS, PARITY, TRACK

Fortran Format

VOL: Tape name.

2A4

DENS: Tape density in BPI.

A4

PARITY: Date parity, either even or odd.

A4

TRACK: Track number, either 7 or 9.

A4

ISKIP, NDAY, IWRITE ... data

where ISKIP: Number of days to be skipped from the beginning of the tape.

NDAY: Number of days for which the weather data are to be stored in the file.

IWRITE = 1: if the weather data are to be printed out on the terminal as they are processed and stored; otherwise zero.

5. The constants of WETDAT may be checked by a separate routine WETAP by

! EQUATE 9 WETDAT

! WETAP

NDAY, NSKIP

where NDAY: Number of days for which the weather data are to be displayed on the terminal.

NSKIP: Number of days to be skipped from the beginning of the file WETDAT.

When the use is made of WETDAT in any other program, it can be read in the Fortran program as follows:

```
READ(9) DB, DP, WB, WS, PB, TC, NTOC, DAY, IYEAR, MONTH, ICITY
```

where DB, DD, WB, WS, PB, TC, and NTOC are all dimensioned 24 and represent respectively dry-bulb temperature, dewpoint temperature, wet-bulb temperature, wind speed, barometric pressure, total cloud amount, and type of cloud.

Table C1

Design Weather Data

Reprinted by permission from the 1972 Handbook of Fundamentals, (American Society of Heating, Refrigerating and Air-Conditioning Engineers, 345 East 47th Street, New York), pp. 669-687.

Climatic Conditions for United States and Canada^{a,*}

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d ft	Winter				Summer						
			Col. 4			Col. 5 Coinci- dent Wind Veloci- ty ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb		
			Median of Annual Ex- tremes	99%	97½%	1%	2½%	5%	1%	2½%	5%		
ALABAMA													
Alexander City	33 0	660	12	16	20	L	96	94	93	21	79	78	77
Anniston AP	33 4	599	12	17	19	L	96	94	93	21	79	78	77
Auburn	32 4	730	17	21	25	L	98	96	95	21	80	79	78
Birmingham AP	33 3	610	14	19	22	L	97	94	93	21	79	78	77
Decatur	34 4	580	10	15	19	L	97	95	94	22	79	78	77
Dothan AP	31 2	321	19	23	27	L	97	95	94	20	81	80	79
Florence AP	34 5	528	8	13	17	L	97	95	94	22	79	78	77
Gadsden	34 0	570	11	16	20	L	96	94	93	22	78	77	76
Huntsville AP	34 4	619	-6	13	17	L	97	95	94	23	78	77	76
Mobile AP	30 4	211	21	26	29	M	95	93	91	18	80	79	79
Mobile CO	30 4	119	24	28	32	M	96	94	93	16	80	79	79
Montgomery AP	32 2	195	18	22	26	L	98	95	93	21	80	79	78
Selma-Craig AFB	32 2	207	18	23	27	L	98	96	94	21	81	80	79
Talladega	33 3	565	11	15	19	L	97	95	94	21	79	78	77
Tuscaloosa AP	33 1	170 ^r	14	19	23	L	98	96	95	22	81	80	79
ALASKA													
Anchorage AP	61 1	90	-29	-25	-20	VL	73	70	67	15	63	61	59
Barrow	71 2	22	-49	-45	-42	M	58	54	50	12	54	51	48
Fairbanks AP	64 5	436	-59	-53	-50	VL	82	78	75	24	64	63	61
Juneau AP	58 2	17	-11	-7	-4	L	75	71	68	15	66	64	62
Kodiak	57 3	21	4	8	12	M	71	66	63	10	62	60	58
Nome AP	64 3	13	-37	-32	-28	L	66	62	59	10	58	56	54
ARIZONA†													
Douglas AP	31 3	4098	13	18	22	VL	100	98	96	31	70	69	68
Flagstaff AP	35 1	6973	-10	0	5	VL	84	82	80	31	61	60	59
Fort Huachuca AP	31 3	4664	18	25	28	VL	95	93	91	27	69	68	67
Kingman AP	35 2	3446	18	25	29	VL	103	100	97	30	70	69	69
Nogales	31 2	3800	15	20	24	VL	100	98	96	31	72	71	70
Phoenix AP	33 3	1117	25	31	34	VL	108	106	104	27	77	76	75
Prescott AP	34 4	5014	7	15	19	VL	96	94	91	30	67	66	65
Tucson AP	33 1	2584	23	29	32	VL	105	102	100	26	74	73	72
Winslow AP	35 0	4880	2	9	13	VL	97	95	92	32	66	65	64
Yuma AP	32 4	199	32	37	40	VL	111	109	107	27	79	78	77
ARKANSAS													
Blytheville AFB	36 0	264	6	12	17	L	98	96	93	21	80	79	78
Camden	33 4	116	13	19	23	L	99	97	96	21	81	80	79
El Dorado AP	33 1	252	13	19	23	L	98	96	95	21	81	80	79
Fayetteville AP	36 0	1253	3	9	13	M	97	95	93	23	77	76	75
Fort Smith AP	35 2	449	9	15	19	M	101	99	96	24	79	78	77
Hot Springs Nat. Pk.	34 3	710	12	18	22	M	99	97	96	22	79	78	77
Jonesboro	35 5	345	8	14	18	M	98	96	95	21	80	79	78
Little Rock AP	34 4	257	13	19	23	M	99	96	94	22	80	79	78
Pine Bluff AP	34 1	204	14	20	24	L	99	96	95	22	81	80	79
Texarkana AP	33 3	361	16	22	26	M	99	97	96	21	80	79	78
CALIFORNIA†													
Bakersfield AP	35 2	495	26	31	33	VL	103	101	99	32	72	71	70
Barstow AP	34 5	2142	18	24	28	VL	104	102	99	37	73	72	71
Blythe AP	33 4	390	26	31	35	VL	111	109	106	28	78	77	76
Burbank AP	34 1	699	30	36	38	VL	97	94	91	25	72	70	69
Chico	39 5	205	23	29	33	VL	102	100	97	36	71	70	69
Concord	38 0	195	27	32	36	VL	96	92	88	32	69	67	66

* Data for U. S. stations extracted from *Evaluuated Weather Data for Cooling Equipment Design, Addendum No. 1, Winter and Summer Data*, with the permission of the publisher, Fluor Products Company, Inc., Box 1267, Santa Rosa, California.

† Data compiled from official weather stations, where hourly weather observations are made by trained observers, and from other sources. Table 1 prepared by ASHRAE Technical Committee 2.2, Weather Data and Design Conditions. Percentage of winter design data show the percent of 3-month period, December through February. Canadian data are based on January only. Percentage of summer design data show the percent of 4-month period, June through September. Canadian data are based on July only. Also see References 1 to 7.

‡ When airport temperature observations were used to develop design data, "AP" follows station name, and "AFB" follows Air Force Bases. Data for stations followed by "CO" came from office locations within an urban area and generally reflect an influence of the surrounding area. Stations without designation can be considered semirural and may be directly compared with most airport data.

§ Latitude is given to the nearest 10 minutes, for use in calculating solar loads. For example, the latitude for Anniston, Alabama is given as 33 4, or 33°40'.

¶ Elevations are ground elevations for each station as of 1964. Temperature readings are generally made at an elevation of 5 ft above ground, except for locations marked r, indicating roof exposure of thermometer.

** Coincident wind velocities derived from approximately coldest 600 hours out of 20,000 hours of December through February data per station. Also see References 5 and 6. The four classifications are:

VL = Very Light, 70 percent or more of cold extreme hours ≤ 7 mph. M = Moderate, 50 to 74 percent cold extreme hours > 7 mph.

L = Light, 50 to 69 percent cold extreme hours ≤ 7 mph. H = High, 75 percent or more cold extreme hours > 7 mph, and 50 percent are > 12 mph.

† The difference between the average maximum and average minimum temperatures during the warmest month.

‡ More detailed data on Arizona, California, and Nevada may be found in *Recommended Design Temperatures, Northern California*, published by the Golden Gate Chapter; and *Recommended Design Temperatures, Southern California*, Arizona, Nevada, published by the Southern California Chapter.

Climatic Conditions for United States and Canada (Continued)*.^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c ° '	Col. 3 Elev. ^d Ft	Winter				Summer						
			Col. 4			Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb		
			Median of Annual Ex- tremes	99% ^g	97½% ^g	1%	2½%	5%	1%		2½%	5%	
CALIFORNIA† (continued)													
Covina.....	34 0	575	32	38	41	VL	100	97	94	31	73	72	71
Crescent City AP.....	41 5	50	28	33	36	L	72	69	65	18	61	60	59
Downey.....	34 0	116	30	35	38	VL	93	90	87	22	72	71	70
El Cajon.....	32 4	525	26	31	34	VL	98	95	92	30	74	73	72
El Centro AP.....	32 5	-30	26	31	35	VL	111	109	106	34	81	80	79
Escondido.....	33 0	660	28	33	36	VL	95	92	89	30	73	72	71
Eureka/Arcata AP.....	41 0	217	27	32	35	L	67	65	63	11	60	59	58
Fairfield-Travis AFB.....	38 2	72	26	32	34	VL	98	94	90	34	71	69	67
Fresno AP.....	36 5	326	25	28	31	VL	101	99	97	34	73	72	71
Hamilton AFB.....	38 0	3	28	33	35	VL	89	85	81	28	71	68	66
Laguna Beach.....	33 3	35	32	37	39	VL	83	80	77	18	69	68	67
Livermore.....	37 4	545	23	28	30	VL	99	97	94	24	70	69	68
Lompoc, Vandenburg AFB.....	34 4	552	32	36	38	VL	82	79	76	20	65	63	61
Long Beach AP.....	33 5	34	31	36	38	VL	87	84	81	22	72	70	69
Los Angeles AP.....	34 0	99	36	41	43	VL	86	83	80	15	69	68	67
Los Angeles CO.....	34 0	312	38	42	44	VL	94	90	87	20	72	70	69
Merced-Castle AFB.....	37 2	178	24	30	32	VL	102	99	96	36	73	72	70
Modesto.....	37 4	91	26	32	36	VL	101	98	96	36	72	71	70
Monterey.....	36 4	38	29	34	37	VL	82	79	76	20	64	63	61
Napa.....	38 2	16	26	31	34	VL	94	92	89	30	69	68	67
Needles AP.....	34 5	913	27	33	37	VL	112	110	107	27	76	75	74
Oakland AP.....	37 4	3	30	35	37	VL	85	81	77	19	65	63	62
Oceanside.....	33 1	30	33	38	40	VL	84	81	78	13	69	68	67
Ontario.....	34 0	995	26	32	34	VL	100	97	94	36	72	71	70
Oxnard AFB.....	34 1	43	32	35	37	VL	84	80	78	19	70	69	67
Palmdale AP.....	34 4	2517	18	24	27	VL	103	101	98	35	70	68	67
Palm Springs.....	33 5	411	27	32	36	VL	110	108	105	35	79	78	77
Passadena.....	34 1	864	31	36	39	VL	96	93	90	29	72	70	69
Petaluma.....	38 1	27	24	29	32	VL	94	90	87	31	70	68	67
Pomona CO.....	34 0	871	26	31	34	VL	99	96	93	36	73	72	71
Redding AP.....	40 3	495	25	31	35	VL	103	101	98	32	70	69	67
Redlands.....	34 0	1318	28	34	37	VL	99	96	93	33	72	71	70
Richmond.....	38 0	55	28	35	38	VL	85	81	77	17	66	64	63
Riverside-March AFB.....	33 5	1511	26	32	34	VL	99	96	94	37	72	71	69
Sacramento AP.....	38 3	17	24	30	32	VL	100	97	94	36	72	70	69
Salinas AP.....	36 4	74	27	32	35	VL	87	85	82	24	67	65	64
San Bernardino, Norton AFB.....	34 1	1125	26	31	33	VL	101	98	96	38	75	73	71
San Diego AP.....	32 4	19	38	42	44	VL	86	83	80	12	71	70	68
San Fernando.....	34 1	977	29	34	37	VL	100	97	94	38	73	72	71
San Francisco AP.....	37 4	8	32	35	37	L	83	79	75	20	65	63	62
San Francisco CO.....	37 5	52	38	42	44	VL	80	77	73	14	64	62	61
San Jose AP.....	37 2	70 ^r	30	34	36	VL	90	88	85	26	69	67	65
San Luis Obispo.....	35 2	315	30	35	37	VL	89	85	82	26	65	64	63
Santa Ana AP.....	33 4	115 ^r	28	33	36	VL	92	89	86	28	72	71	70
Santa Barbara CO.....	34 3	100	30	34	36	VL	87	84	81	24	67	66	65
Santa Cruz.....	37 0	125	28	32	34	VL	87	84	80	28	66	65	63
Santa Maria AP.....	34 5	238	28	32	34	VL	85	82	79	23	65	64	63
Santa Monica CO.....	34 0	57	38	43	45	VL	80	77	74	16	69	68	67
Santa Paula.....	34 2	263	28	33	36	VL	91	89	86	36	72	71	70
Santa Rosa.....	38 3	167	24	29	32	VL	95	93	90	34	70	68	67
Stockton AP.....	37 5	28	25	30	34	VL	101	98	96	37	72	70	69
Ukiah.....	39 1	620	22	27	30	VL	98	96	93	40	70	69	67
Visalia.....	36 2	354	26	32	36	VL	102	100	97	38	73	72	70
Yreka.....	41 4	2625	7	13	17	VL	96	94	91	38	68	66	65
Yuba City.....	39 1	70	24	30	34	VL	102	100	97	36	71	70	69
COLORADO													
Alamosa AP.....	37 3	7536	-26	-17	-13	VL	84	82	79	35	62	61	60
Boulder.....	40 0	5385	-5	4	8	L	92	90	87	27	64	63	62
Colorado Springs AP.....	38 5	6173	-9	-1	4	L	90	88	86	30	63	62	61
Denver AP.....	39 5	5283	-9	-2	3	L	92	90	89	28	65	64	63
Durango.....	37 1	6550	-10	0	4	VL	88	86	83	30	64	63	62

Climatic Conditions for United States and Canada (Continued)*^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c °	Col. 3 Elev. ^d Ft	Winter				Summer						
			Col. 4			Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb		
			Median of Annual Ex- tremes	99%	97½%		1%	2½%	5%		1%	2½%	5%
COLORADO (continued)													
Fort Collins.....	40 4	5001	-18	-9	-5	L	91	89	86	28	63	62	61
Grand Junction AP.....	39 1	4849	-2	8	11	VL	96	94	92	29	64	63	62
Greeley.....	40 3	4648	-18	-9	-5	L	94	92	89	29	65	64	63
La Junta AP.....	38 0	4188	-14	-6	-2	M	97	95	93	31	72	71	69
Leadville.....	39 2	10177	-18	-9	-4	VL	76	73	70	30	56	55	54
Pueblo AP.....	38 2	4639	-14	-5	-1	L	96	94	92	31	68	67	66
Sterling.....	40 4	3939	-15	-6	-2	M	95	93	90	30	67	66	65
Trinidad AP.....	37 2	5746	-9	1	5	L	93	91	89	32	66	65	64
CONNECTICUT													
Bridgeport AP.....	41 1	7	-1	4	8	M	90	88	85	18	77	76	75
Hartford, Brainard Field.....	41 5	15	-4	1	5	M	90	88	85	22	77	76	74
New Haven AP.....	41 2	6	0	5	9	H	88	86	83	17	77	76	75
New London.....	41 2	60	0	4	8	H	89	86	83	16	77	75	74
Norwalk.....	41 1	37	-5	0	4	M	91	89	86	19	77	76	75
Norwich.....	41 3	20	-7	-2	2	M	88	86	83	18	77	76	75
Waterbury.....	41 3	605	-5	0	4	M	90	88	85	21	77	76	75
Windsor Locks, Bradley Field.....	42 0	169	-7	-2	2	M	90	88	85	22	76	75	73
DELAWARE													
Dover AFB.....	39 0	38	8	13	15	M	93	90	88	18	79	78	77
Wilmington AP.....	39 4	78	6	12	15	M	93	90	87	20	79	77	76
DISTRICT OF COLUMBIA													
Andrews AFB.....	38 5	279	9	13	16	M	94	91	88	18	79	77	76
Washington National AP.....	38 5	14	12	16	19	M	94	92	90	18	78	77	76
FLORIDA													
Belle Glade.....	26 4	16	31	35	39	M	93	91	90	16	80	79	79
Cape Kennedy AP.....	28 1	16	33	37	40	L	90	89	88	15	81	80	79
Daytona Beach AP.....	29 1	31	28	32	36	L	94	92	91	15	81	80	79
Fort Lauderdale.....	26 0	13	37	41	45	M	91	90	89	15	81	80	79
Fort Myers AP.....	26 4	13	34	38	42	M	94	92	91	18	80	80	79
Fort Pierce.....	27 3	10	33	37	41	M	93	91	90	15	81	80	79
Gainesville AP.....	29 4	155	24	28	32	L	96	94	93	18	80	79	79
Jacksonville AP.....	30 3	24	26	29	32	L	96	94	92	19	80	79	79
Key West AP.....	24 3	6	50	55	58	M	90	89	88	9	80	79	79
Lakeland CO.....	28 0	214	31	35	39	M	95	93	91	17	80	79	78
Miami AP.....	25 5	7	39	44	47	M	92	90	89	15	80	79	79
Miami Beach CO.....	25 5	9	40	45	48	M	91	89	88	10	80	79	79
Ocala.....	29 1	86	25	29	33	L	96	94	93	18	80	79	79
Orlando AP.....	28 3	106 ^r	29	33	37	L	96	94	93	17	80	79	78
Panama City, Tyndall AFB.....	30 0	22	28	32	35	M	92	91	90	14	81	80	80
Pensacola CO.....	30 3	13	25	29	32	M	92	90	89	14	82	81	80
St. Augustine.....	29 5	15	27	31	35	L	94	92	90	16	81	80	79
St. Petersburg.....	28 0	35	35	39	42	M	93	91	90	16	81	80	79
Sanford.....	28 5	14	29	33	37	L	95	93	92	17	80	79	79
Sarasota.....	27 2	30	31	35	39	M	93	91	90	17	80	80	79
Tallahassee AP.....	30 2	58	21	25	29	L	96	94	93	19	80	79	79
Tampa AP.....	28 0	19	32	36	39	M	92	91	90	17	81	80	79
West Palm Beach AP.....	26 4	15	36	40	44	M	92	91	89	16	81	80	80
GEORGIA													
Albany, Turner AFB.....	31 3	224	21	26	30	L	98	96	94	20	80	79	78
Americus.....	32 0	476	18	22	25	L	98	96	93	20	80	79	78
Athens.....	34 0	700	12	17	21	L	96	94	91	21	78	77	76
Atlanta AP.....	33 4	1005	14	18	23	H	95	92	90	19	78	77	76
Augusta AP.....	33 2	143	17	20	23	L	98	95	93	19	80	79	78
Brunswick.....	31 1	14	24	27	31	L	97	95	92	18	81	80	79
Columbus, Lawson AFB.....	32 3	242	19	23	26	L	98	96	94	21	80	79	78
Dalton.....	34 5	720	10	15	19	L	97	95	92	22	78	77	76
Dublin.....	32 3	215	17	21	25	L	98	96	93	20	80	79	78
Gainesville.....	34 2	1254	11	16	20	L	94	92	89	21	78	77	76
Griffin.....	33 1	980	13	17	22	L	95	93	90	21	79	78	77
La Grange.....	33 0	715	12	16	20	L	96	94	92	21	79	78	77
Macon AP.....	32 4	356	18	23	27	L	98	96	94	22	80	79	78
Marietta, Dobbins AFB.....	34 0	1016	12	17	21	L	95	93	91	21	78	77	76

Climatic Conditions for United States and Canada (Continued)*^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d ft	Winter			Summer							
			Col. 4		Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door DAILY Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99% 97½%		1%	2½%	5%		1%	2½%	5%	
GEORGIA (continued)													
Moultrie	31 1	340	22	26	30	L	97	95	93	20	80	79	78
Rome AP	34 2	637	11	16	20	L	97	95	93	23	78	77	76
Savannah-Travis AP	32 1	52	21	24	27	L	96	94	92	20	81	80	79
Valdosta-Moody AFB	31 0	239	24	28	31	L	96	94	92	20	80	79	78
Waycross	31 2	140	20	24	28	L	97	95	93	20	80	79	78
HAWAII													
Hilo AP	19 4	31	56	59	61	L	85	83	82	15	74	73	72
Honolulu AP	21 2	7	58	60	62	L	87	85	84	12	75	74	73
Kaneohe	21 2	198	58	60	61	L	85	83	82	12	74	73	73
Wahiawa	21 3	215	57	59	61	L	86	84	83	14	75	74	73
IDAHO													
Boise AP	43 3	2842	0	4	10	L	96	93	91	31	68	66	65
Burley	42 3	4180	-5	4	8	VL	95	93	89	35	68	66	64
Coeur d'Alene AP	47 5	2973	-4	2	7	VL	94	91	88	31	66	65	63
Idaho Falls AP	43 3	4730 ^r	-17	-12	-6	VL	91	88	85	38	65	64	62
Lewiston AP	46 2	1413	1	6	12	VL	98	96	93	32	67	66	65
Moscow	46 4	2660	-11	-3	1	VL	91	89	86	32	64	63	61
Mountain Home AFB	43 0	2992	-3	2	9	L	99	96	93	36	68	66	64
Pocatello AP	43 0	4444	-12	-8	-2	VL	94	91	88	35	65	63	62
Twin Falls AP	42 3	4148	-5	4	8	L	96	94	91	34	66	64	63
ILLINOIS													
Aurora	41 5	744	-13	-7	-3	M	93	91	88	20	78	77	75
Belleville, Scott AFB	38 3	447	0	6	10	M	97	95	92	21	79	78	77
Bloomington	40 3	775	-7	-1	3	M	94	92	89	21	79	78	77
Carbondale	37 5	380	1	7	11	M	98	96	94	21	80	79	78
Champaign/Urbana	40 0	743	-6	0	4	M	96	94	91	21	79	78	77
Chicago, Midway AP	41 5	610	-7	-4	1	M	95	92	89	20	78	76	75
Chicago, O'Hare AP	42 0	658	-9	-4	0	M	93	90	87	20	77	75	74
Chicago, CO	41 5	594	-5	-3	1	M	94	91	88	15	78	76	75
Danville	40 1	558	-6	-1	4	M	96	94	91	21	79	78	76
Decatur	39 5	670	-6	0	4	M	96	93	91	21	79	78	77
Dixon	41 5	696	-13	-7	-3	M	93	91	89	23	78	77	76
Elgin	42 0	820	-14	-8	-4	M	92	90	87	21	78	76	75
Freeport	42 2	780	-16	-10	-6	M	92	90	87	24	78	77	75
Galesburg	41 0	771	-10	-4	0	M	95	92	89	22	79	78	76
Greenville	39 0	563	-3	3	7	M	96	94	92	21	79	78	77
Joliet AP	41 3	588	-11	-5	-1	M	94	92	89	20	78	77	75
Kankakee	41 1	625	-10	-4	1	M	94	92	89	21	78	77	76
La Salle/Peru	41 2	520	-9	-3	1	M	94	93	90	22	78	77	76
Macomb	40 3	702	-5	-3	1	M	95	93	90	22	79	78	77
Moline AP	41 3	582	-12	-7	-3	M	94	91	88	23	79	77	76
Mt. Vernon	38 2	500	0	6	10	M	97	95	92	21	79	78	77
Peoria AP	40 4	652	-8	-2	2	M	94	92	89	22	78	77	76
Quincy AP	40 0	762	-8	-2	2	M	97	95	92	22	80	79	77
Rantoul, Chanute AFB	40 2	740	-7	-1	3	M	94	92	89	21	78	77	76
Rockford	42 1	724	-13	-7	-3	M	92	90	87	24	77	76	75
Springfield AP	39 5	587	-7	-1	4	M	95	92	90	21	79	78	77
Waukegan	42 2	680	-11	-5	-1	M	92	90	87	21	77	76	75
INDIANA													
Anderson	40 0	847	-5	0	5	M	93	91	88	22	78	77	76
Bedford	38 5	670	-3	3	7	M	95	93	90	22	79	78	77
Bloomington	39 1	820	-3	3	7	M	95	92	90	22	79	78	76
Columbus, Bakalar AFB	39 2	661	-3	3	7	M	95	92	90	22	79	78	76
Crawfordsville	40 0	752	-8	-2	2	M	95	93	90	22	79	77	76
Evansville AP	38 0	381	1	6	10	M	96	94	91	22	79	78	77
Fort Wayne AP	41 0	791	-5	0	5	M	93	91	88	24	77	76	75
Goshen AP	41 3	823	-10	-4	0	M	92	90	87	23	77	76	74
Hobart	41 3	600	-10	-4	0	M	93	91	88	21	78	76	75
Huntington	40 4	802	-8	-2	2	M	94	92	89	23	78	76	75
Indianapolis AP	39 4	793	-5	0	4	M	93	91	88	22	78	77	76
Jeffersonville	38 2	455	3	9	13	M	96	94	91	23	79	78	77
Kokomo	40 3	790	-6	0	4	M	94	92	89	22	78	76	75
Lafayette	40 2	600	-7	-1	3	M	94	92	89	22	78	77	76

Climatic Conditions for United States and Canada (Continued)*,*

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d Ft	Winter			Col. 5 Coinci- dent Wind Ve- locity ^e	Summer			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb		
			Col. 4		Col. 6 Design Dry-Bulb		Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb					
			Median of Annual Ex- tremes	99% ^g	1%								
INDIANA (continued)													
La Porte.....	41 3	810	-10	-4	0	M	93	91	88	22	77	76	74
Marion.....	40 3	791	-8	-2	2	M	93	91	88	23	78	76	75
Muncie.....	40 1	955	-8	-2	2	M	93	91	88	22	78	77	75
Peru, Bunker Hill AFB.....	40 4	804	-9	-3	1	M	91	89	86	22	77	76	74
Richmond AP.....	39 5	1138	-7	-1	3	M	93	91	88	22	78	77	75
Shelbyville.....	39 3	765	-4	2	6	M	94	92	89	22	78	77	76
South Bend AP.....	41 4	773	-6	-2	3	M	92	89	87	22	77	76	74
Terre Haute AP.....	39 3	601	-3	3	7	M	95	93	91	22	79	78	77
Valparaiso.....	41 2	801	-12	-6	-2	M	92	90	87	22	78	76	75
Vincennes.....	38 4	420	-1	5	9	M	96	94	91	22	79	78	77
IOWA													
Ames.....	42 0	1004	-17	-11	-7	M	94	92	89	23	79	78	76
Burlington AP.....	40 5	694	-10	-4	0	M	95	92	89	22	80	78	77
Cedar Rapids AP.....	41 5	863	-14	-8	-4	M	92	90	87	23	78	76	75
Clinton.....	41 5	595	-13	-7	-3	M	92	90	87	23	78	77	76
Council Bluffs.....	41 2	1210	-14	-7	-3	M	97	94	91	22	79	78	76
Des Moines AP.....	41 3	948	-13	-7	-3	M	95	92	89	23	79	77	76
Dubuque.....	42 2	1065	-17	-11	-7	M	92	90	87	22	78	76	75
Fort Dodge.....	42 3	1111	-18	-12	-8	M	94	92	89	23	78	77	75
Iowa City.....	41 4	645	-14	-8	-4	M	94	91	88	22	79	77	76
Keokuk.....	40 2	526	-9	-3	1	M	95	93	90	22	79	78	77
Marshalltown.....	42 0	898	-16	-10	-6	M	93	91	88	23	79	77	76
Mason City AP.....	43 1	1194	-20	-13	-9	M	91	88	85	24	77	75	74
Newton.....	41 4	946	-15	-9	-5	M	95	93	90	23	79	77	76
Ottumwa AP.....	41 1	842	-12	-6	-2	M	95	93	90	22	79	78	76
Sioux City AP.....	42 2	1095	-17	-10	-6	M	96	93	90	24	79	77	76
Waterloo.....	42 3	868	-18	-12	-8	M	91	89	86	23	78	76	75
KANSAS													
Atchison.....	39 3	945	-9	-2	2	M	97	95	92	23	79	78	77
Chanute AP.....	37 4	977	-3	3	7	H	99	97	95	23	79	78	77
Dodge City AP.....	37 5	2594	-5	3	7	M	99	97	95	25	74	73	72
El Dorado.....	37 5	1282	-3	4	8	H	101	99	96	24	78	77	76
Emporia.....	38 2	1209	-4	3	7	H	99	97	94	25	78	77	76
Garden City AP.....	38 0	2882	-10	-1	3	M	100	98	96	28	74	73	72
Goodland AP.....	39 2	3645	-10	-2	4	M	99	96	93	31	71	70	69
Great Bend.....	38 2	1940	-5	2	6	M	101	99	96	28	77	76	75
Hutchinson AP.....	38 0	1524	-5	2	6	H	101	99	96	28	77	76	75
Liberal.....	37 0	2838	-4	4	8	M	102	100	99	28	74	73	71
Manhattan, Fort Riley.....	39 0	1076	-7	-1	4	H	101	98	95	24	79	78	77
Parsons.....	37 2	908	-2	5	9	H	99	97	94	23	79	78	77
Russell AP.....	38 5	1864	-7	0	4	M	102	100	97	29	78	76	75
Salina.....	38 5	1271	-4	3	7	H	101	99	96	26	78	76	75
Topeka AP.....	39 0	877	-4	3	6	M	99	96	94	24	79	78	77
Wichita AP.....	37 4	1321	-1	5	9	H	102	99	96	23	77	76	75
KENTUCKY													
Ashland.....	38 3	551	1	6	10	L	94	92	89	22	77	76	75
Bowling Green AP.....	37 0	535	1	7	11	L	97	95	93	21	79	78	77
Corbin AP.....	37 0	1175	0	5	9	L	93	91	89	23	79	77	76
Covington AP.....	39 0	869	-3	3	8	L	93	90	88	22	77	76	75
Hopkinsville, Campbell AFB.....	36 4	540	-4	10	14	L	97	95	92	21	79	78	77
Lexington AP.....	38 0	979	0	6	10	'M	94	92	90	22	78	77	76
Louisville AP.....	38 1	474	1	8	12	L	96	93	91	23	79	78	77
Madisonville.....	37 2	439	1	7	11	L	96	94	92	22	79	78	77
Owensboro.....	37 5	420	0	6	10	L	96	94	92	23	79	78	77
Paducah AP.....	37 0	398	4	10	14	L	97	95	94	20	80	79	78
LOUISIANA													
Alexandria AP.....	31 2	92	20	25	29	L	97	95	94	20	80	80	79
Baton Rouge AP.....	30 3	64	22	25	30	L	96	94	92	19	81	80	79
Bogalusa.....	30 5	103	20	24	28	L	96	94	93	19	80	79	78
Houma.....	29 3	13	25	29	33	L	94	92	91	15	81	80	79
Lafayette AP.....	30 1	38	23	28	32	L	95	93	92	18	81	81	80
Lake Charles AP.....	30 1	14	25	29	33	M	95	93	91	17	80	79	79
Minden.....	32 4	250	17	22	26	L	98	96	95	20	81	80	79

Climatic Conditions for United States and Canada (Continued)*,*

Col. 1 State and Station ^b	Col. 2 Latitude ^c °	Col. 3 Elev. ^d Ft	Winter				Summer						
			Col. 4		Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99% ^g		97½%	1%	2½%	5%	1%	2½%	5%	
LOUISIANA (continued)													
Monroe AP.	32 3	78	18	23	27	L	98	96	95	20	81	81	80
Natchitoches	31 5	120	17	22	26	M	99	97	96	20	81	80	79
New Orleans AP.	30 0	3	29	32	35	M	93	91	90	16	81	80	79
Shreveport AP.	32 3	252	18	22	26	M	99	96	94	20	81	80	79
MAINE													
Augusta AP.	44 2	350	-13	-7	-3	M	88	86	83	22	74	73	71
Bangor, Dow AFB	44 5	162	-14	-8	-4	M	88	85	81	22	75	73	71
Caribou AP.	46 5	624	-24	-18	-14	L	85	81	78	21	72	70	68
Lewiston	44 0	182	-14	-8	-4	M	88	86	83	22	74	73	71
Millinocket AP.	45 4	405	-22	-16	-12	L	87	85	82	22	74	72	70
Portland AP.	43 4	61	-14	-5	0	L	88	85	81	22	75	73	71
Waterville	44 3	89	-15	-9	-5	M	88	86	82	22	74	73	71
MARYLAND													
Baltimore AP.	39 1	146	8	12	15	M	94	91	89	21	79	78	77
Baltimore CO.	39 2	14	12	16	20	M	94	92	89	17	79	78	77
Cumberland	39 4	945	0	5	9	L	94	92	89	22	76	75	74
Frederick AP.	39 2	294	2	7	11	M	94	92	89	22	78	77	76
Hagerstown	39 4	660	1	6	10	L	94	92	89	22	77	76	75
Salisbury	38 2	52	10	14	18	M	92	90	87	18	79	78	77
MASSACHUSETTS													
Boston AP.	42 2	15	-1	6	10	H	91	88	85	16	76	74	73
Clinton	42 2	398	-8	-2	2	M	87	85	82	17	75	74	72
Fall River	41 4	190	-1	5	9	H	88	86	83	18	75	74	73
Framingham	42 2	170	-7	-1	3	M	91	89	86	17	76	74	73
Gloucester	42 3	10	-4	2	6	H	86	84	81	15	74	73	72
Greenfield	42 3	205	-12	-6	-2	M	89	87	84	23	75	74	73
Lawrence	42 4	57	-9	-3	1	M	90	88	85	22	76	74	72
Lowell	42 3	90	-7	-1	3	M	91	89	86	21	76	74	72
New Bedford	41 4	70	3	9	13	H	86	84	81	19	75	73	72
Pittsfield AP.	42 3	1170	-11	-5	-1	M	86	84	81	23	74	72	71
Springfield, Westover AFB	42 1	247	-8	-3	2	M	91	88	85	19	76	74	73
Taunton	41 5	20	-9	-4	0	H	88	86	83	18	76	75	74
Worcester AP.	42 2	986	-8	-3	1	M	89	87	84	18	75	73	71
MICHIGAN													
Adrian	41 5	754	-6	0	4	M	93	91	88	23	76	75	74
Alpena AP.	45 0	689	-11	-5	-1	M	87	85	82	27	74	73	71
Battle Creek AP.	42 2	939	-6	1	5	M	92	89	86	23	76	74	73
Benton Harbor AP.	42 1	649	-7	-1	3	M	90	88	85	20	76	74	73
Detroit Met. CAP.	42 2	633	0	4	8	M	92	88	85	20	76	75	74
Escanaba	45 4	594	-13	-7	-3	M	82	80	77	17	73	73	69
Flint AP.	43 0	766	-7	-1	3	M	89	87	84	25	76	75	74
Grand Rapids AP.	42 5	681	-3	2	6	M	91	89	86	24	76	74	73
Holland	42 5	612	-4	2	6	M	90	88	85	22	76	74	73
Jackson AP.	42 2	1003	-6	0	4	M	92	89	86	23	76	75	74
Kalamazoo	42 1	930	-5	1	5	M	92	89	86	23	76	75	74
Lansing AP.	42 5	852	-4	2	6	M	89	87	84	24	76	75	73
Marquette CO.	46 3	677	-14	-8	-4	L	88	86	83	18	73	71	69
Mt. Pleasant	43 4	796	-9	-3	1	M	89	87	84	24	75	74	73
Muskegon AP.	43 1	627	-2	4	8	M	87	85	82	21	75	74	73
Pontiac	42 4	974	-6	0	4	M	90	88	85	21	76	75	73
Port Huron	43 0	586	-6	-1	3	M	90	88	85	21	76	74	73
Saginaw AP.	43 3	662	-7	-1	3	M	88	86	83	23	76	75	73
Sault Ste. Marie AP.	46 3	721	-18	-12	-8	L	83	81	78	23	73	71	69
Traverse City AP.	44 4	618	-6	0	4	M	89	86	83	22	75	73	72
Ypsilanti	42 1	777	-3	-1	5	M	92	89	86	22	76	74	73
MINNESOTA													
Albert Lea	43 4	1235	-20	-14	-10	M	91	89	86	24	77	76	74
Alexandria AP.	45 5	1421	-26	-19	-15	L	90	88	85	24	76	74	72
Bemidji AP.	47 3	1392	-38	-32	-28	L	87	84	81	24	73	72	71
Brainerd	46 2	1214	-31	-24	-20	L	88	85	82	24	74	73	72
Duluth AP.	46 5	1426	-25	-19	-15	M	85	82	79	22	73	71	69
Faribault	44 2	1190	-23	-16	-12	L	90	88	85	24	77	75	74
Fergus Falls	46 1	1210	-28	-21	-17	L	92	89	86	24	75	74	72
International Falls AP.	48 3	1179	-35	-29	-24	L	86	82	79	26	72	69	68

Climatic Conditions for United States and Canada (Continued)*,*

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d ft	Winter				Summer								
			Col. 4			Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb				
			Median of Annual Ex- tremes	99% ^g	97½%		1%	2½%	5%		1%	2½%	5%		
MINNESOTA (continued)															
Mankato.....	44 1	785	-23	-16	-12	L	91	89	86	24	77	75	74		
Minneapolis/St. Paul AP.....	44 5	822	-19	-14	-10	L	92	89	86	22	77	75	74		
Rochester AP.....	44 0	1297	-23	-17	-13	M	90	88	85	24	77	75	74		
St. Cloud AP.....	45 4	1034	-26	-20	-16	L	90	88	85	24	77	75	73		
Virginia.....	47 3	1435	-32	-25	-21	L	86	83	80	23	73	71	69		
Willmar.....	45 1	1133	-25	-18	-14	L	91	88	85	24	77	75	73		
Winona.....	44 1	652	-19	-12	-8	M	91	89	86	24	77	76	74		
MISSISSIPPI															
Biloxi, Keesler AFB.....	30 2	25	26	30	32	M	93	92	90	16	82	81	80		
Clarksdale.....	34 1	178	14	20	24	L	98	96	95	21	81	80	79		
Columbus AFB.....	33 4	224	13	18	22	L	97	95	93	22	79	79	78		
Greenville AFB.....	33 3	139	16	21	24	L	98	96	94	21	81	80	79		
Greenwood.....	33 3	128	14	19	23	L	98	96	94	21	81	80	79		
Hattiesburg.....	31 2	200	18	22	26	L	97	95	94	21	80	79	78		
Jackson AP.....	32 2	330	17	21	24	L	98	96	94	21	79	78	78		
Laurel.....	31 4	264	18	22	26	L	97	95	94	21	80	79	78		
McComb AP.....	31 2	458	18	22	26	L	96	94	93	18	80	79	79		
Meridian AP.....	32 2	294	15	20	24	L	97	95	94	22	80	79	78		
Natchez.....	31 4	168	18	22	26	L	96	94	93	21	80	80	79		
Tupelo.....	34 2	289	13	18	22	L	98	96	95	22	80	79	78		
Vicksburg CO.....	32 2	234	18	23	26	L	97	95	94	21	80	80	79		
MISSOURI															
Cape Girardeau.....	37 1	330	2	8	12	M	98	96	94	21	80	79	78		
Columbia AP.....	39 0	778	-4	2	6	M	97	95	92	22	79	78	77		
Farmington AP.....	37 5	928	-2	4	8	M	97	95	93	22	79	78	77		
Hannibal.....	39 4	489	7	-1	4	M	96	94	91	22	79	78	77		
Jefferson City.....	38 4	640	-4	2	6	M	97	95	93	23	79	78	77		
Joplin AP.....	37 1	982	1	7	11	M	97	95	93	24	79	78	77		
Kansas City AP.....	39 1	742	-2	4	8	M	100	97	94	20	79	77	76		
Kirksville AP.....	40 1	966	-13	-7	-3	M	96	94	91	24	79	78	77		
Mexico.....	39 1	775	-7	-1	3	M	96	94	91	22	79	78	77		
Moberly.....	39 3	850	8	-2	2	M	96	94	91	23	79	78	77		
Poplar Bluff.....	36 5	322	3	9	13	M	98	96	94	22	80	79	78		
Rolla.....	38 0	1202	-3	3	7	M	97	95	93	22	79	78	77		
St. Joseph AP.....	39 5	809	-8	-1	3	M	97	95	92	23	79	78	77		
St. Louis AP.....	38 5	535	-2	4	8	M	98	95	92	21	79	78	77		
St. Louis CO.....	38 4	465	1	7	11	M	96	94	92	18	79	78	77		
Sedalia, Whiteman AFB.....	38 4	838	-2	4	9	M	97	94	92	22	79	77	76		
Sikeston.....	36 5	318	4	10	14	L	98	96	94	21	80	79	78		
Springfield AP.....	37 1	1265	0	5	10	M	97	94	91	23	78	77	76		
MONTANA															
Billings AP.....	45 5	3567	-19	-10	-6	L	94	91	88	31	68	66	65		
Bozeman.....	45 5	4856	-25	-15	-11	L	88	85	82	32	61	60	59		
Butte AP.....	46 0	5526r	-34	-24	-16	VL	86	83	80	35	60	59	57		
Cut Bank AP.....	48 4	3838r	-32	-23	-17	L	89	86	82	35	65	63	61		
Glasgow AP.....	48 1	2277	-33	-25	-20	L	96	93	89	29	69	67	65		
Glendive.....	47 1	2076	-28	-20	-16	L	96	93	90	29	71	69	68		
Great Falls AP.....	47 3	3664r	-29	-20	-16	L	91	88	85	28	64	63	61		
Havre.....	48 3	2488	-32	-22	-15	M	91	87	84	33	66	64	63		
Helena AP.....	46 4	3893	-27	-17	-13	L	90	87	84	32	65	63	61		
Kalispell AP.....	48 2	2965	-17	-7	-3	VE	88	84	81	34	65	63	62		
Lewiston AP.....	47 0	4132	-27	-18	-14	L	89	86	83	30	65	63	62		
Livingston AP.....	45 4	4653	-26	-17	-13	L	91	88	85	32	63	62	61		
Miles City AP.....	46 3	2629	-27	-19	-15	L	97	94	91	30	71	69	68		
Missoula AP.....	46 5	3200	-16	-7	-3	VL	92	89	86	36	65	63	61		
NEBRASKA															
Beatrice.....	40 2	1235	-10	-3	1	M	99	97	94	24	78	77	76		
Chadron AP.....	42 5	3300	-21	-13	-9	M	97	95	92	30	72	70	69		
Columbus.....	41 3	1442	-14	-7	-3	M	98	96	93	25	78	76	75		
Fremont.....	41 3	1203	-14	-7	-3	M	99	97	94	22	78	77	76		
Grand Island AP.....	41 0	1841	-14	-6	-2	M	98	95	92	28	76	75	74		
Hastings.....	40 4	1932	-11	-3	1	M	98	96	94	27	77	75	74		
Kearney.....	40 4	2146	-14	-6	-2	M	97	95	92	28	76	75	74		
Lincoln CO.....	40 5	1150	-10	-4	0	M	100	96	93	24	78	77	76		

Climatic Conditions for United States and Canada (Continued)*.+

Col. 1 State and Station ^b	Col. 2 Latitude ^c °	Col. 3 Elev. ^d ft	Winter				Summer						
			Col. 4		Col. 5 Coiincident Wind Velocity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99%		97½%	1%	2½%		1%	2½%	5%	
NEBRASKA (continued)													
McCook.....	40 1	2565	-12	-4	0	M	99	97	94	28	74	72	71
Norfolk.....	42 0	1532	-18	-11	-7	M	97	95	92	30	78	76	75
North Platte AP.....	41 1	2779	-13	-6	-2	M	97	94	90	28	74	73	72
Omaha AP.....	41 2	978	-12	-5	-1	M	97	94	91	22	79	78	76
Scottsbluff AP.....	41 5	3950	-16	-8	-4	M	96	94	91	31	70	69	67
Sidney AP.....	41 1	4292	-15	-7	-2	M	95	92	89	31	70	69	67
NEVADA†													
Carson City.....	39 1	4675	-4	3	7	VL	93	91	88	42	62	61	60
Elko AP.....	40 5	5075	-21	-13	-7	VL	94	92	90	42	64	62	61
Ely AP.....	39 1	6257	-15	-6	-2	VL	90	88	86	39	60	59	58
Las Vegas AP.....	36 1	2162	18	23	26	VL	108	106	104	30	72	71	70
Lovelock AP.....	40 0	3900	0	7	11	VL	98	96	93	42	65	64	62
Reno AP.....	39 3	4404	-2	2	7	VL	95	92	90	45	64	62	61
Reno CO.....	39 3	4490	8	12	17	VL	94	92	89	45	64	62	61
Tonopah AP.....	38 0	5426	2	9	13	VL	95	92	90	40	64	63	62
Winnemucca AP.....	40 5	4299	-8	1	5	VL	97	95	93	42	64	62	61
NEW HAMPSHIRE													
Berlin.....	44 3	1110	-25	-19	-15	L	87	85	82	22	73	71	70
Claremont.....	43 2	420	-19	-13	-9	L	89	87	84	24	74	73	72
Concord AP.....	43 1	339	-17	-11	-7	M	91	88	85	26	75	73	72
Keene.....	43 0	490	-17	-12	-8	M	90	88	85	24	75	73	72
Laconia.....	43 3	505	-22	-16	-12	M	89	87	84	25	74	73	72
Manchester, Grenier AFB.....	43 0	253	-11	-5	1	M	92	89	86	24	76	74	73
Portsmouth, Pease AFB.....	43 1	127	-8	-2	3	M	88	86	83	22	75	73	72
NEW JERSEY													
Atlantic City CO.....	39 3	11	10	14	18	H	91	88	85	18	78	77	76
Long Branch.....	40 2	20	4	9	13	H	93	91	88	18	77	76	75
Newark AP.....	40 4	11	6	11	15	M	94	91	88	20	77	76	75
New Brunswick.....	40 3	86	3	8	12	M	91	89	86	19	77	76	75
Paterson.....	40 5	100	3	8	12	M	93	91	88	21	77	76	75
Phillipsburg.....	40 4	180	1	6	10	L	93	91	88	21	77	76	75
Trenton CO.....	40 1	144	7	12	16	M	92	90	87	19	78	77	76
Vineland.....	39 3	95	7	12	16	M	93	90	87	19	78	77	76
NEW MEXICO													
Alamagordo, Holloman AFB.....	32 5	4070	12	18	22	L	100	98	96	30	70	69	68
Albuquerque AP.....	35 0	5310	6	14	17	L	96	94	92	27	66	65	64
Artesia.....	32 5	3375	9	16	19	L	101	99	97	30	71	70	69
Carlsbad AP.....	32 2	3234	11	17	21	L	101	99	97	28	72	71	70
Clovis AP.....	34 3	4279	2	14	17	L	99	97	95	28	70	69	68
Farmington AP.....	36 5	5495	-3	6	9	VL	95	93	91	30	66	65	64
Gallup.....	35 3	6465	-13	-5	-1	VL	92	90	87	32	64	63	62
Grants.....	35 1	6520	-15	-7	-3	VL	91	89	86	32	64	63	62
Hobbs AP.....	32 4	3664	9	15	19	L	101	99	96	29	72	71	70
Las Cruces.....	32 2	3900	13	19	23	L	102	100	97	30	70	69	68
Los Alamos.....	35 5	7410	-4	5	9	L	88	86	83	32	64	63	62
Raton AP.....	36 5	6379	-11	-2	2	L	92	90	88	34	66	65	64
Roswell, Walker AFB.....	33 2	3643	5	16	19	L	101	99	97	33	71	70	69
Santa Fé CO.....	35 4	7045	-2	7	11	L	90	88	85	28	65	63	62
Silver City AP.....	32 4	5373	8	14	18	VL	95	93	91	30	68	67	66
Socorro AP.....	34 0	4617	6	13	17	L	99	97	94	30	67	66	65
Tucumcari AP.....	35 1	4053	1	9	13	L	99	97	95	28	71	70	69
NEW YORK													
Albany AP.....	42 5	277	-14	-5	0	L	91	88	85	23	76	74	73
Albany CO.....	42 5	19	-5	1	5	L	91	89	86	20	76	74	73
Auburn.....	43 0	715	-10	-2	2	M	89	87	84	22	75	73	72
Batavia.....	43 0	900	-7	-1	3	M	89	87	84	22	75	74	72
Binghamton CO.....	42 1	858	-8	-2	2	L	91	89	86	20	74	72	71
Buffalo AP.....	43 0	705 ^r	-3	3	6	M	88	86	83	21	75	73	72
Cortland.....	42 4	1129	-11	-5	-1	L	90	88	85	23	75	73	72
Dunkirk.....	42 3	590	-2	4	8	M	88	86	83	18	75	74	72
Elmira AP.....	42 1	860	-5	1	5	L	92	90	87	24	75	73	72
Geneva.....	42 5	590	-8	-2	2	M	91	89	86	22	75	73	72
Glens Falls.....	43 2	321	-17	-11	-7	L	88	86	83	23	74	72	71
Gloversville.....	43 1	770	-12	-6	-2	L	89	87	84	23	75	73	71
Hornell.....	42 2	1325	-15	-9	-5	L	87	85	82	24	74	72	71

Climatic Conditions for United States and Canada (Continued)*.

Col. 1 State and Station ^b	Col. 2 Latitude ^c °	Col. 3 Elev. ^d ft	Winter			Summer							
			Col. 4		Col. 5 Coincid- ent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99% ^g		1%	2½%	5%		1%	2½%	5%	
NEW YORK (continued)													
Ithaca.....	42 3	950	-10	-4	0	L	91	88	85	24	75	73	72
Jamestown.....	42 1	1390	-5	1	5	M	88	86	83	20	75	73	72
Kingston.....	42 0	279	-8	-2	2	L	92	90	87	22	76	74	73
Lockport.....	43 1	520	-4	2	6	M	87	85	82	21	75	74	72
Massena AP.....	45 0	2021	-22	-16	-12	M	86	84	81	20	75	74	72
Newburgh-Stewart AFB.....	41 3	460	-4	2	6	M	92	89	86	21	78	76	74
NYC-Central Park.....	40 5	132	6	11	15	H	94	91	88	17	77	76	75
NYC-Kennedy AP.....	40 4	16	12	17	21	H	91	87	84	16	77	76	75
NYC-LaGuardia AP.....	40 5	19	7	12	16	H	93	90	87	16	77	76	75
Niagara Falls AP.....	43 1	596	-2	4	7	M	88	86	83	20	75	74	73
Olean.....	42 1	1420	-13	-8	-3	L	87	85	82	23	74	72	71
Oneonta.....	42 3	1150	-13	-7	-3	L	89	87	84	24	74	72	71
Oswego CO.....	43 3	300	-4	2	6	M	86	84	81	20	75	74	72
Plattsburg AFB.....	44 4	165	-16	-10	-6	L	86	84	81	22	74	73	71
Poughkeepsie.....	41 4	103	-6	-1	3	L	93	90	87	21	77	75	74
Rochester AP.....	43 1	543	-5	2	5	M	91	88	85	22	75	74	72
Rome-Griffiss AFB.....	43 1	515	-13	-7	-3	L	90	87	84	22	76	74	73
Schenectady.....	42 5	217	-11	-5	-1	L	90	88	85	22	75	73	72
Suffolk County AFB.....	40 5	57	4	9	13	H	87	84	81	16	76	75	74
Syracuse AP.....	43 1	424	-10	-2	2	M	90	87	85	20	76	74	73
Utica.....	43 1	714	-12	-6	-2	L	89	87	84	22	75	73	72
Watertown.....	44 0	497	-20	-14	-10	M	86	84	81	20	75	74	72
NORTH CAROLINA													
Asheville AP.....	35 3	2170 ^r	8	13	17	L	91	88	86	21	75	74	73
Charlotte AP.....	35 1	735	13	18	22	L	96	94	92	20	78	77	76
Durham.....	36 0	406	11	15	19	L	94	92	89	20	78	77	76
Elizabeth City AP.....	36 2	10	14	18	22	M	93	91	89	18	80	79	78
Fayetteville, Pope AFB.....	35 1	95	13	17	20	L	97	94	92	20	80	79	78
Goldsboro, Seymour-Johnson AFB.....	35 2	88	14	18	21	M	95	92	90	18	80	79	78
Greensboro AP.....	36 1	897	9	14	17	L	94	91	89	21	77	76	75
Greenville.....	35 4	25	14	18	22	M	95	93	90	19	81	80	79
Henderson.....	36 2	510	8	12	16	L	94	92	89	20	79	78	77
Hickory.....	35 4	1165	9	14	18	L	93	91	88	21	77	76	75
Jacksonville.....	34 5	24	17	21	25	M	94	92	89	18	81	80	79
Lumberton.....	34 4	132	14	18	22	L	95	93	90	20	81	80	79
New Bern AP.....	35 1	17	14	18	22	L	94	92	89	18	81	80	79
Raleigh/Durham AP.....	35 5	433	13	16	20	L	95	92	90	20	79	78	77
Rocky Mount.....	36 0	81	12	16	20	L	95	93	90	19	80	79	78
Wilmington AP.....	34 2	30	19	23	27	L	93	91	89	18	82	81	80
Winston-Salem AP.....	36 1	967	9	14	17	L	94	91	89	20	77	76	75
NORTH DAKOTA													
Bismarck AP.....	46 5	1647	-31	-24	-19	VL	95	91	88	27	74	72	70
Devil's Lake.....	48 1	1471	-30	-23	-19	M	93	89	86	25	73	71	69
Dickinson AP.....	46 5	2595	-31	-23	-19	L	96	93	90	25	72	70	68
Fargo AP.....	46 5	900	-28	-22	-17	L	92	88	85	25	76	74	72
Grand Forks AP.....	48 0	832	-30	-26	-23	L	91	87	84	25	74	72	70
Jamestown AP.....	47 0	1492	-29	-22	-18	L	95	91	88	26	75	73	71
Minot AP.....	48 2	1713	-31	-24	-20	M	91	88	84	25	72	70	68
Williston.....	48 1	1877	-28	-21	-17	M	94	90	87	25	71	69	67
OHIO													
Akron/Canton AP.....	41 0	1210	-5	1	6	M	89	87	84	21	75	73	72
Ashtabula.....	42 0	690	-3	3	7	M	89	87	84	18	76	75	74
Athens.....	39 2	700	-3	3	7	M	93	91	88	22	77	76	75
Bowling Green.....	41 3	675	-7	-1	3	M	93	91	88	23	77	75	74
Cambridge.....	40 0	800	-6	0	4	M	91	89	86	23	77	76	75
Chillicothe.....	39 2	638	-1	5	9	M	93	91	88	22	77	76	75
Cincinnati CO.....	39 1	761	2	8	12	L	94	92	90	21	78	77	76
Cleveland AP.....	41 2	777 ^r	-2	2	7	M	91	89	86	22	76	75	74
Columbus AP.....	40 0	812	-1	2	7	M	92	88	86	24	77	76	75
Dayton AP.....	39 5	997	-2	0	6	M	92	90	87	20	77	75	74
Defiance.....	41 2	700	-7	-1	1	M	93	91	88	24	77	76	74
Findlay AP.....	41 0	797	-6	0	4	M	92	90	88	24	77	76	75

Climatic Conditions for United States and Canada (Continued)*.^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d Ft	Winter				Summer						
			Col. 4		Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99%		97½%	1%	2½%		1%	2½%	5%	
OHIO (continued)													
Fremont.....	41 2	600	- 7	- 1	3	M	92	90	87	24	76	75	74
Hamilton.....	39 2	650	- 2	4	8	M	94	92	90	22	78	77	76
Lancaster.....	39 4	920	- 5	1	5	M	93	91	88	23	77	76	75
Lima.....	40 4	860	- 6	0	4	M	93	91	88	24	77	76	75
Mansfield AP.....	40 5	1297	- 7	1	3	M	91	89	86	22	76	75	74
Marion.....	40 4	920	- 5	1	6	M	93	91	88	23	77	76	75
Middletown.....	39 3	635	- 3	3	7	M	93	91	88	22	77	76	75
Newark.....	40 1	825	- 7	- 1	3	M	92	90	87	23	77	76	75
Norwalk.....	41 1	720	- 7	- 1	3	M	92	90	87	22	76	75	74
Portsmouth.....	38 5	530	0	5	9	L	94	92	89	22	77	76	75
Sandusky CO.....	41 3	606	- 2	4	8	M	92	90	87	21	76	75	74
Springfield.....	40 0	1020	- 3	3	7	M	93	90	88	21	77	76	75
Steubenville.....	40 2	992	- 2	4	9	M	91	89	86	22	76	75	74
Toledo AP.....	41 4	676 ^r	- 5	1	5	M	92	90	87	25	77	75	74
Warren.....	41 2	900	- 6	0	4	M	90	88	85	23	75	74	73
Wooster.....	40 5	1030	- 7	- 1	3	M	90	88	85	22	76	75	74
Youngstown AP.....	41 2	1178	- 5	- 1	6	M	89	86	84	23	75	74	73
Zanesville AP.....	40 0	881	- 7	- 1	3	M	92	89	87	23	77	76	75
OKLAHOMA													
Ada.....	34 5	1015	6	12	16	H	102	100	98	23	79	78	77
Altus AFB.....	34 4	1390	7	14	18	H	103	101	99	25	77	76	75
Ardmore.....	34 2	880	9	15	19	H	103	101	99	23	79	78	77
Bartlesville.....	36 5	715	- 1	5	9	H	101	99	97	23	79	78	77
Chickasha.....	35 0	1085	5	12	16	H	103	101	99	24	77	76	75
Enid-Vance AFB.....	36 2	1287	3	10	14	H	103	100	98	24	78	77	76
Lawton AP.....	34 3	1108	6	13	16	H	103	101	98	24	78	77	76
McAlester.....	34 5	760	7	13	17	H	102	100	98	23	79	78	77
Muskogee AP.....	35 4	610	6	12	16	M	102	99	96	23	79	78	77
Norman.....	35 1	1109	5	11	15	H	101	99	97	24	78	77	76
Oklahoma City AP.....	35 2	1280	4	11	15	H	100	97	95	23	78	77	76
Ponca City.....	36 4	996	1	8	12	H	102	100	97	24	78	77	76
Seminole.....	35 2	865	6	12	16	H	102	100	98	23	78	77	76
Stillwater.....	36 1	884	2	9	13	H	101	99	97	24	78	77	76
Tulsa AP.....	36 1	650	4	12	16	H	102	99	96	22	79	78	77
Woodward.....	36 3	1900	- 3	4	8	H	103	101	98	26	76	74	73
OREGON													
Albany.....	44 4	224	17	23	27	VL	91	88	84	31	69	67	65
Astoria AP.....	46 1	8	22	27	30	M	79	76	72	16	61	60	59
Baker AP.....	44 5	3368	- 10	- 3	1	VL	94	92	89	30	66	65	63
Bend.....	44 0	3599	- 7	0	4	VL	89	87	84	33	64	62	61
Corvallis.....	44 3	221	17	23	27	VL	91	88	84	31	69	67	65
Eugene AP.....	44 1	364	16	22	26	VL	91	88	84	31	69	67	65
Grants Pass.....	42 3	925	16	22	26	VL	94	92	89	33	68	66	65
Klamath Falls AP.....	42 1	4091	- 5	1	5	VL	89	87	84	36	63	62	61
Medford AP.....	42 2	1298	15	21	23	VL	98	94	91	35	70	68	66
Pendleton AP.....	45 4	1492	- 2	3	10	VL	97	94	91	29	66	65	63
Portland AP.....	45 4	21	17	21	24	L	89	85	81	23	69	67	66
Portland CO.....	45 3	57	21	26	29	L	91	88	84	21	69	68	67
Roseburg AP.....	43 1	505	19	25	29	VL	93	91	88	30	69	67	65
Salem AP.....	45 0	195	15	21	25	VL	92	88	84	31	69	67	66
The Dalles.....	45 4	102	7	13	17	VL	93	91	88	28	70	68	67
PENNSYLVANIA													
Allentown AP.....	40 4	376	- 2	3	5	M	92	90	87	22	77	75	74
Altoona CO.....	40 2	1468	- 4	1	5	L	89	87	84	23	74	73	72
Butler.....	40 4	1100	- 8	- 2	2	L	91	89	86	22	75	74	73
Chambersburg.....	40 0	640	0	5	9	L	94	92	89	23	76	75	74
Erie AP.....	42 1	732	1	7	11	M	88	85	82	18	76	74	73
Harrisburg AP.....	40 1	335	4	9	13	L	92	89	86	21	76	75	74
Johnstown.....	40 2	1214	- 4	1	5	L	91	87	85	23	74	73	72
Lancaster.....	40 1	255	- 3	2	6	L	92	90	87	22	77	76	75
Meadville.....	41 4	1065	- 6	0	4	M	88	86	83	21	75	73	72
New Castle.....	41 0	825	- 7	- 1	4	M	91	89	86	23	75	74	73

Climatic Conditions for United States and Canada (Continued)*.^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c , °	Col. 3 Elev. ^d , Ft.	Winter				Summer						
			Col. 4		Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
	Median of Annual Ex- tremes	99% ^g	97½%	1%		2½%	5%	1%		2½%	5%		
PENNSYLVANIA (continued)													
Philadelphia AP.	39 5	7	7	11	15	M	93	90	87	21	78	77	76
Pittsburgh AP.	40 3	1137	- 1	5	9	M	90	87	85	22	75	74	73
Pittsburgh CO.	40 3	749 r	1	7	11	M	90	88	85	19	75	74	73
Reading CO.	40 2	226	1	6	9	M	92	90	87	19	77	76	75
Scranton/Wilkes-Barre.	41 2	940	- 3	2	6	L	89	87	84	19	75	74	73
State College.	40 5	1175	- 3	2	6	L	89	87	84	23	74	73	72
Sunbury.	40 5	480	- 2	3	7	L	91	89	86	22	76	75	74
Uniontown.	39 5	1040	- 1	4	8	L	90	88	85	22	75	74	73
Warren.	41 5	1280	- 8	- 3	1	L	89	87	84	24	75	73	72
West Chester.	40 0	440	4	9	13	M	92	90	87	20	77	76	75
Williamsport AP.	41 1	527	- 5	1	5	L	91	89	86	23	76	75	74
York.	40 0	390	- 1	4	8	L	93	91	88	22	77	76	75
RHODE ISLAND													
Newport.	41 3	20	1	5	11	H	86	84	81	16	75	74	73
Providence AP.	41 4	55	0	6	10	M	89	86	83	19	76	75	74
SOUTH CAROLINA													
Anderson.	34 3	764	13	18	22	L	96	94	91	21	77	76	75
Charleston AFB.	32 5	41	19	23	27	L	94	92	90	18	81	80	79
Charleston CO.	32 5	9	23	26	30	L	95	93	90	13	81	80	79
Columbia AP.	34 0	217	16	20	23	L	98	96	94	22	79	79	78
Florence AP.	34 1	146	16	21	25	L	96	94	92	21	80	79	78
Georgetown.	33 2	14	19	23	26	L	93	91	88	18	81	80	79
Greenville AP.	34 5	957	14	19	23	L	95	93	91	21	77	76	75
Greenwood.	34 1	671	15	19	23	L	97	95	92	21	78	77	76
Orangeburg.	33 3	244	17	21	25	L	97	95	92	20	80	79	78
Rock Hill.	35 0	470	13	17	21	L	97	95	92	20	78	77	76
Spartanburg AP.	35 0	816	13	18	22	L	95	93	90	20	77	76	75
Sumter-Shaw AFB.	34 0	291	18	23	26	L	96	94	92	21	80	79	78
SOUTH DAKOTA													
Aberdeen AP.	45 3	1296	- 29	- 22	- 18	L	95	92	89	27	77	75	74
Brookings.	44 2	1642	- 26	- 19	- 15	M	93	90	87	25	77	75	74
Huron AP.	44 3	1282	- 24	- 16	- 12	L	97	93	90	28	77	75	74
Mitchell.	43 5	1346	- 22	- 15	- 11	M	96	94	91	28	77	76	74
Pierre AP.	44 2	1718 r	- 21	- 13	- 9	M	98	96	93	29	76	74	73
Rapid City AP.	44 0	3165	- 17	- 9	- 6	M	96	94	91	28	72	71	69
Sioux Falls AP.	43 4	1420	- 21	- 14	- 10	M	95	92	89	24	77	75	74
Watertown AP.	45 0	1746	- 27	- 20	- 16	L	93	90	87	26	76	74	73
Yankton.	43 0	1280	- 18	- 11	- 7	M	96	94	91	25	78	76	75
TENNESSEE													
Athens.	33 3	940	10	14	18	L	96	94	91	22	77	76	75
Bristol-Tri City AP.	36 3	1519	- 1	11	16	L	92	90	88	22	76	75	74
Chattanooga AP.	35 0	670	11	15	19	L	97	94	92	22	78	78	77
Clarksville.	36 4	470	6	12	16	L	98	96	94	21	79	78	77
Columbia.	35 4	690	8	13	17	L	97	95	93	21	79	78	77
Dyersburg.	36 0	334	7	13	17	L	98	96	94	21	80	79	78
Greenville.	35 5	1320	5	10	14	L	93	91	88	22	76	75	74
Jackson AP.	35 4	413	8	14	17	L	97	95	94	21	80	79	78
Knoxville AP.	35 5	980	9	13	17	L	95	92	90	21	77	76	75
Memphis AP.	35 0	263	11	17	21	L	98	96	94	21	80	79	78
Murfreesboro.	35 5	608	7	13	17	L	97	94	92	22	79	78	77
Nashville AP.	36 1	577	6	12	16	L	97	95	92	21	79	78	77
Tullahoma.	35 2	1075	7	13	17	L	96	94	92	22	79	78	77
TEXAS													
Abilene AP.	32 3	1759	12	17	21	M	101	99	97	22	76	75	74
Alice AP.	27 4	180	26	30	34	M	101	99	97	20	81	80	79
Amarillo AP.	35 1	3607	2	8	12	M	98	96	93	26	72	71	70
Austin AP.	30 2	597	19	25	29	M	101	98	96	22	79	78	77
Bay City.	29 0	52	25	29	33	M	95	93	91	16	81	80	79
Beaumont.	30 0	18	25	29	33	M	96	94	93	19	81	80	79
Beeville.	28 2	225	24	28	32	M	99	97	96	18	81	80	79
Big Spring AP.	32 2	2537	12	18	22	M	100	98	96	26	75	73	72
Brownsville AP.	25 5	16	32	36	40	M	94	92	91	18	80	80	79
Brownwood.	31 5	1435	15	20	25	M	102	100	98	22	76	75	74
Bryan AP.	30 4	275	22	27	31	M	100	98	96	20	79	78	78

Climatic Conditions for United States and Canada (Continued)*.^a

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 3 Elev. ^d Ft	Winter				Summer						
			Col. 4		Col. 5 Coincid- ent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99%		97½%	1%	2½%		1%	2½%	5%	
TEXAS (continued)													
Corpus Christi AP.....	27 5	43	28	32	36	M	95	93	91	19	81	80	80
Corsicana.....	32 0	425	16	21	25	M	102	100	98	21	79	78	77
Dallas AP.....	32 5	481	14	19	24	H	101	99	97	20	79	78	78
Del Rio, Laughlin AFB.....	29 2	1072	24	28	31	M	101	99	98	24	79	77	76
Denton.....	33 1	655	12	18	22	H	102	100	98	22	79	78	77
Eagle Pass.....	28 5	743	23	27	31	L	106	104	102	24	80	79	78
El Paso AP.....	31 5	3918	16	21	25	L	100	98	96	27	70	69	68
Fort Worth AP.....	32 5	5441	14	20	24	H	102	100	98	22	79	78	77
Galveston AP.....	29 2	5	28	32	36	M	91	89	88	10	82	81	81
Greenville.....	33 0	575	13	19	24	H	101	99	97	21	79	78	78
Harlingen.....	26 1	37	30	34	38	M	96	95	94	19	80	80	79
Houston AP.....	29 4	50	23	28	32	M	96	94	92	18	80	80	79
Houston CO.....	29 5	1581	24	29	33	M	96	94	92	18	80	80	79
Huntsville.....	30 4	494	22	27	31	M	99	97	96	20	80	79	78
Killeen-Gray AFB.....	31 0	1021	17	22	26	M	100	99	97	22	78	77	76
Lamesa.....	32 5	2965	7	14	18	M	100	98	96	26	74	73	72
Laredo AFB.....	27 3	503	29	32	36	L	103	101	100	23	79	78	78
Longview.....	32 2	345	16	21	25	M	100	98	96	20	81	80	79
Lubbock AP.....	33 4	3243	4	11	15	M	99	97	94	26	73	72	71
Lufkin AP.....	31 1	286	19	24	28	M	98	96	95	20	81	80	79
McAllen.....	26 1	122	30	34	38	M	102	100	98	21	80	79	78
Midland AP.....	32 0	28151	13	19	23	M	100	98	96	26	74	73	72
Mineral Wells AP.....	32 5	934	12	18	22	H	102	100	98	22	78	77	76
Palestine CO.....	31 5	580	16	21	25	M	99	97	96	20	80	79	78
Pampa.....	35 3	3230	0	7	11	M	100	98	95	26	73	72	71
Pecos.....	31 2	2580	10	15	19	L	102	100	97	27	72	71	70
Plainview.....	34 1	3400	3	10	14	M	100	98	95	26	73	72	71
Port Arthur AP.....	30 0	16	25	29	33	M	94	92	91	19	81	80	80
San Angelo, Goodfellow AFB.....	31 2	1878	15	20	25	M	101	99	97	24	76	75	74
San Antonio AP.....	29 3	792	22	25	30	L	99	97	96	19	77	77	76
Sherman-Perrin AFB.....	33 4	763	12	18	23	H	101	99	97	22	79	78	77
Snyder.....	32 4	2325	9	15	19	M	102	100	97	26	75	74	73
Temple.....	31 1	675	18	23	27	M	101	99	97	22	79	78	77
Tyler AP.....	32 2	527	15	20	24	M	99	97	96	21	80	79	78
Vernon.....	34 1	1225	7	14	18	H	103	101	99	24	77	76	75
Victoria AP.....	28 5	104	24	28	32	M	98	96	95	18	80	79	79
Waco AP.....	31 4	500	16	21	26	M	101	99	98	22	79	78	78
Wichita Falls AP.....	34 0	994	9	15	19	H	103	100	98	24	77	76	75
UTAH													
Cedar City AP.....	37 4	5613	-10	-1	6	VL	94	91	89	32	65	64	62
Logan.....	41 4	4775	-7	3	7	VL	93	91	89	33	66	65	63
Moab.....	38 5	3965	2	12	16	VL	100	98	95	30	66	65	64
Ogden CO.....	41 1	4400	-3	7	11	VL	94	92	89	33	66	65	64
Price.....	39 4	5580	-7	3	7	L	93	91	88	33	65	64	63
Provo.....	40 1	4470	-6	2	6	L	96	93	91	32	67	66	65
Richfield.....	38 5	5300	-10	-1	3	L	94	92	89	34	66	65	64
St. George CO.....	37 1	2899	13	22	26	VL	104	102	99	33	71	70	69
Salt Lake City AP.....	40 5	4220	-2	5	9	L	97	94	92	32	67	66	65
Vernal AP.....	40 3	5280	-20	-10	-6	VL	90	88	84	32	64	63	62
VERMONT													
Barre.....	44 1	1120	-23	-17	-13	L	86	84	81	23	73	72	70
Burlington AP.....	44 3	331	-18	-12	-7	M	88	85	83	23	74	73	71
Rutland.....	43 3	620	-18	-12	-8	L	87	85	82	23	74	73	71
VIRGINIA													
Charlottesville.....	38 1	870	7	11	15	L	93	90	88	23	79	77	76
Danville AP.....	36 3	590	9	13	17	L	95	92	90	21	78	77	76
Fredericksburg.....	38 2	50	6	10	14	M	94	92	89	21	79	78	76
Harrisonburg.....	38 3	1340	0	5	9	L	92	90	87	23	78	77	76
Lynchburg AP.....	37 2	947	10	15	19	L	94	92	89	21	77	76	75
Norfolk AP.....	36 5	26	18	20	23	M	94	91	89	18	79	78	78
Petersburg.....	37 1	194	10	15	18	L	96	94	91	20	80	79	78

Climatic Conditions for United States and Canada (Continued)*.a

Col. 1 State and Station ^b	Col. 2 Latitude ^c	Col. 2 Elev. ^d Ft	Winter				Summer						
			Col. 4		Col. 5 Coinci- dent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 6 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb			
			Median of Annual Ex- tremes	99%		1%	2½%	5%		1%	2½%	5%	
VIRGINIA (continued)													
Richmond AP.....	37 3	162	10	14	18	L	96	93	91	21	79	78	77
Roanoke AP.....	37 2	1174 ^r	9	15	18	L	94	91	89	23	76	75	74
Staunton.....	38 2	1480	3	8	12	L	92	90	87	23	78	77	75
Winchester.....	39 1	750	1	6	10	L	94	92	89	21	78	76	75
WASHINGTON													
Aberdeen.....	47 0	12	19	24	27	M	83	80	77	16	62	61	60
Bellingham AP.....	48 5	150	8	14	18	L	76	74	71	19	67	65	63
Bremerton.....	47 3	162	17	24	29	L	85	81	77	20	68	66	65
Ellensburg AP.....	47 0	1729	-5	2	6	VL	91	89	86	34	67	65	63
Everett-Paine AFB.....	47 5	598	13	19	24	L	82	78	74	20	67	65	63
Kennewick.....	46 0	392	4	11	15	VL	98	96	93	30	69	68	66
Longview.....	46 1	12	14	20	24	L	88	86	83	30	68	66	65
Moses Lake, Larson AFB.....	47 1	1183	-14	-7	-1	VL	96	93	90	32	68	66	65
Olympia AP.....	47 0	190	15	21	25	L	85	83	80	32	67	65	63
Port Angeles.....	48 1	99	20	26	29	M	75	73	70	18	60	58	57
Seattle-Boeing Fld.....	47 3	14	17	23	27	L	82	80	77	24	67	65	64
Seattle CO.....	47 4	14	22	28	32	L	81	79	76	19	67	65	64
Seattle-Tacoma AP.....	47 3	386	14	20	24	L	85	81	77	22	66	64	63
Spokane AP.....	47 4	2357	-5	-2	4	VL	93	90	87	28	66	64	63
Tacoma-McChord AFB.....	47 1	350	14	20	24	L	85	81	78	22	68	66	64
Walla Walla AP.....	46 1	1185	5	12	16	VL	98	96	93	27	69	68	66
Wenatchee.....	47 2	634	-2	5	9	VL	95	92	89	32	68	66	64
Yakima AP.....	46 3	1061	-1	6	10	VL	94	92	89	36	69	67	65
WEST VIRGINIA													
Beckley.....	37 5	2330	-4	0	6	L	91	88	86	22	74	73	72
Bluefield AP.....	37 2	2850	1	6	10	L	88	86	83	22	74	73	72
Charleston AP.....	38 2	939	1	9	14	L	92	90	88	20	76	75	74
Clarksburg.....	39 2	977	-2	3	7	L	92	90	87	21	76	75	74
Elkins AP.....	38 5	1970	-4	1	5	L	87	84	82	22	74	73	72
Huntington CO.....	38 2	565 ^r	4	10	14	L	95	93	91	22	77	76	75
Martinsburg AP.....	39 2	537	1	6	10	L	96	94	91	21	78	77	76
Morgantown AP.....	39 4	1245	-2	3	7	L	90	88	85	22	76	74	73
Parkersburg CO.....	39 2	615 ^r	2	8	12	L	93	91	88	21	77	76	75
Wheeling.....	40 1	659	0	5	9	L	91	89	86	21	76	75	74
WISCONSIN													
Appleton.....	44 2	742	-16	-10	-6	M	89	87	84	23	75	74	72
Ashland.....	46 3	650	-27	-21	-17	L	85	83	80	23	73	71	69
Beloit.....	42 3	780	-13	-7	-3	M	92	90	87	24	77	76	75
Eau Claire AP.....	44 5	888	-21	-15	-11	L	90	88	85	23	76	74	72
Fond du Lac.....	43 5	760	-17	-11	-7	M	89	87	84	23	76	74	73
Green Bay AP.....	44 3	683	-16	-12	-7	M	88	85	82	23	75	73	72
La Crosse AP.....	43 5	652	-18	-12	-8	M	90	88	85	22	78	76	75
Madison AP.....	43 1	858	-13	-9	-5	M	92	88	85	22	77	75	73
Manitowoc.....	44 1	660	-11	-5	-1	M	88	86	83	21	75	74	72
Marinette.....	45 0	605	-14	-8	-4	M	88	86	83	20	74	72	70
Milwaukee AP.....	43 0	672	-11	-6	-2	M	90	87	84	21	77	75	73
Racine.....	42 4	640	-10	-4	0	M	90	88	85	21	77	75	73
Sheboygan.....	43 4	648	-10	-4	0	M	89	87	84	20	76	74	72
Stevens Point.....	44 3	1079	-22	-16	-12	M	89	87	84	23	75	73	71
Waukesha.....	43 0	860	-12	-6	-2	M	91	89	86	22	77	75	74
Wausau AP.....	44 6	1196	-24	-18	-14	M	89	86	83	23	74	72	70
WYOMING													
Casper AP.....	42 5	5319	-20	-11	-5	L	92	90	87	31	63	62	60
Cheyenne AP.....	41 1	6126	-15	-6	-2	M	89	86	83	30	63	62	61
Cody AP.....	44 3	5090	-23	-13	-9	L	90	87	84	32	61	60	59
Evanston.....	41 2	6860	-22	-12	-8	VL	84	82	79	32	58	57	56
Lander AP.....	42 5	5563	-26	-16	-12	VL	92	90	87	32	63	62	60
Laramie AP.....	41 2	7266	-17	-6	-2	M	82	80	77	28	61	59	58
Newcastle.....	43 5	4480	-18	-9	-5	M	92	89	86	30	68	67	66
Rawlins.....	41 5	6736	-24	-15	-11	L	86	84	81	40	62	61	60
Rock Springs AP.....	41 4	6741	-16	-6	-1	VL	86	84	82	32	58	57	56
Sheridan AP.....	44 5	3942	-21	-12	-7	L	95	92	89	32	67	65	64
Torrington.....	42 0	4098	-20	-11	-7	M	94	92	89	30	68	67	66

Climatic Conditions for United States and Canada (Continued)*.^a

CANADA

Col. 1 Province and Station ^b	Col. 2 Latitude ^c ° F	Col. 3 Elev. ^d Ft	Winter			Col. 5 Coinci- dent Wind Ve- locity ^e	Summer			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb				
			Col. 4				Col. 6 Design Dry-Bulb								
			Aver- age Annual Min- imum	99%	97½%		1%	2½%	5%		1%	2½%	5%		
ALBERTA															
Calgary AP.....	51 1	3540	-30	-29	-25	M	87	85	82	26	66	64	63		
Edmonton AP.....	53 3	2219	-30	-29	-26	VL	86	83	80	23	69	67	65		
Grande Prairie AP.....	55 1	2190	-44	-43	-37	VL	84	81	78	23	66	64	63		
Jasper CO.....	52 5	3480	-38	-32	-28	VL	87	84	81	28	66	64	63		
Lethbridge AP.....	49 4	3018	-31	-31	-24	M	91	88	85	28	68	66	64		
McMurray AP.....	56 4	1216	-44	-42	-39	VL	87	84	81	23	69	67	65		
Medicine Hat AP.....	50 0	2365	-33	-30	-26	M	96	93	90	28	72	69	67		
Red Deer AP.....	52 1	2965	-38	-33	-28	VL	88	86	83	25	67	65	64		
BRITISH COLUMBIA															
Dawson Creek.....	55 5	2200	-47	-40	-35	L	84	81	78	25	66	64	63		
Fort Nelson AP.....	58 5	1230	-43	-44	-41	VL	87	84	81	23	66	64	63		
Kamloops CO.....	50 4	1150	-15	-16	-10	VL	97	94	91	31	71	69	68		
Nanaimo CO.....	49 1	100	16	17	20	VL	81	78	75	20	66	64	62		
New Westminster CO.....	49 1	50	12	15	19	VL	86	84	82	20	68	66	65		
Penticton AP.....	49 3	1121	0	-1	3	L	94	91	88	31	71	69	68		
Prince George AP.....	53 5	2218	-38	-37	-31	VL	85	82	79	26	68	65	63		
Prince Rupert CO.....	54 2	170	9	11	15	L	73	71	69	13	62	60	59		
Trail.....	49 1	1400	-3	-2	3	VL	94	91	88	30	70	68	67		
Vancouver AP.....	49 1	16	13	15	19	L	80	78	76	17	68	66	65		
Victoria CO.....	48 3	228	20	20	23	M	80	76	72	16	64	62	60		
MANITOBA															
Brandon CO.....	49 5	1200	-36	-29	-26	M	90	87	84	26	75	73	71		
Churchill AP.....	58 5	115	-43	-40	-38	H	79	75	72	18	68	66	63		
Dauphin AP.....	51 1	999	-35	-29	-26	M	89	86	83	24	74	72	70		
Flin Flon CO.....	54 5	1098	-38	-40	-36	L	85	81	78	19	71	69	67		
Portage la Prairie AP.....	49 5	867	-28	-25	-22	M	90	87	84	22	75	74	72		
The Pas AP.....	54 0	894	-41	-35	-32	M	85	81	78	20	73	71	69		
Winnipeg AP.....	49 5	786	-31	-28	-25	M	90	87	84	23	75	74	72		
NEW BRUNSWICK															
Campbellton CO.....	48 0	25	-20	-18	-14	L	87	84	81	20	74	71	69		
Chatham AP.....	47 0	112	-17	-15	-10	M	90	87	84	22	74	71	69		
Edmundston CO.....	47 2	500	-29	-20	-16	M	84	81	78	21	75	72	70		
Fredericton AP.....	45 5	74	-19	-16	-10	L	89	86	83	23	73	70	68		
Moncton AP.....	46 1	248	-16	-12	-7	H	88	85	82	21	74	71	69		
Saint John AP.....	45 2	352	-15	-12	-7	M	81	79	77	18	71	68	66		
NEWFOUNDLAND															
Corner Brook CO.....	49 0	40	-9	-10	-5	H	84	81	79	18	69	68	66		
Gander AP.....	49 0	482	-5	-5	-1	H	85	82	79	20	69	68	66		
Goose Bay AP.....	53 2	144	-28	-27	-25	M	86	81	77	18	69	67	65		
St. John's AP.....	47 4	463	1	2	6	H	79	77	75	17	69	68	66		
Stephenville.....	48 3	44	-4	-6	-1	H	79	76	74	13	69	68	66		
NORTHWEST TERRITORIES															
Fort Smith AP.....	60 0	665	-51	-49	-46	VL	85	83	80	25	67	65	64		
Frobisher Bay AP.....	63 5	68	-45	-45	-42	H	63	59	56	14	63	61	60		
Inuvik.....	68 2	75	-54	-50	-48	VL	80	77	75	23	63	61	60		
Resolute AP.....	74 4	209	-52	-49	-47	M	54	51	49	10					
Yellowknife AP.....	62 3	682	-51	-49	-47	VL	78	76	74	17	65	63	62		
NOVA SCOTIA															
Amherst.....	45 5	63	-15	-10	-5	H	85	82	79	21	72	70	68		
Halifax AP.....	44 4	136	-4	0	4	H	83	80	77	16	69	68	67		
Kentville CO.....	45 0	50	-8	-4	0	M	86	83	80	23	72	70	69		
New Glasgow.....	45 4	317	-16	-10	-5	H	84	81	79	21	72	70	68		
Sydney AP.....	46 1	197	-3	0	5	H	84	82	80	20	72	70	68		
Truro CO.....	45 2	77	-17	-12	-7	M	84	81	79	22	72	70	69		
Yarmouth AP.....	43 5	136	2	5	9	H	76	73	71	15	69	68	67		
ONTARIO															
Bellevoile CO.....	44 1	250	-15	-11	-7	M	89	86	84	21	77	75	73		
Chatham CO.....	42 2	600	-1	3	6	M	92	90	88	20	77	75	74		
Cornwall.....	45 0	210	-22	-14	-9	M	89	86	84	23	77	75	74		
Fort William AP.....	48 2	644	-31	-27	-23	L	86	83	80	23	72	70	68		
Hamilton.....	43 2	303	-2	0	3	M	91	88	86	21	77	75	73		
Kapuskasing AP.....	49 3	752	-37	-31	-28	M	87	84	81	23	73	71	69		
Kenora AP.....	49 5	1345	-33	-31	-28	M	86	83	80	20	75	73	71		
Kingston CO.....	44 2	300	-16	-10	-7	M	85	82	80	20	77	75	73		

Climatic Conditions for United States and Canada (Concluded)*.+

Col. 1 Province and Station ^b	Col. 2 Latitude ^c ° /'	Col. 3 Elev. ^d ft.	Winter				Summer						
			Col. 4			Col. 5 Coincid- ent Wind Ve- locity ^e	Col. 6 Design Dry-Bulb			Col. 7 Out- door Daily Range ^f	Col. 8 Design Wet-Bulb		
			Aver- age Annul- ar Min- imum	99%	97½%		1%	2½%	5%		1%	2½%	5%
ONTARIO (continued)													
Kitchener.....	43 3	1125	-11	-3	1	M	88	85	83	24	76	75	74
London AP.....	43 0	912	-9	-1	3	M	90	88	86	22	76	75	74
North Bay AP.....	46 2	1210	-27	-21	-17	M	87	84	82	18	71	70	69
Oshawa.....	43 5	370	-11	-5	-2	M	90	87	85	21	77	75	73
Ottawa AP.....	45 2	339	-21	-17	-13	M	90	87	84	21	75	74	73
Owen Sound.....	44 3	597	-9	-5	-1	M	87	84	82	21	74	72	71
Peterborough CO.....	44 2	648	-20	-13	-9	M	90	87	85	22	76	74	73
St. Catharines CO.....	43 1	325	1	2	5	M	91	88	86	20	77	75	73
Sarnia.....	43 0	625	-6	2	6	M	92	90	88	19	76	74	73
Sault Ste. Marie CO.....	46 3	675	-21	-20	-15	M	88	85	83	22	72	70	68
Sudbury.....	46 3	850	-25	-20	-15	VL	89	86	84	25	72	70	69
Timmins CO.....	48 3	1100	-37	-33	-28	M	90	87	84	24	73	71	69
Toronto AP.....	43 4	578	-10	-3	1	M	90	87	85	22	77	75	73
Windsor AP.....	42 2	637	-1	4	7	M	92	90	88	20	77	75	74
PRINCE EDWARD ISLAND													
Charlottetown AP.....	46 2	186	-11	-6	-3	H	84	81	79	16	72	70	68
Summerside AP.....	46 3	78	-10	-8	-3	H	84	81	79	16	72	70	68
QUEBEC													
Bagotville.....	48 2	536	-35	-26	-22	VL	88	84	81	20	72	71	69
Chicoutimi CO.....	48 3	150	-31	-24	-20	VL	87	83	80	20	72	71	69
Drummondville CO.....	45 5	270	-26	-18	-13	M	88	85	82	22	76	74	72
Granby.....	45 2	550	-23	-17	-12	L	87	84	82	21	76	74	72
Hull.....	45 3	200	-21	-17	-13	M	90	87	84	21	75	74	73
Mégantic AP.....	45 4	1362	-27	-20	-16	M	84	81	78	19	75	73	71
Montréal AP.....	45 3	98	-20	-16	-10	M	88	86	84	18	76	74	73
Québec AP.....	46 5	245	-25	-19	-13	M	86	82	79	21	75	73	71
Rimouski.....	48 3	117	-18	-16	-12	H	78	74	71	18	71	69	68
St. Jean.....	45 2	129	-21	-15	-10	M	87	85	83	20	76	74	73
St. Jérôme.....	45 5	310	-30	-18	-13	L	87	84	82	23	76	74	73
Sept Iles AP.....	50 1	190	-29	-27	-22	L	80	78	75	17	66	64	63
Shawinigan.....	46 3	306	-27	-20	-15	L	88	85	83	21	76	74	72
Sherbrooke CO.....	45 2	505	-25	-18	-13	L	87	84	81	20	75	73	71
Thetford Mines.....	46 0	1020	-25	-19	-14	M	86	83	80	22	75	73	71
Trois Rivières CO.....	46 2	200	-30	-18	-13	M	88	85	82	23	76	74	72
Val d'Or AP.....	48 0	1108	-37	-31	-27	L	88	85	82	22	72	71	69
Valleyfield.....	45 2	150	-20	-14	-9	M	87	85	83	21	76	74	73
SASKATCHEWAN													
Estevan AP.....	49 0	1884	-32	-30	-25	M	93	89	86	25	75	73	71
Moose Jaw AP.....	50 2	1857	-33	-32	-27	M	93	89	86	27	73	71	69
North Battleford AP.....	52 5	1796	-33	-33	-29	L	90	86	83	25	71	69	67
Prince Albert AP.....	53 1	1414	-45	-41	-35	VL	88	84	81	25	72	70	68
Regina AP.....	50 3	1884	-38	-34	-29	M	92	88	85	27	73	71	69
Saskatoon AP.....	52 1	1645	-37	-34	-30	M	90	86	83	25	71	69	67
Swift Current AP.....	50 2	2677	-31	-29	-25	M	93	89	86	24	72	70	68
Yorkton AP.....	51 2	1653	-38	-33	-28	M	89	85	82	23	74	72	70
YUKON TERRITORY													
Whitehorse AP.....	60 4	2289	-45	-45	-42	VL	78	75	72	22	62	60	59

* Data for U. S. stations extracted from *Evaluated Weather Data for Cooling Equipment Design, Addendum No. 1, Winter and Summer Data*, with the permission of the publisher, Fluor Products Company, Inc., Box 1267, Santa Rosa, California.

^a Data compiled from official weather stations, where hourly weather observations are made by trained observers, and from other sources. Table I prepared by ASHRAE Technical Committee 2.2, Weather Data and Design Conditions. Percentage of winter design data show the percent of 3-month period, December through February. Canadian data are based on January only. Percentage of summer design data show the percent of 4-month period, June through September. Canadian data are based on July only. Also see References 1 to 7.

^b When airport temperature observations were used to develop design data, "AP" follows station name, and "AFB" follows Air Force Bases. Data for stations followed by "CO" came from office locations within an urban area and generally reflect an influence of the surrounding area. Stations without designation can be considered semirural and may be directly compared with most airport data.

^c Latitude is given to the nearest 10 minutes, for use in calculating solar loads. For example, the latitude for Anniston, Alabama is given as 33 4, or 33°40'.

^d Elevations are ground elevations for each station as of 1964. Temperature readings are generally made at an elevation of 5 ft above ground, except for locations marked r, indicating roof exposure of thermometer.

^e Coincident wind velocities derived from approximately coldest 600 hours out of 20,000 hours of December through February data per station. Also see References 5 and 6. The four classifications are:

VL = Very Light, 70 percent or more of cold extreme hours ≤ 7 mph. M = Moderate, 50 to 74 percent cold extreme hours > 7 mph.

H = High, 75 percent or more cold extreme hours > 7 mph., and 50 percent are > 12 mph.

^f The difference between the average maximum and average minimum temperatures during the warmest month.

[†] More detailed data on Arizona, California, and Nevada may be found in *Recommended Design Temperatures, Northern California*, published by the Golden Gate Chapter; and *Recommended Design Temperatures, Southern California*, Arizona, Nevada, published by the Southern California Chapter.

Climatic Conditions for Other Foreign Countries

Col. 1 Country and Station	Col. 2 Latitude and Longitude	Col. 3 Eleva- tion, Ft	Winter			Summer					
			Col. 4			Col. 5 Design Dry-Bulb			Col. 6 Out- door Daily Range F deg	Col. 7 Design Wet-Bulb	
			Mean of Annual Ex- tremes	99%	97½%	1%	2½%	5%		1%	2½%
									5%		
ADEN											
Aden.....	12 50N/45 02E	10	63	68	70	102	100	98	11	83	82
AFGHANISTAN											
Kabul.....	34 35N/69 12E	5955	2	6	9	98	96	93	32	66	65
ALGERIA											
Algiers.....	36 46N/3 03E	194	38	43	45	95	92	89	14	77	76
ARGENTINA											
Buenos Aires.....	34 35S/58 29W	89	27	32	34	91	89	86	22	77	76
Córdoba.....	31 22S/64 15W	1388	21	28	32	100	96	93	27	76	75
Tucuman.....	26 50S/65 10W	1401	24	32	36	102	99	96	23	76	74
AUSTRALIA											
Adelaide.....	34 56S/138 35E	140	36	38	40	98	94	91	25	72	70
Alice Springs.....	23 48S/133 53E	1795	28	34	37	104	102	100	27	75	74
Brisbane.....	27 28S/153 02E	137	39	44	47	91	88	86	18	77	76
Darwin.....	12 28S/130 51E	88	60	64	66	94	93	91	16	82	81
Melbourne.....	37 49S/144 58E	114	31	35	38	95	91	86	21	71	69
Perth.....	31 57S/115 51E	210	38	40	42	100	96	93	22	76	74
Sydney.....	33 52S/151 12E	138	38	40	42	89	84	80	13	74	73
AUSTRIA											
Vienna.....	48 15N/16 22E	644	- 2	6	11	88	86	83	16	71	69
AZORES											
Lajes (Terceira).....	38 45N/27 05W	170	42	46	49	80	78	77	11	73	72
BAHAMAS											
Nassau.....	25 05N/77 21W	11	55	61	63	90	89	88	13	80	80
BELGIUM											
Brussels.....	50 48N/4 21E	328	13	15	19	83	79	77	19	70	68
BERMUDA											
Kindley AFB.....	33 22N/64 41W	129	47	53	55	87	86	85	12	79	78
BOLIVIA											
La Paz.....	16 30S/68 09W	12001	28	31	33	71	69	68	24	58	57
BRAZIL											
Belem.....	1 27S/48 29W	42	67	70	71	90	89	87	19	80	79
Belo Horizonte.....	19 56S/43 57W	3002	42	47	50	86	84	83	18	76	75
Brasilia.....	15 52S/47 55W	3442	46	49	51	89	88	86	17	76	75
Curitiba.....	25 25S/49 17W	3114	28	34	37	86	84	82	21	75	74
Fortaleza.....	3 46S/38 33W	89	66	69	70	91	90	89	17	79	78
Porto Alegre.....	30 02S/51 13W	33	32	37	40	95	92	89	20	76	75
Recife.....	8 04S/34 53W	97	67	69	70	88	87	86	10	78	77
Rio de Janeiro.....	22 55S/43 12W	201	56	58	60	94	92	90	11	80	79
Salvador.....	13 00S/38 30W	154	65	67	68	88	87	86	12	79	78
São Paulo.....	23 33S/46 38W	2608	36	42	46	86	84	82	18	75	74
BRITISH HONDURAS											
Belize.....	17 31N/88 11W	17	55	60	62	90	90	89	13	82	81
BULGARIA											
Sofia.....	42 42N/23 20E	1805	- 2	3	8	89	86	84	26	71	70
BURMA											
Mandalay.....	21 59N/96 06E	252	50	54	56	104	102	101	30	81	80
Rangoon.....	16 47N/96 09E	18	59	62	63	100	98	95	25	83	82
CAMBODIA											
Phnom Penh.....	11 33N/104 51E	36	62	66	68	98	96	94	19	83	82
CEYLON											
Colombo.....	6 54N/79 52E	24	65	69	70	90	89	88	15	81	80
CHILE											
Punta Arenas.....	53 10S/70 54W	26	22	25	27	68	66	64	14	56	55
Santiago.....	33 27S/70 42W	1706	27	32	35	90	89	88	32	71	70
Valparaiso.....	33 01S/71 38W	135	39	43	46	81	79	77	16	67	66
CHINA											
Chungking.....	29 33N/106 33E	755	34	37	39	99	97	95	18	81	80
Shanghai.....	31 12N/121 26E	23	16	23	26	94	92	90	16	81	80
COLOMBIA											
Baranquilla.....	10 59N/74 48W	44	66	70	72	95	94	93	17	83	82
Bogotá.....	4 36N/74 05W	8406	42	45	46	72	70	69	19	60	59
Cali.....	3 25N/76 30W	3189	53	57	58	84	82	79	15	70	69
Medellin.....	6 13N/75 36W	4650	48	53	55	87	85	84	25	73	72
CONGO											
Brazzaville.....	4 15S/15 15E	1043	54	60	62	93	92	91	21	81	80
Kinasha (Leopoldville).....	4 20S/15 18E	1066	54	60	62	92	91	90	19	81	80
Stanleyville.....	0 26N/15 14E	1370	65	67	68	92	91	90	19	81	80

Climatic Conditions for Other Foreign Countries (Continued)

Col. 1 Country and Station	Col. 2 Latitude and Longitude	Col. 3 Elevation, Ft	Winter			Summer						
			Col. 4			Col. 5 Design Dry-Bulb			Col. 6 Out- door Daily Range F deg	Col. 7 Design Wet-Bulb		
			Mean of Annual Ex- tremes	99% 99½%	97½%	1%	2½%	5%		1%	2½%	5%
CUBA												
Guantanamo Bay	19 54N/75 09W	21	60	64	66	94	93	92	16	82	81	80
Havana	23 08N/82 21W	80	54	59	62	92	91	89	14	81	81	80
CZECHOSLOVAKIA												
Prague	50 05N/14 25E	662	3	4	9	88	85	83	16	66	65	64
DENMARK												
Copenhagen	55 41N/12 33E	43	11	16	19	79	76	74	17	68	66	64
DOMINICAN REPUBLIC												
Santo Domingo	18 29N/69 54W	57	61	63	65	92	90	88	16	81	80	80
ECUADOR												
Guayaquil	2 10S/79 53W	20	61	64	65	92	91	89	20	80	80	79
Quito	0 13S/78 32W	9446	30	36	39	73	72	71	32	63	62	62
EL SALVADOR												
San Salvador	13 42N/89 13W	2238	51	54	56	98	96	95	32	77	76	75
ETHIOPIA												
Addis Ababa	9 02N/38 45E	7753	35	39	41	84	82	81	28	66	65	64
Asmara	15 17N/38 55E	7628	36	40	42	83	81	80	27	65	64	63
FINLAND												
Helsinki	60 10N/24 57E	30	-11	-7	-1	77	74	72	14	66	65	63
FRANCE												
Lyon	45 42N/4 47E	938	-1	10	14	91	89	86	23	71	70	69
Marseilles	43 18N/5 23E	246	23	25	28	90	87	84	22	72	71	69
Nantes	47 15N/1 34W	121	17	22	26	86	83	80	21	70	69	67
Nice	43 42N/7 16E	39	31	34	37	87	85	83	15	73	72	72
Paris	48 49N/2 29E	164	16	22	25	89	86	83	21	70	68	67
Strasbourg	48 35N/7 46E	465	9	11	16	86	83	80	20	70	69	67
FRENCH GUIANA												
Cayenne	4 56N/52 27W	20	69	71	72	92	91	90	17	83	83	82
GERMANY												
Berlin	52 27N/13 18E	187	6	7	12	84	81	78	19	68	67	66
Hamburg	53 33N/9 58E	66	10	12	16	80	76	73	13	68	66	65
Hannover	52 24N/9 40E	561	7	16	20	82	78	75	17	68	67	65
Mannheim	49 34N/8 28E	359	2	8	11	87	85	82	18	71	69	68
Munich	48 09N/11 34E	1729	-1	5	9	86	83	80	18	68	66	64
GHANA												
Accra	5 33N/0 12W	88	65	68	69	91	90	89	13	80	79	79
GIBRALTAR												
Gibraltar	36 09N/5 22W	11	38	42	45	92	89	86	14	76	75	74
GREECE												
Athens	37 58N/23 43E	351	29	33	36	96	93	91	18	72	71	71
Thessaloniki	40 37N/22 57E	78	23	28	32	95	93	91	20	77	76	75
GREENLAND												
Narssarssuaq	61 11N/45 25W	85	-23	-12	-8	66	63	61	20	56	54	52
GUATEMALA												
Guatemala City	14 37N/90 31W	4855	45	48	51	83	82	81	24	69	68	67
GUYANA												
Georgetown	6 50N/58 12W	6	70	72	73	89	88	87	11	80	79	79
HAITI												
Port au Prince	18 33N/72 20W	121	63	65	67	97	95	93	20	82	81	80
HONDURAS												
Tegucigalpa	14 06N/87 13W	3094	44	47	50	89	87	85	28	73	72	71
HONG KONG												
Hong Kong	22 18N/114 10E	109	43	48	50	92	91	90	10	81	80	80
HUNGARY												
Budapest	47 31N/19 02E	394	8	10	14	90	86	84	21	72	71	70
ICELAND												
Reykjavik	64 08N/21 56E	59	8	14	17	59	58	56	16	54	53	53
INDIA												
Ahmenabad	23 02N/72 35E	163	49	53	56	109	107	105	28	80	79	78
Bangalore	12 57N/77 37E	3021	53	56	58	96	94	93	26	75	74	74
Bombay	18 54N/72 49E	37	62	65	67	96	94	92	13	82	81	81
Calcutta	22 32N/88 20E	21	49	52	54	98	97	96	22	83	82	82
Madras	13 04N/80 15E	51	61	64	66	104	102	101	19	84	83	83
Nagpur	21 09N/79 07E	1017	45	51	54	110	108	107	30	79	79	78
New Delhi	28 35N/77 12E	703	35	39	41	110	107	105	26	83	82	82
INDONESIA												
Djakarta	6 11S/106 50E	26	69	71	72	90	89	88	14	80	79	78
Kupang	10 10S/123 34E	148	63	66	68	94	93	92	20	81	80	80
Makassar	5 08S/119 28E	61	64	66	68	90	89	88	17	80	80	79
Medan	3 35N/98 41E	77	66	69	71	92	91	90	17	81	80	79
Palembang	3 00S/104 46E	20	67	70	71	92	91	90	17	80	79	79
Surabaya	7 13S/112 43E	10	64	66	68	91	90	89	18	80	79	79

Climatic Conditions for Other Foreign Countries (Continued)

Col. 1 Country and Station	Col. 2 Latitude and Longitude °	Col. 3 Elevation, Ft	Winter			Summer						
			Col. 4			Col. 5 Design Dry-Bulb			Col. 6 Out- door Daily Range F deg	Col. 7 Design Wet-Bulb		
			Mean of Annual Ex- tremes	99%	97½%	1%	2½%	5%		1%	2½%	5%
IRAN												
Abadan.....	30 21N/48 16E	7	32	39	41	116	113	110	32	82	81	81
Mesched.....	36 17N/59 36E	3104	3	10	14	99	96	93	29	68	67	66
Tehran.....	35 41N/51 25E	4002	15	20	24	102	100	98	27	75	74	73
IRAQ												
Baghdad.....	33 20N/44 24E	111	27	32	35	113	111	108	34	73	72	72
Mosul.....	36 19N/43 09E	730	23	29	32	114	112	110	40	73	72	72
IRELAND												
Dublin.....	53 22N/6 21W	155	19	24	27	74	72	70	16	65	64	62
Shannon.....	52 41N/8 55W	8	19	25	28	76	73	71	14	65	64	63
ISRAEL												
Jerusalem.....	31 47N/35 13E	2485	31	36	38	95	94	92	24	70	69	69
Tel Aviv.....	32 06N/34 47E	36	33	39	41	96	93	91	16	74	73	72
ITALY												
Milan.....	45 27N/09 17E	341	12	18	22	89	87	84	20	76	75	74
Naples.....	40 53N/14 18E	220	28	34	36	91	88	86	19	74	73	72
Rome.....	41 48N/12 36E	377	25	30	33	94	92	89	24	74	73	72
IVORY COAST												
Abidjan.....	5 19N/4 01W	65	64	67	69	91	90	88	15	83	82	81
JAPAN												
Fukuoka.....	33 35N/130 27E	22	26	29	31	92	90	89	20	82	80	79
Sapporo.....	43 04N/141 21E	56	- 7	1	5	86	83	80	20	76	74	72
Tokyo.....	35 41N/139 46E	19	21	26	28	91	89	87	14	81	80	79
JORDAN												
Amman.....	31 57N/35 57E	2548	29	33	36	97	94	92	25	70	69	68
KENYA												
Nairobi.....	1 16S/36 4SE	5971	45	48	50	81	80	78	24	66	65	65
KOREA												
Pyongyang.....	39 02N/125 41E	186	- 10	- 2	3	89	87	85	21	77	76	76
Seoul.....	37 34N/126 58E	285	- 1	7	9	91	89	87	16	81	79	78
LEBANON												
Beirut.....	33 54N/35 28E	111	40	42	45	93	91	90	15	78	77	76
LIBERIA												
Monrovia.....	6 18N/10 48W	75	64	68	69	90	89	88	19	82	82	81
LIBYA												
Bengasi.....	32 06N/20 04E	82	41	46	48	97	94	91	13	77	76	75
MADAGASCAR												
Tananaarive.....	18 55S/47 33E	4531	39	43	46	86	84	83	23	73	72	71
MALAYSIA												
Kuala Lumpur.....	3 07N/101 42E	127	67	70	71	94	93	92	20	82	82	81
Penang.....	5 25N/100 19E	17	69	72	73	93	93	92	18	82	81	80
Singapore.....	1 18N/103 50E	33	69	71	72	92	91	90	14	82	81	80
MARTINIQUE												
Fort de France.....	14 37N/61 05W	13	62	64	66	90	89	88	14	81	81	80
MEXICO												
Guadalajara.....	20 41N/103 20W	5105	35	39	42	93	91	89	29	68	67	66
Mérida.....	20 58N/89 38W	72	56	59	61	97	95	94	21	80	79	77
Mexico City.....	19 24N/99 12W	7575	33	37	39	83	81	79	25	61	60	59
Monterrey.....	25 40N/100 18W	1732	31	38	41	98	95	93	20	79	78	77
Vera Cruz.....	19 12N/96 08W	184	55	60	62	91	89	88	12	83	83	82
MOROCCO												
Casablanca.....	33 35N/7 39W	164	36	40	42	94	90	86	50	73	72	70
NEPAL												
Katmandu.....	27 42N/85 12E	4388	30	33	35	89	87	86	25	78	77	76
NETHERLANDS												
Amsterdam.....	52 23N/4 55E	5	17	20	23	79	76	73	10	65	64	63
NEW GUINEA												
Manokwari.....	0 52S/134 05E	62	70	71	72	89	88	87	12	82	81	81
Point Moresby.....	9 29S/147 09E	126	62	67	69	92	91	90	14	80	80	79
NEW ZEALAND												
Auckland.....	36 51S/174 46E	140	37	40	42	78	77	76	14	67	66	65
Christ Church.....	43 32S/172 37E	32	25	28	31	82	79	76	17	68	67	66
Wellington.....	41 17S/174 46E	394	32	35	37	76	74	72	14	66	65	64
NICARAGUA												
Managua.....	12 10N/86 15W	135	62	65	67	94	93	92	21	81	80	79
NIGERIA												
Lagos.....	6 27N/3 24E	10	67	70	71	92	91	90	12	82	82	81
NORWAY												
Bergen.....	60 24N/5 19E	141	14	17	20	75	74	73	21	67	66	65
Oslo.....	59 56N/10 44E	308	- 2	0	4	79	77	74	17	67	66	64

Climatic Conditions for Other Foreign Countries (Continued)

Col. 1 Country and Station	Col. 2 Latitude and Longitude	Col. 3 Elevation, Ft	Winter			Summer						
			Col. 4			Col. 5 Design Dry-Bulb			Col. 6 Out- door Daily Range F deg	Col. 7 Design Wet-Bulb		
			Mean of Annual Ex- tremes	99%	97½%	1%	2½%	5%		1%	2½%	5%
PAKISTAN												
Chittagong.....	22 21N/91 50E	87	48	52	54	93	91	89	20	82	81	81
Karachi.....	24 48N/66 59E	13	45	49	51	100	98	95	14	82	82	81
Lahore.....	31 35N/74 20E	702	32	35	37	109	107	105	27	83	82	81
Peshwar.....	34 01N/71 35E	1164	31	35	37	109	106	103	29	81	80	79
PANAMA AND CANAL ZONE												
Panama City.....	8 58N/79 33W	21	69	72	73	93	92	91	18	81	81	80
PARAGUAY												
Asunción.....	25 17S/57 30W	456	35	43	46	100	98	96	24	81	81	80
PERU												
Lima.....	12 05S/77 03W	394	51	53	55	86	85	84	17	76	75	74
PHILIPPINES												
Manila.....	14 35N/120 59E	47	69	73	74	94	92	91	20	82	81	81
POLAND												
Kraków.....	50 04N/19 57E	723	- 2	2	6	84	81	78	19	68	67	66
Warsaw.....	52 13N/21 02E	394	- 3	3	8	84	81	78	19	71	70	68
PORTUGAL												
Lisbon.....	38 43N/9 08W	313	32	37	39	89	86	83	16	69	68	67
PUERTO RICO												
San Juan.....	18 29N/66 07W	82	65	67	68	89	88	87	11	81	80	79
RUMANIA												
Bucharest.....	44 25N/26 06E	269	- 2	3	8	93	91	89	26	72	71	70
SAUDI ARABIA												
Dhahran.....	26 17N/50 09E	80	39	45	48	111	110	108	32	86	85	84
Jedda.....	21 28N/39 10E	20	52	57	60	106	103	100	22	85	84	83
Riyadh.....	24 39N/46 42E	1938	29	37	40	110	108	106	32	78	77	76
SENEGAL												
Dakar.....	14 42N/17 29W	131	58	61	62	95	93	91	13	81	80	80
SOMALIA												
Mogadiscio.....	2 02N/49 19E	39	67	69	70	91	90	89	12	82	82	81
SOUTH AFRICA												
Capetown.....	33 56S/18 29E	55	36	40	42	93	90	86	20	72	71	70
Johannesburg.....	26 11S/78 03E	5463	26	31	34	85	83	81	24	70	69	69
Pretoria.....	25 45S/28 14E	4491	27	32	35	87	85	85	23	70	69	68
SOVIET UNION												
Alma Ata.....	43 14N/76 53E	2543	- 18	- 10	- 6	88	86	83	21	69	68	67
Archangel.....	64 33N/40 32E	22	- 29	- 23	- 18	75	71	68	13	60	58	57
Kaliningrad.....	54 43N/20 30E	23	- 3	+ 1	6	83	80	77	17	67	66	65
Krasnoyarsk.....	56 01N/92 57E	498	- 41	- 32	- 27	84	80	76	12	64	62	60
Kiev.....	50 27N/30 30E	600	- 12	- 5	+ 1	.87	84	81	22	69	68	67
Kharkov.....	50 00N/36 14E	472	- 19	- 10	- 3	87	84	82	23	69	68	67
Kuibyshev.....	53 11N/50 06E	190	- 23	- 19	- 13	89	85	81	20	69	67	66
Leningrad.....	59 56N/30 16E	16	- 14	- 9	- 5	78	75	72	15	65	64	63
Minsk.....	53 54N/27 33E	738	- 19	- 11	- 4	80	77	74	16	67	66	65
Moscow.....	55 46N/37 40E	505	- 19	- 11	- 6	84	81	78	21	69	67	65
Odessa.....	46 29N/30 44E	214	- 1	4	8	87	84	82	14	70	69	68
Petropavlovsk.....	52 53N/158 42E	286	- 9	- 3	0	70	68	65	13	58	57	56
Rostov on Don.....	47 13N/39 43E	159	- 9	- 2	4	90	87	84	20	70	69	68
Sverdlovsk.....	56 49N/60 38E	894	- 34	- 25	- 20	80	76	72	16	63	62	60
Tashkent.....	41 20N/69 18E	1569	- 4	3	8	95	93	90	29	71	70	69
Tbilisi.....	41 43N/44 48E	1325	12	18	22	87	85	83	18	68	67	66
Vladivostok.....	43 07N/131 55E	94	- 15	- 10	- 7	80	77	74	11	70	69	68
Volgograd.....	48 42N/44 31E	136	- 21	- 13	- 7	93	89	86	19	71	70	69
SPAIN												
Barcelona.....	41 24N/2 09E	312	31	33	36	88	86	84	13	75	74	73
Madrid.....	40 25N/3 41W	2188	22	25	28	93	91	89	25	71	69	67
Valencia.....	39 28N/0 23W	79	31	33	37	92	90	88	14	75	74	73
SUDAN												
Khartoum.....	15 37N/32 33E	1279	47	53	56	109	107	104	30	77	76	75
SURINAM												
Paramaribo.....	5 49N/55 09W	12	66	68	70	93	92	90	18	82	82	81
SWEDEN												
Stockholm.....	59 21N/18 04E	146	3	5	8	78	74	72	15	64	62	60
SWITZERLAND												
Zurich.....	47 23N/8 33E	1617	4	9	14	84	81	78	21	68	67	66
SYRIA												
Damascus.....	33 30N/36 20E	2362	25	29	32	102	100	98	35	72	71	70
TAIWAN												
Tainan.....	22 57N/120 12E	70	40	46	49	92	91	90	14	84	83	82
Taipei.....	25 02N/121 31E	30	41	44	47	94	92	90	16	83	82	81

Table C2
Earth Temperature Tables
for
Underground Heat Distribution System Design

The following Tables TG-1 through TG-11 were developed by applying monthly average temperatures prepared by the U. S. Weather Bureau for many localities in the United States to a technique described in the 1965 ASHRAE technical paper entitled "Earth Temperature and Thermal Diffusivity at Selected Stations in the United States" by T. Kusuda and P. R. Achenbach. These temperature data are, however, for the undisturbed earth. The earth temperature immediately under the building may be estimated by taking an arithmetic average of the building temperature and the design earth temperature found in the appropriate table. For example, the floor on grade in the Washington, D. C. area may be treated as a slab of 12" thickness with ground temperature of 70.5 °F if the room temperature is 75 °F and the summer design TG is determined from the data of Upper Marlboro, Maryland for ALPHA = 0.025 which is 66 °F.

Table TG-1
DRY SOIL

AVERAGE EARTH TEMPERATURE IN DEG. F. TG

THERMAL DIFFUSIVITY IN FT**2/HR ALPHA = .010

STATION	STATES	WINTER	SPRING	SUMMER	FALL	YEAR
AUBURN, ALABAMA		60.	61.	71.	70.	65.
DECATUR, ALABAMA		52.	54.	65.	65.	59.
PALMER AAFS, ALASKA		31.	31.	42.	41.	36.
TEMPE, ARIZONA		62.	64.	73.	74.	68.
TUCSON, ARIZONA		68.	69.	77.	79.	73.
BRAWLEY, CALIFORNIA		70.	73.	83.	84.	77.
DAVIS, CALIFORNIA		61.	61.	72.	72.	67.
FT. COLLINS, COLO.		44.	45.	58.	56.	51.
STORRS, CONN.		46.	45.	58.	58.	52.
GAINESVILLE, FLA.		65.	70.	77.	77.	73.
ATHENS, GEORGIA		59.	61.	72.	72.	66.
MOSCOW, IDAHO		43.	42.	52.	52.	47.
LEMONT, ILLINOIS		46.	45.	59.	59.	52.
URBANA, ILLINOIS		46.	47.	61.	60.	53.
WEST LAFAYETTE, IND		47.	47.	62.	61.	54.
AMES, IOWA		44.	45.	62.	60.	52.
BURLINGTON, IOWA		47.	49.	66.	65.	56.
CASTANEA, IOWA		42.	42.	61.	59.	51.
COUNCIL BLUFFS, IOWA		47.	47.	62.	62.	55.
SARATOGA, IOWA		41.	40.	59.	57.	49.
SPENCER, IOWA		42.	42.	58.	57.	50.
GARDEN CITY, KANSAS		48.	51.	66.	66.	58.
MANHATTAN, KANSAS		48.	50.	64.	64.	56.
MOUND VALLEY, KANSAS		52.	54.	68.	68.	60.
LEXINGTON, KENTUCKY		51.	52.	65.	64.	58.
UPPER MARLBORO, MD.		48.	49.	63.	63.	56.
EAST LANSING, MICH.		45.	43.	57.	57.	50.
FAIRMONT, MINNESOTA		42.	43.	58.	57.	50.
FARIBAULT, MINNESOTA		40.	40.	55.	53.	47.
ST. PAUL, MINNESOTA		42.	40.	57.	56.	49.
WASECA, MINNESOTA		41.	46.	59.	54.	50.
STATE UNIV., MISS.		60.	62.	73.	73.	67.
FAUCETT, MISSOURI		47.	47.	61.	61.	54.
KANSAS CITY, MO.		48.	49.	62.	61.	55.
SIKESTON, MISSOURI		52.	54.	67.	67.	60.
SPICKARD, MISSOURI		50.	49.	60.	62.	55.
BUZEMAN, MONTANA		39.	37.	50.	48.	43.
HUNTLEY, MONTANA		44.	44.	58.	57.	50.
LINCOLN, NEBRASKA		45.	45.	60.	60.	53.
NEW BRUNSWICK, N.J.		48.	48.	60.	60.	54.
ITHACA, NEW YORK		44.	43.	54.	54.	49.
COLUMBUS, OHIO		47.	47.	59.	60.	53.
COSHOCOTON, OHIO		46.	46.	58.	58.	52.
WOOSTER, OHIO		46.	46.	58.	58.	52.
BARNSDALL, OKLAHOMA		56.	57.	69.	69.	63.
LAKE HEFNER, OKLA.		56.	57.	70.	71.	64.
PARTHUSKA, OKLAHOMA		54.	55.	68.	68.	61.
OTTAWA, ONTARIO		42.	39.	54.	52.	47.
CURVALLIS, OREGON		50.	51.	61.	60.	55.
HUDO RIVER, OREGON		46.	48.	57.	57.	52.

AVERAGE EARTH TEMPERATURE IN DEG. F. TG

THERMAL DIFFUSIVITY IN FT**2/HR ALPHA= .010

STATION	STATES	WINTER	SPRING	SUMMER	FALL	YEAR
MEDFORD, OREGON		51.	52.	61.	61.	56.
PENDLETON, OREGON		46.	49.	61.	60.	54.
STATE COLLEGE, PA.		46.	45.	59.	58.	52.
KINGSTON, R. I.		45.	43.	55.	56.	50.
CALHOUN, S. CAROLINA		56.	58.	70.	69.	63.
MADISON, S. DAKOTA		40.	40.	54.	54.	47.
JACKSON, TENNESSEE		53.	55.	66.	64.	59.
TEMPLE, TEXAS		64.	65.	77.	77.	71.
SALT LAKE CITY, UTAH		44.	45.	56.	55.	50.
BURLINGTON, VERMONT		42.	40.	54.	53.	48.
PULLMAN, WASHINGTON		43.	46.	55.	52.	50.
SEATTLE, WASHINGTON		48.	50.	56.	56.	53.
AFTON, WYOMING		43.	43.	53.	53.	48.

Table TG-2
AVERAGE SOIL

AVERAGE EARTH TEMPERATURE IN DEG. F., TG

THERMAL DIFFUSIVITY IN FT**2/HR ALPHA = .025

STATION	STATES	WINTER	SPRING	SUMMER	FALL	YEAR
AUBURN, ALABAMA		57.	61.	74.	70.	65.
DECATUR, ALABAMA		49.	53.	69.	66.	59.
PALMER AAES, ALASKA		29.	30.	45.	41.	36.
TEMPE, ARIZONA		58.	63.	77.	74.	68.
TUCSON, ARIZONA		65.	69.	80.	80.	73.
BRAWLEY, CALIFORNIA		66.	73.	87.	85.	77.
DAVIS, CALIFORNIA		57.	60.	76.	73.	67.
FT. COLLINS, COLO.		40.	44.	62.	57.	51.
STORRS, CONN.		43.	44.	62.	59.	52.
GAINESVILLE, FLA.		61.	71.	79.	78.	73.
ATHENS, GEORGIA		55.	60.	75.	73.	66.
MOSCOW, IDAHO		40.	42.	55.	53.	47.
LEMONT, ILLINOIS		42.	44.	64.	60.	52.
URBANA, ILLINOIS		42.	47.	65.	61.	53.
WEST LAFAYETTE, IND		43.	47.	66.	62.	54.
AMES, IOWA		39.	44.	67.	61.	52.
BURLINGTON, IOWA		42.	48.	71.	66.	56.
CASTANA, IOWA		36.	41.	66.	61.	51.
COUNCIL BLUFFS, IOWA		42.	47.	67.	63.	55.
SARATOGA, IOWA		37.	39.	64.	58.	49.
SPENCER, IOWA		37.	41.	62.	58.	50.
GARDEN CITY, KANSAS		42.	51.	71.	67.	58.
MANHATTAN, KANSAS		44.	49.	68.	65.	56.
MOUND VALLEY, KANSAS		47.	54.	72.	69.	60.
LEXINGTON, KENTUCKY		47.	51.	69.	65.	58.
UPPER MARLBORO, MD.		44.	49.	66.	64.	56.
EAST LANSING, MICH.		41.	41.	61.	58.	50.
FAIRMONT, MINNESOTA		38.	43.	63.	57.	50.
FARIBAULT, MINNESOTA		36.	38.	59.	54.	47.
ST. PAUL, MINNESOTA		38.	38.	62.	57.	49.
WASECA, MINNESOTA		36.	47.	64.	54.	50.
STATE UNIV., MISS.		56.	62.	76.	74.	67.
FAUCETT, MISSOURI		43.	45.	65.	61.	54.
KANSAS CITY, MO.		44.	48.	65.	62.	55.
SIKESTON, MISSOURI		48.	54.	72.	68.	60.
SPICKARD, MISSOURI		47.	48.	63.	64.	55.
BOZEMAN, MONTANA		36.	36.	53.	49.	43.
HUNTLEY, MONTANA		40.	43.	63.	57.	50.
LINCOLN, NEBRASKA		40.	44.	65.	61.	53.
NEW BRUNSWICK, N.J.		44.	47.	63.	61.	54.
ITHACA, NEW YORK		41.	41.	58.	54.	49.
COLUMBUS, OHIO		43.	46.	63.	61.	53.
CUSHOCTON, OHIO		42.	45.	61.	59.	52.
WOOSTER, OHIO		42.	45.	62.	59.	52.
BARNSDALL, OKLAHOMA		53.	56.	73.	70.	63.
LAKE HEFNER, OKLA.		52.	56.	74.	72.	64.
PAWHUSKA, OKLAHOMA		50.	54.	72.	68.	61.
OTTAWA, ONTARIO		39.	37.	58.	52.	47.
CORVALLIS, OREGON		47.	50.	64.	60.	55.
HOOD RIVER, OREGON		43.	46.	59.	57.	52.

AVERAGE EARTH TEMPERATURE IN DEG. F. TG

THERMAL DIFFUSIVITY IN FT**2/HR ALPHA=.025

STATION	STATES	WINTER	SPRING	SUMMER	FALL	YEAR
MEDFORD, OREGON		48.	52.	64.	61.	56.
PENDLETON, OREGON		41.	49.	65.	61.	54.
STATE COLLEGE, PA.		42.	44.	63.	59.	52.
KINGSTON, R. I.		41.	41.	58.	57.	50.
CALHOUN, S. CAROLINA		52.	57.	73.	70.	63.
MAIDISON, S. DAKOTA		36.	38.	59.	55.	47.
JACKSON, TENNESSEE		50.	55.	69.	64.	59.
TEMPLE, TEXAS		61.	65.	81.	77.	71.
SALT LAKE CITY, UTAH		40.	45.	60.	56.	50.
BURLINGTON, VERMONT		39.	38.	59.	54.	48.
PULLMAN, WASHINGTON		40.	45.	58.	52.	50.
SEATTLE, WASHINGTON		46.	50.	59.	56.	53.
AFTON, WYOMING		41.	42.	56.	53.	48.

Table TG-3
WET SOIL

AVERAGE EARTH TEMPERATURE IN DEG. F.	TG			
THERMAL DIFFUSIVITY IN FT**2/HR		ALPHA = .050		
STATION STATES	WINTER	SPRING	SUMMER	FALL
AUBURN, ALABAMA	54.	61.	76.	70.
DECATUR, ALABAMA	46.	53.	71.	65.
PALMER AAFS, ALASKA	27.	30.	48.	41.
TEMPE, ARIZONA	56.	64.	79.	74.
TUCSON, ARIZONA	62.	69.	82.	81.
BRAUNLEY, CALIFORNIA	63.	73.	90.	84.
DAVIS, CALIFORNIA	55.	60.	78.	73.
FT. COLLINS, COLO.	37.	45.	65.	56.
STORRS, CONN.	40.	44.	65.	59.
GAINESVILLE, FLA.	58.	72.	91.	79.
ATHENS, GEORGIA	52.	61.	78.	73.
MOSCOW, IDAHO	38.	42.	57.	53.
LEMONT, ILLINOIS	39.	44.	67.	60.
URBANA, ILLINOIS	39.	47.	68.	60.
WEST LAFAYETTE, IND	40.	47.	69.	62.
AMES, IOWA	35.	44.	70.	61.
BURLINGTON, IOWA	38.	48.	74.	66.
CASTANA, IOWA	32.	42.	70.	61.
COUNCIL BLUFFS, IOWA	39.	47.	70.	63.
SARATOGA, IOWA	33.	39.	68.	58.
SPENCER, IOWA	33.	42.	66.	58.
GARDEN CITY, KANSAS	38.	52.	74.	67.
MANHATTAN, KANSAS	40.	49.	72.	65.
MOON VALLEY, KANSAS	44.	55.	75.	69.
LEXINGTON, KENTUCKY	44.	51.	72.	65.
UPPER MARLBORO, MD.	41.	49.	69.	64.
EAST LANSING, MICH.	39.	41.	64.	57.
FAIRMONT, MINNESOTA	35.	43.	67.	57.
FARIBAULT, MINNESOTA	34.	38.	62.	54.
ST. PAUL, MINNESOTA	35.	38.	65.	57.
WASECA, MINNESOTA	31.	49.	67.	53.
STATE UNIV., MISS.	53.	62.	78.	74.
FAUCETT, MISSOURI	41.	45.	68.	61.
KANSAS CITY, MO.	41.	48.	68.	61.
SIKESTON, MISSOURI	45.	54.	75.	68.
SPICKARD, MISSOURI	44.	48.	65.	64.
BUZEMAN, MONTANA	34.	35.	57.	48.
HUNTLEY, MONTANA	37.	43.	66.	57.
LINCOLN, NEBRASKA	36.	44.	68.	62.
NEW BRUNSWICK, N.J.	41.	47.	66.	62.
ITHACA, NEW YORK	39.	41.	61.	54.
COLUMBUS, OHIO	40.	47.	65.	61.
CUSHCOTON, OHIO	40.	45.	64.	60.
WOOSTER, OHIO	40.	45.	65.	59.
BARNSDALE, OKLAHOMA	50.	56.	75.	70.
LAKE HEFNER, OKLA.	49.	57.	77.	73.
PAWHUSKA, OKLAHOMA	48.	54.	75.	68.
OTTAWA, ONTARIO	37.	37.	61.	51.
CORVALLIS, OREGON	45.	51.	67.	60.
HOD RIVER, OREGON	41.	49.	61.	57.

AVERAGE EARTH TEMPERATURE IN DEG. F. TG

THERMAL DIFFUSIVITY IN FT**2/HR ALPHA= .050

STATION	STATES	WINTER	SPRING	SUMMER	FALL	YEAR
MEDFORD, OREGON		46.	52.	66.	61.	56.
PENDLETON, OREGON		38.	50.	68.	60.	54.
STATE COLLEGE, PA.		40.	44.	66.	59.	52.
KINGSTON, R. I.		39.	41.	61.	57.	50.
CALHOUN, S.CAROLINA		49.	58.	76.	69.	63.
MAUDISON, S. DAKOTA		33.	38.	62.	55.	47.
JACKSON, TENNESSEE		48.	55.	72.	64.	59.
TEMPLE, TEXAS		58.	65.	84.	77.	71.
SALT LAKE CITY, UTAH		37.	45.	62.	55.	50.
BURLINGTON, VERMONT		37.	38.	62.	54.	48.
PULLMAN, WASHINGTON		37.	45.	60.	50.	50.
SEATTLE, WASHINGTON		44.	50.	60.	56.	53.
AFTON, WYOMING		39.	42.	59.	53.	48.

Table C3

Thermophysical Properties of Wall/Roof/Floor

Reprinted by permission from 1972 Handbook of Fundamentals (American Society of Heating, Refrigerating and Air-Conditioning Engineers, 345 East 47th Street, New York, New York), p. 431.

**Thermal Properties and Code Numbers of Layers Used in Calculations of
Coefficients for Wall and Roof Transfer Functions**

Description	Code Number	Thickness and Thermal Properties ^a				
		L	K	D	SH	R
Outside surface resistance	AO					0.333
1" stucco (asbestos cement or wood siding plaster, etc.)	A1	0.0833	0.4	116	0.20	
4" face brick (dense concrete)	A2	0.333	0.77	125	0.22	
Steel siding (aluminum or other light-weight cladding)	A3	0.005	26.0	480	0.10	
Outside surface resistance, 1" slag, membrane and 1" felt	A4	0.0417 0.0313	0.83 0.11	55 70	0.40 0.40	0.333
Outside surface resistance	A5					0.333
Finish	A6	0.0417	0.24	78	0.26	
Air space resistance	B1					0.91
1" insulation	B2	0.083	0.025	2.0	0.2	
2" insulation	B3	0.167	0.025	2.0	0.2	
3" insulation	B4	0.25	0.025	2.0	0.2	
1" insulation	B5	0.0833	0.025	5.7	0.2	
2" insulation	B6	0.167	0.025	5.7	0.2	
1" wood	B7	0.0833	0.07	37.0	0.6	
2.5" wood	B8	0.2033	0.07	37.0	0.6	
4" wood	B9	0.333	0.07	37.0	0.6	
2" wood	B10	0.167	0.07	37.0	0.6	
3" wood	B11	0.25	0.07	37.0	0.6	
3" insulation	B12	0.25	0.025	5.7	0.2	
4" clay tile	C1	0.333	0.33	70.0	0.2	
4" l.w. concrete block	C2	0.333	0.22	38.0	0.2	
4" h.w. concrete block	C3	0.333	0.47	61.0	0.2	
4" common brick	C4	0.333	0.42	120	0.2	
4" h.w. concrete	C5	0.333	1.0	140	0.2	
8" clay tile	C6	0.667	0.33	70	0.2	
8" l.w. concrete block	C7	0.667	0.33	38.0	0.2	
8" h.w. concrete block	C8	0.667	0.6	61.0	0.2	
8" common brick	C9	0.667	0.42	120	0.2	
8" h.w. concrete	C10	0.667	1.0	140	0.2	
12" h.w. concrete	C11	1.0	1.0	140	0.2	
2" h.w. concrete	C12	0.167	1.0	140	0.2	
6" h.w. concrete	C13	0.5	1.0	140	0.2	
4" l.w. concrete	C14	0.333	0.1	40	0.2	
6" l.w. concrete	C15	0.5	0.1	40	0.2	
8" l.w. concrete	C16	0.667	0.1	40	0.2	
Inside surface resistance	E0					0.685
1" plaster; 1" gypsum or other similar finishing layer	E1	0.0625	0.42	100	0.2	
1" slag or stone	E2	0.0417	0.83	55	0.40	
1" felt & membrane	E3	0.0313	0.11	70	0.40	
Ceiling air space	E4					1.0
Acoustic Tile	E5	0.0625	0.035	30	0.20	

^a Units: L = feet. K = Btu per (hr) (sq ft) (F deg). D = lb per cu ft. SH = Btu per (lb) (F deg). R = (hr) (sq ft) (F deg) per Btu.

Table C4

Typical Watt/ft.² of floor area data

	<u>Lighting</u>	<u>Equipment</u>
Apartment	1.7	1.2
Office	5.0	1.0
Department Stores	4.0	0.0
School	5.0	0.0

Table C5

Shading Coefficients

Reprinted by permission from the 1972 Handbook of Fundamentals (American Society of Heating, Refrigerating and Air-Conditioning Engineers, 345 East 47th Street, New York, New York), pp. 402-408.

Shading Coefficients for Single Glass and
Insulating Glass^a

Type of Glass	Nominal Thickness ^b	Solar Trans. ^b	Shading Coefficient	
			$h_0 = 4.0.$	$h_0 = 3.0$
Regular Sheet	$\frac{3}{16}$	0.87	1.00	1.00
	$\frac{1}{4}$	0.80	0.95	0.97
	$\frac{3}{8}$	0.75	0.91	0.93
	$\frac{1}{2}$	0.71	0.88	0.91
Grey Sheet	$\frac{1}{8}$	0.59	0.78	0.80
	$\frac{5}{16}$	0.74	0.90	0.92
	$\frac{3}{4}$	0.45	0.66	0.70
	$\frac{1}{2}$	0.71	0.88	0.90
	$\frac{1}{4}$	0.67	0.86	0.88
Heat-Absorbing Plate/Float ^d	$\frac{3}{16}$	0.52	0.72	0.75
	$\frac{1}{4}$	0.47	0.70	0.74
	$\frac{3}{8}$	0.33	0.56	0.61
	$\frac{1}{2}$	0.24	0.50	0.57

Type of Glass	Nominal Thickness ^c	Solar Trans. ^b	Shading Coefficient	
			Outer Pane	Inner Pane
Regular Sheet Out, Regular Sheet In	$\frac{3}{16}, \frac{1}{4}$	0.87	0.87	0.90
Regular Plate/Float Out, Regular Plate/Float In	$\frac{1}{4}$	0.80	0.80	0.83
Heat-Abs Plate/Float Out, Regular Plate/Float In	$\frac{1}{4}$	0.46	0.80	0.56

^a Refers to factory-fabricated units with $\frac{5}{16}$, $\frac{1}{4}$, or $\frac{3}{8}$ in. air space or to prime windows plus storm windows.

^b Refer to manufacturer's literature for values.

^c Thickness of each pane of glass, not thickness of assembled unit.

^d Refers to grey, bronze, and green tinted heat-absorbing plate/float glass.

Shading Coefficients for Single Glass with Indoor Shading by Venetian Blinds and Roller Shades

Type of Glass	Nominal Thickness ^a	Solar Trans. ^b	Type of Shading				
			Venetian Blinds		Roller Shade		
			Medium	Light	Dark	White	Translucent
Regular Sheet	$\frac{3}{16}$ to $\frac{1}{4}$	0.87-0.80					
Regular Plate/Float	$\frac{1}{4}$ to $\frac{3}{16}$	0.80-0.71	0.64	0.55	0.59	0.25	0.39
Regular Pattern	$\frac{1}{8}$ to $\frac{3}{8}$	0.87-0.79					
Heat-Absorbing Pattern	$\frac{1}{8}$	—					
Grey Sheet	$\frac{3}{16}, \frac{7}{32}$	0.74, 0.71					
Heat-Absorbing Plate/Float ^d	$\frac{3}{16}, \frac{1}{4}$	0.46					
Heat-Absorbing Pattern	$\frac{3}{16}, \frac{1}{4}$	—	0.57	0.53	0.45	0.30	0.36
Grey Sheet	$\frac{3}{16}, \frac{7}{32}$	0.59, 0.45					
Heat-Absorbing Plate/Float or Pattern	—	0.44-0.30					
Heat-Absorbing Plate/Float ^d	$\frac{3}{8}$	0.34	0.54	0.52	0.40	0.28	0.32
Heat-Absorbing Plate or Pattern	—	0.29-0.15	0.42	0.40	0.36	0.28	0.31
Reflective Coated Glass S.C. ^c = 0.30 0.40 0.50 0.60			0.25 0.33 0.42 0.50	0.23 0.29 0.38 0.44			

^a Refer to manufacturer's literature for values.

^b For vertical blinds with opaque white and beige louvers in the tightly closed position, SC is 0.25 and 0.29 when used with glass of 0.71 to 0.80 transmittance.

^c Shading Coefficient for glass with no shading device.

^d Refers to grey, bronze, and green tinted heat-absorbing plate/float glass.

Shading Coefficients for Insulating Glass^a with Indoor Shading by Venetian Blinds and Roller Shades

Type of Glass	Nominal Thickness, each light	Solar Trans. ^b	Type of Shading				
			Venetian Blinds ^c		Roller Shade		
			Outer Pane	Inner Pane	Medium	Light	Dark
Regular Sheet Out	$\frac{3}{16}, \frac{1}{8}$	0.87	0.87				
Regular Sheet In	$\frac{1}{4}$	0.80	0.80		0.57	0.51	0.60
Regular Plate/Float Out							0.25
Regular Plate/Float In							0.37
Heat-Absorbing Plate/Float ^d Out	$\frac{1}{4}$	0.46	0.80		0.39	0.36	0.40
Regular Plate/Float In							0.22
Reflective Coated Glass SC ^c = 0.20 0.30 0.40					0.19 0.27 0.34	0.18 0.26 0.33	

^a Refers to factory-fabricated units with $\frac{1}{4}$, $\frac{1}{2}$, or $\frac{3}{8}$ in. air space, or to prime windows plus storm windows.

^b Refer to manufacturer's literature for exact values.

^c For vertical blinds with opaque white or beige louvers, tightly closed, SC is approximately the same as for opaque white roller shades.

^d Refers to bronze or green tinted heat-absorbing plate/float glass.

^e Shading Coefficient for glass with no shading device.

Properties of Representative Indoor Shading

Indoor Shade	Solar Properties (Normal Incidence)		
	Trans.	Reflect.	Absorp.
Venetian Blinds ^a (Ratio of slat width to slat spacing 1.2, slat angle 45 deg)			
Light Colored Slat	0.05	0.55	0.40
Medium Colored Slat	0.05	0.35	0.60
Vertical Blinds			
White Louvers	0.00	0.77	0.23
Roller Shades			
Light Shades (Translucent)	0.25	0.60	0.15
White Shade (Opaque)	0.00	0.80	0.20
Dark Colored Shade (Opaque)	0.00	0.12	0.88

* The values shown in this table and preceding tables are based on horizontal Venetian blinds. However, tests show these values may be used for vertical blinds with good accuracy.

Shading Coefficients for Double Glazing with Between-Glass Shading

Type of Glass	Nominal Thickness, each pane	Solar Trans. ^a		Description of Air Space	Type of Shading			
		Outer Pane	Inner Pane		Venetion Blinds		Louvered Sun Screen	
					Light	Medium		
Regular Sheet Out	$\frac{3}{16}$, $\frac{1}{8}$	0.87	0.87	Shade in contact with glass or shade separated from glass by air space.	0.33	0.36	0.43	
Regular Sheet In				Shade in contact with glass-voids filled with plastic.	—	—	0.49	
Regular Plate Out	$\frac{1}{4}$	0.80	0.80	Shade in contact with glass or shade separated from glass by air space.	0.28	0.30	0.37	
Regular Plate In				Shade in contact with glass-voids filled with plastic.	—	—	0.41	
Heat-Abs. Plate/Float ^b Out	$\frac{1}{4}$	0.46	0.80					
Regular Plate In								

^a Refer to manufacturer's literature for exact values.

^b Refers to grey, bronze, and green tinted heat-absorbing plate/float glass.

Shading Coefficients for Single and Insulating Glass with Draperies

Glazing	Glass Trans.	Glass SC*	Shading Coefficient For Index Letters in Fig. 10**									
			A	B	C	D	E	F	G	H	I	J
Single Glass												
1 in. Regular	0.80	0.95	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
2 in. Regular	0.71	0.88	0.35	0.39	0.43	0.48	0.52	0.56	0.61	0.66	0.70	0.74
1 in. Heat Abs.	0.46	0.67	0.33	0.36	0.38	0.41	0.44	0.46	0.49	0.52	0.54	0.57
2 in. Heat Abs.	0.34	0.57	0.32	0.34	0.36	0.38	0.41	0.43	0.45	0.47	0.49	0.51
3 in. Heat Abs.	0.24	0.50	0.30	0.32	0.33	0.34	0.36	0.38	0.39	0.40	0.42	0.43
Reflective Coated (See Manufacturers' literature for exact values)	—	0.60	0.33	0.36	0.38	0.41	0.43	0.46	0.49	0.51	0.54	0.57
—	0.50	0.31	0.33	0.34	0.36	0.38	0.39	0.41	0.42	0.44	0.46	0.46
—	0.40	0.26	0.27	0.28	0.29	0.30	0.32	0.33	0.34	0.35	0.36	0.36
—	0.30	0.20	0.21	0.21	0.22	0.23	0.23	0.23	0.24	0.24	0.24	0.25
Insulating Glass (½ in. Air Space) Regular Out and Regular In	0.64	0.83	0.35	0.37	0.42	0.45	0.48	0.52	0.56	0.58	0.62	0.66
Heat Abs. Out and Regular In	0.37	0.56	0.32	0.33	0.35	0.37	0.39	0.41	0.43	0.45	0.47	0.49
Reflective Coated (see Manufacturers' literature for exact values)	—	0.40	0.28	0.28	0.29	0.31	0.32	0.34	0.36	0.37	0.37	0.38
—	0.30	0.24	0.24	0.25	0.25	0.26	0.26	0.26	0.27	0.27	0.28	0.29
—	0.20	0.15	0.15	0.16	0.16	0.17	0.17	0.18	0.18	0.19	0.19	0.19

* For glass alone, with no drapery.

** Shading coefficient values for the SC lines in Fig. 10 for representative glazings. Substitute for the SC index letters in Fig. 10 the values on the line of the glazing selected.

Shading Coefficients for Louvered Sun Screens

Profile Angle, deg	Group 1		Group 2	
	Trans-mittance	SC	Trans-mittance	SC
10	0.23	0.35	0.25	0.33
20	0.06	0.17	0.14	0.23
30	0.04	0.15	0.12	0.21
40 and above	0.04	0.15	0.11	0.20

Profile Angle, deg	Group 3		Group 4	
	Trans-mittance	SC	Trans-mittance	SC
10	0.40	0.51	0.48	0.59
20	0.32	0.42	0.39	0.50
30	0.21	0.31	0.28	0.38
40 and above	0.07	0.18	0.20	0.30

Group 1. Black, width over spacing ratio 1.15/1, 23 louvers per inch.

Group 2. Light color, high reflectance, otherwise same as Group 1.

Group 3. Black or dark color, w/s ratio 0.85/1, 17 louvers per inch.

Group 4. Light color or unpainted aluminum, high reflectance, otherwise same as Group 3.

$U\text{-value} = 0.85 \text{ Btu}/(\text{sq ft})(\text{F deg})$ for all groups when used with single glazing.

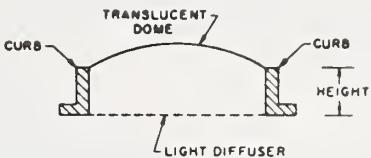


Fig. Terminology for Domed Skylights

Table 23 Shading Coefficients for Domed Skylights

Dome	Light Diffuser (Translucent)	Curb (See Fig.)		Shading Coefficient	U-Value
		Height, in.	Width to Height Ratio		
Clear $\tau = 0.86$	$\tau = 0.58$	0	∞	0.61	0.46
		9	5	0.58	0.43
		18	2.5	0.50	0.40
Clear $\tau = 0.86$	None	0	∞	0.99	0.80
		9	5	0.88	0.75
		18	2.5	0.80	0.70
Translucent $\tau = 0.52$	None	0	∞	0.57	0.80
		9	5	0.51	0.75
		18	2.5	0.46	0.70
Translucent $\tau = 0.27$	None	0	∞	0.34	0.80
		9	5	0.30	0.75
		18	2.5	0.28	0.70

Shading Coefficients for Hollow Glass Block Wall Panels^a

Type of Glass Block ^b	Description of Glass Block		Shading Coefficient ^c	
			Panels ^d in the Sun	Panels ^e in the Shade (N, NW, W, SW)
Type I	Glass Colorless or Aqua Smooth Face A, D: Smooth B, C: Smooth or wide ribs, or flutes horizontal or vertical, or shallow configuration. E: None		0.65	0.40
Type IA	Same as Type I except A: Ceramic Enamel on exterior face.		0.27	0.20
Type II	Same as Type I except E: Glass fiber screen.		0.44	0.34
Type III	Glass Colorless or Aqua A, D: Narrow vertical ribs or flutes. B, C: Horizontal light-diffusing prisms, or horizontal light-directing prisms. E: Glass fiber screen.		0.33	0.27
Type IIIA	Same as Type III except E: Glass fiber screen with green ceramic spray coating, or glass fiber screen and gray glass, or glass fiber screen with light-selecting prisms.		0.25	0.18

^a For glass block used in horizontal skylights see Tables 28 and 29, Chapter 26 of the 1963 ASHRAE GUIDE AND DATA BOOK.

^b All values are for $7\frac{1}{2} \times 7\frac{1}{2} \times 3\frac{1}{4}$ in. block, set in light-colored mortar. For $11\frac{1}{2} \times 11\frac{1}{2} \times 3\frac{1}{4}$ in. block increase coefficients by 15 percent, and for $5\frac{1}{2} \times 5\frac{1}{2} \times 3\frac{1}{4}$ in. blocks reduce coefficients by 15 percent.

^c Shading coefficients are to be applied to Heat Gain Factors for one hour earlier than the time for which the load calculation is made to allow for heat storage in the panel.

^d Shading coefficients are for peak load condition, but provide a close approximation for other conditions. For more precise values for other conditions, see Reference 20.

^e For NE, E, and SE panels in the shade add 50 percent to the values listed for panels in the shade.

Table C6

Absorptivity of Materials to Solar Radiation

Reprinted by permission from Thermal Radiation Properties Survey (Honeywell Research Center, Minneapolis, Minnesota, 1966), pp. 245-248.

BUILDING MATERIALS, SOLAR ABSORPTIVITY

Material	Solar Absorptivity
BRICKS	
Clay, cream, glazed	0.36
Clay, Fleton, dark portion	0.63
Clay, Felton, light portion	0.40
Lime clay, French	0.46
Gault, cream	0.36
Light buff	0.516
Light buff but darker than above	0.60
Mottled purple	0.77
Red	0.699
Red, common and tiles	0.68
Red, darker, glazed	0.766
Red, wire-cut	0.52
Stafford blue	0.89
Stock, light fawn	0.57
White glazed	0.26
White glazed (2 specimens)	0.25-0.27
TILES	
Clay, purple (dark)	0.82
Clay, dark purple, machine-made	0.81
Red	0.67
Red, hand-made	0.60
Red, light, Dutch	0.43
Red, light, machine-made	0.66
Red, light, machine-made	0.62
Concrete, uncolored	0.65
Concrete, black	0.91
Concrete, dark	0.91
Concrete, brown	0.85
Concrete, brown, very rough	0.88

(Continued on next page)

BUILDING MATERIALS, SOLAR ABSORPTIVITY (Continued)

Material	Solar Absorptivity
ASPHALT	
, New, 3 specimens	0.91
New, 3 specimens	0.91
New, another specimen	0.93
Pavement	0.852
Pavement, free from dust	0.928
Pavement, weathered, 3 specimens	0.82 0.83 0.89
ROOFING	
Bituminous felt, aluminized	0.40
Bituminous felt	0.88
Bituminous felt	0.89
Bitumin-covered, brown	0.87
Sheet, green	0.86
Sheet, black matte surface	0.97
Sheet, black matte surface	0.97
ASBESTOS CEMENT	
Aged	0.75
Aged 6 months	0.61
Aged 12 months	0.71
Aged 6 years, very dirty	0.83
Red	0.69
Red	0.74
Washed with soap and water	0.40
White	0.61
White (2 samples)	0.49-0.42
LIMESTONE	
Anston	0.60
Bath	0.53
Clipsham	0.46
Indiana	0.571
Ketton	0.42
Portland	0.36
Steetley	0.33
SAND-LIME	
Light-red	0.55
Red	0.68
White, fine sand	0.41
White, coarse sand	0.50
MARBLE	
White	0.44
Ground, unpolished	0.465
Cleavage	0.592
GRANITE	
Reddish	0.55
FELDSPAR	
$K_2O Al_2O_3 6SiO_2$	0.606
MORTAR SCREENED	0.73

(Continued on next page)

BUILDING MATERIALS, SOLAR ABSORPTIVITY (Continued)

Material	Solar Absorptivity
SANDSTONE	
Grey, Bristol pennant	0.76
Polmaise, light fawn	0.54
Stancliffe, light grey	0.62
Woolton, red	0.73
WHITEWASH	
On galvanized iron	0.22
On galvanized iron	0.22
On galvanized iron	0.26
On galvanized iron, a very thick layer	0.20
SLATE	
Blue grey	0.87
Blue, grey	0.85
Clay, dark	0.933
Greenish, grey, rough	0.88
Grey, dark	0.90
Grey, dark, fairly rough	0.90
Grey, dark, fairly rough	0.90
Grey, dark, smooth	0.89
Purple	0.86
Silver-grey, Norwegian	0.79

BUILDING MATERIALS, SOLAR ABSORPTIVITY

Building Materials	Solar Absorptivity
Thickly tinned surface	0.05
Wood, smoothly planed	0.78
Basalt	0.72
Red sandstone	0.60
Marble (white)	0.58
Granite	0.45
Dolomite lime	0.41
Clay shale	0.69
Paris plaster	0.78
White plastered wall	0.92
Gravel	0.29
Sand	0.76
Glass	0.93
Sawdust	0.75
Clay	0.39
Red brick wall	0.93

CLOTH, SOLAR REFLECTIVITY

Material	Solar Reflectivity
QM1, cotton sheeting bleached, 4 oz per yd	0.62-0.66
QM2, cotton sateen prepared for dyeing, 9 oz per yd	0.68-0.72
QM4, cotton sateen undyed, 9 oz per yd	0.69-0.72
QM6, cotton sateen, medium gray, 9 oz per yd	0.53
QM7, cotton sateen dark gray, 9 oz per yd	0.24
50 percent wool, 50 percent cotton knit, undyed, 10.5 oz per yd	0.62
Cotton knit, undyed, 3 oz per yd	0.60

PARACHUTE CLOTH, SOLAR ABSORPTIVITY, REFLECTIVITY, AND TRANSMISSIVITY

Material	Absorptivity	Reflectivity	Transmissivity
Dacron, 100 lb	0.05	0.35	0.60
Dacron, 300 lb	0.11	0.54	0.35
Dacron, 600 lb	0.12	0.61	0.27
Dacron, 800 lb	0.19	0.62	0.19
Nylon rip-stop (orange) 1.1 oz per sq yd, MIL-C-7020B Type I	0.13	0.23	0.64
Nylon rip-stop 1.1 oz per sq yd (white) MIL-C-7020	0.08	0.27	0.65
Nylon rip-stop 1.6 oz per sq yd (white) MIL-C-7020B Type III	0.06	0.22	0.72
Nylon cloth 2.25 oz per sq yd, MIL-C-7350B Type I	0.05	0.36	0.59
Nylon cloth 4.30 oz per sq yd, MIL-C-8021 Type I	0.08	0.44	0.48
Nylon cloth 7.0 oz per sq yd, MIL-C-8021 Type II	0.13	0.46	0.41
Nylon cloth 14.0 oz per sq yd, MIL-C-8021 Type III	0.11	0.62	0.27

10. Appendix D

Fortran Listing of NBSLD

Although the attached Fortran listing of the NBSLD routine basically embodies the algorithms of Appendix A, some of the subroutines are considerably simplified if compared with the exact adaptation of Appendix A.

It is cautioned also that the Fortran used herein is the UNIVAC version of Fortran V, which is somewhat different from the ANSI standard Fortran.



1 @FCR, IS A1
2 C NBSLD IS A RESEARCH PROGRAM THAT IS CONTINUALLY CHANGED AND UPDATED.
3 CNBSLD.....
4 C
5 C
6 C NBSLD IS A RESEARCH PROGRAM OF NBS FOR THE PURPOSE OF
7 C STUDYING HEATING AND COOLING LOAD AND ROOM TEMPERATURE
8 C OF BUILDING UNDER ACTUAL WEATHER CONDITION
9 C A(I) AREA OF SURFACE I, FT2
10 C ABSP(I) SOLAR HEAT ABSORPTION COEFFICIENT FOR SURFACE I.
11 C THIS DATA REQUIRED FOR OPAQUE SURFACES ONLY.
12 C AENDW AREA OF THE ATTIC END WALL, FT2
13 C AG GROUND HEAT TRANSFER AREA, FT2 (MAY=0.)
14 C AIRCHG NO. OF ATTIC AIR CHANGES PER HR, DAYTIME
15 C AIRNT ATTIC NIGHT TIME AIR CHANGE MULTIPLIER
16 C ARCHGS NO. OF AIR CHANGES PER HR IN SUMMER
17 C ARCHGW NO. OF AIR CHANGES PER HR IN WINTER
18 C ATCACG NO. OF ATTIC AIR CHANGES PER HR (DAY OR NIGHT)
19 C AVEHTG AVERAGE HOURLY HEAT GAIN ENTIRE BUILDING, BTU/HR
20 C AZW(I) WALL AZIMUTH ANGLE FOR SURFACE I, DEGREES
21 C SOUTH = 0.
22 C WEST = 90.
23 C NORTH = 180.
24 C EAST = -90.
25 C BLDMAX BUILDING MAXIMUM SENSIBLE HEAT GAIN, BTU/HR
26 C CFML SUMMER INFILTRATION RATE, FT3/MIN.
27 C CFMV VENTILATION RATE, FT3/MIN.
28 C CFMWT WINTER INFILTRATION, FT3/MIN.
29 C CLDAY DAILY TOTAL ENERGY CONSUMPTION FOR A GROUP
30 C (NCRM OF THEM) OF ROOMS OF THE SAME CONFIG-
31 CURATION, BTU
32 C CLDSUM RUNNING TOTAL ENERGY CONSUMPTION FOR COOLING OF
33 C ALL THE ROOMS IN A BUILDING OVER A SET TIME
34 C PERIOD, BTU
35 C CN CLEARNESS NUMBER
36 C CR(L) RESPONSE FACTOR COMMON RATIO FOR CONSTRUCTION L
37 C DAY DAY OF YEAR
38 C DAYSKP NO. OF DAYS TO BE SKIPPED FROM THE WEATHER TAPE
39 C (FROM ITS LAST STARTING POSITION)
40 C DB(J) OUTDOOR DRYBULB TEMPERATURE AT HOUR J, F
41 C DBA DAILY AVERAGE OUTSIDE DRYBULB TEMPERATURE, F
42 C DBIN DESIGN INDOOR DRYBULB TEMPERATURE, F
43 C DBM DRYBULB MEAN, F
44 C DBMAX DESIGN OUTDOOR MAXIMUM DRYBULB TEMPERATURE, F
45 C DBMWT DESIGN WINTER OUTDOOR DRYBULB TEMPERATURE, F
46 C DBNBS(J) FRACTION OF RANGE TO USE FOR DESIGN PROFILE
47 C AT HOUR J
48 C DP OUTDOOR DEW POINT, F
49 C DPID INDOOR DEW POINT, F
50 C DPIN DESIGN INDOOR DEW POINT, F
51 C DR(L) RESPONSE FACTOR COMMON RATIO FOR CONSTRUCTION L
52 C (SAME AS CR(L))
53 C DST DAYLIGHT SAVING TIME INDICATOR
54 C ELAPS DAYS ELAPSED SINCE JANUARY 1
55 C G(IV,VI) RADIATION CONFIGURATION FACTORS FOR
56 C RADIATION FROM SURFACE VI TO SURFACE IV
57 C H(I) EXTERIOR SURFACE HEAT TRANSFER COEFFICIENT
58 C FOR SURFACE I, BTU/HR, FT2, F

```

59 C HI(I) INTERIOR SURFACE CONVECTION HEAT TRANSFER
60 C COEFFICIENT, BTU/HR,FT2,F
61 C HIND INDOOR ENTHALPY FOR DESIGN CONDITIONS, BTU/LB
62 C HL DAY DAILY TOTAL ENERGY CONSUMPTION FOR HEATING FOR A
63 C GROUP (NORM OF THEM) OF ROOMS OF THE SAME
64 C CONFIGURATION, BTU
65 C HLDSUM RUNNING TOTAL ENERGY CONSUMPTION FOR HEATING OF
66 C ALL THE ROOMS IN A BUILDING, BTU
67 C HOUT OUTDOOR ENTHALPY FOR DESIGN CONDITIONS, BTU/LB
68 C HR INNER SURFACE RADIATIVE HEAT TRANSFER COEFFICIENT
69 C (=4.*((535.***3)*SIGMA))
70 C HT CEILING HEIGHT, FT
71 C IHT(I) HEAT TRANSFER INDEX
72 C =-1 FOR GLASS SURFACE
73 C = 0 OPAQUE
74 C = 1 OTHERWISE
75 C IMAX HOUR OF DAY FOR MAXIMUM COOLING LOAD
76 C INCLUD =0 INCLUDE ROOM IN SUMMARY
77 C =1 OTHERWISE
78 C IRF(I) RESPONSE FACTOR INDEX FOR SURFACE I
79 C IROT DEGREES OF ROTATION
80 C ISKIP = 1 SKIP RESPONSE FACTOR CALCULATION
81 C AND BUILDING DATA INPUT
82 C = 0 OTHERWISE
83 C ITK AND ITHST INDICES FOR ROOM TEMPERATURE COMPUTATION
84 C ITK=0, ITHST=1 ROOM TEMP PRESCRIBED, EITHER CONSTANT
85 C OR WITH NIGHT TIME SET-BACK
86 C ITK=1, ITHST=0 ROOM TEMP NOT BEING CONTROLLED. NO A/C.
87 C ITK=1, ITHST=1 ROOM TEMP FLOAT WITHIN PRESCRIBED UPPER
88 C AND LOWER LIMITS. NO A/C WHEN WITHIN
89 C THE LIMITS.
90 C ITK=0, ITHST=0 EQUIPMENT CAPACITY PRESCRIBED. ROOM TEMP
91 C FLOAT WITHIN PRESCRIBED UPPER AND LOWER
92 C LIMITS, AND WHEN EQUIPMENT CAPACITY IS
93 C EXCEEDED.
94 C ITYPE(I) TYPE OF SURFACE I
95 C = 1 ROOF
96 C = 2 EXPOSED WALL
97 C = 3 WINDOW
98 C = 4 DOOR
99 C = 5 GROUND HEAT TRANSFER SURFACE
100 C = 6 INTERNAL MASS, FURNISHINGS, PARTY WALLS,
101 C PARTITION WALLS, AND FLOOR/CEILINGS
102 C = 7 OPEN PASSAGES
103 C = 8 EXPOSED FLOOR (EXPOSED UNDERSIDE)
104 C LAT LATITUDE, DEGREES
105 C LONG LONGITUDE, DEGREES
106 C LPYR LEAP YEAR INDICATOR
107 C MONTH MONTH OF YEAR
108 C MR(L) NUMBER OF RESPONSE FACTOR TERMS GENERA-
109 C TED BY RESPTK FOR CONSTRUCTION L
110 C SAME AS NR(L)
111 C NAMEBD NAME OF ROOM
112 C NE NUMBER OF SURFACES IN EAST WALL
113 C NEXP TOTAL NUMBER OF SURFACES IN ROOM
114 C = 2+NS+NW+NN+NE
115 C NMAX HR OF THE DAY WHEN QLMAX OCCURS
116 C NN NUMBER OF SURFACES IN NORTH WALL

```

117	C	NOFLR	NUMBER OF FLOORS
118	C	NORM	NO. OF ROOMS HAVING THE SAME DATA
119	C	NR(L)	NUMBER OF RESPONSE FACTOR TERMS CALCULATED BY RESPTK FOR CONSTRUCTION L
120	C	NS	NUMBER OF SURFACES IN SOUTH WALL
121	C	NW	NUMBER OF SURFACES IN WEST WALL
122	C	PB	BAROMETRIC PRESSURE = 29.921 INCHES OF MERCURY
123	C	PI	= 3.1415...
124	C	PV	VAPOR PRESSURE, INCHES OF MERCURY
125	C	QCU	MAXIMUM NUMBER OF OCCUPANTS
126	C	QDES(I)	HEAT GAIN OF SURFACE I AT HOUR IMAX, BTU/HR
127	C	QDESIN(I,J)	HEAT GAIN OF SURFACE I AT HOUR J, BTU/HR
128	C	QEOPD	EQUIPMENT MAXIMUM HEAT LOAD, BTU/HR
129	C	QEOPX	MAXIMUM EQUIPMENT LOAD, WATTS/FT ²
130	C	QEQUJ	EQUIPMENT LOAD AT HOUR J, BTU/HR
131	C	QEQUX(J)	EQUIPMENT USE SCHEDULE
132	C	QGLAS(I,J)	HEAT GAIN OF GLASS FOR I AT HOUR J, BTU/HR
133	C	QGX(I)	HEAT TRANSMISSION OF GLASS FOR SURFACE I AT HOUR IMAX, BTU/HR
134	C	QI(I)	INSIDE SURFACE HEAT FLUX OF SURFACE I, BTU/HR, FT ²
135	C	QISAVE(J,I)	INSIDE SURFACE HEAT FLUX OF SURFACE I AT HOUR J, BTU/HR, FT ²
136	C	QLDS	SUM OF LATENT AND SENSIBLE LOAD AT HOUR J, BTU/HR
137	C	QLITE(J)	LIGHT LOAD AT HOUR J, BTU/HR
138	C	QLITO	MAXIMUM LIGHT LOAD, BTU/HR
139	C	QLITX(J)	LIGHT USE SCHEDULE
140	C	QLITY	MAXIMUM LIGHTING LOAD, WATTS/FT ²
141	C	QLMAX	ABSOLUTE VALUE OF THE MAX COOLING (OR HEATING) LOAD OF THE DAY, BTU/HR
142	C	QLL(J)	LATENT HEAT LOAD AT HOUR J, BTU/HR
143	C	QLS(J)	SENSIBLE HEAT LOAD AT HOUR J, BTU/HR
144	C	QO(I)	OUTSIDE SURFACE HEAT FLUX OF SURFACE I, BTU/HR, FT ²
145	C	QOCPS(J)	OCCUPANT LOAD AT HOUR J, BTU/HR
146	C	QOCUP(J)	OCCUPANT SCHEDULE
147	C	QPEOPL(J)	PEOPLE LATENT LOAD AT HOUR J, BTU/HR
148	C	QPLX	MAX OCCUPANT LATENT LOAD, BTU/HR, PERSON
149	C	QPSX	MAX OCCUPANT SENSIBLE LOAD, BTU/HR, PERSON
150	C	QSAVE(M,J)	HEAT GAINS AND LOADS AT HOUR J, BTU/HR M = 1 TIME, HR M = 2 SENSIBLE HEAT GAIN, BTU/HR M = 3 LATENT HEAT GAIN, BTU/HR M = 4 SENSIBLE LOAD, BTU/HR M = 5 TOTAL LOAD, BTU/HR
151	C	QSKY(I,J)	HEAT RADIATED TO SKY BY SURFACE I AT HOUR J, BTU/HR, FT ²
152	C	QSUMT	SUM OF TOTAL HEAT GAINS FOR 24 HOURS, BTU/HR
153	C	QSUN(I,J)	INCIDENT SOLAR RADIATION FOR SURFACE I AT HOUR J, BTU/HR, FT ²
154	C	QTL(J)	LATENT HEAT GAIN FROM INFILTRATION AT HOUR J, BTU/HR
155	C	QWINT	HEAT LOSS IN WINTER, BTU/HR

175 C	RANGE	DAILY RANGE OF OUTDOOR DRYBULB, F	
176 C	RHIN	DESIGN INDOOR RELATIVE HUMIDITY	
177 C	RHOUT	DESIGN OUTDOOR RELATIVE HUMIDITY	
178 C	RCOMNO	ROOM NUMBER	
179 C	S	INFORMATION ARRAY REQUIRED BY SUBROUTINE SUN AND GLASS	
181 C	SHADE(I)	SHADING COEFFICIENT FOR SURFACE I	
182 C	SIGMA	= 0.1714E-8	
183 C	SITELD(J)	OVERALL COOLING LOAD AT HOUR J, BTU/HR	
184 C	SITEQL(J)	OVERALL LATENT HEAT GAIN AT HOUR J, BTU/HR	
185 C			
186 C	SITEQS(J)	OVERALL SENSIBLE HEAT GAIN AT HOUR J, BTU/HR	
187 C			
188 C	SITETH(J)	OVERALL TOTAL HEAT GAIN AT HOUR J, BTU/HR	
189 C			
190 C	SITMAX	OVERALL MAXIMUM HEAT GAIN, BTU/HR	
191 C	SOTHX	OVERALL HEAT GAIN AT HOUR IMAX, BTU/HR	
192 C	SOLLD	TOTAL COOLING LOAD, BTU/HR	
193 C	SOWINT	OVERALL TOTAL HEAT LOSS, BTU/HR	
194 C	TA	ROOM AIR TEMPERATURE, F	
195 C	TASAVE(J)	RCCM AIR TEMPERATURE AT HOUR J, F	
196 C	TCLLD	DAILY RUNNING TOTAL ENERGY CONSUMPTION FOR COOLING FOR A GROUP (NORM OF THEM) OF ROOMS HAVING THE SAME CONFIGURATION, BTU	
200 C	TG	DESIGN SUMMER GROUND TEMPERATURE, F	>
201 C	TGW	DESIGN WINTER GROUND TEMPERATURE, F	
202 C	THTLD	DAILY RUNNING TOTAL ENERGY CONSUMPTION FOR HEATING FOR A GRUOP (NORM OF THEM) OF ROOMS HAVING THE SAME CONFIGURATION, BTU	
203 C			
204 C			
205 C			
206 C	TI(J)	INSIDE SURFACE TEMPERATURE RELATIVE TO THE REFERENCE TEMPERATURE AT HOUR J	
207 C			
208 C	TIF(J)	INSIDE SURFACE TEMPERATURE AT HOUR J, F	
209 C	TIFSAV(J,I)	INSIDE SURFACE TEMPERATURE OF SURFACE I AT HOUR J, F	
210 C			
211 C	TIM	INDOOR DESIGN MEAN (REFERENCE TEMPERATURE), F	
212 C			
213 C	TIO	INDOOR DESIGN TEMPERATURE, F	
214 C	TIS(I,J)	INSIDE SURFACE TEMPERATURE RELATIVE TO THE REFERENCE TEMPERATURE OF SURFACE I AT HOUR J, F	
215 C			
216 C			
217 C	TIX(J)	INDOOR DESIGN DRYBULB TEMPERATURE AT HOUR J, F	
218 C			
219 C	TNEW(I)	UPDATED OUTSIDE SURFACE TEMPERATURE OF SURFACE I AT EVERY TIME INCEMENT, F	
220 C			
221 C	TNUSAV(J,I)	UPDATED OUTSIDE SURFACE TEMPERATRE OF SURFACE I AT HOUR J, F	
222 C			
223 C	TOS(I,J)	OUTSIDE SURFACE TEMPERATURE RELATIVE TO REFERENCE TEMPERATURE OF SURFACE I AT HOUR J, F	
224 C			
225 C			
226 C	TOHTX	TOTAL COOLING LOAD FOR A ROOM, BTU/HR	
227 C	TOY(J)	ARRAY USED FOR TEMPORARY STORAGE OF VALUES WHILE ADVANCING TEMPERATURE AS REQUIRED BY RESPONSE FACTOR METHOD	
228 C			
229 C			
230 C	TSAVE	MAXIMUM TOTAL COOLING LOAD, BTU/HR	
231 C	TSITHT	TOTAL OVERALL HEAT GAIN FOR 24 HOURS, BTU/HR	
232 C			

233 C TV TEMPERATURE OF VENTILATING AIR, F
 234 C TZN TIME ZONE NUMBER
 235 C U(I) OVERALL HEAT TRANSFER COEFFICIENT FOR SURFACE I
 236 C UCENLNG OVERALL HEAT TRANSFER COEFFICIENT OF THE CEILING BETWEEN THE ATTIC AIR AND THE ROOM AIR BELOW
 238 C UENDW OVERALL HEAT TRANSFER COEFFICIENT OF THE ATTIC ENDWALL
 240 C UG GROUND HEAT TRANSFER COEFFICIENT
 243 C UGLAS WINTER GLASS HEAT TRANSFER COEFFICIENT
 244 C UT(I) U VALUE WITHOUT SURFACE RESISTANCES
 245 C VIN INDOOR AIR SPECIFIC VOLUME, FT3/LB
 246 C VOUT OUTDOOR AIR SPECIFIC VOLUME, FT3/LB
 247 C VT(L) SAME AS UT(I)
 248 C WA OUTDOOR AIR HUMIDITY RATIO, LB OF H2O VAPOR PER LB OF DRY AIR (= WOUT)
 249 C WAZ(I) WALL AZIMUTH ANGLE MEASURED CLOCKWISE FROM SOUTH, DEGREES
 250 C WBID DESIGN INDOOR WETBULB TEMPERATURE, F
 253 C WJMAX DESIGN OUTDOOR WETBULB TEMPERATURE, F
 254 C WBSAVE(J) INDOOR WETBULB TEMPERATURE AT HOUR J, F
 255 C WID DESIGN INDOOR HUMIDITY RATIO, LB OF H2O VAPOR/LB OF DRY AIR
 256 C WIN INDOOR HUMIDITY RATIO, LB H2O/LB DRY AIR
 258 C WOUT DESIGN OUTDOOR HUMIDITY RATIO, LB H2O VAPOR/LB DRY AIR
 259 C WROT DEGREES OF ROTATION FOR ROOM
 261 C WT WALL TILT ANGLE (= 90. DEGREES WHEN VERTICAL WALL)
 262 C WV VENTILATION AIR HUMIDITY RATIO, LB H2O VAPOR/LB DRY AIR
 264 C X(L,N) RESPONSE FACTORS FOR CONSTRUCTION L
 266 C XX(N,L) TRANPOSE OF ARRAY X
 267 C Y(L,N) RESPONSE FACTORS FOR CONSTRUCTION L
 268 C YY(N,L) TRANPOSE OF ARRAY Y
 269 C Z(L,N) RESPONSE FACTORS FOR CONSTRUCTION L
 270 C ZBLDG INPUT ARRAY FOR BUILDING AND EXTERNAL DATA
 271 C ZRCOM INPUT ARRAY FOR RCOM DATA
 272 C ZZ(N,L) TRANPOSE OF ARRAY Z
 273 C
 274 C
 275 CCNMON /CC/ X(10,100),Y(10,100),Z(10,100),ITYPE(30),IHT(30),
 2 IRF(30),ABSP(30),U(30),H(30),HI(30),A(30),UT(30),TOS(30,48),
 3 TIS(30,48),G(30,30),TOY(48),DB(24),QLITX(24,3),QEQUX(24,3),
 4 QOCUP(24,3),QOCPS(24),QLITE(24),QEQUP(24),QI(30),CR(30),NR(30),
 5 QGLAS(30,24),ITHST,UENDW,AZW(30),SHADE(30),RMDBS(24),RMDBW(24),
 6 SHD(30),UCENLNG
 DIMENSION XX(100,10),YY(100,10),ZZ(100,10),TNEW(100),TI(48),
 2 XDUM(100),YDUM(100),ZDUM(100),TDUM(100),QO(30),TIF(30),TOC(24),
 3 QSUN(30,24),QSKY(30,24),NAMERM(9),NAMEBD(9),VT(10),DR(10),MR(10),
 4 PR(24),PS(24),MDAYS(12)/31,28,31,30,31,31,30,31,30,31/
 DIMENSION DPT(24),WBT(24),PBT(24),WST(24),TC(24),NTOC(24)
 DIMENSION SALT(24),IEDAY(12)/15,46,74,105,135,166,196,227,258,288
 2,319,349/
 DIMENSION CALDB(24),CALRH(24),PGLAS(30,24),PSUN(30,24),TATTIC(100)
 2,QLS(24),QLL(24),ZBLDG(15),ZROOM(12),UW(30)
 DIMENSION HEATG(2),HEATX(2),HEATIS(2),HLCG(2),HLCX(2),HLCIS(2)

```

291      DIMENSION DBPF(24) /.87,.92,.96,.99,
292      2 1.00,.98,.93,.84,.71,.56,.39,.23,.11,.03,
293      3 0.0,.03,.10,.21,.34,.47,.58,.68,.76,.82/
294      COMMON /SHDW/ SHAW(30,15)
295      DIMENSION SHDX(20),SHDF(30,24),AIRLK(24),QSOL(24)
296      DIMENSION V(15),PLAT(24),AIRLAT(24),RALD(24),BASEL(24)
297      INTEGER DSTX,DSTY,RUNID,RUNTYP,ASHRAE
298      REAL LAT,LONG,NOFLR
299      INTEGER YEAR,TAPE2
300      LOGICAL LL1,LL2,LL3
301      COMMON /SOL/ LAT,LONG,TZN,WAZ,WT,CN,DSX,LPYR,S(35)
302      COMMON NSKP
303      PI=3.1415927
304      WRITE (6,1790)
305      WRITE (6,1800)
306      WRITE (6,1810)
307      WRITE (6,1820)
308      WRITE (6,1270)
309      READ (5,1460) RUNID,RUNTYP,ASHRAE,IDEAL,METHOD
310      READ (5,1640) NAMEBD
311      WRITE (6,1630) NAMEBD
312 C      READ 24 HOUR PROFILES FOR LIGHTING,EQUIPMENT AND OCCUPANCY
313      J3=3
314      DO 10 J=1,J3
315      IF (J.EQ.1) WRITE (6,1280)
316      IF (J.EQ.2) WRITE (6,1290)
317      IF (J.EQ.3) WRITE (6,1300)
318      READ (5,1460) (QLITX(I,J),I=1,24)
319      IF (J.EQ.1) WRITE (6,1310)
320      IF (J.EQ.2) WRITE (6,1320)
321      IF (J.EQ.3) WRITE (6,1330)
322      READ (5,1460) (QEQUX(I,J),I=1,24)
323      IF (J.EQ.1) WRITE (6,1340)
324      IF (J.EQ.2) WRITE (6,1350)
325      IF (J.EQ.3) WRITE (6,1360)
326      READ (5,1460) (QOCUP(I,J),I=1,24)
327      10 CONTINUE
328      IF (RUNTYP.GT.2) RUNTYP=2
329      WRITE (6,1370)
330      READ (5,1460) RMDBS
331      WRITE (6,1380)
332      READ (5,1460) RMDBW
333      WRITE (6,1390)
334      READ (5,1460) RMDBWO,RMBSO,RHW,RHS
335      SIGMA=0.1714E-8
336      HR=4.*0.9*SIGMA*(530.***3)
337      WRITE (6,1400)
338      READ (5,1460) NDAY,NSKIP,TAPE2
339      WRITE (6,1410)
340      READ (5,1460) ZBLDG
341      CLDSUM=0.
342      HLDSUM=0.
343      DO 1260 IJKLMN=1,10
344      WRITE (6,1420)
345      READ (5,1630) NAMERM
346 C      IF TAPE2 IS NOT BLANK B TAPE SHOULD BE ASSIGNED
347      IF (NAMERM(1).EQ.4H      ) STOP
348      WRITE (6,1430)

```

```

349      READ (5,1460) IROT,ISKIP,INCLUD
350  C      IF ISKIP .NE. 0, RESPONSE FACTOR CALCULATION IS SKIPPED
351  C      SC NO WALL DATA IS NEEDED
352      IF (ISKIP.NE.0) GO TO 50
353      DO 20 I=1,10
354      DO 20 J=1,100
355      X(I,J)=0.
356      Y(I,J)=0.
357  20      Z(I,J)=0.
358      IF (RUNID.EQ.1) GO TO 30
359      READ (8) X,Y,Z,MR,DR,VT
360      GO TO 40
361  C      THIS RESPONSE FACTOR ROUTINE REQUIRES MANY CONSTRUCTION DATA
362  C      PLEASE REFER TO THE INPUT INSTRUCTIONS
363  30      CONTINUE
364      CALL RESFX (X,Y,Z,XX,YY,ZZ,MR,DR,VT,10)
365      WRITE (8) X,Y,Z,MR,DR,VT
366      END FILE 8
367  40      PB=29.921
368  50      IF (IROT.NE.0) GO TO 60
369      WRROT=0.
370      WRITE (6,1440)
371      READ (5,1460) ZROOM
372      WRITE (6,1450)
373      READ (5,1460) IW,IL,ISTART,ILEAVE
374      READ (5,1460) TUL,TLL,QCMAX,QHMAX,DBVMAX,DBVMIN
375      READ (5,1460) ITHTST,ITK
376      CALL ROCMX (NEXP,NS,NW,NN,NE,HT)
377      RCOMND=ZROCM(1)
378      MONTH=ZBLDG(1)
379      AG=A(NEXP)
380      NOFLR=1
381      QCU=ZROOM(4)
382      LAT=ZBLDG(12)
383      LONG=ZBLDG(11)
384      TZN=ZBLDG(13)
385      DAYSKP=NSKIP
386      QLITY=ZROOM(2)
387      QECPX=ZROOM(3)
388      CFNV=ZROOM(8)
389      WBMAX=ZBLDG(6)
390      FLCG=ZROOM(5)
391      TGS=ZBLDG(8)
392      TGW=ZBLDG(9)
393      LDAY=ZBLDG(2)
394      YEAR=2000
395      DBWT=ZBLDG(7)
396      DBMAX=ZBLDG(4)
397      RHOW=ZBLDG(15)
398      ZLF=ZBLDG(14)
399      DBIN=RMDBW(12)
400      RHIN=RHW
401      IF (RUNTYP.EQ.2) CALL PSY1 (DBMAX,WBMAX,PB,DPMAX,PV,WA,HA,VA,RHO)
402      UG=ZBLDG(10)
403      TV=ZROOM(7)
404      FRAS=ZROOM(6)
405      ZNORM=ZROOM(12)
406      ARCHGW=ZROOM(10)

```

```

407      CFMWT=AG*HT*ARCHGW/60.
408      ARCHGM=ZROOM(11)
409      CFMIN=AG*HT*ARCHGM/60.
410      CONST=ARCHGW/0.695
411 C      THESE AIR CHANGE VALUES ARE FOR THE ATTIC VENTILATION
412 C      ROOM AIR CHANGE VALUES WILL BE DETERMINED AS A FUNCTION OF
413 C      WIND SPEED AND TEMPERATURE DIFFERENTIAL
414 60      CONTINUE
415      WRITE (6,1510)
416      IF (IDETAL.EQ.0) GO TO 70
417      WRITE (6,1550)
418      WRITE (6,1560) RCCMNO,HT,AG,NOFLR,QCU,ZROOM(9),ZROOM(10)
419      WRITE (6,1740)
420 70      CONTINUE
421      S(1)=LAT
422      S(2)=LONG
423      S(3)=TZN
424      IF (IDETAL.EQ.0) GO TO 80
425      WRITE (6,1570)
426      WRITE (6,1560) LAT,LONG,TZN,ZNORM
427      WRITE (6,1740)
428      WRITE (6,1580)
429      RHIN=RHS
430      WRITE (6,1560) QLITY,QEQPX,CFMV,DBIN,TGW,TV,RHIN
431      WRITE (6,1740)
432      WRITE (6,1600) NEXP,ITK,ITHST
433 80      CONTINUE
434      WRITE (6,1510)
435      IF (IROT.NE.0) GO TO 90
436      WRITE (6,1470)
437      READ (5,1460) UENDW,UCELNG,AENDW,ATCHT,AIRCHG,AIRNT
438      WRITE (6,1480)
439      READ (5,1460) IEXTSD,IEXMS,IEXME,NTVNT,NVENT
440      CFMNT=NTVNT*AG*HT/60.
441 90      CONTINUE
442      IF (IDETAL.EQ.0) GO TO 100
443      WRITE (6,1740)
444      WRITE (6,1590)
445      WRITE (6,1560) UENDW,UCELNG,AENDW,ATCHT
446 100     CONTINUE
447      IF (IROT.NE.0) GO TO 210
448      SUM=0.
449      DO 200 I=1,NEXP
450      K=IRF(I)
451      IF (Y(K,1).GT.1.) IRF(I)=10
452      NR(I)=MR(K)
453      IF (IRF(I).EQ.10) NR(I)=1
454      UT(I)=VT(K)
455      CR(I)=DR(K)
456      IF (NR(I).EQ.0) NR(I)=1
457      IF (NR(I).GT.48) NR(I)=48
458      IF (ITYPE(I).EQ.3) ABSP(I)=0.
459      IF (ITYPE(I).EQ.5) ABSP(I)=0.
460      IF (ITYPE(I).GE.6) ABSP(I)=0.
461      IHT(I)=1
462      IF (ITYPE(I).EQ.3) IHT(I)=-1
463      H(I)=6.0
464      HI(I)=1.46-HR

```

```

465      IF (ITYPE(I).GE.5) H(I)=0.
466      IF (ITYPE(I).EQ.1) HI(I)=1.630-HR
467      IF (ITYPE(I).EQ.5) HI(I)=1.080-HR
468      IF (ITYPE(I).EQ.7) U(I)=500.
469      IF (ITYPE(I).EQ.8) H(I)=1.46
470      IF (IRF(I).NE.10) U(I)=0.
471      IF (U(I)) 110,110,120
472 110      RU=1./UT(I)+1./(HI(I)+HR)
473      IF (ITYPE(I).LT.5.OR.ITYPE(I).EQ.8) RU=RU+1./H(I)
474      U(I)=1./RU
475 120      CONTINUE
476      IF (X(K,2)) 170,130,170
477 130      IF (H(I)) 140,150,140
478 140      R=1./U(I)-1./H(I)
479      GO TO 160
480 150      R=1./U(I)
481 160      UT(I)=1./(R-1./(HI(I)+HR))
482      IF (UT(I).LE.0.) UT(I)=28.0
483      IF (ITYPE(I).EQ.7) UT(I)=500.
484 170      CONTINUE
485      IF (UCELNG) 190,190,180
486 180      IF (ITYPE(I).NE.1) GO TO 190
487      RTA=1./UCELNG-1./(HI(I)+HR)
488      UT(I)=1./RTA
489 190      CONTINUE
490      UW(I)=U(I)
491      IF (ITYPE(I).GT.4) GO TO 200
492      SUM=SUM+A(I)*U(I)
493 200      CONTINUE
494      IF(ZLF.EQ.0.)ZLF=1.
495      ZK=SUM/ZLF
496      FC=1.-0.02*ZK
497 210      IF (IROT.EQ.0) GO TO 240
498      WROT=IROT
499      DO 220 I=1,NEXP
500      AZW(I)=AZW(I)+WROT
501      IF (AZW(I).LT.-180.) AZW(I)=AZW(I)+360.
502 220      IF (AZW(I).GT.180.) AZW(I)=AZW(I)-360.
503      DO 230 I=1,NEXP
504      DO 230 J=1,NEXP
505 230      G(I,J)=G(I,J)/HR
506 240      CONTINUE
507      IF (IDETAL.EQ.0) GO TO 280
508      WRITE (6,1680)
509      DO 250 I=1,NEXP
510      WRITE (6,1650) I,ITYPE(I),IHT(I),IRF(I),ABSP(I),U(I),H(I),A(I),AZW
511      2(I),SHADE(I),UT(I),HI(I)
512 250      CONTINUE
513      WRITE (6,1690)
514      DO 260 I=1,NEXP
515 260      WRITE (6,1560) (SHAW(I,J),J=1,15)
516      IF (ASHRAE.EQ.1) GO TO 300
517      WRITE (6,1700)
518      WRITE (6,1710)
519      DO 270 I=1,NEXP
520      WRITE(6,1720) I,(G(I,J),J=1,NEXP)
521 270      CONTINUE
522 280      DO 290 I=1,NEXP

```

```

523      DO 290 J=1,NEXP
524 290      G(I,J)=HR*G(I,J)
525 300      TIM=75.
526      IF (RUNTYP.EQ.2) CALL WINTER (A,UW,ITYPE,NEXP,CFMWT,DBIN,DBWT,UG,T
527      2GW,RHW,RHOUENDW,UECENG,AENDW,ATCHT,AIRCHG)
528      QLITO=QLITY*AG*3.413*NOFLR
529      QEQP0=QEQPX*AG*3.413*NOFLR
530      DO 310 I=1,NEXP
531      QO(I)=0.
532      QI(I)=0.
533 310      CONTINUE
534      QRFC=0.
535      QRFI=0.
536      C      DBM=TIM= REFERENCE TEMPERATURE
537      TA=TIM
538      MOT=0
539      TCLLD=0.
540      THLLD=0.
541      IF (IJKLMN.GT.1) GO TO 320
542 320      CONTINUE
543      NEND=DAYSKP+NDAY
544      IF (RUNTYP.NE.2) GO TO 340
545      NEND=7
546      DO 330 J=1,24
547      DB(J)=ZBLDG(4)-ZBLDG(5)*DBPF(J)
548      DPT(J)=DPMAX
549      WST(J)=0.
550      PBT(J)=29.921
551      TC(J)=0.
552      NTOC(J)=0
553 330      CONTINUE
554 340      DO 1250 ND=1,NEND
555      NSKP=ND-DAYSKP
556      IF (RUNTYP.EQ.2) GO TO 380
557      READ (7) DB,DPT,WBT,WST,PBT,TC,TOC,PR,PS,YEAR,MONTH,LDAY,ICITY
558      DO 350 IZ1=1,24
559      NTOC(IZ1)=TOC(IZ1)
560 350      CONTINUE
561      N=ND-DAYSKP
562      IF (N.LT.1) GO TO 1250
563      INDAY=DAYSKP+N
564      IF (IDETAL.EQ.0) GO TO 360
565      WRITE (6,1620) N,INDAY,YEAR,MONTH,LDAY
566      WRITE (6,1610) NAMERM
567 360      CONTINUE
568      KDAY=WKDAY(YEAR,MONTH,LDAY)
569      CALL HOLIDAY (YEAR,MONTH,LDAY,KDAY,IHOL)
570      CALL DST (YEAR,MONTH,LDAY,DSTX,DSTY)
571      IDST=1
572      IF (MONTH.LT.4) IDST=0
573      IF (MONTH.GT.10) IDST=0
574      IF (MONTH.NE.4.OR.MONTH.NE.10) GO TO 370
575      IF (MONTH.EQ.4.AND.LDAY.LT.DSTX) IDST=0
576      IF (MONTH.EQ.10.AND.LDAY.GT.DSTY) IDST=0
577 370      DSX=IDST
578      JJ=1
579      IF (KDAY.EQ.7.OR.KDAY.EQ.1) JJ=2
580      IF (IHOL.EQ.1) JJ=2

```

```

581 380 IF (RUNTYP.EQ.2) JJ=1
582 DO 390 J=1,24
583 QLITE(J)=QLITO*QLITX(J,JJ)
584 QECUP(J)=QECPD*QEQUX(J,JJ)
585 390 CONTINUE
586 IF (MONTH.EQ.MOT) GO TO 550
587 TG=TGW
588 IF (MONTH.GT.5.AND.MONTH.LT.10) TG=TGS
589 MCT=MONTH
590 S(4)=IEDAY(MCNTH)
591 IF (RUNTYP.EQ.2) S(4)=ZBLDG(3)
592 S(6)=IDST
593 IF (RNLNTYP.EQ.2) S(6)=0.
594 S(7)=0.2
595 S(8)=1.0
596 S(33)=1.
597 IF (IDETAL.EQ.0) GO TO 400
598 WRITE (6,1730)
599 400 CONTINUE
600 DO 530 I=1,NEXP
601 IF (ITYPE(I).LT.5) GO TO 420
602 DO 410 J=1,24
603 QSUN(I,J)=0.
604 QGLAS(I,J)=0.
605 410 QSKY(I,J)=0.
606 GO TO 520
607 420 WAZ=AZW(I)
608 S(9)=WAZ
609 S(10)=90.
610 IF (ITYPE(I).EQ.1) S(10)=0.
611 SHDX(1)=SHAW(I,1)
612 SHDX(2)=SHAW(I,2)
613 SHDX(3)=SHAW(I,3)
614 SHDX(4)=SHAW(I,4)
615 SHDX(5)=SHAW(I,5)
616 SHDX(6)=SHAW(I,6)
617 SHDX(7)=SHAW(I,7)
618 SHDX(8)=SHAW(I,8)
619 SHDX(9)=SHAW(I,9)
620 SHDX(10)=SHAW(I,10)
621 SHDX(11)=SHAW(I,11)
622 SHDX(12)=SHAW(I,12)
623 SHDX(13)=SHAW(I,13)
624 SHDX(14)=SHAW(I,14)
625 SHDX(15)=SHAW(I,15)
626 430 CONTINUE
627 DO 510 J=1,24
628 QSKY(I,J)=0.
629 TIME=J
630 S(5)=TIME
631 CALL SUN
632 SALT(J)=S(20)
633 IF (S(25).GT.0.) GO TO 440
634 QSUN(I,J)=0.
635 QGLAS(I,J)=0.
636 GO TO 510
637 440 QSUN(I,J)=S(25)*AESP(I)
638 QGLAS(I,J)=0.

```

```

639      PHI=S(21)*PI/180.
640      XQ=S(20)*PI/180.
641      CGSZ=SIN(XG)
642      IF (SHD(I)) 460,460,450
643 450      SHDF(I,J)=0.
644      GO TO 480
645 460      SHDF(I,J)=1.
646      IF (SHDX(1)) 480,480,470
647 470      SHDX(16)=S(9)*PI/180.
648      CALL SHADOW (SHDX,PHI,COSZ,SHDF(I,J))
649 480      CONTINUE
650      IF (ITYPE(I).NE.3) GO TO 500
651      IF (IEXTSD.EQ.0) GO TO 490
652      IF (MONTH.GE.IEXMS.AND.MONTH.LE.IEXME) SHDF(I,J)=0.
653 490      CONTINUE
654      CALL GLASS (SHDF(I,J),SHADE(I),1.,1.,QGLAS(I,J))
655 500      CONTINUE
656      S34=S(25)-S(26)-S(27)
657      QSUN(I,J)=(S34*SHDF(I,J)+S(26)+S(27))*ABSP(I)
658 510      CONTINUE
659 520      IF (IDETAL.NE.0) WRITE (6,1660) I
660      IF (IDETAL.NE.0) WRITE (6,1670) (QSUN(I,J),J=1,24)
661      IF (IDETAL.NE.0) WRITE (6,1670) (QGLAS(I,J),J=1,24)
662 530      CONTINUE
663      DO 540 I=1,NEXP
664      DO 540 J=1,24
665      PGLAS(I,J)=QGLAS(I,J)
666 540      PSUN(I,J)=QSUN(I,J)
667 550      CONTINUE
668      IF (ND.NE.1) GO TO 640
669      DO 560 J=1,24
670      DO 560 I=1,NEXP
671 560      TOS(I,J)=DB(24-J+1)-TIM
672      DO 570 J=25,48
673      DO 570 I=1,NEXP
674 570      TOS(I,J)=TOS(I,J-24)
675      DO 580 I=1,NEXP
676      DO 580 J=1,48
677 580      TIS(I,J)=0.
678      TA=TIM
679      DO 590 J=1,48
680      TNEW(J)=0.
681 590      TATTIC(J)=0.
682      IF (ASHRAE) 640,640,600
683 600      DO 620 I=1,NEXP
684      DO 610 J=1,24
685 610      TIS(I,J)=RNDBS(24-J+1)-TIM
686      DO 620 J=25,48
687 620      TIS(I,J)=TIS(I,J-24)
688      DO 630 II=1,2
689      HEATG(II)=0.
690      HEATX(II)=0.
691      HEATIS(II)=0.
692      HLCG(II)=0
693      HLCX(II)=0.
694 630      HLCIS(II)=0.
695 640      CONTINUE
696 C      END OF INITIALIZATION

```

```

697 C      TIME CALCULATION BEGINS HERE
698      DO 1150 NK=1,24
699      LL1=NK.GE.ISTART.AND.NK.LE.ILEAVE
700      LL2=NK.LT.ISTART.OR.NK.GT.ILEAVE
701      LL3=NVENT.NE.0.AND.CB(NK).LT.TV.AND.QL.LT.10.
702      IF (ITK.NE.0) GO TO 650
703      IF (ITHST.NE.1) GC TO 650
704      CALL TEMPSPH (MONTH,JJ,NK,RMDBS,RMDBW,RMDBWO,RMDBSO,TA)
705 650      CONTINUE
706      IF (RUNTYP.NE.2) GC TO 660
707      FOT=4.
708      ACHG=ZROOM(9)
709      CM=1.
710      GO TO 670
711 660      WSTX=WST(NK)
712      CALL FC (WSTX,3,FOC,FOT,0)
713 C      AIR CHANGE AS A FUNCTION OF WIND SPEED
714 C      COBLENZ AND ACHENBACH 1963 ASHRAE TRANSACTION
715      WSTZ=WST(NK)*1.151
716      ACH=0.15+0.013*WSTZ+0.005*ABS(DB(NK)-TA)
717      ACHG=ACH*CONST
718      CM=CCM(SALT(NK),NTOC(NK),TC(NK))
719 670      CFML=A(1)*ACHG*HT/60.+CFMIN
720      CFMLX=CFML
721      IF (LL1) GO TO 680
722      CFMV=0.
723      GO TO 690
724 680      IF (JJ.GT.1) CFMV=0.
725 690      CONTINUE
726      DO 720 I=1,NEXP
727      NRR=NR(I)
728      QSUN(I,NK)=PSUN(I,NK)*CM
729      QGLAS(I,NK)=PGLAS(I,NK)*CM
730      QSKY(I,NK)=0.
731      IF (ITYPE(I).EQ.1) QSKY(I,NK)=2.*((10.-TC(NK)))
732      IF (NRR.LT.2) GO TO 720
733      DO 700 NTT=2,NRR
734 700      TOY(NTT)=TOS(I,NTT-1)
735      DO 710 NTT=2,NRR
736 710      TOS(I,NTT)=TOY(NTT)
737 720      CONTINUE
738      DO 800 I=1,NEXP
739      NRR=NR(I)
740      IF (ASHRAE.GT.0) TIS(I,1)=TA-TIM
741      K=IRF(I)
742      DO 730 J=1,NRR
743      XDUM(J)=X(K,J)
744      YDUM(J)=Y(K,J)
745      ZDUM(J)=Z(K,J)
746      TDUM(J)=TOS(I,J)
747      IF (ITYPE(I).EQ.6.OR.ITYPE(I).EQ.7) TDUM(J)=TIS(I,J)
748      IF (ITYPE(I).EQ.5) TDUM(J)=TG-TIM
749      TI(J)=TIS(I,J)
750 730      CONTINUE
751      UX=U(I)
752      IF (H(I)) 750,750,740
753 740      H(I)=FOT
754      RX=1./UT(I)+1./(HI(I)+HR)

```

```

755      RX X=RX+1./H(I)
756      U(I)=1./RXX
757      UX=1./RX
758 750  CONTINUE
759      IF (ITYPE(I).EQ.1.AND.UENDW.NE.0.) GO TO 760
760      GO TO 780
761 760  ATCACG=AIRCHG*AIRNT
762      IF (LL1) ATCACG=AIRCHG
763      CALL ATTIC (XDUM,YDUM,ZDUM,CR(I),NRR,UX,H(I),DB(NK),QSUN(I,NK),QSK
764      2Y(I,NK),TDUM,TATTIC,TNEWO,TA,TIM,QRFO,QRFI,QO(I),QI(I),UENDW,UCELN
765      3G,AENDW,A(I),ATCHT,ATCACG)
766      DO 770 J=1,NRR
767      TNEW(J)=TDUM(J)
768 770  TOS(1,J)=TATTIC(J)
769      GO TO 800
770 780  CONTINUE
771      IF (RUNTYP.EQ.2) ITEMP=0
772      CALL OUTSID (XDUM,YDUM,ZDUM,CR(I),UX,H(I),DB(NK),TIM,QO(I),QI(I),Q
773      2SUN(I,NK),QSKY(I,NK),TDUM,TI,TNEWO,TA,NRR)
774      DO 790 J=1,NRR
775 790  TOS(I,J)=TDUM(J)
776 800  CONTINUE
777      QOCPS(NK)=QOCUP(NK,JJ)*10.* (100.-TA)*QCU
778      QOCPL=10.* (TA-60.)*QOCUP(NK,JJ)*QCU
779      IF (TA-100.) 820,810,810
780 810  QOCPS(NK)=0.
781      QOCPL=400.*QOCUP(NK,JJ)*QCU
782      GO TO 840
783 820  IF (TA-65.) 830,840,840
784 830  QOCPS(NK)=350.*QOCUP(NK,JJ)*QCU
785      QOCPL=50.*QOCUP(NK,JJ)*QCU
786 840  DO 870 I=1,NEXP
787      NRR=NR(I)
788      IF (NRR.LT.2) GO TO 870
789      DO 850 NTT=2,NRR
790 850  TOY(NTT)=TIS(I,NTT-1)
791      DO 860 NTT=2,NRR
792 860  TIS(I,NTT)=TCY(NTT)
793 870  CONTINUE
794      IF (ASHRAE) 900,900,880
795 880  QSUMG=0.
796      QSUMX=0.
797      DO 890 I=1,NEXP
798      IF (ITYPE(I).LE.3.OR.ITYPE(I).EQ.8) QSUMX=QSUMX-QI(I)*A(I)
799      IF (ITYPE(I).EQ.3) QSUMG=QSUMG+QGLAS(I,NK)*A(I)
800 890  CCNTINUE
801      HEATG(1)=HEATG(2)
802      HEATG(2)=QSUMG
803      HEATX(1)=HEATX(2)
804      HEATX(2)=QSUMX+GCCFS(NK)+QEQUF(NK)
805      HEATIS(1)=HEATIS(2)
806      NKK=NK-1
807      IF (NKK.EQ.0) NKK=24
808      HEATIS(2)=QLITE(NKK)
809      HLCG(1)=HLCG(2)
810      HLCX(1)=HLCX(2)
811      HLCIS(1)=HLCIS(2)
812      ISC=1

```

```

813      CALL RMRT (HEATG,HLCG,HEATX,HLCX,HEATIS,HLCIS,IW,IL,FC,ISC)
814      QL=HLCG(2)+HLCX(2)+HLCIS(2)+1.08*CFML*(DB(NK)-TA)
815      QGAIN=HEATG(2)+HEATX(2)+HEATIS(2)
816      QL=-QL
817      GO TO 965
818 900  CONTINUE
819      DO 960 I=1,NEXP
820      HI(I)=0.542
821      HTEST=TIS(I,1)
822      IF (I.NE.1) GO TO 930
823      IF (HTEST) 910,910,920
824 910  HI(1)=0.712
825      GO TO 960
826 920  HI(1)=0.162
827      GO TO 960
828 930  IF (I.NE.NEXP) GO TO 960
829      IF (HTEST) 940,940,950
830 940  HI(NEXP)=0.162
831      GO TO 960
832 950  HI(NEXP)=0.712
833 960  CONTINUE
834 965  CONTINUE
835      IF (NTVNT.EQ.0) GO TO 1010
836      IF (DB(NK).LT.DBVMIN.OR.DB(NK).GT.DBVMAX ) GO TO 1010
837 970  IF (TA-DB(NK)) 1010,1010,980
838 980  IF (JJ.GT.1) GO TO 990
839      IF (LL1) GO TO 1010
840 990  IF (QL+10) 1000,1010,1010
841 1C00  CFML=CFMLX+CFMNT
842 1010  CONTINUE
843      V(3)=0.
844      V(2)=CFML
845      V(1)=DB(NK)
846      IF(LL2 .CR..NOT.LL3.OR.JJ.GT.1)GO TO 1011
847      V(3)=CFMV
848 1011  CONTINUE
849      CFMLNC=CFML+V(3)
850      IF(ASHRAE.GT.0.)GO TO 1040
851      V(4)=FRAS
852      V(5)=FLCG
853      V(6)=TIM
854      V(7)=QCMAX
855      V(8)=GHMAX
856      IF (JJ.GT.1) GO TO 1020
857      IF (LL2) GO TO 1020
858      V(9)=TUL
859      V(10)=TLL
860      GO TO 1030
861 1C20  V(9)=RMDBSO
862      V(10)=RMDBWO
863 1030  CONTINUE
864      V(11)=TA
865      V(12)=FRAS
866      V(13)=HR
867      V(14)=METHOD
868      CALL RMTMK (V,TIF,QL,TA,NEXP,NK,ITK)
869      IF(LL1 .AND.LL3 .AND.QL.GT.0..AND.DB(NK).GT.60.)QL=0.
870 1040  CALL PSY2 (DB(NK),DPT(NK),PBT(NK),WBT(NK),PVO,WA,HA,VA,RHA)

```

```

871      IF(ABS(QL).LT.10.)QL=0.
872      PLAT(NK)=-QOCPL*ZNORM
873      WV=WA
874      QOCPL=QOCPL/1060.
875 1080  WIN=(4.5*CFMLNC*WA+QOCPL)/4.5/CFMLNC
876      PVI=PB*WIN/(0.622+WIN)
877      RHIN=100.*PVI/PVSF(TA)
878      IF(RHIN.GT.100)RHIN=100.
879      IF(QL.EG.0.)GO TO 1086
880      IF(QL.GT.0.)GO TO 1085
881      IF(RHIN.GT.RHS)RHIN=RHS
882 1085  IF(QL.LT.0.)GO TO 1086
883      IF(RHIN.LT.RHW)RHIN=RHW
884 1086  CONTINUE
885      CALDB(NK)=TA
886      CALRH(NK)=RHIN
887      CALL DBRH (TA,RHIN,WIN)
888      AIRLAT(NK)=4.5*CFMLNC*(WIN-WA)*1060.*ZNORM
889      RALD(NK)=QLITE(NK)*FLCG*ZNORM
890      BASEL(NK)=(QLITE(NK)+QEQUF(NK))*ZNORM
891      AIRLK(NK)=1.08*CFMLNC*(TA-DB(NK))*ZNORM
892      QSOL(NK)=PSUN(1,NK)
893      QLATNT=(4.5*CFMLNC*(WIN-WA)-QOCPL)*1060.
894      IF((QL.GT.0..AND.RHIN.GT.RHW).OR.(QL.LT.0..AND.RHIN.LT.RHS))
895      1QLATNT=0.
896      IF (RUNTYP.EQ.2) GO TO 1100
897      IF (ASHRAE.EQ.0) GO TO 1100
898      CALL ADJUST (QL,QLATNT,MONTH,NK,JJ)
899 1100  CONTINUE
900      C
901      QLS(NK)=CL*ZNCRM
902      QLL(NK)=QLATNT*ZNORM
903      IF (ABS(QLS(NK))-1.) 1110,1110,1120
904 1110  QLL(NK)=0.
905 1120  CONTINUE
906      IF (UENDW) 1150,1150,1130
907 1130  NRR=NR(1)
908      DO 1140 J=1,NRR
909 1140  TOS(1,J)=TNEW(J)
910 1150  CONTINUE
911      IF (RUNTYP.EQ.2.AND.ND.LT.7) GO TO 1250
912      QLMAX=ABS(QLS(1))
913      NMAX=1
914      TSUM=0.
915      QLDSUM=0.
916      CLDAY=0.
917      HLDAY=0.
918      DO 1200 NK=1,24
919      IF (QLMAX-ABS(QLS(NK))) 1160,1170,1170
920 1160  QLMAX=AES(QLS(NK))
921      NMAX=NK
922      GO TO 1170
923 1170  CONTINUE
924      TSUM=TSUM+DB(NK)
925      QLDSUM=QLDSUM+QLS(NK)+QLL(NK)
926      QLDS=QLS(NK)+QLL(NK)
927      IF (QLDS) 1180,1180,1190
928 1180  CLDAY=CLDAY+QLDS

```

```

929      GO TO 1200
930  1190  HLDAY=HLDAY+QLDS
931  1200  CONTINUE
932      TCLLD=TCLLD+CLDAY
933      THTLD=THTLD+HLDAY
934      DBA=TSUM/24.
935      QLMAX=QLS(NMAX)+QLL(NMAX)
936      IF (RUNTYP.EQ.2) N=1
937      IF (N.GT.1) GO TO 1210
938      WRITE (6,1520) NAMERM,MONTH
939  1210  CONTINUE
940      WRITE (6,1530) MONTH,LDAY,NMAX,QLMAX,CLDAY,HLDAY,DBA
941      IF(MOD(YEAR,4).EQ.0)MDAYS(2)=29
942      TMTHH=TMTHH+HLDAY
943      TMTHC=TMTHC+CLDAY
944      IF(QLMAX.LT.YMAXH)GO TO 1207
945      YMAXH=QLMAX
946      NMAXH=NMAX
947      LDAYH=LDAY
948      LMH=MONTH
949  1207  IF(QLMAX.GT.YMAXC)GO TO 1208
950      YMAXC=QLMAX
951      NMAXC=NMAX
952      LDAYC=LDAY
953      LMC=MONTH
954  1208  IF(LDAY.NE.MDAYS(MONTH))GO TO 1209
955      WRITE(6,1271)TMTHC,TMTHH
956      TMTHC=0.
957      TMTHH=0.
958      IF(ND.EQ.NEND)GO TO 1209
959      WRITE(6,1272)
960  1209  CONTINUE
961      IF (ND.EQ.NEND) WRITE (6,1510)
962      IF (RUNTYP.NE.2) GO TO 1230
963      IF (ND.NE.NEND) WRITE (6,1510)
964      WRITE (6,1540) YEAR,MONTH,LDAY
965      WRITE (6,1490)
966      DO 1220 J=1,24
967  1220  WRITE (6,1500) J,DB(J),WBT(J),CALDB(J),CALRH(J),QLS(J),QLL(J)
968      WRITE (6,1510)
969  1230  CONTINUE
970      IF (IDETAL.EQ.0) GO TO 1240
971      WRITE (6,1750) DBA,QLDSUM
972      WRITE (6,1760) CLDAY,HLDAY
973      WRITE (6,1770) N,TCLLD,N,THTLD
974  1240  CONTINUE
975      IF (TAPE2.EQ.0) GO TO 1250
976      WRITE (TAPE2) NAMERM,MONTH,LDAY,DB,DPT,WBT,WST,PBT,TC,NTOC,CALDB,C
977      2ALRH,QLS,QLL,DBA,CLDAY,HLDAY,TCLLD,THTLD,QLITE,QEQU,QSOL,QDCPS,AI
978      3RLK
979      WRITE (10) QLS,PLAT,AIRLAT,DB,DPT,CALDB,RALD,BASEL
980  1250  CONTINUE
981      CLDSUM=CLDSUM+TCLLD
982      HLDSUM=HLDSUM+THTLD
983      WRITE(6,1273)YMAXC,LMC,LDAYC,NMAXC,YMAXH,LMH,LDAYH,NMAXH
984      WRITE (6,1780) IJKLMN,CLDSUM,IJKLMN,HLDSUM
985      REWIND 7
986  1260  CONTINUE

```

```

987      END FILE TAPE2
988      END FILE 10
989      STOP
990      C
991      C
992      1271  FORMAT(//' MONTHLY COOLING LOAD=',E15.8,' BTU',//' MONTHLY HEATING
993      * LOAD=',E15.8,' BTU')
994      1272  FORMAT(1H1,"MONTH DAY",7X,"MHR QLMAX",5X,"CL DAY",5X,"HLDAY",7X,
995      *#DEA")
996      1273  FORMAT(" MAX COOLING LOAD =",F10.0," MONTH =",I3," DAY =",I3," HOU
997      *R =",I3," MAX HEATING LOAD =",F10.0," MCNTN =",I3," DAY =",I3," H
998      *OUR =",I3)
999      1270  FORMAT (//34H RUNID,RUNTYP,ASHRAE,IDEATAL,METHOD/41H RUNID.....
1000      2 IDENTIFICATION OF THE RUN /42H                               1 NEED RESPONSE FACTO
1001      3R DATA/42H                                         2 SKIP RESPONSE FACTOR DATA/26H RUNTYP...
1002      4.....TYPE OF RUN/56H                                1 ENERGY CALCULATION ..NEEDS WE
1003      5ATHER TAPE/40H                                     2 DESIGN LOAD CALCULATION/52H
1004      6      3 DESIGN AND ENERGY LOAD CALCULATIONS/28H ASHRAE.....
1005      7 USE RMTMP/47H                                    1 USE ASHRAE WEIGHTING FACTORS/37H
1006      8 IDEATAL.....0     NO DETAILED OUTPUT/34H          1 DETAILE
1007      9D OUTPUT/49H MET+CD.....0    REGULAR TREATMENT FOR THE ROOM/48H.
1008      *.....1     SPECIAL TREATMENT OF THE ROOM)
1009      1280  FORMAT (31H LIGHTING SCHEDULE FOR WEEKDAYS)
1010      1290  FORMAT (30H LIGHTING SCHEDULE FOR WEEKEND)
1011      1300  FORMAT (42H LIGHTING SCHEDULE FOR THE VACATION PERIOD)
1012      1310  FCRMAT (38H EQUIPMENT USAGE SCHEDULE FOR WEEKDAYS)
1013      1320  FORMAT (32H EQUIPMENT SCHEDULE FOR WEEKENDS)
1014      1330  FORMAT (49H EQUIPMENT USAGE SCHEDULE FOR THE VACATION PERIOD)
1015      1340  FCRMAT (32H OCCUPANCY SCHEDULE FOR WEEKDAYS)
1016      1350  FORMAT (31H OCCUPANCY SCHEDULE FOR WEEKEND)
1017      1360  FORMAT (43H OCCUPANCY SCHEDULE FOR THE VACATION PERIOD)
1018      1370  FORMAT (42H THERMSTAT SETTING FOR THE COOLING SEASON)
1019      1380  FORMAT (42H THERMOSTAT SETTING FOR THE HEATING SEASON)
1020      1390  FORMAT (22H RMDEWC,RMDBSO,RHW,RHS)
1021      1400  FORMAT (33H DATA SHEET NO 1:NDAY,NSKIP,TAPE2)
1022      1410  FORMAT (56H DATA SHEET NO 2 +3 :MONTH,DAY,ELAPS,DBMAX,RANGE,WBMAX,
1023      2 DBMWT,TGS,TGW,UG,LONG,LAT,TZN,ZLF,RHOW)
1024      1420  FORMAT (34H DATA SHEET NO 4: NAME OF THE ROOM)
1025      1430  FORMAT (35H DATA SHEET NO 5:IROT,ISKIP,INCLUDE)
1026      1440  FORMAT (85H DATA SHEET NO 8: ROOMNO,QLITY,SEQPY,QU,FLCG,FRAS,TS,C
1027      2FMV,ARCHGS,ARCHGW,ARCHGM,ZNORM)
1028      1450  FORMAT (53H DATA SHEET NO.9: IW,IL,TUL,TLL,QCMAX,QHMAX,ITHST,ITK)
1029      1460  FORMAT ()
1030      1470  FORMAT (56H DATA SHEET NO 13: UENDW,UCELNG,AENDW,ATCHT,AIRCHG,AIRN
1031      2T)
1032      1480  FORMAT (49H DATA SHEET NO 14: IEXTSD,IEXMS,IEXME,NTVNT,NVENT//)
1033      1490  FORMAT (//69H      TIME      DBOUT      WBOUT      DBIN      RHIN
1034      2 G S      QLL)
1035      1500  FORMAT (I10,4F10.1,2F10.0)
1036      1510  FORMAT (///)
1037      1520  FORMAT (///14H      ROOM NAME= 9A4,9H      MONTH= 16/56H      DAY
1038      2MHR QLMAX      CLDAY      HLDAY      DBA)
1039      1530  FORMAT (I4,I6,I10,3F10.0,F10.1)
1040      1540  FORMAT (13H ***** YEAR =,I5,14H ***** MONTH =,I3,12H ***** DAY =,I
1041      23/)
1042      1550  FORMAT (8H RCCMNO,6X2HHT,6X2HAG,3X5HNOFLR,5X3HQCU,2X6HARCHGS,2X6H
1043      2ARCHGW)
1044      1560  FORMAT (15F8.1)

```

```

1045 1570 FORMAT (5X3HLAT,4X4HLONG,5X3HTZN,3X5HZNORM)
1046 1580 FORMAT (3X5HQLITY,3X5HQEQPX,4X4HCFMV,4X4HDBIN,6X2HTG,6X2HTV,4X4HRH
1047 2IN)
1048 1590 FORMAT (/31H UENCW UCELNG AENDW ATCHT)
1049 1600 FORMAT (6X,4HNEXP,7X,3HITK,5X,5HITHST/3(8X,I2))
1050 1610 FORMAT (1H ,6A6)
1051 1620 FORMAT (24H CLIMATIC DATA FOR DAY=,I5/27H DAYS ELAPSED SINCE JAN
1052 2 1=,I5,7H YEAR=,I5,8H MONTH=,I5,6H DAY=,I5)
1053 1630 FORMAT (1X,9A4)
1054 1640 FORMAT (9A4)
1055 1650 FCRMAT (I3,3I10,8F10.2)
1056 1660 FORMAT (I10,F10.0)
1057 1670 FORMAT (24F5.0)
1058 1680 FORMAT (58H SURFACE NO ITYPE IHT IRF ABSP U
1059 2 H,9X,1HA9X,3HWAZ5X,5HSHADE8X,2HUT8X,2HHI)
1060 1690 FORMAT (//21H SHADOW CASTING DATA/121H HT FL FP
1061 2 AW BWL BWR D FP1 A1 B1 C1
1062 3 FP2 A2 B2 C2)
1063 1700 FORMAT (///33H RADIATION INTERCHANGE FACTORS)
1064 1710 FORMAT (108H SURFACE 1 2 3 4
1065 2 5 6 7 8 9 10)
1066 1720 FORMAT (I10,10F10.3)
1067 1730 FORMAT (27H SCLAR DATA (QSUN/QGLASS))
1068 1740 FORMAT (4H /5H )
1069 1750 FORMAT (6H DBA =,F6.2/9H QLDSUM =,F10.0//)
1070 1760 FORMAT (36H TOTAL COOLING CONSUMFTION PER DAY =,F10.0,4H BTU/36H T
1071 2OTAL HEATING CONSUMPTION PER DAY =,F10.0,4H BTU)
1072 1770 FORMAT (49H TOTAL COOLING CONSUMPTION FOR THE ROOM OVER THE ,I3,14
1073 2H DAY PERIOD =,E11.5,4H BTU/49H TOTAL HEATING CONSUMPTION FOR THE
1074 3 ROOM OVER THE ,I3,13H DAY PERIOD =,E11.5,4H BTU)
1075 1780 FORMAT (31H TOTAL COOLING CONSUMPTION FOR ,I2,8H ROOMS =,E11.5,4H
1076 2BTU/31H TOTAL HEATING CONSUMPTION FOR ,I2,8H ROOMS =,E11.5,4H BTU)
1077 1790 FORMAT (///39H CONGRATULATIONS## NOW YOU ARE ON NESLD)
1078 1800 FCRMAT (/46H WE ASSUME YOU HAVE ALREADY PREPARED THE DATA)
1079 1810 FORMAT (52H ON NBS DATA FORMS..IF YOU HAD NOT ,PLEASE TURN OFF)
1080 1820 FORMAT (57H THE TERMINAL AND HAVE YOUR DATA READY ON THE DATA FOR
1081 2MS)
1082 C
1083 END
1084 @FOR,IS A2
1085 SUBROUTINE ABCD2 (Z,K,L,G,A,B,C,D,NL)
1086 C
1087 C ****
1088 C
1089 DIMENSION AX(10),BX(10),CX(10),DX(10),G(10)
1090 REAL K(10),L(10)
1091 PI=4.*ATAN(1.)
1092 PP=PI*0.5
1093 DO 50 I=1,NL
1094 IF (G(I)) 40,40,10
1095 10 IF (Z) 30,30,20
1096 20 ZG=SQRT(Z/G(I))
1097 ZQL=ZG*L(I)
1098 CC=SIN(ZQL)
1099 C1=COS(ZQL)
1100 S1=CO/ZQL
1101 S2=(S1-C1)/ZGL/ZQL
1102 AX(I)=C1

```

```

1103      BX(I)=L(I)/K(I)*S1
1104      CX(I)=-ZQL*K(I)/L(I)*CO
1105      DX(I)=C1
1106      GO TO 50
1107 30    AX(I)=1.
1108      CX(I)=0.
1109      DX(I)=1.
1110      BX(I)=L(I)/K(I)
1111      GO TO 50
1112 40    AX(I)=1.
1113      BX(I)=1/K(I)
1114      CX(I)=0.
1115      DX(I)=1.
1116 50    CONTINUE
1117      A=AX(1)
1118      B=BX(1)
1119      C=CX(1)
1120      D=DX(1)
1121      IF (NL.LT.2) GO TO 60
1122      CALL MULT (AX,BX,CX,DX,A,B,C,D,NL)
1123 60    RETURN
1124 C
1125      END
1126 aFOR,IS   A3
1127      SUBRCUTINE ABCDP2 (Z,K,L,G,AP,BP,CP,DP)
1128 C
1129 C      ****
1130 C
1131      REAL K,L
1132      PI=4.*ATAN(1.)
1133      IF (G) 30,30,10
1134 10    PP=PI/4./G
1135      IF (Z) 40,40,20
1136 20    ZG=SQRT(Z/G)
1137      ZQL=ZQ*L
1138      X=L*L*0.5/G
1139      RES=L/K
1140      CO=SIN(ZQL)
1141      C1=COS(ZQL)
1142      S1=CO/ZQL
1143      S2=(S1-C1)/ZQL/ZQL
1144      AP=X*S1
1145      BP=X*RES*S2
1146      CP=X*(S1+C1)/RES
1147      DP=X*S1
1148      GO TO 50
1149 C
1150 30    AP=0.
1151      BP=0.
1152      CP=0.
1153      DP=0.
1154      GO TO 50
1155 C
1156 40    CONTINUE
1157      X=L*L*0.5/G
1158      AP=X
1159      BP=X*L/K/3
1160      CP=K/L*X*2.

```

```

1161      DP=X
1162      GC TO 50
1163 C
1164 50   RETURN
1165 C
1166 END
1167 @FCR,IS A4
1168      SUBROUTINE ADJUST (QL,QLATNT,MONTH,NK,JJ)
1169 C
1170 C ****
1171 C
1172      IF (MCNTH.GE.6.AND.MCNTH.LE.9) GO TO 30
1173      IF (QL) 10,10,20
1174 10   IF (JJ.GT.1) GO TO 50
1175      IF (NK.LT.8.OR.NK.GT.17) GO TO 50
1176 20   RETURN
1177 C
1178 30   IF (QL) 40,50,50
1179 40   IF (JJ.GT.1) GO TO 50
1180      IF (NK.LT.8.OR.NK.GT.17) GO TO 50
1181      RETURN
1182 C
1183 50   QL=0.
1184      QLATNT=0.
1185      RETURN
1186 C
1187 END
1188 @FOR,IS A5
1189      SUBRCUTINE ATTIC (X,Y,Z,CR,NR,UX,FO,DB,QSUN,QSKY,TOS,TI,TINEW,TA,
1190 2,TIM,QRFC,QRFI,QO,QI,UENDW,UCELNG,AENDW,AROOF,ATCHT,ATCACG)
1191 C
1192 C ****
1193 C
1194 C THIS ROUTINE CALCULATES HEAT INPUT TO THE ROOM BELOW THE
1195 C ATTIC CEILING. IT ALSO CALCULATES ATTIC TEMPERATURE
1196 C X,Y,Z RESPONSE FACTORS FOR ROOF... INSIDE SURFACE THERMAL
1197 C RESISTANCE IS INCLUDED
1198 C CR COMMON RATIO OF THE ROOF RESPONSE FACTORS
1199 C NR NUMBER OF SIGNIFICANT RESPONSE FACTORS TO BE USED
1200 C UX ROOF OVER ALL HEAT CONDUCTANCE EXCLUDING THE EXTERIOR SURFACE
1201 C THERMAL FESISTANCE
1202 C FC ROOF EXTERIOR SURFACE THERMAL TRANSFER COEFFICIENT
1203 C DB CUTDOOR CRY-BULB TEMPERATURE
1204 C QSUN SOLAR RADIATION OVER THE ROOF
1205 C QSKY RADIATION TO THE SKY
1206 C TCS ROOF SURACE TEMPERATURE HISTORY
1207 C TI ATTIC TEMPERATURE HISTORY
1208 C TONEW NEW OUTSIDE SURFACE TEMPERATURE
1209 C TINEW NEW ATTIC TEMPERATURE
1210 C QRFO HEAT CONDUCTED INTO THE ROOF SURFACE
1211 C QRFI HEAT CONDUCTED INTO THE ATTIC FROM THE ROOF
1212 C QO,QI HEAT CONDUCTED INTO THE ROOM BELOW THE ATTIC
1213 C UENDW OVERALL HEAT TRANSFER COEFFICIENT OF THE END WALL
1214 C UCELNG OVERALL HEAT TRANSFER COEFFICIENT OF THE CEILING
1215 C BETWEEN THE ATTIC AIR AND ROOM AIR BELOW
1216 C AENDW AREA OF THE ATTIC END WALLS
1217 C ARCOF TOTAL AREA OF THE CEILING
1218 C ATCHT ATTIC HEIGHT

```

```

1219 C      ATCACG  ATTIC AIR CHANGE PER HOUR
1220 C      ALL UNITS IN ENGLISH UNIT  ALL LENGTH IN FT
1221      DIMENSION TOS(1),TI(1),X(1),Y(1),Z(1),TOY(50)
1222      CFM=ATCACG*ATCHT*AROOF/60.
1223      BB=DB-TIM
1224      TAM=TA-TIM
1225      XNUM=QSLN-QSKY+F0*BB
1226      YNUM=UENDW*BB*AENDW+1.08*CFM*BB+UCELNG*TAM*AROOF
1227      YDEN=UENDW*AENDW+UCELNG*AROOF+1.08*CFM
1228      IF (NR.LT.2) GO TO 10
1229      GO TO 20
1230 C
1231 10      TAM=TI(1)
1232      TCNEW=(XNUM+UX*TAM)/(UX+F0)
1233      QRFO=UX*(TAM-TONEW)
1234      QRFI=GRFC
1235      TINEW=(YNUM+UX*AROOF*TONEW)/(YDEN+UX*AROOF)
1236      TOS(1)=TCNEW
1237      QO=UCELNG*(TAM-TINEW)
1238      QI=GC
1239      TI(1)=TINEW
1240      RETURN
1241 C
1242 20      SUMX=X(1)*TI(1)
1243      SUMZ=0.
1244      SUMY=Y(1)*TI(1)
1245      SUMXY=0.
1246      DO 50 J=2,NR
1247      SUMY=SUMY+Y(J)*TI(J)
1248      SUMX=SUMX+X(J)*TI(J)
1249      SUMXY=SUMXY+Y(J)*TOS(J)
1250 50      SUMZ=SUMZ+Z(J)*TOS(J)
1251      XNUM=XNUM+SUMY-SUMZ+CR*QRFO
1252      TONEW=XNUM/(Z(1)+F0)
1253      TOS(1)=TONEW
1254      SUMZ=SUMZ+Z(1)*TOS(1)
1255      SUMXY=SUMXY+Y(1)*TOS(1)
1256      QRFO=SUMY-SUMZ+CR*QRFO
1257      QRFI=SUMX-SUMXY+CR*QRFI
1258      DO 30 J=2,NR
1259 30      TOY(J)=TI(J-1)
1260      DO 40 J=2,NR
1261 40      TI(J)=TOY(J)
1262      SUMX=0.
1263      SUMY=SUMXY
1264      SUMXY=0.
1265      DO 60 J=2,NR
1266      SUMX=SUMX+X(J)*TI(J)
1267 60      SUMXY=SUMXY+Y(J)*TI(J)
1268      YNUM=YNUM-AROOF*(SUMX-SUMY+CR*QRFI)
1269      YDEN=AROOF*X(1)+YDEN
1270      TINEW=YNLM/YDEN
1271      SUMX=SUMX+TINEW*X(1)
1272      QRFI=SUMX-SUMY+CR*QRFI
1273      SUMXY=SUMXY+Y(1)*TINEW
1274      QRFO=SUMXY-SUMZ+CR*QRFO
1275      QO=UCELNG*(TAM-TINEW)
1276      QI=QO

```

```

1277      TI(1)=TINEW
1278      RETURN
1279  C
1280      END
1281  @FOR,IS A6
1282      FUNCTION CCM (SALT,NTYPE,TC)
1283  C
1284  C      ****
1285  C
1286      REAL CC1(10) / .60,.60,.58,.57,.53,.49,.43,.35,.27/
1287      REAL CC2(10) / .88,.88,.88,.87,.85,.83,.79,.73,.61,.46/
1288      REAL CC3(10) / .84,.83,.83,.82,.80,.79,.74,.67,.60,.49/
1289      REAL CC4(10) / 1.,1.,1.,1.,.99,.98,.95,.90,.84,.74/
1290      ITC=TC
1291      IF (ITC.NE.0) GO TO 10
1292      CCM=1.
1293      GO TO 60
1294  C
1295  10  CONTINUE
1296      IF (SALT-45.) 40,40,20
1297  20  IF (NTYPE.EQ.0) GO TO 30
1298      CCM=CC2(ITC)
1299      GO TO 60
1300  C
1301  30  CCM=CC4(ITC)
1302      GO TO 60
1303  C
1304  40  IF (NTYPE.EQ.0) GO TO 50
1305      CCM=CC1(ITC)
1306      GO TO 60
1307  C
1308  50  CCM=CC3(ITC)
1309  60  RETURN
1310  C
1311      END
1312  @FOR,IS A7
1313      SUBROUTINE DBRH (DB,RH,W)
1314  C
1315  C      ****
1316  C
1317      PVS=PVSF(DB)
1318      PV=RH*PVS/100.
1319      W=0.622*PV/(29.92-PV)
1320      RETURN
1321  C
1322      END
1323  @FOR,IS A8
1324      SUBROUTINE DECODE (WPOSX,WLONGX,NUM,OUTPUT,MM,YR,MO,DAY,LOCAL)
1325  C
1326  C      ****
1327  C
1328  C      THIS SUBROUTINE PRODUCES HOURLY DATA OF UP TO 10 WEATHER
1329  C      PARAMETERS FOR A GIVEN YEAR,MO AND DATE
1330  C      TAPE FCSECTION FOR EACH OF TEN PARAMETERS ARE
1331  C          PARAMETERS          WPOSX        WLONGX
1332  C          WIND SPEED         13            3
1333  C          WIND DIRECTION     11            2
1334  C          DRY-BULB TEMP      16            3

```

```

1335 C      WET-BULB TEMP      19      3
1336 C      DEW-POINT TEMP    22      3
1337 C      BAROMETRIC PRESS  34      4
1338 C      TOTAL CLOUD AMOUNT 43      1
1339 C      OPAQUE CLOUD COVER 44      1
1340 C      PRECIPITATION(LIQUID) 68      2
1341 C      PRECIPITATION(FRZ)    70      3
1342 C      TAPE FCSITION CN TAPE 280
1343 C      SOLAR DATA        14      4
1344 C      ELEVATION ANGLE    18      2
1345 C      TOTAL CLCUD        42      1
1346 C      1ST LAYER TYPE OF CLOUD 46      1
1347 C      YR      YEAR
1348 C      MO      MONTH
1349 C      DAY     DAY
1350      INTEGER IPS(24),ICHAR(2000),WPOS,WLONG,OUTPUT(24,10),YR,DAY,WORD,
1351      2 WORDX(20),WPOSX(10),WLONGX(10),TAPE1,TAPE2
1352      COMMON TAPE1,TAPE2,N01,N02,INPUT(1100)
1353      IASS=1000000
1354      IF (MM.NE.0) GO TO 90
1355      DO 10 I=1,4
1356      CALL WD (0)
1357      DO 10 JJ=1,498
1358      KK=498*( I-1)+JJ
1359      10 ICHAR(KK)=INPUT( JJ)
1360      DO 20 I=1,15
1361      IW=ICHAR(I)
1362      CALL WDX ( IW)
1363      20 ICHAR(I)=IW
1364      YR=ICHAR(10)*10+ICHAR(11)+1900
1365      MO=ICHAR(12)*10+ICHAR(13)
1366      DAY=ICHAR(14)*10+ICHAR(15)
1367      LOCAL=ICHAR(9)
1368      IPWR=1
1369      DO 30 I=1,4
1370      IPWR=IPWR*10
1371      30 LOCAL=LCCAL+ICHAR(9-I)*IPWR
1372      DO 80 KU=1,NUM
1373      WPCS=WPOSX (KU)
1374      WLNG=WLCNGX (KU)
1375      DO 40 I=1,6
1376      IPS(I)=15+WPOS+80*(I-1)
1377      DO 40 J=1,3
1378      II=I+J*6
1379      40 IPS(II)=IPS( I)+J*498
1380      DO 70 I=1,24
1381      KI=IPS(I)
1382      KL=KI+WLCNG-1
1383      DO 50 L2=KI,KL
1384      IW=ICHAR(L2)
1385      CALL WDX ( IW)
1386      50 ICHAR(L2)=IW
1387      LONG=WLCNG-1
1388      IF ( ICHAR(KI).EQ.IASS.AND.WLONG.GT.1 ) LONG=WLONG-2
1389      WORD=AES(ICHAR(KL))
1390      IF ( LCNG.EQ.0) GO TO 70
1391      IPWR=1
1392      DO 60 JK=1,LONG

```

```

1393      IPWR=IPWR*10
1394 60      WORD=WORD+ICHAR(KL-JK)*IPWR
1395      IF (ICHAR(KL).LT.0) WORD=-WORD
1396 70      OUTPUT(I,KU)=WORD
1397 80      CONTINUE
1398      GO TO 240
1399 C
1400 90      CALL WD (1)
1401      JZ=0
1402      DO 100 J=1,991,66
1403      JX=J
1404      JZ=JZ+1
1405      IW=INPUT(J)
1406      CALL WDX (IW)
1407      IF (IW.NE.IASS) GO TO 110
1408 100     CONTINUE
1409 110     IF (JX.LT.991) GO TO 130
1410     DO 120 KU=1,NUM
1411     DO 120 J=1,24
1412 120     OUTPUT(J,KU)=IASS
1413     GO TO 240
1414 C
1415 130     JY=JX+20
1416     DO 140 I=JX,JY
1417     IW=INPUT(I)
1418     CALL WDX (IW)
1419 140     ICHAR(I)=IW
1420     YR=ICHAR(JX+5)*10+ICHAR(JX+6)+1900
1421     DAY=ICHAR(JX+9)*10+ICHAR(JX+10)
1422     MO=ICHAR(JX+7)*10+ICHAR(JX+8)
1423     IF (DAY.GT.0) GO TO 150
1424     IY=ABS(DAY)
1425     IF (IY.LT.20) DAY=DAY+20
1426     IF (IY.GE.20) DAY=DAY+40
1427 150     CONTINUE
1428     LCCAL=ICHAR(JX+4)
1429     IPWR=1
1430     DC 160 I=1,4
1431     IPWR=IPWR*10
1432     IF (ICHAR(JX+4-I).GT.0) GO TO 160
1433     LCCAL=IASS
1434     GO TO 170
1435 160     LOCAL=LCCAL+ICHAR(JX+4-I)*IPWR
1436 170     CONTINUE
1437     IHR=3+JZ
1438     IF (WPCS.EQ.0) GO TO 240
1439     DO 230 KU=1,NUM
1440     WPCS=WPCSX(KU)
1441     WLONG=WLONGX(KU)
1442     DO 180 I=1,24
1443 180     OUTPUT(I,KU)=0
1444     DO 210 I=1,16
1445     KI=WPOS+66*(I-1)
1446     KL=KI+WLONG-1
1447     DO 190 L2=KI,KL
1448     IW=INPUT(L2)
1449     CALL WDX (IW)
1450 190     ICHAR(L2)=IW

```

```

1451      LCNG=WLCNG-1
1452      IF ( ICHAR(KI).EQ.IASS.AND.WLONG.GT.1 ) LONG=WLONG-2
1453      WORD=ICHAR(KL)
1454      IF ( LCNG.EQ.0) GO TO 210
1455      IPWR=1
1456      IPWR=IPWR*10
1457      DO 200 JK=1,LCNG
1458      IF ( ICHAR(KL).LT.0) WORD=-WORD
1459 200      WORD=WORD+ICHAR(KL-JK)*IPWR
1460 210      WORDX(I)=WORD
1461      DO 220 I=1,16
1462      KK=I+3
1463 220      OUTPUT(KK,KU)=WORDX(I)
1464 230      CONTINUE
1465 240      RETURN
1466      C
1467      END
1468  @FOR,IS A9
1469      SUBROUTINE DERVT (A,B,C,D,AP,BP,CP,DP,APP,BPP,CPP,DPP,N)
1470      C
1471      C ****
1472      C
1473      DIMENSION A(N),B(N),C(N),D(N),AP(N),BP(N),CP(N),DP(N),AT(10),
1474      2 BT(10),CT(10),DT(10),ATT(10),BTT(10),CTT(10),DTT(10)
1475      DO 30 I=1,N
1476      DO 20 J=1,N
1477      IF ( I.EQ.J) GO TO 10
1478      AT(J)=A(J)
1479      BT(J)=B(J)
1480      CT(J)=C(J)
1481      DT(J)=D(J)
1482      GO TO 20
1483 10      AT(J)=AP(J)
1484      BT(J)=BP(J)
1485      CT(J)=CP(J)
1486      DT(J)=DP(J)
1487 20      CONTINUE
1488 30      CALL MULT (AT,BT,CT,DT,ATT(I),BTT(I),CTT(I),DTT(I),N)
1489      APP=ATT(1)
1490      BFF=BTT(1)
1491      CPP=CTT(1)
1492      DPP=DTT(1)
1493      DO 40 I=2,N
1494      AFF=APP+ATT(I)
1495      BPP=BPP+BTT(I)
1496      CPP=CPP+CTT(I)
1497 40      DPP=DPP+DTT(I)
1498      RETURN
1499      C
1500      END
1501  @FCR,IS A10
1502      SUBROUTINE DST (YR,MO,DAY,DSTX,DSTY)
1503      C
1504      C ****
1505      C
1506      INTEGER YR,DAY,DSTX,DSTY
1507      NDAY=WKDAY(YR,MO,DAY)
1508      IF ( MO.LT.4 .OR. MC.GT.10) GO TO 10

```

```

1509      IF (MO.EQ.4.AND.DAY.LT.24) GO TO 10
1510      IF (NDAY.EQ.1) DSTX=DAY
1511      IF (MO.EQ.10.AND.DAY.LT.24) GO TO 10
1512      IF (NDAY.EQ.1) DSTY=DAY
1513 10    CONTINUE
1514      RETURN
1515      C
1516      END
1517  @FOR,IS A11
1518      FUNCTION DPF (PV)
1519      C
1520      ****
1521      C
1522      C THIS SUBROUTINE CALCULATES DEW-POINT TEMPERATURE FOR GIVEN VAPOR P
1523      IF (PV) 10,10,20
1524 10    GO TO 40
1525      C
1526 20    CONTINUE
1527      Y=LOG(PV)
1528      IF (PV.GT.0.1836) GO TO 30
1529      DPF=71.98+24.873*Y+0.8927*YY
1530      GO TO 40
1531      C
1532 30    DPF=79.047+30.579*Y+1.8893*YY
1533 40    RETURN
1534      C
1535      END
1536  @FOR,IS A12
1537      SUBRCUTINE ERROR (IDATA,K)
1538      C
1539      ****
1540      C
1541      DIMENSION MAX(10) /100,100,150,150,3500,10,10,99,999/
1542      DIMENSION MIN(10) /0,0,-40,-40,-40,2000,0,0,0,0/,IDATA(24)
1543      DC 10 J=1,24
1544      IZ=IDATA(J)
1545      IF (IZ.GT.MAX(K)) GO TO 10
1546      IF (IZ.LT.MIN(K)) GC TO 10
1547      GO TO 20
1548 10    CCNTINUE
1549 20    IDATA(1)=IZ
1550      DO 40 J=2,24
1551      IZ=IDATA(J)
1552      IF (IZ.GT.MAX(K)) GO TO 30
1553      IF (IZ.LT.MIN(K)) GC TO 30
1554      GO TO 40
1555 30    IDATA(J)=IDATA(J-1)
1556 40    CCNTINUE
1557      RETURN
1558      C
1559      END
1560  @FOR,IS A13
1561      FUNCTION F (A,B,C)
1562      C
1563      ****
1564      C
1565      C BC = RECEIVING SURFACE
1566      C AB = SENDING SURFACE

```

```

1567 C      F(A,B,C)= FRCM AB TO BC
1568 C      PI=3.14159
1569 C      F(C,E,A)=F(A,B,C)*A/C
1570 C      (A*B)*F(A,B,C)=(B*C)*F(C,B,A)
1571 C      X=A/B
1572 C      Y=C/B
1573 C      Z=X*X+Y*Y
1574 C      A2=LOG((1.+X*X)*(1.+Y*Y)/(1.+Z))
1575 C      A3=Y*Y*LOG(Y*Y*(1.+Z)/(1.+Y*Y)/Z)
1576 C      A4=X*X*LOG(X*X*(1.+Z)/(1.+X*X)/Z)
1577 C      A5=Y*ATAN(1./Y)
1578 C      A6=X*ATAN(1./X)
1579 C      A7=SQRT(Z)*ATAN(1./SQRT(Z))
1580 C      SUM=(A2+A3+A4)/4.+A5+A6-A7
1581 C      F=SUM/PI/Y
1582 C      RETURN
1583 C
1584 C      END
1585 @FCR,IS A14
1586 SUBROUTINE FCTR (L,W,H,SF)
1587 C
1588 C ***** ****
1589 C
1590 REAL L,SF(6,6)
1591 C THIS ROUTINE CALCULATES BASIC RADIATION SHAPE FACTORS FOR A ROOM.
1592 C RADIATION SHAPE FACTOR F(H,L,W)=(H*L)---*(L*W)
1593 C      TO          FROM   C       S       W       N       E
1594 C      C     CEILING           0     FHLW    FHWL   FHLW   FHWL
1595 C      S     SOUTH WALL        FWLH    0     FWHL   RMS    FWHL
1596 C      W     WEST WALL         FLWH   FLHW   0     FLHW   RMW
1597 C      N     NORTH WALL        FWLH   RMN    FWHL   0     FWHL
1598 C      E     EAST WALL         FLWH   FLHW   RME    FLHW   0
1599 C      F     FLOOR            RMF    FHLW   FHWL   FHLW   FHWL
1600 C
1601 C      RM = REMAINDER
1602 C      FHLW=F(H,L,W)
1603 C      FHWL=F(H,W,L)
1604 C      FWLH=F(W,L,H)
1605 C      FWHL=F(W,H,L)
1606 C      FLWH=F(L,W,H)
1607 C      FLHW=F(L,H,W)
1608 C      RMC=1.-2.* (FHLW+FHWL)
1609 C      RMS=1.-2.* (FWLH+FWHL)
1610 C      RMW=1.-2.* (FLWH+FLHW)
1611 C      RMN=RMS
1612 C      RME=RMW
1613 C      RMF=RMC
1614 C      SF(1,1)=0.
1615 C      SF(1,2)=FHLW
1616 C      SF(1,3)=FHWL
1617 C      SF(1,4)=FHLW
1618 C      SF(1,5)=FHWL
1619 C      SF(1,6)=RMC
1620 C      SF(2,1)=FWLH
1621 C      SF(2,2)=0.
1622 C      SF(2,3)=FWHL
1623 C      SF(2,4)=RMS
1624 C      SF(2,5)=FWHL

```

```

1625      SF(2,6)=FWLH
1626      SF(3,1)=FLWH
1627      SF(3,2)=FLHW
1628      SF(3,3)=0.
1629      SF(3,4)=FLHW
1630      SF(3,5)=RMW
1631      SF(3,6)=FLWH
1632      SF(4,1)=FWLH
1633      SF(4,2)=RMN
1634      SF(4,3)=FWHL
1635      SF(4,4)=0.
1636      SF(4,5)=FWHL
1637      SF(4,6)=FWLH
1638      SF(5,1)=FLWH
1639      SF(5,2)=FLHW
1640      SF(5,3)=RMF
1641      SF(5,4)=FLHW
1642      SF(5,5)=0.
1643      SF(5,6)=FLWH
1644      SF(6,1)=RMF
1645      SF(6,2)=FHLW
1646      SF(6,3)=FHWL
1647      SF(6,4)=FHLW
1648      SF(6,5)=FHWL
1649      SF(6,6)=0.
1650      RETURN
1651 C
1652      END
1653 @FCR,IS A15
1654      SUBROUTINE FO (V,IS,FOC,FOT,IWD)
1655 C
1656 C ***** ****
1657 C
1658 C      THIS SUBROUTINE CALCULATES OUTSIDE SURFACE HEAT TRANSFER
1659 C      COEFFICIENTS, FOT AND FOC
1660 C      FOT.... RADIATION PLUS CONVECTION
1661 C      FOC.... CONVECTION
1662 C      V..... WIND VELOCITY IN KNOTS
1663 C
1664 C
1665 C ***** ****
1666 C
1667 C      DIMENSION A(6) /0.,0.001,0.,-0.002,0.,-0.00125/,B(6) /.464,0.320,
1668 C      2 0.330,0.315,0.244,0.262/,C(6) /2.04,2.20,1.90,1.45,1.80,1.45/
1669 C      VP=V*1.153
1670 C      FOT=A(IS)*VP*VP+B(IS)*VP+C(IS)
1671 C      IWD=1    IF THE SURFACE IS WINDWARD OR PARALLEL TO THE WIND
1672 C      IWD=0    IF THE SURFACE IS LEEWARD
1673 C      IF (IWD.EQ.0) GO TO 20
1674 C      IF (VP-7.0) 20,20,10
1675 10   FOC=0.23*VP+1.02
1676      GO TO 30
1677 C
1678 20   FOC=2.63
1679 30   RETURN
1680 C
1681      END
1682 @FOR,IS A16

```

```

1683      SUBROUTINE GLASS (SHADCW,SHDCF,GLTYP,GLAZE,SHGF )
1684 C
1685 C
1686 C
1687      DIMENSION TR(9),SH(25)
1688      REAL LAT,LONG
1689      COMMON /SCL/ LAT,LONG,TZN,WAZ,WT,CN,DST,LPYR,S( 35)
1690      TR(7)=S( 19)
1691      TR(8)=GLTYP
1692      TR(9)=GLAZE
1693      CALL TAR (TR)
1694      SH(1)=S(24)
1695      SH(2)=S(22)
1696      SH(3)=S(23)
1697      SH(4)=S(19)
1698      SH(5)=0.5
1699      SH(6)=0.5
1700      SH(7)=0.25
1701      SH(8)=0.
1702      SH(9)=0.7
1703      SH(10)=SHADOW
1704      SH(11)=SHDCF
1705      SH(12)=TR(1)
1706      SH(13)=TR(2)
1707      SH(14)=TR(3)
1708      SH(15)=TR(5)
1709      SH(16)=TR(4)
1710      SH(17)=TR(6)
1711      CALL SHG (SH)
1712      SHGF=SH(18)
1713      RETURN
1714 C
1715      END
1716  @FOR,IS A17
1717      SUBROUTINE GPF (U,ZL,Z)
1718 C
1719 C
1720 C
1721      DIMENSION Z(1)
1722      PI=4.*ATAN(1.)
1723      SQTP=SQRT(PI)
1724      PI2=2./PI
1725      EB=0.001
1726      DB=0.1
1727      WRITE (6,30)
1728      WRITE (6,40)
1729      Z(1)=2*ZL*SQRT(U)/SQTP
1730      ZZ=Z(1)
1731      Z(2)=Z(1)*(SQRT(2.)-2.)
1732      DO 10 K=3,50
1733      ZK=K
1734 10      Z(K)=Z(1)*(SQRT(ZK)-2.*SQRT(ZK-1)+SQRT(ZK-2.))
1735      DO 20 K=1,50
1736 20      WRITE (6,50) K,Z(K)
1737      RETURN
1738 C
1739 C
1740 30      FORMAT (50H0  RESPONSE FACTORS FOR SEMI-INFINITE BED

```

```

1741 40      FORMAT (50H0          K      Z(K)
1742 50      FORMAT (1I10,3F10.5)
1743 C
1744      END
1745 @FCR,IS A18
1746      SUBRCUTINE HOLDAY (YR,MO,DAY,NDAY,HCL)
1747 C
1748 C ***** **** * **** * **** * **** * **** * **** * **** * **** * **** *
1749 C
1750      INTEGER YR,DAY,HOL,WKDAY
1751      NDAY=WKDAY(YR,MO,DAY)
1752      HOL=0
1753      IF (MO.EQ.1.AND.DAY.EQ.1) HCL=1
1754      IF (MO.EQ.12.AND.DAY.EQ.31.AND.NDAY.EQ.6) HOL=1
1755      IF (MO.EQ.1.AND.DAY.EQ.2.AND.NDAY.EQ.2) HOL=1
1756      IF (MO.EQ.2.AND.DAY.EQ.22) HOL=1
1757      IF (MO.EQ.2.AND.DAY.EQ.21.AND.NDAY.EQ.6) HOL=1
1758      IF (MO.EQ.2.AND.DAY.EQ.23.AND.NDAY.EQ.2) HOL=1
1759      IF (MO.EQ.5.AND.DAY.EQ.30) HOL=1
1760      IF (MO.EQ.5.AND.DAY.EQ.29.AND.NDAY.EQ.6) HOL=1
1761      IF (MO.EQ.5.AND.DAY.EQ.31.AND.NDAY.EQ.2) HOL=1
1762      IF (MC.EQ.7.AND.DAY.EQ.4) HCL=1
1763      IF (MO.EQ.7.AND.DAY.EQ.3.AND.NDAY.EQ.6) HOL=1
1764      IF (MO.EQ.7.AND.DAY.EQ.5.AND.NDAY.EQ.2) HOL=1
1765      IF (MO.EQ.12.AND.DAY.EQ.25) HOL=1
1766      IF (MO.EQ.12.AND.DAY.EQ.24.AND.NDAY.EQ.6) HOL=1
1767      IF (MC.EQ.12.AND.DAY.EQ.26.AND.NDAY.EQ.2) HOL=1
1768      IF (MO.EQ.9.AND.DAY.LT.7.AND.NDAY.EQ.2) HOL=1
1769      IF (MO.EQ.11.AND.DAY.GT.24.AND.NDAY.EQ.5) HOL=1
1770      RETURN
1771 C
1772      END
1773 @FOR,IS A19
1774      SUBRCUTINE MULT (A,B,C,D,AT,BT,CT,DT,N)
1775 C
1776 C ***** **** * **** * **** * **** * **** * **** * **** * **** * **** *
1777 C
1778      DIMENSION A(N),B(N),C(N),D(N)
1779      ATT=A(1)
1780      BTT=B(1)
1781      CTT=C(1)
1782      DTT=D(1)
1783      IF (N.LT.2) GO TO 20
1784      DO 10 J=2,N
1785      AT=ATT*A(J)+BTT*C(J)
1786      BT=ATT*B(J)+BTT*D(J)
1787      CT=CTT*A(J)+CTT*C(J)
1788      DT=CTT*B(J)+DTT*D(J)
1789      ATT=AT
1790      BTT=BT
1791      CTT=CT
1792 10      DTT=DT
1793      GO TO 30
1794 C
1795 20      AT=ATT
1796      BT=BTT
1797      CT=CTT
1798      DT=DTT

```

```

1799 30      RETURN
1800 C
1801      END
1802 @FCR,IS A20
1803      SUBRCUTINE OUTSID (X,Y,Z,CR,UX,FO,DB,TIM,QO,QI,QSUN,QSKY,TO,TI,
1804      2 TCNEW,TA,NR)
1805 C
1806 C      ****
1807 C
1808      DIMENSION TO(1),TI(1),X(1),Y(1),Z(1)
1809      XNUM=QSUN-QSKY+FO*(DB-TIM)
1810      IF (NR.GT.1) GO TO 40
1811      IF (FO) 10,10,20
1812 10      TONEW=TO(1)
1813      GO TO 30
1814 C
1815 20      TAM=TA-TIM
1816      TCNEW=(XNUM+UX*TAM)/(UX+FO)
1817 30      CONTINUE
1818      QO=UX*(TAM-TONEW)
1819      TO(1)=TONEW
1820      GO TO 80
1821 C
1822 40      SUMZ=0.
1823      SUMY=Y(1)*TI(1)
1824      SUMX=X(1)*TI(1)
1825      SUMXY=0.
1826      DO 50 J=2,NR
1827      SUMY=SUMY+Y(J)*TI(J)
1828      SUMX=SUMX+X(J)*TI(J)
1829      SUMXY=SUMXY+Y(J)*TC(J)
1830 50      SUMZ=SUMZ+Z(J)*TO(J)
1831      XNLM=SLMY-SUMZ+CR*QO+XNUM
1832      TONEW=XNUM/(Z(1)+FO)
1833      IF (FO) 60,60,70
1834 60      TONEW=TO(1)
1835 70      TO(1)=TONEW
1836      SUMZ=SUMZ+Z(1)*TO(1)
1837      SUMXY=SUMXY+Y(1)*TO(1)
1838      QO=SLMY-SUMZ+CR*GC
1839 80      CONTINUE
1840      RETURN
1841 C
1842      END
1843 @FCR,IS A21
1844      SUBRCUTINE PSY1 (DB,WB,PB,DP,PV,W,H,V,RH)
1845 C
1846 C      ****
1847 C
1848      PVP=PVSF(WB)
1849      IF (DB-WB) 30,30,10
1850 10      WSTAR=0.622*PVP/(PB-PVP)
1851      IF (WB-32.) 20,20,40
1852 20      PV=PVP-5.704E-4*PB*(DB-WB)/1.8
1853      GO TO 50
1854 C
1855 30      PV=PVP
1856      GO TO 50

```

```

1857 C
1858 40 CDB=(DB-32.)/1.8
1859 CWB=(WB-32.)/1.8
1860 HL=597.31+0.4409*CDB-CWB
1861 CH=0.2402+0.4409*WSTAR
1862 EX=(WSTAR-CH*(CDB-CWB)/HL)/0.622
1863 PV=PB*EX/(1.+EX)
1864 50 W=0.622*PV/(PB-PV)
1865 V=0.754*(DB+459.7)*(1+7000*W/4360)/PB
1866 H=0.24*DB+(1061+0.444*DB)*W
1867 IF (PV.LE.0) GO TO 70
1868 IF (CB.NE.WB) GO TO 60
1869 DP=DB
1870 RH=1.
1871 GO TO 70
1872 C
1873 60 CONTINUE
1874 DP=DPF(PV)
1875 RH=PV/PVSF(DB)
1876 70 RETURN
1877 C
1878 END
1879 @FOR,IS A22
1880 SUBROUTINE PSY2 (DB,DP,PB,WB,PV,W,H,V,RH)
1881 C
1882 C ****
1883 C
1884 C THIS SUBROUTINE CALCULATES THE FOLLOWINGS WHEN DRY-BULB TEMPERATURE
1885 C (DB),DEW-POINT TEMPERATURE(DP),AND BAROMETRIC PRESSURE(PB) ARE GIVEN
1886 C WB WET-BULB TEMPERATURE
1887 C W HUMICITY RATIO
1888 C H ENTHALPY
1889 C V VOLUME
1890 C PV VAPOR PRESSURE
1891 C RH RELATIVE HUMIDITY
1892 IF (DP-DB) 20,10,10
1893 10 DP=DB
1894 20 PV=PVSF(DP)
1895 PV=PVSF(DP)
1896 PVS=PVSF(DB)
1897 RH=PV/PVS
1898 W=0.622*PV/(FB-PV)
1899 V=0.754*(DB+459.7)*(1+7000*W/4360)/PB
1900 H=0.24*DB+(1061+0.444*DB)*W
1901 IF (H) 30,30,40
1902 30 WB=DP
1903 RETURN
1904 C
1905 40 WB=WBF(H,PB)
1906 RETURN
1907 C
1908 END
1909 @FCR,IS A23
1910 FUNCTION PVSF (X)
1911 C
1912 C ****
1913 C
1914 DIMENSION A(6) /-7.90298,5.02808,-1.3816E-7,11.344,

```

```

1915      2 8.1328E-3,-3.49149/,B(4) /-9.09718,-3.56654,0.876793,0.0060273/
1916      3,P(4)
1917      T=(X+459.688)/1.8
1918      IF (T.LT.273.16) GO TO 10
1919      Z=373.16/T
1920      P(1)=A(1)*(Z-1)
1921      P(2)=A(2)*LOG10(Z)
1922      Z1=A(4)*(1-1/Z)
1923      P(3)=A(3)*(10**Z1-1)
1924      Z1=A(6)*(Z-1)
1925      P(4)=A(5)*(10**Z1-1)
1926      GO TO 20
1927      C
1928      10      Z=273.16/T
1929      P(1)=B(1)*(Z-1)
1930      P(2)=B(2)*LOG10(Z)
1931      P(3)=B(3)*(1-1/Z)
1932      P(4)=LOG10(B(4))
1933      20      SUM=0
1934      DO 30 I=1,4
1935      30      SLM=SUM+P(I)
1936      PVSF=29.921*10**SLM
1937      RETURN
1938      C
1939      END
1940      @FCR,IS A24
1941      SUBROUTINE RESF (XX,YY,ZZ,IRUN)
1942      C
1943      ****
1944      C
1945      C THIS PROGRAM IS DEVELOPED BY T.KUSUDA OF THE NATIONAL BUREAU OF
1946      C STANDARDS FOR CALCULATING THE THERMAL RESPONSE FACTORS FOR
1947      C COMPOSITE WALLS,FLOORS,ROOFS,BASEMENT WALLS BASEMENT FLOORS
1948      C REAL K(10),G(10),L(10),KG
1949      C DIMENSION X(100),Y(100),Z(100),C(10),D(10),RES(10),RMK(10,6)
1950      C DIMENSION RMKG(6),F(100),XX(100,1),YY(100,1),ZZ(100,1),FF(100,20)
1951      C DELTAT=1.
1952      C IRUN=0
1953      C IN=0
1954      C WRITE (6,200)
1955      10      READ (5,380) NLAYR
1956      C IF (NLAYR.EQ.0) GO TO 190
1957      C IRUN=IRUN+1
1958      C IF (NLAYR.GT.10) GO TO 190
1959      C IF (NLAYR.EQ.0) GO TO 30
1960      C DO 20 I=1,NLAYR
1961      20      READ (5,380) L(I),K(I),D(I),C(I),RES(I)
1962      C WRITE (6,210)
1963      C IF (IN.EQ.2) GO TO 40
1964      C READ K,RHO, AND C OF GROUND IF IN=1
1965      C FOLLOWINGS ARE GROUND THERMAL CONDUCTIVITY, DENSITY AND SP.HT IF
1966      C IN=2, OTHERWISE THE SAME PROPERTIES OF THE INTERNAL SLAB
1967      30      IF (IN.NE.0) READ (5,380) KG,DG,CG
1968      C AG THERMAL DIFFUSIVITY OF EARTH
1969      C IF (IN.NE.0) AG=KG/CG/DG
1970      C IF (NLAYR.EQ.0) GO TO 90
1971      C IF (IN.EQ.2) READ (5,320) (RMKG(J),J=1,6)
1972      40      DO 50 I=1,NLAYR

```

```

1973 50  READ (5,320) (RMK(I,J),J=1,6)
1974  IF (IN.EQ.1) READ (5,320) (RMKG(J),J=1,6)
1975  DO 80 I=1,NLAYR
1976  IF (L(I)) 70,60,70
1977 60  G(I)=0.
1978  K(I)=1./RES(I)
1979  GO TO 80
1980 70  G(I)=K(I)/C(I)/D(I)
1981 80  CONTINUE
1982 90  CONTINUE
1983  CALL RESPTK (K,L,E,AG,KG,X,Y,Z,NLAYR,DELTAT,NRT,CR,UT,IN,F)
1984  WRITE (6,230) IRUN
1985  WRITE (6,340)
1986  WRITE (6,240)
1987  WRITE (6,250)
1988  WRITE (6,220)
1989  IF (NLAYR.EQ.0) GO TO 120
1990  IF (IN.EQ.2) WRITE (6,350) KG,DG,CG,(RMKG(J),J=1,4)
1991  DO 110 I=1,NLAYR
1992  IF (L(I)) 110,100,110
1993 100  K(I)=0.
1994 110  WRITE (6,260) I,L(I),K(I),D(I),C(I),RES(I),(RMK(I,J),J=1,6)
1995  IF (IN.EQ.1) WRITE (6,350) KG,DG,CG,(RMKG(J),J=1,6)
1996 120  WRITE (6,280) DELTAT
1997  WRITE (6,270) UT
1998  WRITE (6,290)
1999  WRITE (6,220)
2000  IF (IN.NE.0) GO TO 140
2001  WRITE (6,300)
2002  XX(1,IRUN)=FLOAT(NRT)
2003  YY(1,IRUN)=FLOAT(NRT)
2004  ZZ(1,IRUN)=FLOAT(NRT)
2005  XX(2,IRUN)=CR
2006  YY(2,IRUN)=CR
2007  ZZ(2,IRUN)=CR
2008  XX(NRT+3,IRUN)=UT
2009  DO 130 N=1,NRT
2010  XX(N+2,IRUN)=X(N)
2011  YY(N+2,IRUN)=Y(N)
2012  ZZ(N+2,IRUN)=Z(N)
2013  JN=N-1
2014 130  WRITE (6,310) JN,X(N),Y(N),Z(N)
2015  GC TC 180
2016  C
2017 140  WRITE (6,360)
2018  IF (IN.EQ.1) GC TO 160
2019  IF (IN.EQ.2) GO TO 160
2020  XX(1,IRUN)=FLOAT(NRT)
2021  XX(2,IRUN)=CR
2022  XX(NRT+3,IRUN)=UT
2023  DO 150 N=1,NRT
2024  JN=N-1
2025  X(N)=-X(N)
2026  XX(N+2,IRUN)=X(N)
2027 150  WRITE (6,370) JN,X(N)
2028  GC TC 180
2029  C
2030 160  DO 170 N=1,NRT

```

```

2031      JN=N-1
2032      FF(N+2,IRUN)=F(N)
2033 170   WRITE (6,370) JN,F(N)
2034      FF(1,IRUN)=FLOAT(NRT)
2035      FF(2,IRUN)=CR
2036      FF(NRT+3,IRUN)=UT
2037 180   WRITE (6,220)
2038      WRITE (6,220)
2039      WRITE (6,330) CR
2040      GO TO 10
2041 C
2042 190   RETURN
2043 C
2044 C
2045 200   FORMAT (28H DATA SHEET NO 6 N/L,K,P,C,R)
2046 210   FORMAT (43H DATA SHEET NO 7: DESCRIPTION OF EACH LAYER)
2047 220   FORMAT (2H0 )
2048 230   FORMAT (7H1 IRF=I10)
2049 240   FORMAT (77H0 LAYER    L(I)      K(I)      (I)      C(I)      RES(
2050 2I)    DESCRIPTION      )
2051 250   FORMAT (70H NO
2052 2      OF LAYERS)
2053 260   FORMAT (1I6,1F11.3,1F10.3,1F10.2,1F10.3,1F8.2,2X,6A4)
2054 270   FORMAT (58H0
2055 2      U=1F7.3)
2056 280   FORMAT (49H0
2057 290   FORMAT (50H0
2058 300   FORMAT (/70H
2059 2      Z)
2060 310   FORMAT (1I17,1F23.4,2F15.4)
2061 320   FORMAT (6A4)
2062 330   FORMAT (44H0
2063 340   FORMAT (50H0 WALL COMPOSITION
2064 350   FORMAT (1F27.3,1F10.2,1F10.3,1OX,6A4)
2065 360   FORMAT (50H0
2066 370   FORMAT (1I24,1F21.5)
2067 380   FORMAT ()
2068 C
2069      END
2070 @FOR IS A25
2071      SUBROUTINE RESFX (X,Y,Z,XX,YY,ZZ,NR,CR,UT,NEXP)
2072 C
2073 C ***** ****
2074 C
2075 DIMENSION XX(100,10),YY(100,10),ZZ(100,10)
2076 DIMENSION X(10,100),Y(10,100),Z(10,100),NR(10),CR(10),UT(10)
2077 TEST=1.E-6
2078 DO 10 K=1,10
2079 DO 10 J=1,100
2080 XX(J,K)=0
2081 YY(J,K)=0
2082 10 ZZ(J,K)=0
2083 CALL RESF (XX,YY,ZZ,IRUN)
2084 DO 50 K=1,NEXP
2085 I=K
2086 IF(YY(5,K))11,11,12
2087 11 YY(3,K)=0.
2088 YY(4,K)=0.

```

```

2089      YY(5,K)=0.
2090 12      CONTINUE
2091      IF (K.GT.IRUN) GO TO 50
2092      X(I,1)=XX(3,K)
2093      Y(I,1)=YY(3,K)
2094      Z(I,1)=ZZ(3,K)
2095      NR(I)=XX(1,K)
2096      CR(I)=XX(2,K)
2097      JJJ=NR(I)+3
2098      UT(I)=XX(JJJ,K)
2099      NMAX=NR(I)
2100      J1=1
2101      DO 40 J=2,NMAX
2102      J3=J+2
2103      J2=J+1
2104      X(I,J)=XX(J3,K)-XX(J2,K)*CR(I)
2105      Y(I,J)=YY(J3,K)-YY(J2,K)*CR(I)
2106      IF (ABS(X(I,J))-TEST) 20,20,30
2107 20      NR(I)=J
2108      GO TO 50
2109 30      CONTINUE
2110      Z(I,J)=ZZ(J3,K)-ZZ(J2,K)*CR(I)
2111      JK=J
2112 40      CONTINUE
2113 50      CONTINUE
2114      RETURN
2115 C
2116 C
2117      END
2118 @FCR,IS A26
2119      SUBROUTINE RESPTK (K,L,G,AG,KG,X,Y,Z,NL,DT,NR,CR,U,IS,F)
2120 C
2121 C ***** ****
2122 C
2123      DIMENSION K(10),L(10),G(10),X(100),Y(100),Z(100),AP(10),BP(10),
2124      2 CP(10),DP(10),A(10),B(10),C(10),D(10),ZR1(3),ZR2(3),RB(3),RAP(3),
2125      3 ROOT(100),RA(3,100),ZRK(3,100),RX(100),RY(100),AZ(100),F(100)
2126      REAL K,L,KG
2127      PI=4.*ATAN(1.)
2128      ZN=1.
2129 5      M3=3
2130      IF (IS.NE.1) GO TO 10
2131      ZL=KG/10.
2132      UY=100./AG/DT
2133      CALL GPF (UY,ZL,AZ)
2134      IF (IS.EQ.1.AND.NL.EQ.0) GO TO 360
2135 10      CALL ABCD2 (0.,K,L,G,AX,BX,CX,DX,NL)
2136      RB(1)=DX
2137      RB(2)=1.
2138      RB(3)=AX
2139      U=1./BX
2140      DO 20 I=1,NL
2141      PX=0
2142      CALL ABCDP2 (PX,K(I),L(I),G(I),AP(I),BP(I),CP(I),DP(I))
2143 20      CALL ABCD2 (PX,K(I),L(I),G(I),A(I),B(I),C(I),D(I),1)
2144      IF (NL.LT.2) GO TO 30
2145      CALL DERVT (A,B,C,D,AP,BP,CP,DP,APP,BPP,CPP,DPP,NL)
2146      GO TO 40

```

```

2147 25      ZN=ZN+1.
2148      IF(ZN.GT.4.) GO TO 510
2149      GC TO 5
2150      C
2151 30      APP=AP(1)
2152      BPP=EP(1)
2153      CFF=CP(1)
2154      DPP=DP(1)
2155 40      RAP(1)=DPP
2156      RAP(2)=0.
2157      RAF(3)=AFP
2158      DO 50 I=1,3
2159      C1=RAP(I)/BX/DT
2160      C2=RB(I)*BPP/BX/BX/DT
2161      ZR2(I)=-C1+C2
2162 50      ZR1(I)=-ZR2(I)+RE(I)/BX
2163 C      ROOTS OF B(P)=0.
2164      NMAX=40
2165      TESTMX=40.
2166      PX=0.001
2167      DPC=0.001/DT
2168      DLX=0.0001
2169      N=0
2170 60      DL=DPO
2171      CALL ABCD2 (PX,K,L,G,AX,BX,CX,DX,NL)
2172 70      PXP=PX+DL
2173      CALL ABCD2 (PXP,K,L,G,AXP,BXP,CXP,DXP,NL)
2174      IF (BX*BXP) 90,110,80
2175 80      PX=PXP
2176      BX=BXP
2177      TESTX=PX*DT
2178      IF (TESTX-TESTMX) 70,170,170
2179 90      IF (DL-DLX) 140,140,100
2180 100     DL=DL/2.
2181      GO TO 70
2182      C
2183 110     IF (BX) 130,120,130
2184 120     RXX=PX
2185      GO TO 150
2186      C
2187 130     RXX=PXP
2188      GO TO 150
2189      C
2190 140     AB=AES(BX/BXP)
2191     RXX=(PXP+AB*BXP)/(1.+AB)
2192 150     N=N+1
2193     RCCT(N)=RXX
2194     IF (N.GT.1) DPC=(RCCT(N)-ROOT(N-1))/ZN
2195     NRT=N
2196     PX=RXX+DLX
2197     TESTX=RXX*DT
2198     IF (TESTX-TESTMX) 160,160,170
2199 160     IF (N.LT.NMAX) GO TO 60
2200 170     CONTINUE
2201     IF (ROOT(NRT)-100.) 190,180,180
2202 180     NRT=NRT-1
2203 190     DO 250 JJ=1,NRT
2204     PX=ROOT(JJ)

```

```

2205      DO 200 J=1,NL
2206      CALL ABCD2 (PX,K(J),L(J),G(J),A(J),B(J),C(J),D(J),1)
2207 200   CALL ABCCP2 (PX,K(J),L(J),G(J),AP(J),BP(J),CP(J),DP(J))
2208      CALL ABCD2 (PX,K,L,G,AX,BX,CX,DX,NL)
2209      IF (NL.LT.2) GO TO 210
2210      CALL DERVT (A,B,C,D,AP,BP,CP,DP,APP,BPP,CPP,DPP,NL)
2211      GO TO 220
2212 210   APP=AP(1)
2213      BPP=EP(1)
2214      CPP=CP(1)
2215      DPP=DP(1)
2216 220   PY=BPP*FX*PX*DT
2217      RA(1,JJ)=DX/PY
2218      RA(2,JJ)=1./PY
2219      RA(3,JJ)=AX/PY
2220      PZ=PX*DT
2221      IF (PZ-20.) 240,240,230
2222 230   RX(JJ)=0.
2223      RY(JJ)=25.E16
2224      GO TO 250
2225 240   RX(JJ)=EXP(-PZ)
2226      RY(JJ)=(1.-EXP(PZ))**2
2227 250   CONTINUE
2228      DO 260 JJ=1,NRT
2229      DO 260 M=1,M3
2230      ZR1(M)=RA(M,JJ)*RX(JJ)+ZR1(M)
2231 260   ZR2(M)=RA(M,JJ)*(RX(JJ)*RX(JJ)-2.*RX(JJ))+ZR2(M)
2232      III=1
2233      III=2
2234      IF (ZR1(2).LT.0) ZR1(2)=0.
2235      DO 270 M=1,M3
2236      ZRK(M,1)=ZR1(M)
2237 270   ZRK(M,2)=ZR2(M)
2238      NT=100
2239      DO 310 N=3,NT
2240      NR=N
2241      DO 280 M=1,M3
2242 280   ZRK(M,N)=0.
2243      DO 290 M=1,M3
2244      DO 290 JJ=1,NRT
2245      IF (RX(JJ).LE.0.) GO TO 288
2246      AFCWER=ALOG10(RX(JJ))
2247      NDERFL=ABS(APOWER*N)
2248      IF (NDERFL.LE.37) GO TO 285
2249 285   PZ=0.
2250      GO TO 290
2251 285   PZ=(RX(JJ))**N
2252 290   ZRK(M,N)=ZRK(M,N)+PZ*RY(JJ)*RA(M,JJ)
2253      IF (ZRK(1,N-1)*ZRK(1,N-2)) 300,320,300
2254 300   IF (N.LT.5) GO TO 310
2255      TEST1=ZRK(1,N)/ZRK(1,N-1)
2256      TEST2=ZRK(1,N-1)/ZRK(1,N-2)
2257      TEST3=AES(TEST1-TEST2)
2258      IF (TEST3-0.001) 320,320,310
2259 310   CONTINUE
2260 320   DO 330 N=1,NR
2261      X(N)=ZRK(1,N)
2262      Y(N)=ZRK(2,N)

```

```

2263      IF(Y(N).LT.-1.0E-04)GO TO 25
2264 330  Z(N)=ZRK(3,N)
2265  CR=TEST2
2266  IF (X(3)) 350,340,350
2267 340  CR=0.
2268 350  CONTINUE
2269  IF (IS.EQ.2) GO TO 480
2270  IF (IS.NE.1) GO TO 500
2271 360  IF (NL.EQ.0) GO TO 420
2272  GF=2*KG/SQRT(DT*AG*PI)
2273  IF (NR.LT.50) GO TO 380
2274  DO 370 J=50, NR
2275  ZJ=J
2276 370  AZ(J)=GF*(SQRT(ZJ)-2.*SQRT(ZJ-1.)+SQRT(ZJ-2.))
2277  NRR=NR
2278  GO TO 400
2279  C
2280 380  DO 390 J=NR,50
2281  Z(J+1)=Z(J)*CR
2282  X(J+1)=X(J)*CR
2283 390  Y(J+1)=Y(J)*CR
2284  NRR=50
2285 400  DO 410 J=1,NRR
2286 410  F(J)=X(J)-Y(J)*Y(J)/(Z(J)+AZ(J))
2287  NR=NPR
2288  GO TO 440
2289  C
2290 420  DO 430 J=1,NR
2291 430  F(J)=AZ(J)
2292 440  CONTINUE
2293  CR1=1.
2294  DO 460 J=1,50
2295  CR=F(J+1)/F(J)
2296  TESTCR=ABS(CR-CR1)
2297  IF (TESTCR>0.001) 470,470,450
2298 450  CR1=CR
2299  JJ=J-1
2300 460  CONTINUE
2301 470  NR=J
2302  CR=CR1
2303  GO TO 500
2304  C
2305 480  CONTINUE
2306  DO 490 J=1,NR
2307  F(J)=X(J)+Z(J)-2.*Y(J)
2308  JJ=J-1
2309 490  CONTINUE
2310 500  RETURN
2311 510  WRITE(6,520)
2312 520  FORMAT(27H ERROR IN SUBROUTINE RESPTK)
2313  C
2314  C
2315  END
2316 @FOR, IS A27
2317  SUBROUTINE RMRT (HEATG,HLCG,HEATX,HLCX,HEATIS,HLCIS,IW,IL,FC,ISC)
2318  C
2319  C ***** ****
2320  C

```

```

2321 C   FC: CORRECTION FACTOR FOR THE HEAT LOST TO THE SURROUNDINGS
2322 C   ISC: SHADING COEFFICIENT INDEX IF ISC=0 EXTERNAL SHADING
2323 C       OTHERWISE INTERNAL SHADING
2324      DIMENSION HEATG(2),HLCG(2),HEATX(2),HLCX(2),HEATIS(2),HLCIS(2)
2325      DIMENSION AGO(3),AG1(3),AX0(3),AIS1(4,3),AIS2(4,3),B1(3),AX1(3)
2326      DATA AGO /0.187,0.197,0.224/, AG1 /-0.097,-0.067,-0.044/
2327      DATA B1 /-0.91,-0.87,-0.82/
2328      DATA AX0 /0.676,0.681,0.703/, AX1 /-0.586,-0.551,-0.523/
2329      DATA (AIS1(1,J),J=1,3) /0.53,0.53,0.53/
2330      DATA (AIS2(1,J),J=1,3) /-0.44,-0.40,-0.35/
2331      DATA (AIS1(2,J),J=1,3) /0.59,0.59,0.59/
2332      DATA (AIS2(2,J),J=1,3) /-0.50,-0.46,-0.41/
2333      DATA (AIS1(3,J),J=1,3) /0.87,0.87,0.87/
2334      DATA (AIS2(3,J),J=1,3) /-0.78,-0.74,-0.69/
2335      DATA (AIS1(4,J),J=1,3) /0.50,0.50,0.50/
2336      DATA (AIS2(4,J),J=1,3) /-0.41,-0.37,-0.32/
2337      HLCG(2)=FC*(AGO(IW)*HEATG(2)+AG1(IW)*HEATG(1))-B1(IW)*HLCG(1)
2338      HLCX(2)=FC*(AX0(IW)*HEATX(2)+AX1(IW)*HEATX(1))-B1(IW)*HLCX(1)
2339      HLCIS(2)=FC*(AIS1(IL,IW)*HEATIS(2)+AIS2(IL,IW)*HEATIS(1))-B1(IW)*H
2340      2LCIS(1)
2341      IF (ISC.EQ.0) RETURN
2342      HLCG(2)=FC*(AX0(IW)*HEATG(2)+AX1(IW)*HEATG(1))-B1(IW)*HLCG(1)
2343      RETURN
2344 C
2345      END
2346 @FCR,IS A28
2347      SUBROUTINE RMTMK (V,TIF,CL,TA,NEXP,NX,ITK)
2348 C
2349 C ***** **** * **** * **** * **** * **** * **** * **** * **** * **** * **** * **** *
2350 C
2351      CCMCN /CC/ X(10,100),Y(10,100),Z(10,100),ITYPE(30),IHT(30),
2352      2 IRF(30),ABSP(30),U(30),H(30),HI(30),A(30),UT(30),TOS(30,48),
2353      3 TIS(30,48),G(30,30),TOY(48),DB(24),QLITX(24,3),QEQUX(24,3),
2354      4 QOCUP(24,3),QOCPS(24),QLITE(24),QEQUUP(24),QI(30),CR(30),NR(30),
2355      5 QGLAS(30,24),ITHST,UENDW,AZW(30),SHADE(30),RMDBS(24),RMDBW(24),
2356      6 SHD(30),UCELNG
2357      DIMENSION AA(30,30),BB(30),TT(30),TIF(30),A2(30,30),B2(30),B3(30),
2358      2 GSUM(30),V(15)
2359      TS=V(1)
2360      CFML=V(2)
2361      CFMS=V(3)
2362      RRDM=V(4)
2363      RCELG=V(5)
2364      RRCCML=V(12)
2365      TIM=V(6)
2366      QCMAX=V(7)
2367      QHMAX=V(8)
2368      TUL=V(9)
2369      TLL=V(10)
2370      TSET=V(11)
2371      HR=V(13)
2372      MET=V(14)
2373      DBNX=DB(NX)-TIM
2374      TU=TS-TIM
2375      NEXP2=NEXP+1
2376      DO 10 I=1,NEXP
2377      BB(I)=0.
2378      B2(I)=0.

```

```

2379      DO 10 J=1,NEXP
2380      A2(I,J)=0,
2381 10      AA(I,J)=0.
2382      SHG=0.
2383      HSUM=0.
2384      ASUM=0.
2385      ASUMT=0.
2386      DO 70 I=1,NEXP
2387      NRR=NR(I)
2388      SFG=SHG+QGLAS(I,NX)*A(I)
2389      ASUMT=ASUMT+A(I)
2390      GSUM(I)=0.
2391      DO 20 J=1,NEXP
2392 20      GSUM(I)=GSUM(I)+G(I,J)
2393      IF (ITYPE(I).NE.3) ASUM=ASUM+A(I)
2394      IF (MET.NE.0) GSUM(I)=HR
2395      HSUM=HSUM+HI(I)*A(I)
2396      IR=IRF(I)
2397      CRX=CR(I)
2398      IF (UENDW.NE.0..AND.ITYPE(I).EQ.1)NRR=1
2399      XTEMP=X(IR,1)
2400      YTEMP=Y(IR,1)
2401      ZTEMP=Z(IR,1)
2402      IF (NRR.GE.2) GO TO 30
2403      X(IR,1)=UT(I)
2404      Y(IR,1)=UT(I)
2405      CRX=0.
2406      Z(IR,1)=UT(I)
2407 30      AA(I,I)=X(IR,1)+HI(I)+GSUM(I)
2408      DO 40 J=1,NEXP
2409      IF (I.EQ.J) GO TO 40
2410      AA(I,J)=-G(I,J)
2411 40      CONTINUE
2412      AA(I,NEXP2)=-HI(I)
2413      SUMY=Y(IR,1)*TOS(I,1)
2414      SUMX=0.
2415      IF (NRR.LT.2) GO TO 60
2416      DO 50 J=2,NRR
2417      SUMY=SUMY+Y(IR,J)*TOS(I,J)
2418 50      SUMX=SUMX+X(IR,J)*TIS(I,J)
2419 60      CONTINUE
2420      B3(I)=SUMY-CFX*QI(I)-SUMX
2421      AA(NEXP2,I)=A(I)*HI(I)
2422      X(IR,1)=XTEMP
2423      Y(IR,1)=YTEMP
2424 70      Z(IR,1)=ZTEMP
2425      SHX=SHG/ASUM
2426      QLTTEMP=QLITE(NX)*(1-RCELG)*RRoomL+(QOCPS(NX)+QEQU(NX))*RRoom
2427      QLX=QLTEMP/ASUMT
2428      DO 90 I=1,NEXP
2429      SHF=SHX
2430      QLT=QLX
2431      IF (ITYPE(I).EQ.3.OR.ITYPE(I).EQ.7) SHF=0.
2432      IF (ITYPE(I).EQ.7) QLT=0.
2433 90      BB(I)=B3(I)+SHF+QLT
2434      AA(NEXP2,NEXP2)=-1.08*(CFML+CFMS)-HSUM
2435      JK=1
2436      NEXP3=NEXP2+1

```

```

2437      DO 100 I=1,NEXP2
2438      DO 100 J=1,NEXP2
2439 100  A2(I,J)=AA(I,J)
2440      SUM1=(QOCPS(NX)+QEQU(NX))*(1.-RROOM)
2441      SUM2=GLITE(NX)*(1.-RRCOML)*(1.-RCELG)
2442      SUM3=0.
2443      SUM=1.08*(CFML*DBNX+CFMS*TU)+SUM1+SUM2
2444      BB(NEXP2)=-SUM
2445      IF (ITHST.NE.0.AND.ITK.EQ.0) GO TO 150
2446 110  BB(NEXP2)=-SUM-SUM3
2447      IF (MET.EQ.0) GO TO 130
2448      SUM4=0.
2449      SUM5=0.
2450      DO 120 I=1,NEXP
2451      SUM4=SUM4+(HI(I)*A(I)*BB(I))/AA(I,I)
2452      SUM5=SUM5+HI(I)*A(I)*(HI(I)+HR)/AA(I,I)
2453 120  CONTINUE
2454      TT(NEXP2)=(SUM4-BB(NEXP2))/(-AA(NEXP2,NEXP2)-SUM5)
2455      DO 121 I=1,NEXP
2456 121  TT(I)=((HI(I)+HR)*TT(NEXP2)+BB(I))/AA(I,I)
2457      GO TO 140
2458  C
2459 130  CONTINUE
2460      CALL SOLVP (NEXP2,NEXP3,AA,BB,TT,30)
2461 140  TA=TT(NEXP2)+TIM
2462      IF (ITHST.EQ.0.AND.ITK.EQ.1) GO TO 190
2463      IF (JK.EQ.2) GO TO 190
2464      GO TO 200
2465  C
2466 150  DO 160 I=1,NEXP2
2467 160  B2(I)=BB(I)-AA(I,NEXP2)*(TA-TIM)
2468      IF (MET.EQ.0) GO TO 180
2469      DO 170 I=1,NEXP
2470      TT(I)=((HI(I)+HR)*(TA-TIM)+BB(I))/AA(I,I)
2471 170  CONTINUE
2472      GO TO 190
2473  C
2474 180  CONTINUE
2475      CALL SOLVP (NEXP,NEXP2,A2,B2,TT,30)
2476 190  CONTINUE
2477      QL=SUM-1.08*(CFML+CFMS)*(TA-TIM)
2478      GO TO 240
2479  C
2480 200  IF (TA-TUL) 210,220,220
2481 210  IF (TA-TLL) 230,230,190
2482 220  TA=TUL
2483      GO TO 150
2484  C
2485 230  TA=TLL
2486      GO TO 150
2487  C
2488 240  SUMQ=0.
2489      DO 250 I=1,NEXP
2490      K=IRF(I)
2491      XK1=X(K,1)
2492      TIS(I,1)=TT(I)
2493      TEST=ABS(TT(I))
2494      IF (TEST.GT.100.) GO TO 310

```

```

2495 IF(K.EQ.10)X(K,1)=UT(I)
2496 QI(I)=X(K,1)*TT(I)-B3(I)
2497 IF (ITYPE(I).EQ.7) QI(I)=0.
2498 IF (UENDW.NE.0..AND.ITYPE(I).EQ.1) QI(I)=UT(1)*(TT(1)-TOS(1,1))
2499 TIF(I)=TT(I)+TIN
2500 IF (ITYPE(I).EQ.7) TIF(I)=TA
2501 SUMQ=SUMG+A(I)*HI(I)*(TA-TIF(I))
2502 X(K,1)=XK1
2503 250 CONTINUE
2504 GL=-GL+SUMG
2505 IF (ITHST.NE.0.OR.ITK.NE.0) GO TO 300
2506 IF (JK.EQ.2) GO TO 300
2507 IF (QL) 260,300,280
2508 260 QLTEST=AES(QL)
2509 IF (QLTEST-QCMAX) 300,300,270
2510 270 SUM3=-QCMAX
2511 JK=2
2512 GO TO 110
2513 C
2514 280 IF (QL-QHMAX) 300,300,290
2515 290 SLM3=QHMAX
2516 JK=2
2517 GO TO 110
2518 C
2519 300 RETURN
2520 C
2521 310 CONTINUE
2522 WRITE (6,330)
2523 DO 320 I=1,NEXP2
2524 320 WRITE (6,340) (A2(I,J),J=1,NEXP2),B2(I),TT(I)
2525 RETURN
2526 C
2527 C
2528 330 FORMAT (109H ERROR IN THE RMTMK ROUTINE: MATRIX ELEMENTS ARE LISTED
2529 2D IN THE FOLLOWING ORDER: AA(I,J),J=1,NEXP2,B(I),T(I))
2530 340 FORMAT (12F10.3)
2531 C
2532 END
2533 #FOR, IS A29
2534 SUBROUTINE RCCMX (NEXP,NS,NW,NN,NE,H)
2535 C
2536 C ****
2537 C
2538 DIMENSION NEXP(4)
2539 COMMON /CC/ X(10,100),Y(10,100),Z(10,100),ITYPE(30),IHT(30),
2540 2 IRF(30),ABSP(30),U(30),HT(30),HI(30),A(30),V(30),TOS(30,48),
2541 3 TIS(30,48),G(30,30),TOY(48),DB(24),QLITX(24,3),QEQUX(24,3),
2542 4 QCCLP(24,3),QCCLS(24),QLITE(24),QEQLP(24),QI(30),CR(30),NR(30),
2543 5 QGLAS(30,24),ITHST,UENDW,AZW(30),SHADE(30),RMDBS(24),RMDBW(24),
2544 6 SHD(30),UCELNG
2545 REAL L,FS(6,6)
2546 COMMON /SHDW/ SHADE(30,15)
2547 C
2548 C ****
2549 C *
2550 C * *
2551 C * ****
2552 C * * SOUTH FACING *

```

```

2553 C          (W)*      *      WALL      *(H)
2554 C          *      *
2555 C          ****
2556 C          ****
2557 C          (L)
2558 C
2559 C      NS = NUMBER OF HEAT TRANSFER SURFACES IN THE SOUTH WALL
2560 C      NW = NUMBER OF HEAT TRANSFER SURFACES IN THE WEST WALL
2561 C      NN = NUMBER OF HEAT TRANSFER SURFACES IN THE NORTH WALL
2562 C      NE = NUMBER OF HEAT TRANSFER SURFACES IN THE EAST WALL
2563 C      NEXP = TOTAL NUMBER OF HEAT TRANSFER SURFACES = 2+NS+NW+NN+NE
2564 C      WRITE (6,50)
2565 C      READ (5,110) NEXP
2566 C      NS=NEXP(1)
2567 C      NW=NEXP(2)
2568 C      NN=NEXP(3)
2569 C      NE=NEXP(4)
2570 C      NEXP=2+NS+NW+NN+NE
2571 C      L = ROOM LENGTH ALONG THE SOUTH WALL
2572 C      W = ROOM WIDTH ALONG THE WEST WALL
2573 C      H = ROOM CEILING HEIGHT
2574 C      READ (5,110) L,W,H
2575 C      CALL FCTR (L,W,H,FS)
2576 C      NS=NS+1
2577 C      NW=NS+NW
2578 C      NN=NW+NN
2579 C      NE=NE+NN
2580 C      AS=L*H
2581 C      AW=W*H
2582 C      AN=AS
2583 C      AE=AW
2584 C      AR=L*W
2585 C      AF=AR
2586 C      WRITE (6,60)
2587 C      DC 10 I=1,NEXP
2588 C      READ FOLLOWING DATA IN THE ORDER OF CEILING, SOUTH WALL, WEST
2589 C      WALL, NORTH WALL, EAST WALL, FLOOR.
2590 C      READ (5,110) ITYPE(I),IRF(I),A(I),AZW(I),U(I),SHADE(I),ABSP(I),SHD
2591 2(I)
2592 C      READ SHADOW INFORMATION
2593 C      READ (5,110) (SHADW(I,J),J=1,7)
2594 C      READ (5,110) (SHADW(I,J),J=8,15)
2595 10    CONTINUE
2596 DO 20 I=1,NEXP
2597 IF (I.EQ.1) M=1
2598 IF (I.GT.1.AND.I.LE.NS) M=2
2599 IF (I.GT.NS.AND.I.LE.NW) M=3
2600 IF (I.GT.NW.AND.I.LE.NN) M=4
2601 IF (I.GT.NN.AND.I.LE.NE) M=5
2602 IF (I.EQ.NEXP) M=6
2603 DO 20 J=1,NEXP
2604 IF (J.EQ.1) G(I,J)=FS(M,1)
2605 IF (J.GT.1.AND.J.LE.NS) G(I,J)=FS(M,2)*A(J)/AS
2606 IF (J.GT.NS.AND.J.LE.NW) G(I,J)=FS(M,3)*A(J)/AW
2607 IF (J.GT.NW.AND.J.LE.NN) G(I,J)=FS(M,4)*A(J)/AN
2608 IF (J.GT.NN.AND.J.LE.NE) G(I,J)=FS(M,5)*A(J)/AE
2609 IF (J.EQ.NEXP) G(I,J)=FS(M,6)
2610 20    CONTINUE

```

```

2611      RETURN
2612 C
2613 C * * * * * * * * * * * * * * * * * * * * *
2614 C
2615 ENTRY RMOUT
2616 C
2617 C * * * * * * * * * * * * * * * * * * * * *
2618 C
2619 WRITE (6,70) NEXP,NNEXP,L,W,H
2620 WRITE (6,80)
2621 DO 30 I=1,6
2622 WRITE (6,100) (FS(I,J),J=1,6)
2623 30 CONTINUE
2624 WRITE (6,90)
2625 DO 40 I=1,NEXP
2626 WRITE (6,100) (G(I,J),J=1,NEXP)
2627 40 CONTINUE
2628 RETURN
2629 C
2630 C
2631 50 FORMAT (36H DATA SHEET NO 10: NS,NW,NN,NE,L,W,H)
2632 60 FORMAT (68H DATA SHEET 11 AND 12: ROOM SURFACE DATA AND EXTERIOR S
2633 2URFACE SHADOW)
2634 70 FORMAT (///5X24HTHIS RCOM HAS A TOTAL OF 13,23H HEAT TRANSFER SURFA
2635 2CES//15X15HSOUTH WALL HAS 13,9H SURFACES//15X15HWEST WALL HAS 13,
2636 39H SURFACES//15X15HNORTH WALL HAS 13,9H SURFACES//15X15HEAST WALL
2637 4 HAS 13,9H SURFACES//5X30HROOM LENGTH ALONG SOUTH WALL =F7.2//5X30
2638 SHRCOM WIDTH ALONG WEST WALL =F7.2//5X30HROOM CEILING HEIGHT
2639 E=F7.2//)
2640 80 FORMAT (24H1 BASIC SHAPE FACTORS//)
2641 90 FORMAT (///31H RADIATION EXCHANGE FACTORS//)
2642 100 FORMAT (20F6.3)
2643 110 FORMAT ()
2644 C
2645 END
2646 @FCR,IS A30
2647 SUBRCUTINE SHADOW (SHDX,PHI,COSZ,SHRAT)
2648 C
2649 C **** **** **** **** **** **** **** **** **** **** **** **** **** ****
2650 C
2651 DIMENSION SHDX(20)
2652 FL=SHDX(1)
2653 HT=SHDX(2)
2654 FP=SHDX(3)
2655 AW=SHDX(4)
2656 BWL=SHDX(5)
2657 BWR=SHDX(6)
2658 D=SHDX(7)
2659 FP1=SHDX(8)
2660 A1=SHDX(9)
2661 B1=SHDX(10)
2662 C1=SHDX(11)
2663 FP2=SHDX(12)
2664 A2=SHDX(13)
2665 B2=SHDX(14)
2666 C2=SHDX(15)
2667 WAZI=SHDX(16)
2668 C THIS PROGRAM CALCULATES SHADOW CAST BY OVERHANG AND SIDE FINS

```

```

2669 C THIS PROGRAM HAS BEEN DEVELOPED BY TSENG-YAO SUN
2670 C PHI....SOLAR AZIMUTH ANGLE
2671 C COSZ...COSINE OF SOLAR ZENITH ANGLE
2672 C SHRAT..SHADE RATIO:RATIO OF THE SUNLIT AREA TO THE TOTAL WINDOW AR
2673 C HT.....WINDOW HEIGHT
2674 C FL.....WINDOW WIDTH
2675 C FP.....DEPTH OF THE OVERHUNG
2676 C AW.....DISTANCE FROM TOP OF THE WINDOW TO THE OVERHUNG
2677 C BWL....DISTANCE OF THE OVERHUNG EXTENDED BEYOND THE LEFT EDGE OF T
2678 C BWR....DISTANCE OF THE OVERHUNG EXTENDED BEYOND THE RIGHT EDGE OF
2679 C D.....DEPTH OF VERTICAL PROJECTION AT THE END OF THE OVERHUNG
2680 C FP1....DEPTH OF THE LEFT FIN
2681 C A1.....DISTANCE OF THE LEFT FIN EXTENDED ABOVE THE TOP OF THE WIND
2682 C B1.....DISTANCE FROM THE LEFT EDGE OF THE WINDOW TO THE LEFT FIN
2683 C C1.....DISTANCE OF THE LEFT FIN STOP SHORT ABOVE THE BOTTOM OF THE
2684 C FP2....DEPTH OF THE RIGHT FIN
2685 C A2.....DISTANCE CF THE RIGHT FIN EXTENDED ABOVE THE TOP OF THE WIN
2686 C B2.....DISTANCE FPOM THE RIGHT EDGE OF THE WINDOW TO THE RIGHT FIN
2687 C C2.....DISTANCE OF THE RIGHT FIN STOP SHORT ABOVE THE BOTTOM OF TH
2688 C WAZI...WINDOW AZIMUTH ANGLE
2689 C SHRAT=1.
2690 A=AW
2691 H=HT
2692 GAMMA=PHI-WAZI
2693 COSG=COS(GAMMA)
2694 IF (COSG) 10,10,20
2695 10 SHRAT=0.
2696 GO TC 910
2697 C
2698 20 CONTINUE
2699 SBETA=CCSZ
2700 IF (SBETA) 10,10,30
2701 30 SING=SIN(GAMMA)
2702 VERT=SBETA/SQRT(1.-SBETA*SBETA)/COSG
2703 HCRIZ=ABS(SING)/COSG
2704 TCETA=VERT/HCRIZ
2705 IF (GAMMA) 50,40,40
2706 C -----SUN ON LEFT
2707 40 B=BWL
2708 GO TO 60
2709 C -----SUN ON RIGHT
2710 50 B=BWR
2711 60 ARSHF=0.
2712 AREAV=0.
2713 ARSIF=0.
2714 AREAC=0.
2715 AREA1=0.
2716 ARSH1=0.
2717 FL3=0.
2718 H3=0.
2719 H1=H
2720 FL1=FL
2721 K=1
2722 L=1
2723 T1=FP*VERT
2724 FM1=FP*HCRIZ
2725 IF (FP) 430,430,70
2726 70 T=T1

```

```

2727      FM=FM1
2728      AB=B*TCETA
2729      UG=(FL+B)*TCETA
2730      DE=(H+A)/TCETA
2731 C      -----HCRIZCNTAL OVERTUNG AREA0
2732      IF (T-A) 330,330,80
2733 80     IF (AB-A) 200,200,90
2734 90     IF (DE-B) 180,180,100
2735 100    IF (FM-B) 170,170,110
2736 110    IF (DE-(FL+B)) 140,140,120
2737 120    IF (FM-(FL+B)) 150,130,130
2738 C      -----HORIZ 9
2739 130    AREA0=FL*(0.5*(AB+UG)-A)
2740      GC TC 430
2741 C
2742 140    IF (T-(H+A)) 150,160,160
2743 C      -----HCRIZ 7
2744 150    AREAC=(T-A)*FL-((FM-B)**2)*TCETA*0.5
2745 L=2
2746      GO TO 270
2747 C      -----HORIZ 8
2748 160    AREAC=H*FL-(DE-B)**2*TCETA*0.5
2749      GO TO 430
2750 C      -----HORIZ 3
2751 170    AREA0=FL*(T-A)
2752 L=2
2753      GO TO 300
2754 C
2755 180    IF (T-(H+A)) 170,190,190
2756 C      -----HORIZ 2
2757 190    AREA0=H*FL
2758      GC TO 900
2759 C
2760 200    IF (UG-A) 220,330,210
2761 210    IF (DE-(FL+B)) 240,240,220
2762 220    IF (FM-(FL+B)) 260,230,230
2763 C      -----HORIZ 6
2764 230    AREA0=(UG-A)**2/TCETA*0.5
2765      GO TO 430
2766 C
2767 240    IF (T-(H+A)) 260,250,250
2768 C      -----HORIZ 5
2769 250    AREA0=H+(FL-(A+0.5*H)/TCETA+B)
2770      GC TC 430
2771 C      -----HORIZ 4
2772 260    AREAC=(T-A)*(FL+B-FM*(1.+A/T)*0.5)
2773 L=2
2774 C      -----VERT PROJ AREA V
2775 270    FL3=FL+B-FM
2776      IF (T+D-(H+A)) 280,280,290
2777 C      -----VERT 8
2778 280    H3=D
2779      GC TO 420
2780 C      -----VERT 9
2781 290    H3=H+A-T
2782      GO TO 420
2783 C
2784 300    FL3=FL

```

```

2785      IF (T+D-(H+A)) 320,320,310
2786 C -----VERT 7
2787 310 H3=H+A-T
2788      AREA V=H3*FL3
2789      GO TO 900
2790 C -----VERT 6
2791 320 H3=D
2792      GO TO 420
2793 C
2794 330 IF (T+D-A) 430,430,340
2795 340 IF (FM-B) 390,390,350
2796 350 IF (FM-(FL+B)) 360,430,430
2797 360 FL3=FL+B-FM
2798      IF (T+D-(H+A)) 380,380,370
2799 C -----VERT 5
2800 370 H3=H
2801      GO TO 420
2802 C -----VERT 4
2803 380 H3=T+D-A
2804      GO TC 420
2805 C
2806 390 IF (T+D-(H+A)) 410,400,400
2807 C -----VERT 2
2808 400 AREA V=H*FL
2809      GO TO 900
2810 C VERT 3
2811 410 H3=T+D-A
2812      FL3=FL
2813 420 AREA V=FL3*H3
2814 C -----SIDE FIN AND SHORT SIDE FIN
2815 C -----SIDE FIN AREA1 ARSIF
2816 430 IF (GAMMA) 450,500,440
2817 440 FPF=FP1
2818 AF=A1
2819 BF=B1
2820 CX=C1
2821      GO TO 460
2822 C
2823 450 FFF=FP2
2824 AF=A2
2825 BF=B2
2826 CX=C2
2827 460 IF (FPF) 900,900,470
2828 470 T=FPF*VERT
2829 FM=FPF*MCRIZ
2830 AF1=AF
2831 IF (AREAO) 530,530,480
2832 C -----TEST FOR OVERLAP OF FIN AND OVERHUNG SHADOW
2833 480 AT=A+(BF-B)*TCETA
2834 IF (AT-AF) 490,530,530
2835 C -----OVERLAP EXISTS..L=2 IF OVERHUNG SHADOW HAS HORIZ EDGE IN WIN
2836 490 GO TO (510,500), L
2837 C -----TEST FOR TYPE OF OVERLAP
2838 500 IF ((FM-BF)-(FM1-B)) 510,520,520
2839 C -----SET L=1, SHADOW INTERSECT ON INCLINED EDGE OF OVERHUNG SHADOW
2840 C -----FIN SHADOW IS BELOW INCLINED EDGE OF OVERHUNG SHADOW
2841 510 AF=AT
2842 L=1

```

```

2843      GO TO 530
2844 C -----L IS 2, HORIZ EDGE OF OVERHUNG SHADOW-PORTION ABOVE HORIZ E
2845 C -----NOT IN OVERHUNG SHADOW IS FIN SHADOW
2846 520 AREA1=FL*(T1-A)-AREA0
2847 C -----RESET TO CALC FIN SHADOW BELOW HORIZ EDGE OF OVHNG SHADOW
2848 AF=T1-A+AF1
2849 H=H+AF1-AF
2850 C -----SHADOW OF FIN (K=1 ON GLASS K=2 ON VERT PROJ SHADOW)
2851 530 AB=BF*TCETA
2852 UG=(FL+BF)*TCETA
2853 DE=(H+AF)/TCETA
2854 DJ=CX/TCETA
2855 IF (FM-BF) 800,800,540
2856 540 IF (AB-AF) 550,660,660
2857 550 IF (UG-AF) 630,630,560
2858 560 IF (T-AF) 640,640,570
2859 570 IF (UG-(H+AF)) 600,600,580
2860 580 IF (T-(H+AF)) 620,590,590
2861 C -----FIN 9
2862 590 AREA1=H*((AF+H*0.5)/TCETA-BF)+AREA1
2863 GC TO 730
2864 C
2865 600 IF (FM-(FL+BF)) 620,610,610
2866 C -----FIN8
2867 610 AREA1=H*FL-(UG-AF)**2/TCETA*0.5+AREA1
2868 GO TO 730
2869 C -----FIN 7
2870 620 AREA1=(FM-BF)*H-(T-AF)**2/TCETA*0.5+AREA1
2871 GO TO 770
2872 C
2873 630 IF (FM-(FL+BF)) 640,640,650
2874 C -----FIN 3
2875 640 AREA1=H*(FM-BF)+AREA1
2876 GO TO 770
2877 C -----FIN 2
2878 650 AREA1=H*FL+AREA1
2879 GO TO 730
2880 C
2881 660 IF (DE-BF) 800,800,670
2882 670 IF (UG-(H+AF)) 710,710,680
2883 680 IF (T-(H+AF)) 700,690,690
2884 C -----FIN 6
2885 690 AREA1=(DE-BF)**2*TCETA*0.5+AREA1
2886 GC TO 730
2887 C -----FIN 4
2888 700 AREA1=(FM-BF)*(H+AF-(T+AB)*0.5)+AREA1
2889 GO TO 770
2890 C
2891 710 IF (FM-(FL+BF)) 700,720,720
2892 C -----FIN 5
2893 720 AREA1=FL*(H-(BF+FL*0.5)*TCETA+AF)+AREA1
2894 C -----SHORT SIDE FIN ARSH1,ARSHF
2895 730 IF (DJ-BF) 800,800,740
2896 740 IF (DJ-(FL+BF)) 760,760,750
2897 C -----SHORT 3
2898 750 ARSH1=-FL*(CX-(BF+FL/2.)*TCETA)
2899 GO TO 800
2900 C -----SHORT 4

```

```

2901 760 ARSH1=-(CX-AB)**2/TCETA*0.5
2902      GO TO 800
2903 C
2904 770 IF (DJ-BF) 800,800,780
2905 780 IF (DJ-FM) 760,760,790
2906 C -----SHORT 2
2907 790 ARSH1=-(FM-BF)*(CX-(T+AB)*0.5)
2908 800 GO TO (820,810), K
2909 C
2910 810 ARSH1=-ARSH1
2911      AREA1=-AREA1
2912 820 ARSHF=ARSHF+ARSH1
2913      ARSIF=ARSIF+AREA1
2914      GO TC (830,900), K
2915 C
2916 830 IF (AREAV) 900,900,840
2917 C -----RESET PARAMETERS TO DEDUCT FIN SHADOW OVERLAP ON VERT PROJ
2918 840 K=2
2919      AREA1=0.
2920      ARSH1=0.
2921      BBF=BF
2922      BF=FM1-B+BF
2923      IF (BF) 850,860,860
2924 850 BF=BBF
2925 860 IF (HT+A-T1-D) 890,890,870
2926 870 CX=CX-(HT+A-T1-D)
2927      IF (CX) 880,890,890
2928 880 CX=0.
2929 890 AF=T1-A+AF
2930      H=H3
2931      FL=FL3
2932      GO TC 530
2933 C ----- SHADED AREA ARSHA
2934 900 ARSHA=AREAO+AREAV+ARSHF+ARSIF
2935      SHRAT=(FL1*H1-ARSHA)/(FL1*H1)
2936      FL=FL1
2937 910 CONTINUE
2938      RETURN
2939 C
2940      END
2941 @FOR,IS A31
2942      SUBROUTINE SHG (SH)
2943 C
2944 C ****
2945 C
2946 DIMENSION SH(20)
2947 C SH(1)=INTENSITY OF DIRECT NORMAL SOLAR RADIATION
2948 C SH(2)=INTENSITY OF DIFFUSE SKY RADIATION
2949 C SH(3)=INTENSITY OF GROUND REFLECTED DIFFUSE RADIATION
2950 C SH(4)=COSINE OF INCIDENCE OF DIRECT SOLAR RADIATION
2951 C SH(5)=FORM FACTOR BETWEEN THE WINDOW AND THE SKY
2952 C SH(6)=FCRM FACTOR BETWEEN THE WINDOW AND THE GROUND
2953 C SH(7)=THERMAL RESISTANCE AT OUTSIDE SURFACE
2954 C SH(8)=THERMAL RESISTANCE AT THE AIR SPACE (DOUBLE GLAZING)
2955 C SH(9)=THERMAL RESISTANCE AT THE INNER SURFACE
2956 C SH(10)=SUNLIT AREA FACTOR
2957 C SH(11)=SHADING COEFFICIENT ,NON-ZERO VALUE WILL BE GIVEN ONLY
2958 C WHEN THE WINDOW IS SHADED BY DRAPES OR BLINDS OR IF IT HAS

```

```

2959 C          AN INTERPANE SEPARATION OF MORE THAN 1-INCH
2960 C          SH(12)=TRANSMISSION FACTOR FOR DIRECT RADIATION
2961 C          SH(13)=TRANSMISSION FACTOR FOR DIFFUSE RADIATION
2962 C          SH(14)=ABSORPTION FACTOR FOR DIRECT RADIATION (OUTER PANE)
2963 C          SH(15)=ABSORPTION FACTOR FOR DIRECT RADIATION (INNER PANE)
2964 C          SH(16)=ABSORPTION FACTOR FOR DIFFUSE RADIATION(OUTER PANE)
2965 C          SH(17)=ABSORPTION FACTOR FOR DIFFUSE RADIATION(INNER PANE)
2966 C          SH(18)=SCALAR HEAT GAIN
2967 COMMON /SOL/ LAT,LONG,TZN,WAZ,WT,CN,DST,LPYR,S(35)
2968 REAL LAT,LONG,NI,NO
2969 NI=(SH(7)+SH(8))/(SH(7)+SH(8)+SH(9))
2970 NO=(SH(7))/(SH(7)+SH(8)+SH(9))
2971 D=SH(10)*SH(1)*SH(4)*(SH(12)+NO*SH(14)+NI*SH(15))
2972 DD=(SH(2)*SH(5)+SH(3)*SH(6))*(SH(13)+NO*SH(16)+NI*SH(17))
2973 IF (SH(11)) 20,10,20
2974 10 SH(18)=D+DD
2975 GO TO 30
2976 C
2977 20 SH(18)=(D+DD)*SH(11)
2978 30 RETURN
2979 C
2980 END
2981 @FOR,IS A32
2982 SUBROUTINE SOLVP (M,N,C,D,X,I)
2983 C
2984 C ****
2985 C
2986 C THIS IS A ROUTINE FOR SOLVING SIMULTANEOUS LINEAR EQUATIONS
2987 C THE ROUTINE WAS DEVELOPED BY B.A. PEAVY OF NBS
2988 C ROUTINE FAILS WHEN ANY OF THE DIAGONAL ELEMENTS IS ZERO
2989 C DIMENSION A(100,101),C(I,1),D(1),X(1)
2990 DO 10 IX=1,M
2991 DO 10 IY=1,M
2992 10 A(IX,IY)=C(IX,IY)
2993 DO 20 IZ=1,M
2994 20 A(IZ,N)=D(IZ)
2995 L=1
2996 30 AA=A(L,L)
2997 DO 40 K=L,N
2998 40 A(L,K)=A(L,K)/AA
2999 DO 60 K=1,M
3000 IF (K.EQ.L) GO TO 60
3001 AA=-A(K,L)
3002 DO 50 IA=L,N
3003 50 A(K,IA)=A(K,IA)+AA*A(L,IA)
3004 60 CONTINUE
3005 L=L+1
3006 IF (L.LE.M) GO TO 30
3007 DO 70 IP=1,M
3008 70 X(IP)=A(IP,N)
3009 RETURN
3010 C
3011 END
3012 @FOR,IS A33
3013 SUBROUTINE SUN
3014 C
3015 C ****
3016 C

```

```

3017 DIMENSION A0(5) /.302,-.0002,368.44,.1717,0.0905/ .
3018 2 A1(5) /-22.93,.4197,24.52,-.0344,-.0410/ ,
3019 3 A2(5) /-.229,-3.2265,-1,14,.0032,.0073/ ,
3020 4 A3(5) /-.243,-.0903,-1.09,.0024,.0015/ ,
3021 5 B1(5) /3.851,-7.351,.58,-.0043,-.0034/ ,B2(5) /.002,-9.3912,-.18,
3022 6 0.,0.0004/ ,B3(5) /-.055,-.3361,.28,-.0008,-.0006/
3023 REAL LAT,LATD,LONG,MERID,LOND
3024 COMMON /SOL/ LAT,LONG,TZN,WAZ,WY,CN,DST,LPYR,S(35)
3025 C S(1)= LATITUDE,DEGREES(+NORTH,-SOUTH)
3026 C S(2)= LONGITUDE,DEGREES(+WEST,-EAST)
3027 C S(3)= TIME ZCNE NUMBER
3028 C STANDARD TIME DAYLIGHT SAVING TIME
3029 C ATLANTIC 4 3
3030 C EASTERN 5 4
3031 C CENTRAL 6 5
3032 C MOUNTAIN 7 6
3033 C PACIFIC 8 7
3034 C S(4)= DAYS(FROM START OF YEAR)
3035 C S(5)= TIME,HOUR AFTER MIDNIGHT)
3036 C S(6)= DAYLIGHT SAVING TIME INDICATOR
3037 C S(7)= GROUND REFLECTIVITY
3038 C S(8)= CLEARNESS NUMBER
3039 C S(9)= WALL AZIMUTH ANGLE, DEGREES FROM SOUTH
3040 C S(10)=WALL TILT ANGLE, DEGREES FROM HORIZON
3041 C S(11)=SUN RISE TIME (HOURS AFTER MIDNIGHT)
3042 C S(12)=SUN SET TIME
3043 C S(13)=COSZ DIRECTION COSINES
3044 C S(14)=CCSN DIRECTION COSINES
3045 C S(15)=COS(S) DIRECTION COSINES)
3046 C S(16)=ALPHA DIRECTION COSINES NORMAL TO SURFACE
3047 C S(17)=BETA
3048 C S(18)=GAMMA
3049 C S(19)=COS(ETA)COSINE OF INCIDENCE ANGLE
3050 C S(20)=SOLAR ALTITUDE ANGLE
3051 C S(21)=SOLAR AZIMUTH ANGLE
3052 C S(22)=DIFFUSE SKY RADIATION ON HORIZONTAL SURFACE
3053 C S(23)=DIFFUSE GROUND REFLECTED RADIATION
3054 C S(24)=DIRECT NORMAL RADIATION
3055 C S(25)=TOTAL SOLAR RADIATION INTENSITY
3056 C S(26)=DIFFUSE SKY RADIATION INTENSITY
3057 C S(27)=GROUND REFLECTED DIFFUSE RADIATION INTENSITY
3058 C S(28)=SUN DECLINATION ANGLE,DEGREES
3059 C S(29)=EQUATION OF TIME ,HOURS
3060 C S(30)=A SOLAR FACTOR
3061 C S(31)= SCLAR FACTOR
3062 C S(32)= SOLAR FACTOR
3063 C S(33)= CLOUD COVER MODIFIER
3064 C S(34) INTENSITY OF DIRECT SOLAR RADIATION ON SURFACE
3065 C S(35) HOUR ANGLE,DEGREE
3066 PI=3.1415927
3067 X=2*PI/366.*S(4)
3068 C1=COS(X)
3069 C2=COS(2*X)
3070 C3=CCS(3*X)
3071 S1=SIN(X)
3072 S2=SIN(2*X)
3073 S3=SIN(3*X)
3074 DO 10 K=1,E

```

```

3075      KS=(K-1)+28
3076 10     S(KS)=A0(K)+A1(K)*C1+A2(K)*C2+A3(K)*C3+B1(K)*S1+B2(K)*S2+B3(K)*S3
3077      S(29)=S(29)/60.
3078      LATD=S(1)
3079      LCONG=S(2)
3080      MERID=15*S(3)
3081      LOND=LONG-MERID
3082      Y=S(28)*PI/180.
3083      YY=LATD*PI/180.
3084      HP=-TAN(Y)*TAN(YY)
3085      TR=12/PI*ACOS(HP)
3086      S(11)=(12-TR)-S(29)+LOND/15.
3087      S(12)=24.-S(11)
3088      H=15*(S(5)-12+S(3)+S(29)-S(6))-S(2)
3089      S(35)=H
3090      S13=SIN(YY)*SIN(Y)+COS(YY)*COS(Y)*COS(H*PI/180.)
3091      S(13)=S13
3092      HP1=180.*ACOS(HP)/PI
3093      X1=ABS(HF1)
3094      X2=ABS(H)
3095      IF (X1-X2) 130,20,20
3096 20     S(14)=CGS(Y)*SIN(H*PI/180.)
3097      S(15)=SQRT(1.-S(13)*S(13)-S(14)*S(14))
3098      STEST=S(15)
3099      STEST1=COS(H*PI/180.)-TAN(Y)/TAN(YY)
3100      IF (STEST1) 40,30,30
3101 30     S(15)=STEST
3102      GO TO 50
3103      C
3104 40     S(15)=-STEST
3105 50     S(20)=ASIN(S(13))
3106      IF (S(15)) 70,60,60
3107 60     S(21)=ASIN(S(14)/COS(S(20)))
3108      GO TO 80
3109      C
3110 70     S(21)=PI-ASIN(S(14)/COS(S(20)))
3111 80     S(20)=180.*S(20)/PI
3112      S(21)=180.*S(21)/PI
3113      S(24)=S(30)*S(8)*S(33)*EXP(-S(31)/S(13))
3114      S(22)=S(32)*S(24)/S(8)/S(8)
3115      S(23)=S(7)*(S(22)+S(24)*S(13))
3116      WY=S(10)*PI/180.
3117      S(16)=COS(WY)
3118      WA=S(9)*PI/180.
3119      S(16)=COS(WY)
3120      S(17)=SIN(WA)*SIN(WY)
3121      S(18)=COS(WA)*SIN(WY)
3122      S(19)=S(16)*S(13)+S(17)*S(14)+S(18)*S(15)
3123      S(34)=S(24)*S(19)
3124      Y=0.45
3125      IF (S(19)+0.2) 100,100,90
3126 90     Y=0.55+0.437*S(19)+0.313*S(19)**2
3127 100    IF (S(19)) 110,110,120
3128 110    S(19)=0.
3129    S(34)=0.
3130 120    CONTINUE
3131    S(26)=S(22)*Y
3132    S(27)=S(23)*(1-S(16))/2.

```

```

3133      S(25)=S(34)+S(26)+S(27)
3134      GO TO 150
3135      C
3136 130      DO 140 J=14,26
3137 140      S(J)=0.
3138      S(34)=0
3139 150      RETURN
3140      C
3141      END
3142  @FCR,IS A34
3143      SUBRCUTINE TAR (TR)
3144      C
3145      C ****
3146      C ****
3147      REAL A1(6) /0.01154,0.77674,-3.94657,8.57881,-8.38135,3.01188/
3148      REAL A2(6) /0.01636,1.40783,-6.79030,14.37378,-13.83357,4.92439/
3149      REAL A3(6) /0.01837,1.92497,-8.89134,18.40197,-17.48648,6.17544/
3150      REAL A4(6) /0.01902,2.35417,-10.4715,21.24322,-19.95978,6.99964/
3151      REAL A5(6) /0.01712,3.50839,-13.8639,26.34330,-23.84846,8.17372/
3152      REAL A6(6) /0.01406,4.15958,-15.0628,27.18492,-23.88518,8.03650/
3153      REAL A7(6) /0.01153,4.55946,-15.4329,26.70568,-22.87993,7.57795/
3154      REAL A8(6) /0.00962,4.81911,-15.4714,25.86516,-21.69106,7.08714/
3155      REAL T1(6) /-0.00885,2.71235,-0.62062,-7.07329,9.75995,-3.89922/
3156      REAL T2(6) /-0.01114,2.39371,0.42978,-8.98262,11.51798,-4.52054/
3157      REAL T3(6) /-0.01200,2.13036,1.13833,-10.07925,12.44161,-4.83285/
3158      REAL T4(6) /-0.01218,1.90950,1.61391,-10.64872,12.83698,-4.95199/
3159      REAL T5(6) /-0.01056,1.29711,2.28615,-10.37132,11.95884,-4.54880/
3160      REAL T6(6) /-0.00835,0.92766,2.15721,-8.71429,9.87152,-3.73328/
3161      REAL T7(6) /-0.00646,0.68256,1.82499,-6.95325,7.80647,-2.94454/
3162      REAL T8(6) /-0.00496,0.51043,1.47607,-5.41985,6.00546,-2.28162/
3163      REAL A01(6) /0.01407,1.06226,-5.59131,12.15034,-11.78092,4.20070/
3164      REAL A02(6) /0.01819,1.86277,-9.24831,19.49443,-18.56094,6.53940/
3165      REAL A03(6) /0.01905,2.47900,-11.7427,24.14037,-22.64299,7.89954/
3166      REAL A04(6) /0.01862,2.96400,-13.4870,27.13020,-25.11877,8.68895/
3167      REAL A05(6) /0.01423,4.14384,-16.66709,31.30484,-27.81955,9.36959/
3168      REAL A06(6) /0.01056,4.71447,-17.33454,30.91781,-26.63898,8.79495/
3169      REAL A07(6) /0.00819,5.01768,-17.21228,29.46388,-24.76915,8.05040/
3170      REAL A08(6) /0.00670,5.18781,-16.84820,27.90292,-22.99619,7.38140/
3171      REAL AI1(6) /0.00228,0.34559,-1.19908,2.22336,-2.05287,0.72376/
3172      REAL AI2(6) /0.00123,0.29788,-0.92256,1.58171,-1.40040,0.48316/
3173      REAL AI3(6) /0.00061,0.26017,-0.72713,1.14950,-0.97138,0.32705/
3174      REAL AI4(6) /0.00035,0.22974,-0.58381,0.84626,-0.67666,0.22102/
3175      REAL AI5(6) /-0.00009,0.15049,-0.27590,0.25618,-0.12919,0.02859/
3176      REAL AI6(6) /-0.00016,0.10579,-0.15035,0.06487,0.02759,-0.02317/
3177      REAL AI7(6) /-0.00015,0.07717,-0.09059,0.00050,0.06711,-0.03394/
3178      REAL AI8(6) /-0.00012,0.05746,-0.05878,-0.01855,0.06837,-0.03191/
3179      REAL TD1(6) /-0.00401,0.74050,7.20350,-20.11763,19.68824,-6.74585/
3180      REAL TD2(6) /-0.00438,0.57818,7.42065,-20.26848,19.79706,-6.79619/
3181      REAL TD3(6) /-0.00428,0.45797,7.41367,-19.92004,19.40969,-6.66603/
3182      REAL TD4(6) /-0.00401,0.36698,7.27324,-19.29364,18.75408,-6.43968/
3183      REAL TD5(6) /-0.00279,0.16468,6.17715,-15.84811,15.28302,-5.23666/
3184      REAL TD6(6) /-0.00192,0.08180,4.94753,-12.43481,11.92495,-4.07787/
3185      REAL TD7(6) /-0.00136,0.04419,3.87529,-9.59069,9.16022,-3.12776/
3186      REAL TD8(6) /-0.00098,0.02576,3.00400,-4.33834,6.98747,-2.38328/
3187      DIMENSION TR(9),A(8,6),T(8,6),AO(8,6),AI(8,6),TD(8,6)
3188      C      TR(1)= TRANSMISSION FACTOR ,DIRECT
3189      C      TR(2)= TRANSMISSION FACTOR ,DIFFUSE
3190      C      TR(3)= ABSORPTION FACTOR ,DIRECT, OUTER

```

```

3191 C      TR(4)=          ,DIFFUSE,OUTER
3192 C      TR(5)=          ,DIRECT,INNER
3193 C      TR(6)=          ,DIFFUSE,INNER
3194 C      TR(7)= COSINE OF INCIDENT ANGLE
3195 C      TR(8)=TYPE CF GLASS
3196 C      TR(9)=ID CODE FOR THE GLAZING
3197 C      ID =1 SINGLE GLAZING
3198 C      ID =2 DOUBLE GLAZING
3199 DO 10 J=1,6
3200 A(1,J)=A1(J)
3201 A(2,J)=A2(J)
3202 A(3,J)=A3(J)
3203 A(4,J)=A4(J)
3204 A(5,J)=A5(J)
3205 A(6,J)=A6(J)
3206 A(7,J)=A7(J)
3207 A(8,J)=A8(J)
3208 T(1,J)=T1(J)
3209 T(2,J)=T2(J)
3210 T(3,J)=T3(J)
3211 T(4,J)=T4(J)
3212 T(5,J)=T5(J)
3213 T(6,J)=T6(J)
3214 T(7,J)=T7(J)
3215 T(8,J)=T8(J)
3216 AO(1,J)=AO1(J)
3217 AO(2,J)=AO2(J)
3218 AO(3,J)=AC3(J)
3219 AO(4,J)=AO4(J)
3220 AO(5,J)=AO5(J)
3221 AO(6,J)=AO6(J)
3222 AO(7,J)=AO7(J)
3223 AO(8,J)=AO8(J)
3224 AI(1,J)=AI1(J)
3225 AI(2,J)=AI2(J)
3226 AI(3,J)=AI3(J)
3227 AI(4,J)=AI4(J)
3228 AI(5,J)=AI5(J)
3229 AI(6,J)=AI6(J)
3230 AI(7,J)=AI7(J)
3231 AI(8,J)=AI8(J)
3232 TD(1,J)=TD1(J)
3233 TD(2,J)=TD2(J)
3234 TD(3,J)=TD3(J)
3235 TD(4,J)=TD4(J)
3236 TD(5,J)=TD5(J)
3237 TD(6,J)=TD6(J)
3238 TD(7,J)=TD7(J)
3239 10   TD(8,J)=TD8(J)
3240 ETA=TR(7)
3241 L=TR(8)
3242 ID=TR(9)
3243 IF ( ID.EQ.2) GO TO 30
3244 TR(1)=T(L,1)
3245 TR(2)=T(L,1)/2.
3246 TR(3)=A(L,1)
3247 TR(4)=A(L,1)/2.
3248 DO 20 J=2,6

```

```

3249      TR(1)=TR(1)+T(L,J)*(ETA***(J-1))
3250      TR(2)=TR(2)+T(L,J)/(J+1)
3251      TR(3)=TR(3)+A(L,J)*(ETA***(J-1))
3252 20    TR(4)=TR(4)+A(L,J)/(J+1)
3253      TR(5)=0
3254      TR(6)=0
3255      GO TO 50
3256 C
3257 30    TR(1)=TD(L,1)
3258      TR(2)=TD(L,1)/2.
3259      TR(3)=AC(L,1)
3260      TR(4)=AO(L,1)/2.
3261      TR(5)=AI(L,1)
3262      TR(6)=AI(L,1)/2.
3263      DC 40 J=2,6
3264      X=ETA***(J-1)
3265      TR(1)=TR(1)+TD(L,J)*X
3266      TR(2)=TR(2)+TD(L,J)/(J+1)
3267      TR(3)=TR(3)+AO(L,J)*X
3268      TR(4)=TR(4)+AO(L,J)/(J+1)
3269      TR(5)=TR(5)+AI(L,J)*X
3270 40    TR(6)=TR(6)+AI(L,J)/(J+1)
3271 50    TR(2)=2*TR(2)
3272      TR(4)=2*TR(4)
3273      TR(6)=2*TR(6)
3274      RETURN
3275 C
3276      END
3277 @FOR,IS A35
3278      SUBROUTINE TEMPSH (MONTH,JJ,NK,RMDBS,RMDBW,RMDBWO,RMDBSO,TA)
3279 C
3280 C ***** ****
3281 C
3282      DIMENSION RMDBS(24),RMDBW(24)
3283      IF (MONTH.GE.6.AND.MONTH.LE.9) GO TO 20
3284      IF (JJ.GT.1) GO TO 10
3285      TA=RMDBW(NK)
3286      GO TO 40
3287 C
3288 10    TA=RMDBWC
3289      GO TO 40
3290 C
3291 20    IF (JJ.GT.1) GO TO 30
3292      TA=RMDBS(NK)
3293      GO TO 40
3294 C
3295 30    TA=RMDBSO
3296 40    CONTINUE
3297      RETURN
3298 C
3299      END
3300 @FOR,IS A36
3301      FUNCTION WBF (H,PB)
3302 C
3303 C ***** ****
3304 C
3305 C THIS PROGRAM APPROXIMATES THE WET-BULB TEMPERATURE WHEN
3306 C ENTHALPY IS GIVEN

```

```

3307      IF (H) 30,30,10
3308 10      Y=LOG(H)
3309      IF (H.GT.11.758) GO TO 20
3310      WBF=0.6041+3.4841*Y+1.3601*Y*Y+0.97307*Y*Y*Y
3311      GC TC 100
3312      C
3313 20      WBF=30.9185-39.68200*Y+20.5841*Y*Y-1.758*Y*Y*Y
3314      GO TO 100
3315      C
3316 30      WB1=150.
3317      PV1=PVSF(WB1)
3318      W1=0.622*PV1/(PB-PV1)
3319      X1=0.24*WB1+(1061+0.444*WB1)*W1
3320      Y1=H-X1
3321 40      WB2=WB1-1
3322      PV2=PVSF(WB2)
3323      W2=0.622*PV2/(PB-PV2)
3324      X2=0.24*WB2+(1061+0.444*WB2)*W2
3325      Y2=H-X2
3326      IF (Y1*Y2) 50,60,50
3327 50      WB1=WB2
3328      Y1=Y2
3329      GO TO 40
3330      C
3331 60      IF (Y1) 80,70,80
3332 70      WBF=WB1
3333      GO TC 100
3334      C
3335 80      WBF=WB2
3336      GC TC 100
3337      C
3338 90      Z=ABS(Y1/Y2)
3339      WBF=(WB2*Z+WB1)/(1+Z)
3340 100     RETURN
3341      C
3342      END
3343  aFCR,IS A37
3344      COMPILER (FLC=ABS)
3345      C
3346      C
3347  C      ****
3348  C      ****
3349      SUBROUTINE WD (MM)
3350      C
3351  C      ****
3352  C      ****
3353      INTEGER INCM(176,2),TAPE1,TAPE2
3354      COMMON TAPE1,TAPE2,NC1,N02,INPUT(1100)
3355      MT=TAPE2
3356      IF (MM.EQ.0) MT=TAPE1
3357      NL=176
3358      IF (MM.EQ.0) NL=83
3359      NM=N01
3360      N01=N02
3361      N02=NM
3362      IF (NC1.NE.N02) GO TO 10
3363      N02=2
3364      CALL NTRAN (MT,24,26)

```

```

3365      CALL NTRAN (MT,2,NL,INCM(1,1),L,22)
3366 10    IF (L.LT.0) GO TO 30
3367      CALL NTRAN (MT+2,NL,INCM(1,NC2),L,22)
3368      DO 20 J=1,NL
3369      DO 20 K=1,6
3370      JJ=(K-1)*6
3371      JK=(J-1)*6+K
3372 20    INPUT(JK)=FLD(JJ,6,INCM(J,NC1))
3373      GO TO 40
3374 C
3375 30    WRITE (6,50) L
3376      STOP
3377 C
3378 40    CONTINUE
3379      RETURN
3380 C
3381 C
3382 50    FORMAT (20H0  INPUT ERROR     L=1I10)
3383 C
3384      END
3385 @FCR,IS A38
3386      SUBROUTINE WDX (IW)
3387 C
3388 C ***** ****
3389 C
3390      DIMENSION IDATA(10) /054,06,07,010,011,C12,013,014,015,016/ ,
3391      2 JDATA(10) /C60,C61,062,C63,064,C65,066,067,070,071/ ,
3392      3 KDATA(10) /030,C17,020,021,022,023,024,025,026,027/
3393      DATA KX /041/
3394      DO 10 KK=1,10
3395      IF (IW.EQ.IDATA(KK)) GO TO 20
3396      IF (IW.EQ.JDATA(KK)) GO TO 20
3397      IF (IW.EQ.KDATA(KK)) GO TO 30
3398 10    CONTINUE
3399      IF (IW.EQ.KX) GO TO 40
3400      IW=1000000
3401      GO TO 50
3402 C
3403 20    IW=KK-1
3404      GO TO 50
3405 C
3406 30    IW=-(KK-1)
3407      GO TO 50
3408 C
3409 40    IW=10
3410 50    RETURN
3411 C
3412      END
3413 @FCR,IS A39
3414      SUBROUTINE WINTER (A,U,ITYPE,NEXP,CFMWT,DBIN,DBWT,UG,TGW,RHI,RHO,
3415 *UENDW,UCELNG,AENDW,ATCHT,AIRCHG)
3416 C
3417 C ***** ****
3418 C
3419      DIMENSION A(30),U(30),ITYPE(30)
3420      CALL DBRF (DBWT,RHO,W0)
3421      CALL DBRH (DBIN,RHI,W1)
3422      DT=DBIN-CBWT

```

```

3423      DW=WI-WO
3424      QWINTS=1.08*CFMWT*DT
3425      QWINTL=4.5*CFMWT*Dw*1060.
3426      DO 20 I=1,NEXP
3427      IF (ITYPE(I).EQ.6.OR.ITYPE(I).EQ.7) GO TO 20
3428      IF (UCELNG.EQ.0..OR.ITYPE(I).NE.1)GO TO 5
3429      X=U(1)*A(1)+1.08*AIRCHG*ATCHT/60.+UENDW*AENDW
3430      Y=UCELNG*A(1)
3431      TATTIC=(X*DBWT+Y*DBIN)/(X+Y)
3432      QWINTS=QWINTS+Y*(DBIN-TATTIC)
3433      GO TO 20
3434      5      IF (ITYPE(I).NE.5) GO TO 10
3435      QWINTS=QWINTS+UG*A(1)*(DBIN-TGW)
3436      GO TO 20
3437      10     CONTINUE
3438      QWINTS=QWINTS+U(I)*A(I)*DT
3439      20     CONTINUE
3440      TOTAL=QWINTS+QWINTL
3441      WRITE (6,30) QWINTS,QWINTL,TOTAL
3442      RETURN
3443      C
3444      C
3445      30     FORMAT (//30H HEATING LOAD IN BTU PER HOUR /26H           SENSIBLE
3446      2LCAD = F10.0/26H           LATENT    LOAD = F10.0/36H           -----
3447      3-----/26H           TOTAL    LOAD = F10.0///)
3448      C
3449      END
3450      @FOR, IS A40
3451          FUNCTION WKDAY (YR,MO,DAY)
3452      C
3453      C ***** **** * **** * **** * **** * **** * **** * **** * **** * **** *
3454      C
3455      C      WKDAY=1 SUNDAY
3456      C      WKDAY=2 MONDAY
3457      C      WKDAY=3 TUESDAY
3458      C      WKDAY=4 WEDNESDAY
3459      C      WKDAY=5 THURSDAY
3460      C      WKDAY=6 FRIDAY
3461      C      WKDAY=7 SATURDAY
3462      INTEGER YR,DAY,WKDAY,TDAY,FSTDAY
3463      DIMENSION FSTDAY(12) /31,59,90,120,151,181,212,243,273,304,334,
3464      2 365/
3465      N=YR/4
3466      ND=N-485
3467      IY=2
3468      IF (ND.EQ.0) GO TO 40
3469      IF (ND.LT.0) GO TO 10
3470      IADD=2
3471      GO TO 20
3472      C
3473      10     ND=-ND
3474      IADD=-2
3475      20     DO 30 J=1,ND
3476      IY=IY-IADD
3477      IF (IY.GT.7) IY=IY-7
3478      IF (IY.EQ.0) IY=7
3479      IF (IY.LT.0) IY=IY+7
3480      30     CONTINUE

```

```

3481 40      MD=YR-N*4
3482      IF (MD.EQ.0) IWK=IY
3483      IF (MD.EQ.1) IWK=IY+2
3484      IF (MD.EQ.2) IWK=IY+3
3485      IF (MD.EQ.3) IWK=IY+4
3486      IF (IWK.GT.7) IWK=IWK-7
3487      IF (MO.NE.1) GO TO 50
3488      TDAY=DAY-1
3489      GO TO 80
3490 C
3491 50      DO 60 J=2,12
3492      IF (MO.NE.J) GO TO 60
3493      TDAY=FSTDAY(J-1)+DAY-1
3494      GO TO 70
3495 60      CONTINUE
3496 70      IF (MD.EQ.0.AND.MC.GT.2) TDAY=TDAY+1
3497 80      NTX=TDAY/7
3498      NDX=TDAY-7*NTX+IWK
3499      IF (NDX.GT.7) NDX=NDX-7
3500      WKDAY=NDX
3501      KV=YR/100
3502      KTEST=YR-KV*100
3503      IF (MO.GT.2.OR.KTEST.NE.0) GO TO 90
3504      KV=KV-1
3505 90      LV=KV/4
3506      LTEST=KV-LV*4
3507      IF (LTEST.EQ.2) WKDAY=WKDAY+1
3508      IF (LTEST.EQ.1) WKDAY=WKDAY+2
3509      IF (LTEST.EQ.0) WKDAY=WKDAY+3
3510      WKDAY=WKDAY-3*(LV-4)
3511 100     IF (WKDAY.LE.0) WKDAY=WKDAY+7
3512     IF (WKDAY.LE.0) GO TO 100
3513     IF (WKDAY.GT.7) WKDAY=WKDAY-7
3514     RETURN
3515 C
3516     END
3517 @ELT,IL A41
3518 C      THIS IS A MAIN PROGRAM FOR DECODING WEATHER BUREAU TAPES.
3519      DIMENSION DB(24),DP(24),WB(24),WS(24),PB(24),TC(24),TOC(24),PR(24)
3520      2,PS(24)
3521      INTEGER WPOS(10) /13,11,16,19,22,34,43,46,68,70/
3522      INTEGER WLON(10) /3,2,3,3,3,4,1,1,2,3/
3523      INTEGER TAPE1,TAPE2,DAY,CITY,YEAR,OUT(24),OUTPUT(24,10)
3524      COMMON TAPE1,TAPE2,N01,N02,INPUT(1100)
3525      TAPE1=7
3526      TAPE2=8
3527      READ (5,60) NDYSKP,NDAY
3528      NSKIP=4*NDYSKP
3529      CALL NTRAN (TAPE1,7,NSKIP)
3530      N01=1
3531      NC2=1
3532      DO 50 N=1,NDAY
3533      CALL DECODE (WPOS,WLON,10,OUTPUT,0,YEAR,MONTH,DAY,CITY)
3534      DO 30 K=1,10
3535      DO 10 J=1,24
3536 10      OUT(J)=OUTPUT(J,K)
3537      CALL ERFCR (OUT,K)
3538      DO 20 J=1,24

```

```
3539 20 OUTPLT(J,K)=OUT(J)
3540 30 CONTINUE
3541 DO 40 J=1,24
3542 WS(J)=OUTPUT(J,1)
3543 DB(J)=OUTPUT(J,3)
3544 WB(J)=OUTPUT(J,4)
3545 DP(J)=OUTPUT(J,5)
3546 PB(J)=OUTPUT(J,6)/100.
3547 TC(J)=OUTPUT(J,7)
3548 PR(J)=OUTPUT(J,9)
3549 PS(J)=OUTPUT(J,10)
3550 TO=2
3551 ITK=CUTPUT(J,8)
3552 IF (ITK.EQ.2) TO=1.
3553 IF (ITK.EQ.8.OR.ITK.EQ.9) TO=0.
3554 40 TOC(J)=TC
3555 WRITE (6,80) YEAR,MONTH,DAY,CITY
3556 IF (N.EQ.1) WRITE (6,70) DB,DP,WB,WS,PB,TC,TOC,PR,PS
3557 50 WRITE (8) DB,DP,WB,WS,PB,TC,TOC,PR,PS,YEAR,MONTH,DAY,CITY
3558 END FILE 8
3559 C
3560 C
3561 60 FORMAT (10I7)
3562 70 FORMAT (12F10.3)
3563 80 FORMAT (22H DATA PROCESSED FOR 4I20)
3564 C
3565 END
3565:
```

NBSLD Sample Input/Output

58 BRICK 13 INCHES
59 3
60 .25,0 .024,3.5..157,0
61 .024,.12,55.,.259,0
62 0,0,0,0,0.7
63 FG WOOL 6-INCHES
64 GYPSUM BOARD 1/4-IN
65 CEILING SIDE RESISTANCE
66 0
67 1.,3.,,2,21.,,5.,5,65.,2000.,1.,1.,.02,1.
68 3,3,8,17
69 78.,68.,72000.,72000.,65.,50.
70 0,0
71 2,3,1,2
72 35.,93.3,10.7
73 1,5,3265.,0.,0.,0.,0.88,0.
74 0,0,0,0,0,0,0
75 0,0,0,0,0,0,0,0
76 2,1,370.,0.,0.,0.,7,0
77 0,0,0,0,0,0,0
78 0,0,0,0,0,0,0,0
79 3,10,4.5,0.,1.06.,55,0.,0
80 0,0,0,0,0,0,0
81 0,0,0,0,0,0,0,0
82 2,1,793.,50.,0.,0.,.7,0
83 0,0,0,0,0,0,0
84 0,0,0,0,0,0,0,0
85 3,10,155.,90.,1.06.,55,0.,0
86 0,0,0,0,0,0,0
87 0,0,0,0,0,0,0,0
88 4,10,50.,50.,.61,0.,.9,0
89 0,0,0,0,0,0,0
90 0,0,0,0,0,0,0,0
91 6,3,374.,180.,0.,0.,0.,0
92 0,0,0,0,0,0,0
93 0,0,0,0,0,0,0,0
94 2,1,918.,-90.,0.,0.,.9,0
95 0,0,0,0,0,0,0
96 0,0,0,0,0,0,0,0
97 3,10,80.,-90.,1.06.,55,0.,0
98 0,0,0,0,0,0,0
99 0,0,0,0,0,0,0,0
100 8,4,3265.,0.,0.,0.,0.,0,0
101 0,0,0,0,0,0,0
102 0,0,0,0,0,0,0,0
103 .37,.08,470.,6.5.,.02,1.
104 0,0,0,4,1
105
END PRT

@XQT JIMBAR.NESLD

CONGRATULATIONS## NOW YOU ARE ON NBSLD

WE ASSUME YOU HAVE ALREADY PREPARED THE DATA
ON NBS DATA FORMS..IF YOU HAD NOT ,PLEASE TURN OFF

THE TERMINAL AND HAVE YOUR DATA READY ON THE DATA FORMS

RUNIO,RUNTYP,ASHRAE,IDEATAL,METHOD
RUNIO..... IDENTIFICATION OF THE RUN
I NEED RESPONSE FACTOR DATA
2 SKIP RESPONSE FACTOR DATA
RUNTYP..... TYPE OF RUN
1 ENERGY CALCULATION ..NEEDS WEATHER TAPE
2 DESIGN LOAD CALCULATION
3 DESIGN AND ENERGY LOAD CALCULATIONS
ASHRAE.....0 USE RMTMP
I USE ASHRAE WEIGHTING FACTORS
IDEATAL.....0 NO DETAILED OUTPUT
I DETAILED OUTPUT
METHOD.....0 REGULAR TREATMENT FOR THE ROOM
.....I SPECIAL TREATMENT OF THE ROOM
FORT MEYER BLDG 219
LIGHTING SCHEDULE FOR WEEKDAYS
EQUIPMENT USAGE SCHEDULE FOR WEEKDAYS
OCCUPANCY SCHEDULE FOR WEEKDAYS
LIGHTING SCHEDULE FOR WEEKEND
EQUIPMENT SCHEDULE FOR WEEKENDS
OCCUPANCY SCHEDULE FOR WEEKEND
LIGHTING SCHEDULE FOR THE VACATION PERIOD
EQUIPMENT USAGE SCHEDULE FOR THE VACATION PERIOD
OCCUPANCY SCHEDULE FOR THE VACATION PERIOD
THERMOSTAT SETTING FOR THE COOLING SEASON
THERMOSTAT SETTING FOR THE HEATING SEASON
RMDBWO,RMDBSO,RHW,RHS
DATA SHEET NO 1:NDAY,NSKIP,TAPE2
DATA SHEET NO 2 +3 :MCNTH,DAY,ELAPS,DBMAX,RANGE,WBMAX, DBMWT,TGS,TGW,UG,LONG,LAT,TZN,ZLF,RHOW
DATA SHEET NO 4: NAME OF THE ROOM
DATA SHEET NO 5:IROT,ISKIP,INCLUDE
DATA SHEET NO 6 N/L,K,P,C,R
DATA SHEET NO 7: DESCRIPTION OF EACH LAYER

IRF= 1

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	R(E(I))	DESCRIPTION OF LAYERS
1	.031	.120	55.00	.259	.00	GYPSUM BOARD 3/8-IN
2	.000	.000	.00	.000	.20	AIR SPACE 3/4-IN
3	1.080	.580	125.00	.200	.00	COMMON BRICK 13-IN

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .431

RESPONSE FACTORS

J	X	Y	Z
0	1.8144	.0000	4.2967
1	-.6456	.0003	-2.5170
2	-.1642	.0047	-.4141
3	-.1045	.0162	-.2144
4	-.0753	.0271	-.1370
5	-.0581	.0331	-.0974
6	-.0467	.0350	-.0739
7	-.0387	.0341	-.0586
8	-.0326	.0319	-.0480
9	-.0279	.0291	-.0402
10	-.0240	.0262	-.0342
11	-.0208	.0233	-.0293
12	-.0181	.0207	-.0254
13	-.0158	.0182	-.0221
14	-.0138	.0160	-.0192
15	-.0121	.0141	-.0168

COMMON RATIO CR= .87392

DATA SHEET NO 7: DESCRIPTION OF EACH LAYER

IRF=

2

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	RES(I)	DESCRIPTION OF LAYERS
1	.031	.120	55.00	.259	.00	GYPSUM BOARD 3/8-IN
2	.250	.024	3.50	.157	.00	FG WCOL 6-IN

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .094

RESPONSE FACTORS

J	X	Y	Z
0	.5709	.0650	.1406
1	-.4771	.0286	-.0469
2	-.0001	.0001	-.0000
3	-.0000	.0000	-.0000
4	-.0000	.0000	-.0000

COMMON RATIO CR= .00157

DATA SHEET NC 7: DESCRIPTION OF EACH LAYER

IRF=

3

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	RES(I)	DESCRIPTION OF LAYERS
1	.031	.120	55.00	.259	.00	GYPSUM BOARD 3/8-IN
2	.000	.000	.00	.000	1.00	AIR SPACE 4-IN
3	.031	.120	55.00	.259	.00	GYPSUM BOARD 3/8-IN

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .658

RESPONSE FACTORS

J	X	Y	Z
0	1.0350	.5905	1.0350
1	-.3771	.0674	-.3771
2	.0000	.0000	.0000
3	.0000	.0000	.0000

COMMON RATIO CR= .00000

DATA SHEET NO 7: DESCRIPTION OF EACH LAYER

IRF=

4

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	RES(I)	DESCRIPTION OF LAYERS
1	.010	.122	69.00	.300	.00	ASPHALT TILE 1/8-IN
2	.063	.094	32.00	.200	.00	WOOD FLOOR 3/4-IN
3	.170	.094	32.00	.200	.00	WOOD SUBFLOOR 2-IN

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .391

RESPONSE FACTORS

J	X	Y	Z
0	1.0303	.1583	.8785
1	-.6150	.2094	-.4640
2	-.0221	.0217	-.0214
3	-.0018	.0018	-.0017
4	-.0001	.0001	-.0001

COMMON RATIO CR= .08120

DATA SHEET NC 7: DESCRIPTION OF EACH LAYER

IRF= 5

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	RES(I)	DESCRIPTION OF LAYERS
1	.000	.000	.00	.000	.70	ATTIC SIDE RESISTANCE
2	.073	.094	32.00	.600	.00	WOOD 7/8-IN
3	.000	.000	.00	.000	.08	BUILDING PAPER
4	.050	.750	95.00	.400	.00	GREEN SLATE 1/2-IN

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .616

RESPONSE FACTORS

J	X	Y	Z
0	.7870	.3149	3.0529
1	-.1623	.2824	-2.3962
2	-.0082	.0177	-.0385
3	-.0004	.0010	-.0021
4	-.0000	.0001	-.0001

COMMON RATIO CR= .05392

DATA SHEET NC 7: DESCRIPTION OF EACH LAYER

IRF=

6

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	RES(I)	DESCRIPTION OF LAYERS
1	1.080	.583	125.00	.200	.00	BRICK 13INCHES

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .540

RESPONSE FACTORS

J	X	Y	Z
0	4.3078	.0000	4.3078
1	-2.5235	.0015	-2.5235
2	-.4152	.0181	-.4152
3	-.2149	.0457	-.2149
4	-.1373	.0609	-.1373
5	-.0974	.0627	-.0974
6	-.0733	.0576	-.0733
7	-.0573	.0501	-.0573
8	-.0457	.0425	-.0457
9	-.0369	.0355	-.0369
10	-.0300	.0294	-.0300
11	-.0245	.0242	-.0245
12	-.0201	.0200	-.0201
13	-.0165	.0164	-.0165
14	-.0135	.0135	-.0135

COMMON RATIO CR= .81966

DATA SHEET NC 7: DESCRIPTION OF EACH LAYER

IRF= 7

WALL COMPOSITION

LAYER NO	L(I)	K(I)	(I)	C(I)	R _E S(I)	DESCRIPTION OF LAYERS
1	.250	.024	3.50	.157	.00	FG WOOL 6-INCHES
2	.024	.120	55.00	.259	.00	GYPSUM BOARD 1/4-IN
3	.000	.000	.00	.000	.70	CEILING SIDE RESISTANCE

TIME INCREMENT DT= 1.

THERMAL CONDUCTANCE U= .088

RESPONSE FACTORS

J	X	Y	Z
0	.1393	.0438	.4112
1	-.0505	.0423	-.3121
2	-.0005	.0022	-.0104
3	-.0000	.0001	-.0004
4	-.0000	.0000	-.0000

COMMON RATIO CR=.03509

DATA SHEET NO 8: ROOMNO, QLITY, QEQPY, QCU, FLCG, FRAS, TS, CFMV, ARCHGS, ARCHGW, ARCHGM, ZNORM

DATA SHEET NO.9: IW, IL, TUL, TLL, QCMAX, QHMAX, ITHST, ITK

DATA SHEET NC 10: NS, NW, NN, NE, L, W, H

DATA SHEET 11 AND 12: ROOM SURFACE DATA AND EXTERIOR SURFACE SHADOW

ROOMNO	HT	AG	NOFLR	QCU	ARCHGS	ARCHGW
1.0	10.7	3265.0	1.0	21.0	1.0	1.0

LAT	LONG	TZN	ZNORM
38.0	76.5	5.0	1.0

QLITY	QEQPX	CFMV	DBIN	TG	TV	RHIN
3.0	.2	2000.0	68.0	44.0	65.0	60.0

NEXP	ITK	I THST
10	0	0

DATA SHEET NO 13: UENDW, UCEILING, AENDW, ATCHT, AIRCHG, AIRPT
 DATA SHEET NO 14: IEXTSD, IEXMS, IEXME, NTVNT, NVENT

LENDW	UCEILING	AENDW	ATCHT	H	WAZ	SHADE	UT	HI
*4	*1	47C*0	*.5					.71
SURFACE NO	I TYPE	IHT	IRF	ABSP				
1	1	1	5	*.88	*42	3265.00	*.00	*.08
2	2	1	1	*70	*32	370.00	*.00	*4.3
3	3	-1	10	*00	1.06	6.00	4.50	*54
4	2	1	1	*70	*32	6.00	793.00	10.89
5	3	-1	10	*00	1.06	6.00	155.00	*54
6	4	1	10	*90	*61	50.00	90.00	10.89
7	5	1	3	*00	*45	374.00	180.00	*54
8	2	1	1	*90	*32	6.00	918.00	*4.3
9	3	-1	10	*00	1.06	6.00	-90.00	*54
10	8	1	4	*00	*25	1.46	3265.00	*39

SHADCW	CASTING DATA	BWL	BWR	D	FP1	A1	B1	C1	FP2	A2	B2	C2
HT	FL	FP	AW	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0
*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0	*0

RADIATION INTERCHANGE FACTORS

SURFACE	1	2	3	4	5	6	7	8	9	10
1	*000	*041	*001	*096	*019	*006	*042	*111	*010	*675
2	*366	*000	*000	*102	*020	*006	*013	*118	*010	*366
3	*366	*000	*000	*102	*020	*006	*013	*118	*010	*366
4	*395	*047	*001	*000	*000	*000	*048	*106	*009	*395
5	*395	*047	*001	*000	*000	*000	*048	*106	*009	*395
6	*395	*047	*001	*000	*000	*000	*048	*106	*009	*395
7	*366	*013	*000	*102	*020	*006	*048	*118	*010	*366
8	*395	*047	*001	*091	*018	*006	*048	*000	*000	*395
9	*395	*047	*001	*091	*018	*006	*048	*000	*000	*395
10	*675	*041	*001	*096	*019	*006	*042	*111	*010	*000

HEATING LOAD IN BTU PER HOUR
 SENSIBLE LOAD = 125946.
 LATENT LOAD = 6820.

 TOTAL LOAD = 132766.

SOLAR DATA (QSUN/QGLASS)

YEAR = 2000 *** MONTH = 8 *** DAY = 21

M/E	D BOUT	W BOUT	DBIN	RHIN	QLL	QLS
1	79.4	69.7	84.4	53.6	0.	0.
2	78.4	69.4	83.6	54.8	0.	0.
3	77.6	69.2	82.9	56.1	0.	0.
4	77.0	69.0	82.3	57.2	0.	0.
5	76.8	69.0	81.8	58.2	0.	0.
6	77.2	69.1	81.8	58.2	0.	0.
7	76.2	69.2	82.7	56.5	0.	0.
8	80.0	69.9	78.0	60.0	-36082.	-8260.
9	82.6	70.6	78.0	60.0	-40255.	-7266.
10	85.6	71.5	78.0	60.0	-44928.	-7266.
11	89.0	72.4	78.0	60.0	-49980.	-7266.
12	92.2	73.3	78.0	60.0	-55125.	-7266.

13	94.6	73.9	78.0	60.0	-61245.	-7266.
14	96.2	74.3	78.0	60.0	-67573.	-7266.
15	96.8	74.5	78.0	60.0	-71931.	-7266.
16	96.2	74.3	78.4	60.0	-72000.	-6842.
17	94.8	74.0	78.0	60.0	-71305.	-7342.
18	92.6	73.4	85.0	52.5	-24316.	0.
19	90.0	72.7	85.0	52.5	-17841.	0.
20	87.4	72.0	85.0	52.5	-13144.	0.
21	85.2	71.4	85.0	52.5	-9202.	0.
22	83.2	70.8	85.0	52.5	-5660.	0.
23	81.6	70.4	85.0	52.5	-2594.	0.
24	80.4	70.0	85.0	52.5	-28.	0.

DEA = 85.54

GLDSUM = -716519.

TOTAL COOLING CONSUMPTION PER DAY = -716519. BTU

TOTAL HEATING CONSUMPTION PER DAY = 0. BTU

TOTAL COOLING CONSUMPTION FOR THE ROOM OVER THE 1 DAY PERIOD = -.71652+06 BTU

TOTAL HEATING CONSUMPTION FOR THE ROOM OVER THE 1 DAY PERIOD = .00000 BTU

MAX COOLING LOAD = -78842. MONTH = 8 DAY = 21 HOUR = 16

MAX HEATING LOAD = 0. MONTH = 0 DAY = 0 HOUR = 0

TOTAL COOLING CONSUMPTION FOR 1 ROOMS = -.71652+06 BTU

TOTAL HEATING CONSUMPTION FOR 1 ROOMS = .00000 BTU

DATA SHEET NO 4: NAME OF THE ROOM

@PRT,S QAZ*MYFILE.MEYEF1

FURFUR NS26H-03/05-12:01

58 0,0,0,4,1
59
END PRT

@XCT JIMBAR.NESLD

CONGRATULATIONS## NOW YOU ARE ON NBSLD

WE ASSUME YOU HAVE ALREADY PREPARED THE DATA
ON NBS DATA FORMS..IF YOU HAD NOT ,PLEASE TURN OFF
THE TERMINAL AND HAVE YOUR DATA READY ON THE DATA FORMS

RUNID,RUNTYP,ASHRAE,IDEATAL,METHOD
RUNID..... IDENTIFICATION OF THE RUN
 1 NEED RESPONSE FACTOR DATA
 2 SKIP RESPONSE FACTOR DATA
RUNTYP..... TYPE OF RUN
 1 ENERGY CALCULATION ..NEEDS WEATHER TAPE
 2 DESIGN LOAD CALCULATION
 3 DESIGN AND ENERGY LOAD CALCULATIONS
ASHRAE.....0 USE RMTMP
 1 USE ASHRAE WEIGHTING FACTORS
IDEATAL.....0 NO DETAILED OUTPUT
 1 DETAILED OUTPUT
METHOD.....0 REGULAR TREATMENT FOR THE ROOM
*****1 SPECIAL TREATMENT OF THE ROOM
 FORT MEYER BLDG 219
LIGHTING SCHEDULE FOR WEEKDAYS
EQUIPMENT USAGE SCHEDULE FOR WEEKDAYS
OCCUPANCY SCHEDULE FOR WEEKDAYS
LIGHTING SCHEDULE FOR WEEKEND
EQUIPMENT SCHEDULE FOR WEEKENDS
OCCUPANCY SCHEDULE FOR WEEKEND
LIGHTING SCHEDULE FOR THE VACATION PERIOD
EQUIPMENT USAGE SCHEDULE FOR THE VACATION PERIOD
OCCUPANCY SCHEDULE FOR THE VACATION PERIOD
THERMSTAT SETTING FOR THE COOLING SEASON
THERMOSTAT SETTING FOR THE HEATING SEASON
RMCEWO,RMDBSD,RHW,RHS
DATA SHEET NC 1:NCAY,NSKIF,TAPE2
DATA SHEET NO 2 +3 :MONTH,DAY,ELAPS,DBMAX,RANGE,WBMAX, DBMWT,TGS,TGW,UG,LONG,LAT,TZN,ZLF,RHOW
DATA SHEET NC 4: NAME OF THE RCOM
DATA SHEET NO 5: IROT,ISKIP,INCLUDE
DATA SHEET NC 8: RCCMNIC,QLITY,GEQPY,QCU,FLCG,FRAS,TS,CFMV,ARCHGS,ARCHGW,ARCHGM,ZNORM
DATA SHEET NO.9: IW,IL,TUL,TLL,QCMAX,QHMAX,ITHST,ITK
DATA SHEET NO 10: NS,NW,NN,NE,L,W,H
DATA SHEET 11 AND 12: RCOM SURFACE DATA AND EXTERIOR SURFACE SHADOW

DATA SHEET NO 13: UENDW, UCELNG, AENDW, ATCHT, AIRCHG, AIRNT
 DATA SHEET NO 14: IEXTSD, IEXMS, IEXME, NTVNT, NVENT

ROOM NAME= OFFICE					MONTH=	1
	DAY	MHR	QLMAX	CLDAY	HLDAY	DBA
1	1	24	67266.	0.	833917.	33.4
1	2	8	74977.	0.	1557859.	24.0
1	3	8	69210.	0.	1339045.	28.8
1	4	8	51673.	0.	767721.	41.8
1	5	24	46525.	0.	829164.	36.1
1	6	6	54181.	0.	1099831.	31.3
1	7	8	49389.	0.	982197.	35.5
1	8	4	43912.	0.	923993.	35.5
1	9	4	44824.	0.	851840.	36.7
1	10	24	49385.	0.	871738.	37.6
1	11	9	64347.	0.	1239178.	28.5
1	12	4	54753.	0.	1079643.	32.6
1	13	24	46914.	0.	855627.	37.5
1	14	24	71760.	0.	1394308.	24.4
1	15	17	72942.	0.	1742967.	17.4
1	16	7	72919.	0.	1588378.	22.8
1	17	15	74586.	0.	1768679.	13.8
1	18	11	73847.	0.	1680665.	18.2
1	19	4	74156.	0.	1430075.	25.0
1	20	5	63771.	0.	1141373.	32.5
1	21	8	46194.	0.	765276.	40.3
1	22	5	31852.	0.	436868.	48.6
1	23	24	48898.	0.	335641.	49.1
1	24	8	68003.	0.	1301764.	25.4
1	25	6	56741.	0.	1157575.	30.0
1	26	6	48566.	0.	826622.	38.5
1	27	1	37008.	0.	707440.	40.8
1	28	8	40155.	0.	797525.	37.2
1	29	8	43283.	0.	789407.	38.5
1	30	8	42105.	0.	789377.	38.0
1	31	8	43971.	0.	875430.	35.2

MONTHLY COOLING LOAD= .0000000 BTU


MONTHLY HEATING LOAD= .32761124+08 BTU

MAX COOLING LOAD = 0. MONTH = 0 DAY = 0 HOUR = 0
 MAX HEATING LOAD = 74977. MONTH = 1 DAY = 2 HOUR = 8
 TOTAL COOLING CONSUMPTION FOR 1 ROOMS = .00000 BTU
 TOTAL HEATING CONSUMPTION FOR 1 ROOMS = .32761+08 BTU
 DATA SHEET NO 4: NAME OF THE ROOM

ABRKPT PRINT\$

11. ASHRAE PSYCHROMETRIC CHART NO. 1

NORMAL TEMPERATURE
BAROMETRIC PRESSURE 29.921 INCHES OF MERCURY
COPYRIGHT 1963
AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS, INC.

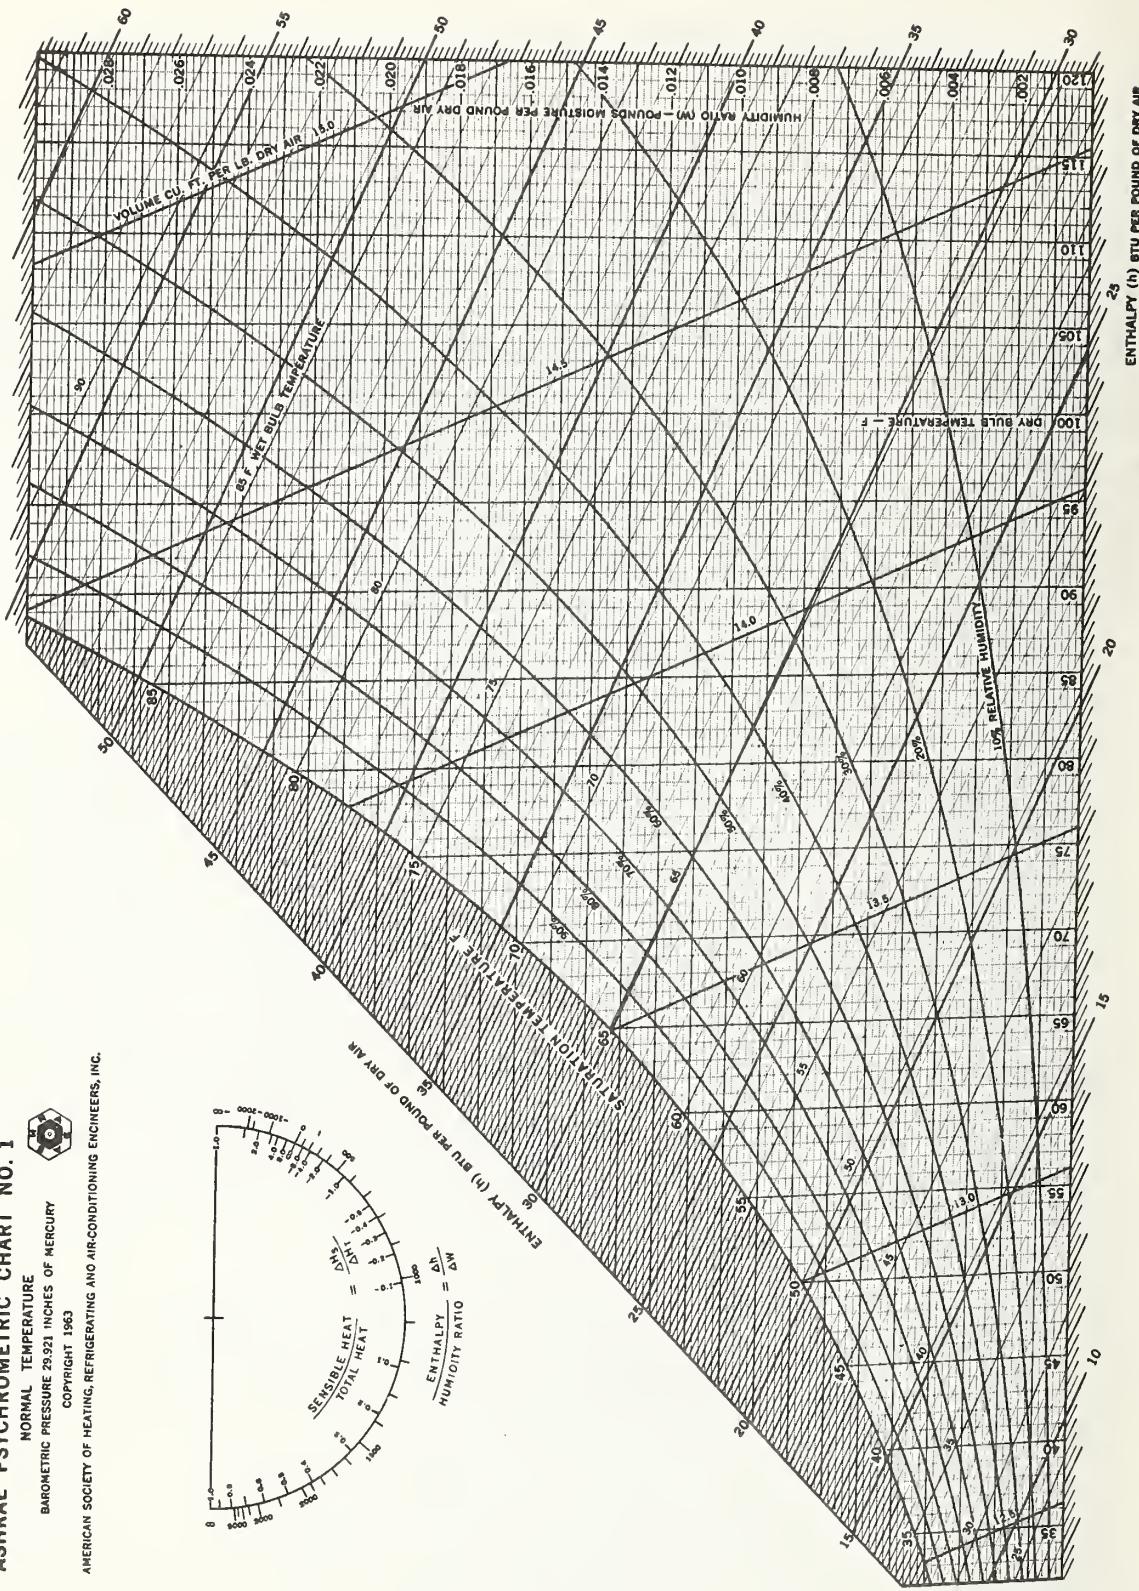

BUILD
ON YOUR KNOWLEDGE
WITH



Construction Review

CONSTRUCTION REVIEW is our monthly magazine for and about the construction industry. All the major U.S. Government statistical series plus selected series from the private sector are brought together to keep you up-to-date on:

- New construction outlays
- Housing starts
- Building permits
- Contract awards
- Cost indexes
- Materials price indexes
- Union wages
- Materials output
- Employment
- Hours of work
- Weekly earnings

Our regular feature articles include the annual outlook for new construction activity, a review of the year in construction, and other analytical data. Only \$14.50 a year. Use the order form below to start your subscription today.

(please detach here)

SUBSCRIPTION ORDER FORM

C57.509:

ENTER MY SUBSCRIPTION TO CONSTRUCTION REVIEW
at \$14.50. Add \$3.65 for foreign mailing. No additional postage is required for mailing within the United States or its possessions.

Send Subscription to:

NAME—FIRST, LAST		
COMPANY NAME OR ADDITIONAL ADDRESS LINE		
STREET ADDRESS		
CITY	STATE	ZIP CODE

Remittance Enclosed
(Make checks payable
to Superintendent of
Documents)

Charge to my Deposit
Account No. _____

MAIL ORDER FORM TO:
Superintendent of Documents
Government Printing Office
Washington, D.C. 20402

PLEASE PRINT

Time Was When Energy Was Cheaper



...but that's all changed now.

Today, increased energy costs—caused by increasing demand—boost the price of consumer goods, fuel inflation, and hurt our balance of payments.

That's why conserving energy is a must today, especially for you in the business and industry community which uses two thirds of our nation's energy.

Now . . . there's a book to tell you how to do it. It's called EPIC—the Energy Conservation Program Guide for Industry and Commerce. Prepared for you by the Commerce Department's National Bureau of Standards in cooperation with the Federal Energy Administration.

EPIC is a comprehensive handbook that can help you establish or improve an energy conservation program in your organization.

Not only industry and commerce but also hospitals, universities, research institutes, ANY organization that uses energy—and has to pay the bills—will want a copy of EPIC.

EPIC outlines in detail the steps in setting up an energy conservation program.

It contains a checklist of more than 200 Energy Conservation Opportunities—suggestions to save

energy in a dozen different areas.

EPIC's actual case histories of energy saving actions help you estimate your potential for saving energy—and reducing costs.

And EPIC contains much more—financial analysis procedures to evaluate projects, sources of information on energy conservation, engineering data and factors, an energy conservation bibliography.

Make EPIC part of your plan to control energy use and costs. Make EPIC part of your contribution to using energy resources wisely . . . so we can keep America working and growing.

To order your copy of EPIC, send \$2.90 per copy (check, money order or Superintendent of


Documents Coupons) to Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

Ask for NBS Handbook 115, EPIC, C13.11:115.

Discount of 25% on orders of 100 copies or more.



U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET		1. PUBLICATION OR REPORT NO. NBS-BSS-69	2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE NBSLD, the Computer Program for Heating and Cooling Loads in Buildings		5. Publication Date July 1976		
7. AUTHOR(S) Tamami Kusuda		6. Performing Organization Code		
9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS DEPARTMENT OF COMMERCE WASHINGTON, D.C. 20234		10. Project/Task/Work Unit No. 4626400		
		11. Contract/Grant No.		
12. Sponsoring Organization Name and Complete Address (Street, City, State, ZIP) National Bureau of Standards Housing and Urban Development Department of Commerce 451 7th Street, S.W. Washington, D.C. 20234 Washington, D.C. 20410		13. Type of Report & Period Covered Final Report		
		14. Sponsoring Agency Code		
15. SUPPLEMENTARY NOTES				
16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.)				
<p>A comprehensive computer program called NBSLD, the National Bureau of Standards Load Determination program, has been developed at NBS to reflect the time change of the many building parameters which are pertinent to accurate estimation of energy usage for heating and cooling. Current status of heating and cooling load techniques is reviewed. Of general interest are unique features of NBSLD which are not available in existing computer programs. A summary of various subroutines of NBSLD is given along with the detailed procedures for them. These subroutines constitute the recommended subroutine algorithms of the ASHRAE Task Group on Energy Requirements. Complete Fortran listing of NBSLD and data preparation forms are given for those who wish to use the program. The NBSLD computation is on the basis of the detailed solution of simultaneous heat balance equations at all the interior surfaces of a room or space. Transient heat conduction through exterior walls and the interior structures is handled by using conduction transfer functions. The use of heat balance equations, although time consuming in calculation, can avoid the vagueness and uncertainties inherent in the more popularly used weighting factor approach. In addition, it is more accurate for a specific building design.</p>				
17. KEY WORDS (six to twelve entries; alphabetical order; capitalize only the first letter of the first key word unless a proper name; separated by semicolons) ASHRAE Task Group on Energy Requirements; conduction transfer functions; heating and cooling load; National Bureau of Standards Heating and Cooling Load Computer Program				
18. AVAILABILITY		<input checked="" type="checkbox"/> Unlimited	19. SECURITY CLASS (THIS REPORT) UNCL ASSIFIED	21. NO. OF PAGES 3 98
		<input type="checkbox"/> For Official Distribution. Do Not Release to NTIS		
		<input checked="" type="checkbox"/> Order From Sup. of Doc., U.S. Government Printing Office Washington, D.C. 20402, SD Cat. No. C13.29/2.69	20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED	22. Price \$4.60
		<input type="checkbox"/> Order From National Technical Information Service (NTIS) Springfield, Virginia 22151		



(cut here)

ANNOUNCEMENT OF NEW PUBLICATIONS IN BUILDING SCIENCE SERIES

Superintendent of Documents,
Government Printing Office,
Washington, D.C., 20402

Dear Sir:

Please add my name to the announcement list of new publications to be issued in the series: National Bureau of Standards Building Science Series.


Name.....

Company.....


Address.....

City..... State..... Zip Code.....

(Notification key N-339)







NBS TECHNICAL PUBLICATIONS

PERIODICALS

JOURNAL OF RESEARCH reports National Bureau of Standards research and development in physics, mathematics, and chemistry. It is published in two sections, available separately:

• Physics and Chemistry (Section A)

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, \$17.00; Foreign, \$21.25.

• Mathematical Sciences (Section B)

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables. Issued quarterly. Annual subscription: Domestic, \$9.00; Foreign, \$11.25.

DIMENSIONS/NBS (formerly **Technical News Bulletin**)—This monthly magazine is published to inform scientists, engineers, businessmen, industry, teachers, students, and consumers of the latest advances in science and technology, with primary emphasis on the work at NBS. The magazine highlights and reviews such issues as energy research, fire protection, building technology, metric conversion, pollution abatement, health and safety, and consumer product performance. In addition, it reports the results of Bureau programs in measurement standards and techniques, properties of matter and materials, engineering standards and services, instrumentation, and automatic data processing.

Annual subscription: Domestic, \$9.45; Foreign, \$11.85.

NONPERIODICALS

Monographs—Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

Handbooks—Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications—Include proceedings of conferences sponsored by NBS, NBS annual reports, and other special publications appropriate to this grouping such as wall charts, pocket cards, and bibliographies.

Applied Mathematics Series—Mathematical tables, manuals, and studies of special interest to physicists, engineers, chemists, biologists, mathematicians, computer programmers, and others engaged in scientific and technical work.

National Standard Reference Data Series—Provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated. Developed under a world-wide

program coordinated by NBS. Program under authority of National Standard Data Act (Public Law 90-396).

NOTE: At present the principal publication outlet for these data is the **Journal of Physical and Chemical Reference Data (JPCRD)** published quarterly for NBS by the American Chemical Society (ACS) and the American Institute of Physics (AIP). Subscriptions, reprints, and supplements available from ACS, 1155 Sixteenth St. N. W., Wash. D. C. 20056.

Building Science Series—Disseminates technical information developed at the Bureau on building materials, components, systems, and whole structures. The series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

Technical Notes—Studies or reports which are complete in themselves but restrictive in their treatment of a subject. Analogous to monographs but not so comprehensive in scope or definitive in treatment of the subject area. Often serve as a vehicle for final reports of work performed at NBS under the sponsorship of other government agencies.

Voluntary Product Standards—Developed under procedures published by the Department of Commerce in Part 10, Title 15, of the Code of Federal Regulations. The purpose of the standards is to establish nationally recognized requirements for products, and to provide all concerned interests with a basis for common understanding of the characteristics of the products. NBS administers this program as a supplement to the activities of the private sector standardizing organizations.

Federal Information Processing Standards Publications (FIPS PUBS)—Publications in this series collectively constitute the **Federal Information Processing Standards Register**. Register serves as the official source of information in the Federal Government regarding standards issued by NBS pursuant to the **Federal Property and Administrative Services Act of 1949** as amended, Public Law 89-306 (79 Stat. 1127), and as implemented by Executive Order 11717 (38 FR 12315, dated May 11, 1973) and Part 6 of Title 15 CFR (Code of Federal Regulations).

Consumer Information Series—Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

NBS Interagency Reports (NBSIR)—A special series of interim or final reports on work performed by NBS for outside sponsors (both government and non-government). In general, initial distribution is handled by the sponsor; public distribution is by the National Technical Information Service (Springfield, Va. 22161) in paper copy or microfiche form.

Order NBS publications (except NBSIR's and Bibliographic Subscription Services) from: Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.

BIBLIOGRAPHIC SUBSCRIPTION SERVICES

The following current-awareness and literature-survey bibliographies are issued periodically by the Bureau: **Cryogenic Data Center Current Awareness Service**

A literature survey issued biweekly. Annual subscription: Domestic, \$20.00; foreign, \$25.00.

Liquefied Natural Gas. A literature survey issued quarterly. Annual subscription: \$20.00.

Superconducting Devices and Materials. A literature

survey issued quarterly. Annual subscription: \$20.00. Send subscription orders and remittances for the preceding bibliographic services to National Bureau of Standards, Cryogenic Data Center (275.02) Boulder, Colorado 80302.

Electromagnetic Metrology Current Awareness Service

Issued monthly. Annual subscription: \$24.00. Send subscription order and remittance to Electromagnetics Division, National Bureau of Standards, Boulder, Colo. 80302.

U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards
Washington, D.C. 20234

OFFICIAL BUSINESS

Penalty for Private Use, \$300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE
COM-215



SPECIAL FOURTH-CLASS RATE
BOOK



75 YEARS
NBS
1901-1976