

NOV 30 1947

DIAMOND CORE DRILL FITTINGS

(Fourth Edition)

COMMERCIAL STANDARD CS17-47

(Supersedes CS17-42)

Effective Date for New Production from July 1, 1947



A RECORDED VOLUNTARY STANDARD
OF THE TRADE

UNITED STATES DEPARTMENT OF COMMERCE

W. AVERELL HARRIMAN, Secretary

COMMERCIAL STANDARDS

Commercial Standards are voluntary standards of the trade developed through concerted action of those directly concerned, and issued by the United States Department of Commerce upon written evidence of their acceptability to the trade. They are initiated by written request from a responsible element of business to the Division of Trade Standards of the National Bureau of Standards. The Division of Trade Standards acts as a coordinating and fact-finding agency in ascertaining the desires of all concerned.

The Federal Government exercises no regulatory authority in the enforcement of Commercial Standards. In accepting a Commercial Standard, the producer, distributor, or user says in effect that he considers it a useful standard of practice, and plans to utilize it as far as practicable in his business, reserving the right to depart from the standard so long as no deception results from such departure. When reference to a Commercial Standard is made in contracts, labels, invoices, or advertising literature, however, the provisions of the standard are enforceable through usual legal channels as a part of the sales contract.

Organized in 1927, the Division of Trade Standards has assisted many industries in the development of Commercial Standards for a wide variety of commodities. A list of previously established Commercial Standards appears herein.

COMMERCIAL STANDARD FOR DIAMOND CORE DRILL FITTINGS

On May 27, 1929, at the instance of the Diamond Core Drill Manufacturers Association, a joint conference of representative manufacturers, drilling contractors and general interests adopted a commercial standard for diamond core drill fitting which was accepted by the industry and published as Commercial Standard CS17-30. In 1932, upon recommendation of the standing committee to keep abreast of progress, a revision was adopted and issued as CS17-32. Subsequently, a proposal of the Diamond Core Drill Manufacturers Association, to extend the scope of the standard was adopted and issued as CS17-42. This revision, due to war conditions, was not put into effect.

Pending completion of developments toward further revision, the Diamond Core Drill Manufacturers Association recommended that the requirements of the 1932 edition be made available in current commercial standards form. Accordingly, upon endorsement by the standing committee, a draft so prepared was circulated on November 21, 1946 for acceptance. Those concerned have since accepted and approved the revised standard as shown herein.

Project Manager:

F. E. POWELL, assisted by W. H. JACKETT, JR., Division of Trade Standards, National Bureau of Standards.

Technical Adviser:

D. R. MILLER, Division of Metrology, National Bureau of Standards.

COMMERCIAL STANDARD CS17-47

for

DIAMOND CORE DRILL FITTINGS

(Fourth Edition)

PURPOSE

1. The purpose of this commercial standard is to provide dimensional interchangeability in essential diamond core drill fittings as made by American manufacturers. The difficulty of replacing parts in the field should therefore be minimized, since sizes and size designations are identical for all manufacturers.

SCOPE

2. This standard covers standard designs and tolerances with controlling dimensions for rod couplings, drill rods, core-barrel bits, casing couplings, casings, and casing bits. Dimensions of core-barrel bits apply to these items as machine-shop products prior to being set with drilling diamonds.

GENERAL

3. The following nomenclature, symbols, dimensions, tolerances, and types are recommended as standard for diamond core drill fittings.

4. The four sizes of diamond core drill casing shall be known as EX, AX, BX, and NX. The corresponding sizes of bits, core barrels, and casing couplings shall be known as EX, AX, BX, and NX. Rod and rod coupling sizes are known as E, A, B, and N. Nominal dimensions are given in table 1 and illustrated in figure 1.

TABLE 1.—Nominal dimensions

Size designation		Casing O.D.	Casing coupling		Casing bit O.D.	Core- barrel bit O.D.	Drill rod O.D.	Diam- eter of hole made by core- barrel bit ¹	Approximate diam- eter of core
Casing, casing coupling, casing bit, c.-b. bit.	Rod, rod coupling		O.D.	I.D.					
EX	E	1 13/16	1 13/16	1 1/2	1 27/32	1 7/16	1 5/16	1 1/2	7/8
AX	A	2 1/4	2 1/4	1 29/32	2 5/16	1 27/32	1 5/8	1 7/8	1 1/8
BX	B	2 7/8	2 7/8	2 3/8	2 15/16	2 5/16	1 29/32	2 3/8	1 5/8
NX	N	3 1/2	3 1/2	3	3 9/16	2 15/16	2 3/8	3	2 1/8

¹ Assuming hole 1/32 in. larger than bit and listing diameters to nearest 1/8 in.

5. Casings made flush on the outside when connected with couplings shall be known as "flush-coupled casing"; when connected without couplings, shall be known as "flush-joint casing." The threads of both are identical.

6. Core barrels shall be known as "single-tube core barrels," "rigid-type double-tube core barrels," or "swivel-type double-tube core barrels," as the case may be.

7. Single-tube and double-tube core-barrel bits shall be identical as regards the outside diameter and thread.

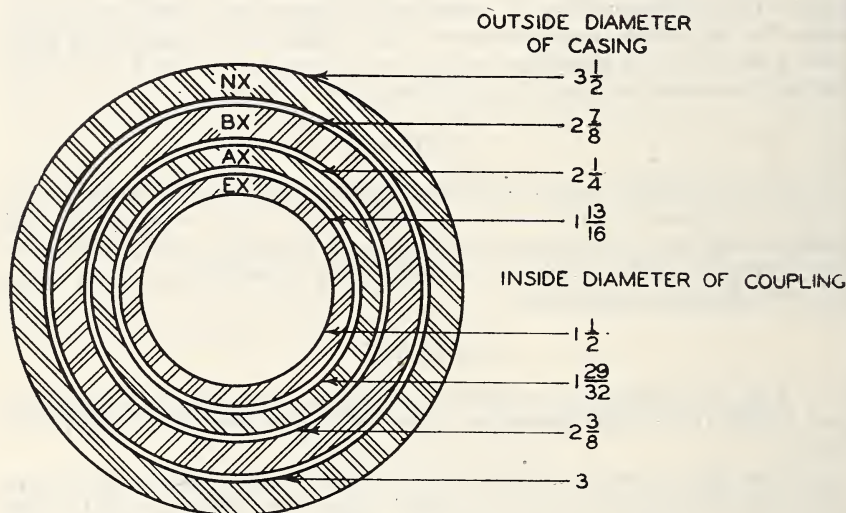


FIGURE 1.—Section through casing couplings.

8. The term "reaming shell" shall be used in preference to "swell coupling." The bit thread of reaming shells and core shells shall conform to the standard bit thread.



9. The approximate sizes of standard cores are: EX, $\frac{7}{8}$ inch; AX, $1\frac{1}{8}$ in.; BX, $1\frac{5}{8}$ in.; NX, $2\frac{1}{8}$ in. Larger cores are obtainable with special fittings.

DETAIL REQUIREMENTS

10. The dimensions and tolerances for drill rod couplings, drill rods, core-barrel bits, casing couplings, casings, and casing bits are given in tables 2 to 7, inclusive.

Diamond Core Drill Fittings


TABLE 2.—Drill rod couplings

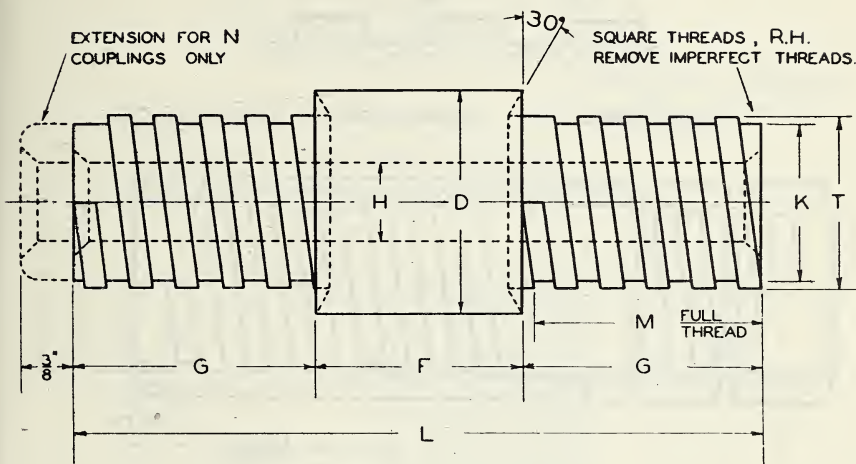

Designating symbol	D	F	G	H	Threads per in.	K	
						Max.	Min.
	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>		<i>in.</i>	<i>in.</i>
E.....	1 5/16	1 1/2	1 1/2	7/16	3	0.874	0.870
A.....	1 5/8	1 1/2	1 3/4	9/16	3	1.139	1.134
B.....	1 29/32	1 1/2	1 7/8	5/8	5	1.280	1.275
N.....	2 3/8	1 1/2	2 3/8	1	4	1.686	1.681

Designating symbol	L	M	S		T		V	
			Max.	Min.	Max.	Min.	Max.	Min.
	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>
E.....	4 1/2	1 7/16	0.1608	0.1563	0.999	0.998	0.1657	0.1617
A.....	5	1 11/16	.1608	.1563	1.264	1.263	.1657	.1617
B.....	5 1/4	1 13/16	.0941	.0897	1.405	1.404	.0990	.0950
N.....	6 1/4	2 5/16	.1164	.1120	1.874	1.873	.1212	.1173


TABLE 3.—Drill rod

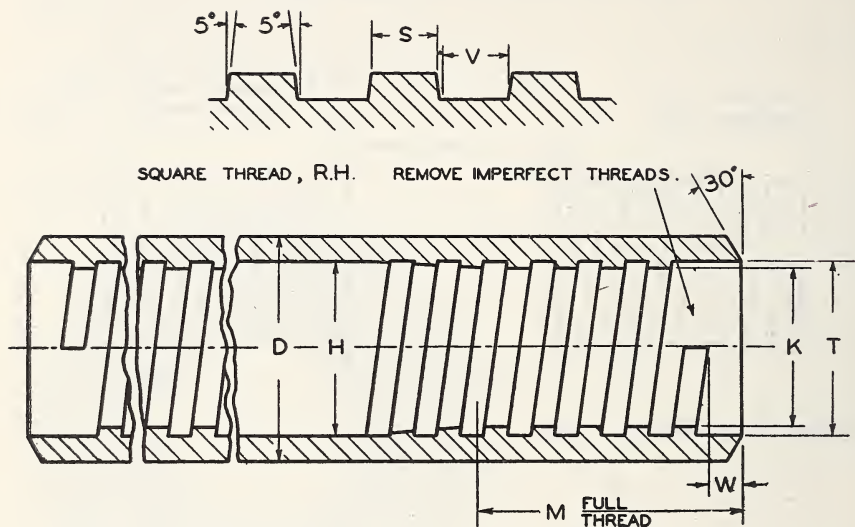

Designating symbol	D	H	K		M	S		T		Threads per in.	V		W
			Max.	Min.		Max.	Min.	Max.	Min.		Max.	Min.	
	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>	<i>in.</i>		<i>in.</i>	<i>in.</i>	<i>in.</i>
E---	1 5/16	27/32	0.877	0.876	1 5/8	0.1608	0.1544	1.002	1.001	3	0.1680	0.1617	1/4
A---	1 5/8	1 17/64	1.142	1.141	1 7/8	.1608	.1544	1.267	1.266	3	.1680	.1617	1/4
B---	1 29/32	1 13/32	1.283	1.282	2	.0941	.0877	1.408	1.407	5	.1014	.0950	1/4
N---	{ Max. 2.385 Min. 2.375	2	1.689	1.688	2 1/2	.1163	.1099	1.877	1.876	4	.1236	.1173	5/16


Diamond Core Drill Fittings

TABLE 4.—Core-barrel bits¹

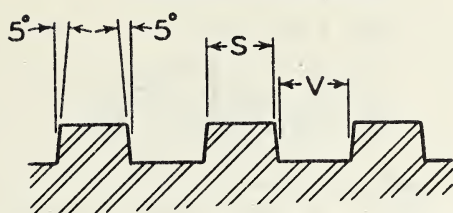

8-SQUARE THREADS
PER INCH-R.H.

ON BEVEL BITS THE INCLUDED
ANGLE OF BEVEL IS TO BE 10 DEGREES

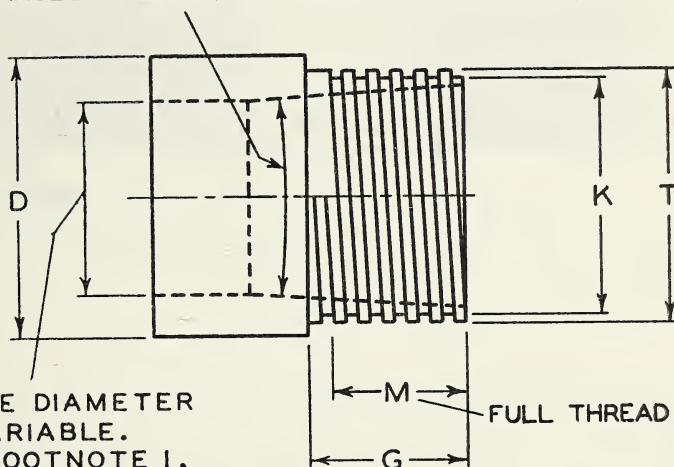


INSIDE DIAMETER
VARIABLE.
(SEE FOOTNOTE 1,
TABLE 4)

Designating symbol	D		G	K		M ²	S		T		V	
	Max.	Min.		Max.	Min.		Max.	Min.	Max.	Min.	Max.	Min.
EX	1.439	1.435	7/8	1.124	1.119	3/4	0.0594	0.0550	1.186	1.185	0.0642	0.0602
AX	1.845	1.841	1	1.499	1.494	7/8	.0594	.0550	1.561	1.560	.0642	.0602
BX	2.314	2.310	1 1/8	1.967	1.962	1	.0594	.0550	2.030	2.029	.0642	.0602
NX	2.939	2.935	1 1/4	2.592	2.587	1 1/8	.0594	.0550	2.655	2.654	.0642	.0602

¹ Inside diameters for use in manufacturing and not as a "commercial standard" are as follows: EX, 7/8 (0.877 to 0.873) in.; AX, 1 7/32 (1.220 to 1.216) in.; BX, 1 11/16 (1.689 to 1.685) in.; and NX, 2 3/16 (2.189 to 2.185) in.

² Threads shall be full form to within 1/8 in. of shoulder.

TABLE 5.—Casing couplings

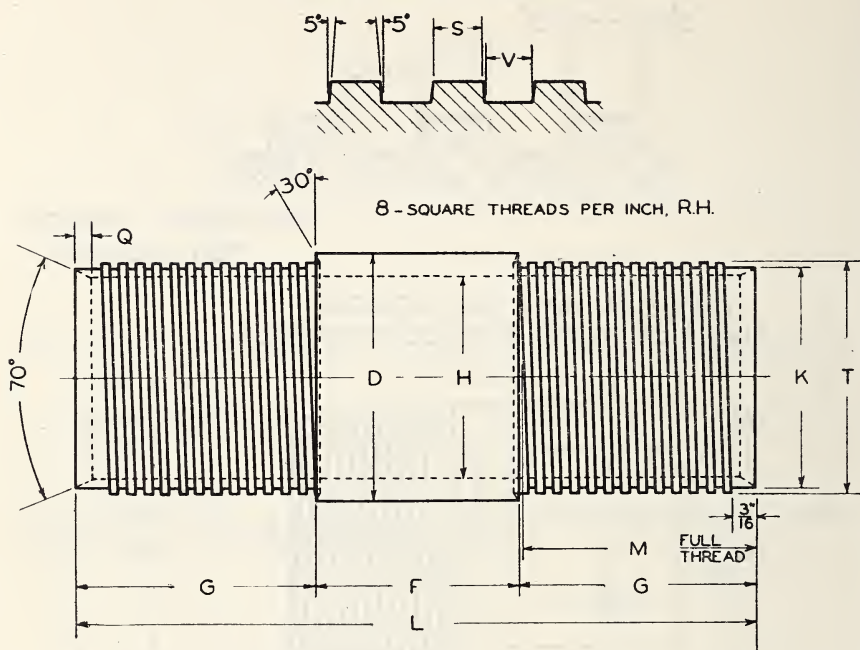


Designating symbol	D	F	G	H		K		L	M ¹
				Max.	Min.	Max.	Min.		
EX.....	1 13/16	1 1/2	1 3/4	1.502	1.498	1.655	1.650	5	1 5/8
AX.....	2 1/4	3	2	1.908	1.904	2.061	2.056	7	1 7/8
BX.....	2 7/8	3 1/2	2 1/8	2.377	2.373	2.592	2.587	7 3/4	2
NX.....	3 1/2	3 1/2	2 3/8	3.002	2.998	3.217	3.212	8 1/4	2 1/4

Designating symbol	Q	S		T		V	
		Max.	Min.	Max.	Min.	Max.	Min.
EX.....	1/8	0.0594	0.0550	1.717	1.716	0.0642	0.0602
AX.....	3/16	.0593	.0549	2.124	2.123	.0642	.0602
BX.....	1/4	.0580	.0536	2.686	2.685	.0629	.0588
NX.....	1/4	.0580	.0536	3.311	3.310	.0629	.0588

¹Threads shall be full form to within 1/8 in. of shoulder.

Diamond Core Drill Fittings


TABLE 6.—Casing

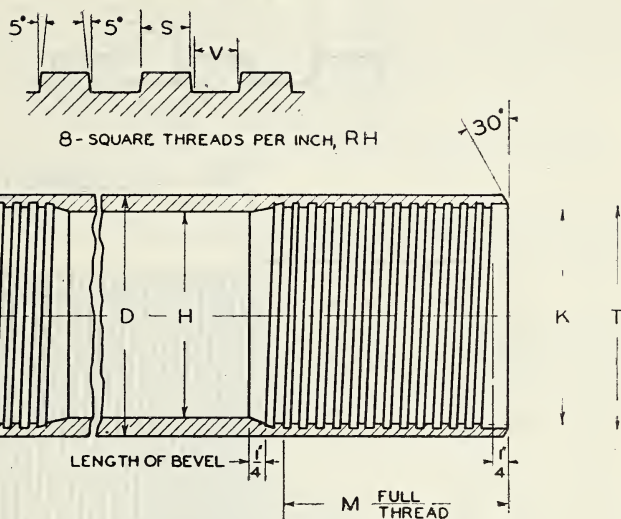

Designating symbol	D	H	K		M ¹	S		T		V	
			Max.	Min.		Max.	Min.	Max.	Min.	Max.	Min.
EX----	1 13/16	1 5/8	1.658	1.657	1 7/8	0.0593	0.0529	1.720	1.719	0.0667	0.0602
AX----	2 1/4	2	2.064	2.063	2 1/8	.0593	.0529	2.127	2.126	.0665	.0602
BX----	2 7/8	2 15/32	2.595	2.594	2 1/4	.0579	.0515	2.689	2.688	.0652	.0589
NX----	3 1/2	3 1/16	3.220	3.219	2 1/2	.0579	.0515	3.314	3.313	.0652	.0589

¹ Threads shall be recessed 1/4 in.

TABLE 7.—Casing bit

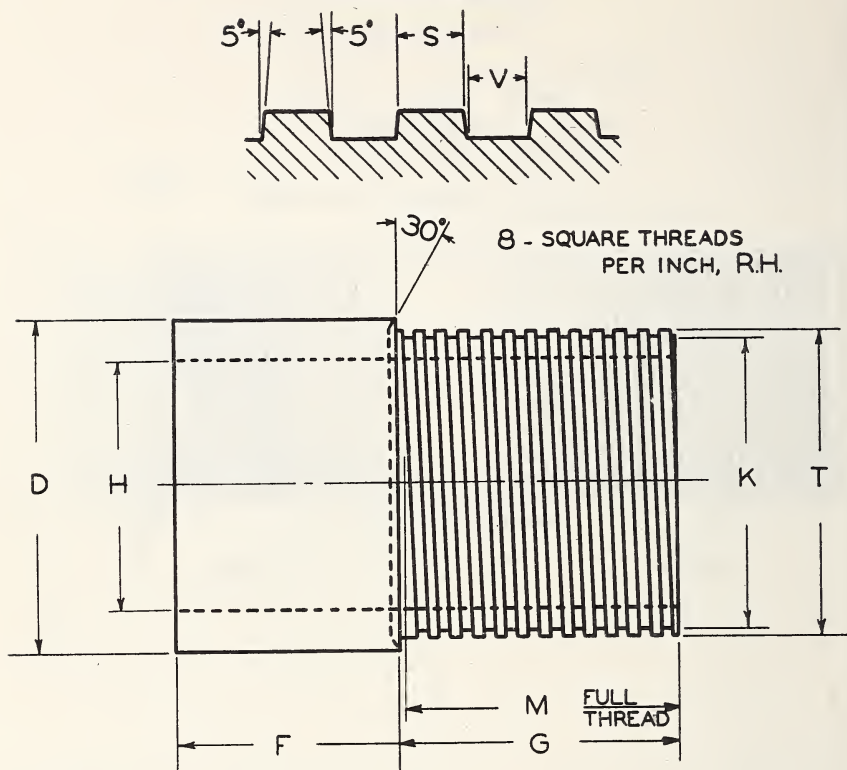

Designating symbol	D		F	G	H (Approximate)	K	
	Max.	Min.				Max.	Min.
	in.	in.	in.	in.	in.	in.	in.
EX-----	1.845	1.841	1 1/4	1 9/16	1 7/16	1.655	1.650
AX-----	2.314	2.310	1 1/2	1 13/16	1 13/16	2.061	2.056
BX-----	2.939	2.935	1 3/4	1 15/16	2 1/4	2.592	2.587
NX-----	3.564	3.560	2	1 15/16	2 7/8	3.217	3.212

Designating symbol	M ¹	S		T		V	
		Max.	Min.	Max.	Min.	Max.	Min.
		in.	in.	in.	in.	in.	in.
EX-----	1 7/16	0.0594	0.0550	1.717	1.716	0.0642	0.0602
AX-----	1 11/16	.0593	.0549	2.124	2.123	.0642	.0602
BX-----	1 13/16	.0580	.0536	2.686	2.685	.0629	.0588
NX-----	1 13/16	.0580	.0536	3.311	3.310	.0629	.0588

¹Threads shall be full form to within 1/8 in. of shoulder.

IDENTIFICATION

11. In order that purchasers may be assured that diamond core drill fittings purchased comply with all requirements of this standard, manufacturers may identify products by means of a statement of compliance on labels, invoices, sales literature, etc. Where the manufacturer's name, trademark or trade name appears, the following statement is recommended:

This diamond core drill fitting complies with Commercial Standard CS17-47, as issued by the National Bureau of Standards of the United States Department of Commerce.

12. When available space on labels is insufficient for the full statement in legible type, an abbreviated statement, as follows, is recommended:

Complies with CS17-47.

13. The following symbol or seal is used in trade literature and advertisements by members of the Diamond Core Drill Manufacturers' Association to indicate equipment manufactured according to this commercial standard.

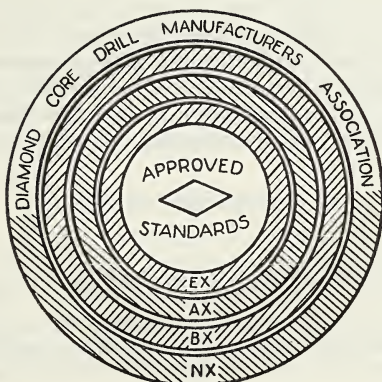


FIGURE 2.—Seal.

14. Figure 3 illustrates the insignia adopted by the Diamond Core Drill Manufacturers' Association for marking items of diamond core drill equipment conforming to this standard. The significance of the insignia as marked on the equipment is explained in the statement of compliance below, which should accompany each contract and shipment.



FIGURE 3.—Insignia.

STATEMENT OF COMPLIANCE

Date-----

The diamond core drill equipment marked with the above insignia has been manufactured by a member of the DIAMOND CORE DRILL MANUFACTURERS' ASSOCIATION and complies with COMMERCIAL STANDARD CS17-47, as issued by the NATIONAL BUREAU OF STANDARDS, UNITED STATES DEPARTMENT OF COMMERCE.
COMMERCIAL STANDARD CS17-47.

Name of manufacturer

EFFECTIVE DATE

15. The standard becomes effective as a voluntary standard of the trade from July 1, 1947.

STANDING COMMITTEE

16. The following individuals comprise the membership of the standing committee, which is to review, prior to circulation for acceptance, revisions proposed to keep the standard abreast of progress. Each organization nominated its own representative. Comment concerning the standard and suggestions for revision may be addressed to any member of the committee or to the Division of Trade Standards, National Bureau of Standards, which acts as secretary for the committee.

H. C. JOHANSEN, *Chairman*

Manufacturers:

H. C. JOHANSEN, Joy Manufacturing Co., Sullivan Division, Michigan City, Indiana.
R. D. LONGYEAR, E. J. Longyear Co., 1701 Foshay Tower, Minneapolis, Minn.
B. H. MOTT, Mott Core Drilling Co., P. O. Box 2076, Huntington, W. Va.
WM. J. SCHANK, Sprague & Henwood, Inc., 221 Olive St., Scranton, Pa.

Users:

E. L. DERBY, JR., Cleveland Cliffs Iron Co., Ishpeming, Mich.
T. B. STURGES, Pennsylvania Drilling Co., 1201 Chartiers Ave., Pittsburgh, Pa.

HISTORY OF PROJECT

17. On May 27, 1929, at the request of the Diamond Core Drill Manufacturers' Association a general conference of manufacturers, drilling contractors, and general interests was held at Chicago, Ill., to which approximately 1,100 interested organizations had been invited. Pursuant to the action of this conference, the recommended standard was submitted to the trade for written acceptance. Following acceptance by a satisfactory majority, the recommended standard was issued as Commercial Standard CS17-30, being effective for new production on January 1, 1930, and for clearance of existing stocks on July 1, 1930.

FIRST REVISION

18. On the recommendation of the Standing Committee, a revised draft was circulated to the industry for written acceptance on March 5, 1932. The revised draft included the new tolerances adopted by the Diamond Core Drill Manufacturers' Association. In general, the changes constitute minor refinements which have developed as a result of experience with the standards and which do not change the important nominal dimensions as set forth in the first edition of the pamphlet. As announced to the trade under date of May 14, 1932, the revised standard was accepted and authorized by the industry for publication as Commercial Standard CS17-32. It was effective for new production and clearance of existing stocks from August 15, 1932.

SECOND REVISION

19. Pursuant to a request of the Diamond Core Drill Manufacturers' Association dated December 18, 1940, and following approval by the Standing Committee, the second revision was circulated on March 25, 1941, to all concerned for written acceptance. Its chief purpose is to reduce the area of the kerf cut by the two smaller sizes of core-barrel bits, thereby decreasing drill costs and recovering a slightly larger core. The revision provides new, thin-wall core barrels, core-barrel bits and reaming shells designated EXT and AXT, as well as new flush-joint casings in these two sizes. Following acceptance by a preponderant majority, the second revision was announced and promulgated on May 23, 1941, as Commercial Standard CS17-42.

THIRD REVISION

20. At the request of the Diamond Core Drill Manufacturers' Association, in view of wartime conditions, the effective date of the second revision was postponed. This automatically continued the 1932 edition in effect. To avoid confusion due to the latest edition not being in effect, and pending completion of developments toward further revision, the Diamond Core Drill Manufacturers' Association recommended that the requirements of the 1932 edition be made available in current commercial standards form. Accordingly, upon endorsement by the Standing Committee, a draft so prepared was circulated on November 21, 1946 for written acceptance. The trade accepted the revised standard which was announced as Commercial Standard CS17-47, effective from July 1, 1947.

ACCEPTANCE OF COMMERCIAL STANDARD

If acceptance has not previously been filed, this sheet properly filled in, signed, and returned will provide for the recording of your organization as an acceptor of this commercial standard.

Date -----

Division of Trade Standards,
National Bureau of Standards,
Washington 25, D. C.

Gentlemen:

We believe that the Commercial Standard CS17-47 constitutes a useful standard of practice, and we individually plan to utilize it as far as practicable as a

☐ Manufacturer¹
☐ Testing Laboratory¹

☐ Distributor¹
☐ User¹

of diamond core drill fittings. We reserve the right to depart from it as we deem advisable.

We understand, of course, that only those articles which actually comply with the standard in all respects can be identified or labeled as conforming thereto.

Signature of authorized officer -----
(In ink)

(Kindly typewrite or print the following lines)

Name and title of above officer -----

Organization² -----
(Fill in exactly as it should be listed)

Street address -----

City, zone, and State -----

¹ In the case of related interests, trade associations, trade papers, etc., desiring to record their general support, the words "General support" should be added after the signature.

² Please see that separate acceptances are filed for all subsidiary companies and affiliates which should be listed separately as acceptors.

TO THE ACCEPTOR

The following statements answer the usual questions arising in connection with the acceptance and its significance:

1. *Enforcement.*—Commercial standards are commodity specifications voluntarily established by mutual consent of those concerned. They present a common basis of understanding between the producer, distributor, and consumer and should not be confused with any plan of governmental regulation or control. The United States Department of Commerce has no regulatory power in the enforcement of their provisions, but since they represent the will of the interested groups as a whole, their provisions through usage soon become established as trade customs, and are made effective through incorporation into sales contracts by means of labels, invoices and the like.

2. *The acceptor's responsibility.*—The purpose of commercial standards is to establish for specific commodities, nationally recognized grades or consumer criteria and the benefits therefrom will be measurable in direct proportion to their general recognition and actual use. Instances will occur when it may be necessary to deviate from the standard and the signing of an acceptance does not preclude such departures; however, such signature indicates an intention to follow the commercial standard where practicable, in the production, distribution, or consumption of the article in question.

3. *The Department's responsibility.*—The major function performed by the Department of Commerce in the voluntary establishment of commercial standards on a Nation-wide basis is fourfold: first, to act as an unbiased coordinator to bring all interested parties together for the mutually satisfactory adjustment of trade standards; second, to supply such assistance and advice as past experience with similar programs may suggest; third, to canvass and record the extent of acceptance and adherence to the standard on the part of producers, distributors, and users; and fourth, after acceptance, to publish and promulgate the standard for the information and guidance of buyers and sellers of the commodity.

4. *Announcement and promulgation.*—When the standard has been endorsed by a satisfactory majority of production or consumption in the absence of active, valid opposition, the success of the project is announced. If, however, in the opinion of the standing committee or the Department of Commerce, the support of any standard is inadequate, the right is reserved to withhold promulgation and publication.

ACCEPTORS

21. The organizations listed below have individually accepted this standard for use as far as practicable in the production, distribution, testing, or purchase of diamond core drill fittings. In accepting the standard they reserve the right to depart therefrom as they individually deem advisable. It is expected that articles which actually comply with the requirements of this standard in all respects will be regularly identified or labeled as conforming thereto, and that purchasers will require such specific evidence of conformity.

ASSOCIATIONS (General Support)

American Association of Engineers,
Chicago, Ill.
Diamond Core Drill Manufacturers Association, New York, N. Y.
Rocky Mountain Coal Mining Institute, The,
Denver, Colo.

FIRMS

Acker Drill Co., Scranton, Pa.
Alabama, Geological Survey of, University,
Ala.
Alaska Drilling Co., Juneau, Alaska.
Allegheny River Mining Co., Kittanning, Pa.
American Zinc Co. of Tennessee, Mascot,
Tenn.
Anaconda Copper Mining Co., Butte, Mont.
Arkansas Power & Light Co., Pine Bluff,
Ark.
Atkins Co., S. E., Duluth, Minn.
Baltimore, City of, Bureau of Water
Supply, Baltimore, Md.
Bath & Co., Inc., John, Worcester, Mass.
(General support).
Beaumont Iron Works Co., Beaumont, Tex.
Benedict Coal Corp., St. Charles, Va.
Bethlehem Steel Co., Cornwall Division,
Cornwall, Pa.
Bevil Co., Los Angeles, Calif.
Bowditch Co., The, Canton, Ohio.
Bradford Supply Co., Bradford, Pa.
California Division of Highways, Materials
& Research Department, Sacramento,
Calif.
California State Bureau of Purchases,
Sacramento, Calif.
Canadian Collieries (Dunsmuir), Ltd.,
Cumberland, B. C., Canada.
Cannon Diamond Drilling Co., Compton,
Calif.
Carboloy Co., Inc., Detroit, Mich.
Central Power & Light Co., Corpus Christi,
Tex.
Chedsey, Wm. R., Champaign, Ill.
Chicago Pneumatic Tool Co., New York,
N. Y.
Christensen Diamond Products Co., Salt
Lake City, Utah.
Cia. Minera de Penoles S. A., Monterrey,
N. L., Mexico.
Cia. Minera, Fundidora y Afinadora, "Mon-
terrey," S. A., Monterrey, N. L., Mexico.
Cities Service Oil Co., Bartlesville, Okla.
Clearfield Bituminous Coal Corp., Indiana,
Pa.
Cleveland-Cliffs Iron Co., The, Ishpeming,
Mich.
Colburn & Weiss, Asheville, N. C. (General
support).
Columbia University, School of Mines, New
York, N. Y. (General support).
Compania Minera de Penoles, S. A., Avalos
Unit, Avalos, Zacatecas, Mexico.
Consolidated Mining Co., Eureka, Utah.
Denver Machine Shop, Denver, Colo.
Denver Municipal Water Works, Board of
Water Commissioners, Denver, Colo.
Diamond Drill Carbon Co., The, New York,
N. Y.

Diamond Drill Contracting Co., Inc.,
Spokane, Wash.
Eagle-Picher Mining & Smelting Co.,
Tucson, Ariz.
Eureka Corp., Ltd., Eureka, Nev.
Failing Supply Co., George E., Enid, Okla.
Foester Co., H. W., El Paso, Tex.
Gardner-Denver Co., Denver, Colo.
General Industrial Diamond Co., Inc.,
New York, N. Y.
Grace & Co., W. R., New York, N. Y.
Hanifen, J. L., New York, N. Y.
Harza Engineering Co., Chicago, Ill.
Hawley Engineering Corp., Charles B.,
Washington, D. C.
Healey, Inc., Philip J., New York, N. Y.
Heath & Sherwood, Ltd., Kirkland Lake,
Ontario, Canada.
Homestake Mining Co., Lead, S. Dak.
Howard, Needles, Tammen & Bergendoff,
Kansas City, Mo.
Illinois State Geological Survey, Urbana,
Ill. (General support).
Illinois Division of Highways, Springfield,
Ill.
Ingersoll Rand Co., New York, N. Y.
Inland Steel Co., Ishpeming, Mich.
Inter-State Iron Co., Pittsburgh, Pa.
Iowa State College, Chemical & Mining
Engineering Department, Ames, Iowa
(General support).
Island Creek Coal Co., Holden, W. Va.
Iverson Tool Co., Tulsa, Okla.
Jones & Laughlin Ore Co., Pittsburgh, Pa.
Joy Manufacturing Co., Sullivan Division,
Michigan City, Ind.
Kennametal, Inc., Latrobe, Pa.
Kennecott Copper Corp., Nevada Mines
Division, Ruth, Nev.
Keplinger & Wannenmacher, Tulsa, Okla.
Keystone Portland Cement Co., Bath, Pa.
Lafayette College, Easton, Pa. (General
support).
La Plante, F. R., Ouray, Colo. (General
support).
Lehigh Portland Cement Co., Allentown, Pa.
Longtin Co., Daniel G., San Francisco,
Calif.
Longyear Co., E. J., Minneapolis, Minn.
McIntyre Porcupine Mines, Ltd.,
Schumacher, Ontario, Canada.
Metal Carbides Corp., Youngstown, Ohio.
Metropolitan District Water Supply Com-
mission, Boston, Mass.
Mississippi Lime Co., Alton, Ill.
Missouri School of Mines & Metallurgy,
Rolla, Mo. (General support).
Mott Core Drilling Co., Huntington, W. Va.
National Boring & Sounding Inc., Quebec,
Canada.
National Gypsum Co., N. Holston, Va.
Nebraska, University of, Department of
Mechanical Engineering, Lincoln, Nebr.
(General support).
New York Coal Sales Co., Columbus, Ohio.
New York Testing Laboratories, Inc., New
York, N. Y.
North Dakota, University of, Grand Forks,
N. Dak. (General support).

- Northwestern Improvement Co., Roslyn, Wash.
 Nova Scotia, Province of, Department of Mines, Halifax, N. S., Canada.
 Nutting Co., The H. C., Cincinnati, Ohio.
 Odgers, Ira, Crystal Falls, Mich.
 Page-Hersey Tubes, Ltd., Toronto, Ontario, Canada.
 Pardee & Curtain Lumber Co., Bergoo, W. Va.
 Patzig Testing Laboratories, Des Moines, Iowa.
 Pennsylvania Drilling Co., Pittsburgh, Pa.
 Philadelphia & Reading Coal & Iron Co., Pottsville, Pa.
 Picklands Mather & Co., Duluth, Minn.
 Pittsburgh Steel Co., Allenport, Pa.
 Processed Diamond Bit & Tool Co., Inc., San Francisco, Calif.
 Pyrites Co., Inc., The, Wilmington, Del. (General support).
 Ritter Lumber Co., W. M., Columbus, Ohio.
 Roberts, Hugh M., Duluth, Minn. (General support).
 Robinson Contracting Co., Ltd., Vancouver, B. C., Canada.
 St. Louis, Rocky Mountain & Pacific Co., Raton, N. Mex.
 San Angelo Foundry & Machine Co., San Angelo, Tex.
 Service Steel Co., Los Angeles, Calif.
 Silanco Mining & Refining Co., Ltd., Cobalt, Ontario, Canada.
 Siscoe Gold Mines, Ltd., Siscoe, Quebec, Canada.
 Siscoe Metals, Ltd., O'Brien, Ontario, Canada (General support).
 Smit & Co., Inc., Anton, New York, N. Y.
 Smit & Sons, Inc., J. K., New York, N. Y.
 Smith & Co., Inc., B. F., Boston, Mass.
 Smith & Travers, Co., Ltd., Sudbury, Ontario, Canada.
 South Carolina Geological Survey, Columbia, S. C.
 Sprague & Henwood, Inc., Scranton, Pa.
 Stadacona Mines (1944), Ltd., Rouyn, Quebec, Canada.
 Thompson & Lichtner Co., Inc., The, Brookline, Mass.
 Twining Laboratories, The, Fresno, Calif.
 United States Testing Co., Hoboken, N. J. (General support).
 Utah, University of, Salt Lake City, Utah.
 Uvalde Rock Asphalt Co., San Antonio, Tex.
 Virginia, University of, Charlottesville, Va.
 Washington, State College of, School of Mines, Pullman, Wash. (General support).
 West Virginia University, School of Mines, Morgantown, W. Va. (General support).

UNITED STATES GOVERNMENT

- Interior, U. S. Department of the, Geological Survey, Washington, D. C. (General support).
 Interior, U. S. Department of the, Bureau of Mines, Mining Branch, Washington, D. C.; College Park, Md.; Bluemont, Va.; and Juneau, Alaska.
 Interior, U. S. Department of the, Bureau of Reclamation, Denver, Colo., and Salt Lake City, Utah.
 War Department, Washington, D. C.

Diamond Core Drill Fittings

COMMERCIAL STANDARDS

CS No.	Item	CS No.	Item
0-40.	Commercial standards and their value to business (third edition).	44-32.	Apple wraps.
1-42.	Clinical thermometers (third edition).	45-45.	Douglas fir plywood (sixth edition).
2-30.	Mopsticks.	46-40.	Hosiery lengths and sizes (third edition).
3-40.	Stoddard solvent (third edition).	47-34.	Marking of gold-filled and rolled-gold-plate articles other than watchcases.
4-29.	Staple porcelain (all-clay) plumbing fixtures.	48-40.	Domestic burners for Pennsylvania anthracite (underfeed type) (second edition).
5-46.	Pipe nipples; brass, copper, steel and wrought-iron (second edition).	49-34.	Chip board, laminated chip board, and miscellaneous boards for bookbinding purposes.
6-31.	Wrought-iron pipe nipples (second edition). Superseded by CS5-46.	50-34.	Binders board for bookbinding and other purposes.
7-29.	Standard weight malleable iron or steel screwed unions.	51-35.	Marking articles made of silver in combination with gold.
8-41.	Gage blanks (third edition).	52-35.	Mohair pile fabrics (100-percent mohair plain velvet, 100-percent mohair plain frieze, and 50-percent mohair plain frieze).
9-33.	Builders' template hardware (second edition).	53-35.	Colors and finishes for cast stone.
10-29.	Brass pipe nipples. Superseded by CS5-46.	54-35.	Mattresses for hospitals.
11-41.	Moisture regains of cotton yarns (second edition).	55-35.	Mattresses for institutions.
12-40.	Fuel oils (fifth edition).	56-41.	Oak flooring (second edition).
13-44.	Dress patterns (fourth edition).	57-40.	Book cloths, buckrams, and impregnated fabrics for bookbinding purposes except library bindings (second edition).
14-43.	Boys' button-on waists, shirts, junior and sport shirts (made from woven fabrics) (third edition).	58-36.	Woven elastic fabrics for use in overalls (overall elastic webbing).
15-46.	Men's pajama sizes (made from woven fabrics) (third edition).	59-44.	Textiles—testing and reporting (fourth edition).
16-29.	Wall paper.	60-36.	Hardwood dimension lumber.
17-47.	Diamond core drill fittings (fourth edition).	61-37.	Wood-slat venetian blinds.
18-29.	Hickory golf shafts.	62-38.	Colors for kitchen accessories.
19-32.	Foundry patterns of wood (second edition).	63-38.	Colors for bathroom accessories.
20-47.	Staple vitreous china plumbing fixtures (fourth edition).	64-37.	Walnut veneers.
21-39.	Interchangeable ground-glass joints, stopcocks, and stoppers (fourth edition).	65-43.	Methods of analysis and of reporting fiber composition of textile products (second edition).
22-40.	Builders' hardware (nontemplate) (second edition).	66-38.	Marking of articles made wholly or in part of platinum.
23-30.	Feldspar.	67-38.	Marking articles made of karat gold.
24-43.	Screw threads and tap-drill sizes.	68-38.	Liquid hypochloride disinfectant, deodorant, and germicide.
25-30.	Special screw threads. Superseded by CS24-43.	69-38.	Pine oil disinfectant.
26-30.	Aromatic red cedar closet lining.	70-41.	Phenolic disinfectant (emulsifying type) (second edition) (published with CS71-41).
27-36.	Mirrors (second edition).	71-41.	Phenolic disinfectant (soluble type) (second edition) (published with CS70-41).
28-46.	Cotton fabric tents, tarpaulins and covers (second edition).	72-38.	Household insecticide (liquid spray type).
29-31.	Staple seats for water-closet bowls.	73-45.	Old growth Douglas fir standard stock doors (third edition).
30-31.	Colors for sanitary ware.	74-39.	Solid hardwood wall paneling.
31-38.	Wood shingles (fourth edition).	75-42.	Automatic mechanical draft oil burners designed for domestic installations (second edition).
32-31.	Cotton cloth for rubber and pyroxylin coating.	76-39.	Hardwood interior trim and molding.
33-43.	Knit underwear (exclusive of rayon) (second edition).	77-40.	Sanitary cast-iron enameled ware.
34-31.	Bag, case, and strap leather.	78-40.	Ground-and-polished lenses for sun glasses (second edition) (published with CS79-40).
35-47.	Hardwood plywood (third edition).		
36-33.	Fourdrinier wire cloth (second edition).		
37-31.	Steel bone plates and screws.		
38-32.	Hospital rubber sheeting.		
39-37.	Wool and part wool blankets (second edition). (Withdrawn as commercial standard, July 14, 1941).		
40-32.	Surgeons' rubber gloves.		
41-32.	Surgeons' latex gloves.		
42-43.	Structural fiber insulating board (third edition).		
43-32.	Grading of sulphonated oils.		

Commercial Standard CS17-47

CS No.	Item	CS No.	Item
79-40.	Blown, drawn, and dropped lenses for sun glasses (second edition) (published with CS78-40).	109-44.	Solid-fuel-burning forced-air furnaces.
80-41.	Electric direction signal systems other than semaphore type for commercial and other vehicles subject to special motor vehicle laws (after market).	110-43.	Tire repairs—vulcanized (passenger, truck, and bus tires).
81-41.	Adverse-weather lamps for vehicles (after market).	111-43.	Earthenware (vitreous-glazed) plumbing fixtures.
82-41.	Inner-controlled spotlamps for vehicles (after market).	112-43.	Homogeneous fiber wallboard.
83-41.	Clearance, marker, and identification lamps for vehicles (after market).	113-44.	Oil-burning floor furnaces equipped with vaporizing pot-type burners.
84-41.	Electric tail lamps for vehicles (after market).	114-43.	Hospital sheeting for mattress protection.
85-41.	Electric license-plate lamps for vehicles (after market).	115-44.	Porcelain-enameled tanks for domestic use.
86-41.	Electric stop lamps for vehicles (after market).	116-44.	Bituminized-fibre drain and sewer pipe.
87-41.	Red electric warning lanterns.	117-44.	Mineral wool; blankets, blocks, insulating cement, and pipe insulation for heated industrial equipment.
88-41.	Liquid-burning flares.	118-44.	Marking of jewelry and novelties of silver.
89-40.	Hardwood stair treads and risers.	(E) 119-45. ¹	Dial indicators (for linear measurements).
90-	(Reserved for power shovels and cranes).	120-46.	Standard stock ponderosa pine doors (second edition).
91-41.	Factory-fitted Douglas fir entrance doors.	121-45.	Women's slip sizes (woven fabrics).
92-41.	Cedar, cypress and redwood tank stock lumber.	122-45.	Western hemlock plywood.
93-41.	Portable electric drills (exclusive of high frequency).	123-45.	Grading of diamond powder.
94-41.	Calking lead.	(E) 124-45. ¹	Master disks.
95-41.	Lead pipe.	125-45.	Prefabricated homes.
96-41.	Lead traps and bends.	126-45.	Tank mounted air compressors.
97-42.	Electric supplementary driving and passing lamps for vehicles (after market).	127-45.	Self-contained mechanically refrigerated drinking water coolers.
98-42.	Artists' oil paints.	128-45.	Men's sport shirt sizes—woven fabrics (other than those marked with regular neck-band sizes).
99-42.	Gas floor furnaces—gravity circulating type.	129-47.	Materials for safety wearing apparel (second edition).
100-44.	Porcelain-enameled steel utensils (second edition).	130-46.	Color materials for art education in schools.
101-43.	Flue-connected oil-burning space heaters equipped with vaporizing pot-type burners. (Reserved for Diesel and fuel-oil engines).	131-46.	Industrial mineral wool products, all types—testing and reporting.
102-	(Reserved for Diesel and fuel-oil engines).	132-46.	Hardware cloth.
103-42.	Cotton and rayon velour (jacquard and plain).	133-46.	Woven wire netting.
104-46.	Warm-air furnaces equipped with vaporizing pot-type oil burners (second edition).	134-46.	Cast aluminum cooking utensils (metal composition).
105-43.	Mineral wool; loose granulated, or felted form, in low-temperature installations.	135-46.	Men's shirt sizes (exclusive of work shirts).
106-44.	Boys' pajama sizes (woven fabrics) (second edition).	136-46.	Blankets for hospitals (wool, and wool and cotton).
107-45.	Commercial electric-refrigeration condensing units (second edition).	137-46.	Size measurements for men's and boys' shorts (woven fabrics).
108-43.	Treading automobile and truck tires.	138-47.	Insect wire screening.
		139-47.	Work gloves.
		140-47.	Convector: testing and rating.
		141-47.	Sine bars, blocks, plates, and fixtures.

NOTICE.—Those interested in commercial standards with a view toward accepting them as a basis of everyday practice may secure copies of the above standards, while the supply lasts, by addressing the Division of Trade Standards, National Bureau of Standards, Washington 25, D. C.

¹ Where "(E)" precedes the CS number, it indicates an emergency commercial standard, drafted under war conditions with a view toward early revision.