

American National Standard

Adopted for Use by
the Federal Government



FIPS PUB 14
See Notice on Inside
Front Cover

hollerith punched card code

X3.26-1970



american national standards institute, inc.
1430 broadway, new york, new york 10018

JK 468
A8 A3
no. 14
1970
c-2

This standard was approved as a Federal Information Processing Standard by the Office of Management and Budget on June 16, 1971.

Details concerning the use of this standard within the Federal Government are contained in FIPS PUB 14, HOLLERITH PUNCHED CARD CODE. For a complete list of the publications available in the FEDERAL INFORMATION PROCESSING STANDARDS Series, write to the Office of Technical Information and Publications, National Bureau of Standards, Washington, D.C. 20234.

American National Standard Hollerith Punched Card Code

American National Standard

This standard is one of approximately 6000 approved as either a USA Standard or as an American Standard. It became an American National Standard in October 1969 when the Institute changed its name to American National Standards Institute, Inc.

ANSI, 1430 Broadway, New York, N. Y. 10018

Sponsor

Business Equipment Manufacturers Association

Approved January 19, 1970

American National Standards Institute, Inc

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether he has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review and users are cautioned to obtain the latest editions.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published by

American National Standards Institute, Inc
1430 Broadway, New York, New York 10018

Copyright © 1970 by American National Standards Institute, Incorporated
All rights reserved.

*No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.*

Printed in the United States of America

A8C476/425

Foreword

(This Foreword is not part of American National Standard Hollerith Punched Card Code, X3.26-1970.)

This standard presents the Hollerith card code representation of 256 characters, including the 128 characters of ASCII and 128 additional characters in twelve-row punched cards.

Other standards specify the dimensions and quality of punched paper cards and the dimensions and locations of the holes punched in the cards.

This coded representation of the ASCII character set for the twelve-row punched card was developed from research, review of historical work, and careful consideration of the use of punched cards in information processing and communication. Resolution of several conflicting requirements is reflected herein.

In the development of this standard careful consideration was given to current practices, existing equipment and supplies, and the broadest possible acceptance, while providing a basis for future improvement in the use of the medium.

Suggestions for improvement gained in the use of this standard will be welcome. They should be sent to the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018.

The American National Standards Committee on Computers and Information Processing, X3, had the following membership at the time this standard was approved:

C. A. Phillips, *Chairman*

Alexander C. Grove, *Secretary*†

Organization Represented

Name of Representative

Administrative Management Society	C. S. Everhardt
Air Transport Association	F. C. White
American Bankers Association	G. W. Frey
American Gas Association	E. Cotty
American Institute of Certified Public Accountants	N. Zakin
American Library Association	H. Avram
American Newspaper Publishers Association	W. D. Rinehart
American Petroleum Institute	F. A. Gitzendanner
Association of American Railroads	R. A. Petrash
Association for Computing Machinery	E. Lohse
Association for Educational Data Systems	J. J. Fast, Jr.
Business Equipment Manufacturers Association	L. Avanzino
	R. W. Bemer
	S. Buckland
	R. F. Clippinger
	D. J. Daugherty
	C. T. Deer
	U. S. C. Dilks
	R. W. Green
	J. A. Haddad
	E. Lesnick
	R. J. Mindlin
	G. Poorte
	D. J. Reyen
	R. C. Elliot
	H. D. Limmer
	H. Smith
	D. Shoemaker
	Wm. Bregartner
	C. L. Hutchinson
	G. W. Patterson
	R. E. Utman
	E. L. Luippold
	J. O. Harrison
	E. Koschella
	E. Langtry

†Deceased

Organization Represented

Name of Representative

Printing Industries of America	L. Chvany
Scientific Apparatus Makers Association	W. B. Schultz
System and Procedures Association	E. Tomeski
Telephone Group	L. W. Claussen
U. S. Department of Defense	R. A. Raup

At the time this standard was developed and processed through the X3-2 Subcommittee on Codes and Input/Output, the membership was:

L. L. Griffin, *Chairman*

R. Adams	R. M. Ireland
G. C. Arndt	D. A. Kerr
E. A. Avakian	R. E. Lawn
J. B. Booth	W. G. Leary
R. M. Brown	J. L. Little
E. H. Clamons	N. H. Locke
N. Clark	C. E. Mackenzie
M. Cohen	W. H. McKenzie
R. J. Donahue	M. Mendelsohn
S. Erdreich	G. L. Murphy
S. Grunkorn	F. G. Smith
H. L. Hill	F. W. Smith
T. Holtey	J. L. Smith
H. Hoots	H. Spielman

G. E. Williams

The Task Group on Punched Cards, X3-2-3 B, which developed this standard had the following personnel:

R. M. Brown, *Chairman*

J. B. Booth	R. E. Mullendore
R. M. Brown	F. Schaller
E. H. Clamons	G. Spector
L. L. Griffin	M. Bressler
J. J. Krause	H. C. Umpstead
N. H. Locke	U. Weil
C. E. Mackenzie	C. D. Whitaker

It should be recognized that although X3-2 and X3-2-3 B members are variously affiliated, work on subcommittee or task group is achieved on an individual competence and experience basis.

Contents

SECTION	PAGE
1. Scope	6
2. Hollerith Punched Card Code	6
3. Qualifications	6
4. Hole-Pattern Cross Reference Table	8
5. Revision of American National Standards Referred to in This Document	8
Tables	
Table 1 Code Table	7
Table 2 Code Table Arranged for Ease of Reference	8
Appendixes	
Appendix A Design Considerations	9
A1. Introduction	9
A2. Commonly Used Hollerith Codes	9
A3. Extension	10
Appendix B EBCDIC Card Code	10
Appendix C Subsets	12
Appendix D Related Standards	13
Tables	
Table B1 EBCDIC Card Code	11
Table B2 EBCDIC Code Table Arranged for Ease of Reference	12
Figures	
Fig. A1	10
Fig. B1	10

American National Standard Hollerith Punched Card Code

1. Scope

This standard specifies 256 hole-patterns in twelve-row punched cards. Hole-patterns are assigned to the 128 characters of ASCII (American National Standard Code for Information Interchange, X3.4-1968) and to 128 additional characters for use in 8-bit coded systems. The assignments incorporate the commonly used "Hollerith" hole-patterns for the numerals and single case letters.

2. Hollerith Punched Card Code

2.1 Code Table. See Table 1.

2.2 The standard row positional order and notation for the twelve-row punched card is shown in Fig. 1. The card code hole-patterns in the Code Table represent punches in the corresponding rows of the card.

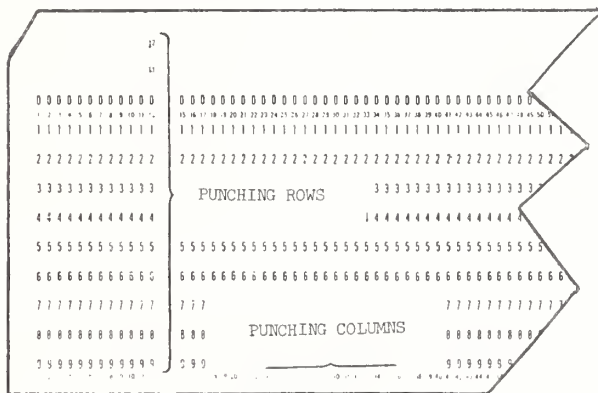


Fig. 1
Layout of Punching Positions

2.3 This standard specifies the Hollerith card hole-patterns for representing the characters of ASCII when punched in the standard 12-row punched card. A single hole-pattern (such as 12-2, or 11-8-6, or 11-9-8-6) is to be punched in a single column of the standard 12-row punched card.

2.4 A particular hole-pattern may be referred to as being in Code Table position x/y , where x

is the table column and y is the table row. The vertical columns (x) in the body of the Code Table (not to be confused with columns on a punched card) are designated column 0, 1, 2, 3, 4, 5, 6, 15 for reference purposes only. The horizontal rows (y) in the body of the Code Table (not to be confused with rows on the punched card) are designated row 0, 1, 2, 3, 15 for reference purposes only.

EXAMPLE: Hole-pattern 12-9-8-4 is in Code Table position 0/12.

2.5 A particular hole-pattern may also be related to a particular bit-pattern in an 8-bit system, as described, for example, in American National Standard Recorded Magnetic Tape for Information Interchange (800 CPI, NRZI), X3.22-1967.

EXAMPLE: Hole-pattern 12-9-8-4 corresponds to bit-pattern 0000 1100.

3. Qualifications

3.1 This standard does not include any redundancy, or define techniques for error control.

3.2 This standard does not specify a card sorting sequence.

3.3 In specific applications it may be desirable to stylize the graphics in Code Table positions 2/1 and 5/14 into those frequently associated with Logical OR (\vee) and Logical NOT (\neg) respectively. Other graphics may be similarly stylized in specific applications, as provided for in X3.4-1968.

3.4 Punched card systems have used the convention of overpunching digits with 12 or 11 to represent signed numbers or for other purposes. This standard does not provide a simple translation of overpunched digits to the ASCII representation of digits. Where possible, signs of numbers should be in separate card columns. Overpunched digits should be used in information interchange only by specific agreement between sender and receiver.

Table 1
Code Table

		b8																
		b7																
		b6																
		b5																
		b4b3b2b1																
		COL															CCL	
ROW		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	ROW
0000	0	NUL 12-0-9-8-1	DLE 12-11-9-8-1	SP NO PCH 0	0	a 8-4	P 11-7	\ 8-1	p 12-11-7	11-0-9-8-1	12-11-0-9-8-1	12-0-9-1	12-11-9-8	12-11-0-9-6	12-11-8-7	12-11-0-8	12-11-9-8-4	0
0001	1	SOH 12-9-1	DC1 11-9-1	! ① 12-8-7-1	1	A 12-1	Q 11-8	a 12-0-1	q 12-11-8	0-9-1	9-1	12-0-9-2	11-8-1	12-11-0-9-7	11-0-8-1	12-11-0-9	12-11-9-8-5	1
0010	2	STX 12-9-2	DC2 11-9-2	" 8-7	2	B 12-2	R 11-9	b 12-0-2	r 12-11-9	0-9-2	11-9-8-2	12-0-9-3	11-0-9-2	12-11-0-9-8	11-0-8-2	12-11-0-8-2	12-11-9-8-6	2
0011	3	ETX 12-9-3	DC3 11-9-3	# 8-3	3	C 12-3	S 0-2	c 12-0-3	s 11-0-2	0-9-3	9-3	12-0-9-4	11-0-9-3	12-0-8-1	11-0-8-3	12-11-0-8-3	12-11-9-8-7	3
0100	4	ECT 9-7	DC4 9-8-4	\$ 11-8-3	4	D 12-4	T 0-3	d 12-0-4	t 11-0-3	0-9-4	9-4	12-0-9-5	11-0-9-4	12-0-8-2	11-0-8-4	12-11-0-8-4	11-0-9-8-2	4
0101	5	ENQ 0-9-8-5	NAK 9-8-5	% 0-8-4	5	E 12-5	U 0-4	e 12-0-5	u 11-0-4	11-9-5	9-5	12-0-9-6	11-0-9-5	12-0-8-3	11-0-8-5	12-11-0-8-5	11-0-9-8-3	5
0110	6	ACK 0-9-8-6	SYN 9-2	& 12	6	F 12-6	V 0-5	f 12-0-6	v 11-0-5	12-9-6	9-6	12-0-9-7	11-0-9-6	12-0-8-4	11-0-8-6	12-11-0-8-6	11-0-9-8-4	6
0111	7	BEL 0-9-8-7	ETB 0-9-6	' 8-5	7	G 12-7	W 0-6	g 12-0-7	w 11-0-6	11-9-7	12-9-8	12-0-9-8	11-0-9-7	12-0-8-5	11-0-8-7	12-11-0-8-7	11-0-9-8-5	7
1000	8	BS 11-9-6	CAN 11-9-8	(12-8-5	8	H 12-8	X 0-7	h 12-0-8	x 11-0-7	0-9-8	9-8	12-8-1	11-0-9-8	12-0-8-6	12-11-0-8-1	12-0-9-8-2	11-0-9-8-6	8
1001	9	HT 12-9-5	EM 11-9-8-1) 11-8-5	9	I 12-9	Y 0-8	i 12-0-9	y 11-0-8	0-9-8-1	9-8-1	12-11-9-1	0-8-1	12-0-8-7	12-11-0-1	12-0-9-8-3	11-0-9-8-7	9
1010	10	IF 0-9-5	SUB 9-8-7	* 11-8-4	8-2	J 11-1	Z 0-9	j 12-11-1	z 11-0-9	0-9-8-2	9-8-2	12-11-9-2	12-11-0	12-11-8-1	12-11-0-2	12-0-9-8-4	12-11-0-9-8-2	10
1011	11	VT 12-9-8-3	ESC 0-9-7	+ 12-8-6	11-8-6	K 11-2	[12-8-2	k 12-11-2	{ 12-0	0-9-8-3	9-8-3	12-11-9-3	12-11-0-9-1	12-11-8-2	12-11-0-3	12-0-9-8-5	12-11-0-9-8-3	11
1100	12	FF 12-9-8-4	FS 11-9-8-4	, 0-8-3	12-8-4	L 11-3	\ 0-8-2	l 12-11-3	 12-11	0-9-8-4	12-9-4	12-11-9-4	12-11-0-9-2	12-11-8-3	12-11-0-4	12-0-9-8-6	12-11-0-9-8-4	12
1101	13	CR 12-9-8-5	GS 11-9-8-5	- 11	= 8-6	M 11-4] 11-8-2	m 12-11-4	} 11-0	12-9-8-1	11-9-4	12-11-9-5	12-11-0-9-3	12-11-8-4	12-11-0-5	12-0-9-8-7	12-11-0-9-8-5	13
1110	14	SO 12-9-8-6	RS 11-9-8-6	. 12-8-3	> 0-8-6	N 11-5	^ 11-8-7	n ② 12-11-5	~ 11-0-1	12-9-8-2	9-8-6	12-11-9-6	12-11-0-9-4	12-11-8-5	12-11-0-6	12-11-9-8-2	12-11-0-9-8-6	14
1111	15	SI 12-9-8-7	US 11-9-8-7	/ 0-1	? 0-8-7	O 11-6	_ 0-8-5	o 12-11-6	DEL 12-9-7	11-9-8-3	11-0-9-1	12-11-9-7	12-11-0-9-5	12-11-8-6	12-11-0-7	12-11-9-8-3	EO 12-11-0-9-8-7	15

① may be " | "

② may be " 7 "

③ The top line in each entry to the table represents an assigned character (Columns 0 to 7). The bottom line in each entry is the corresponding card hole-pattern.

3.5 Deviations from the standard may create serious difficulties in general information interchange. Such deviations should be used only with full cognizance of the parties involved. The use of hole-patterns not defined in this standard is considered a deviation from the standard. (See Appendix A.)

4. Hole-Pattern Cross Reference Table

Table 2 shows the 256 hole-patterns of the Code Table rearranged for ease of reference. In the body of the table are two types of entries. One type consists of the ASCII character representation such as A, #, SOH, etc. There are 128 of these entries, and they are the 128 characters from columns 0 through 7 of the Code Table (see Table 1).

The other type of entry consists of the column/row notation explained in Section 2.4. There are 128 of these entries, and they are the 128 characters from columns 8 through 15 of the Code Table.

5. Revision of American National Standards Referred to in This Document

When any of the following American National Standards referred to in this document is superseded by a revision approved by the American National Standards Institute, the revision shall apply:

American National Standard Code for Information Interchange, X3.4-1968.

American National Standard Recorded Magnetic Tape for Information Interchange (800 CPI, NRZI), X3.22-1967.

Table 2
Code Table Arranged for Ease of Reference

	12	11	0		12	12	11	12
					0	11	0	11
					0	0	0	0
	&	-	∅	SP	{		}	11/10
1	A	J	/	1	a	j	~	13/9
2	B	K	S	2	b	k	s	13/10
3	C	L	T	3	c	l	t	13/11
4	D	M	U	4	d	m	u	13/12
5	E	N	V	5	e	n	v	13/13
6	F	O	W	6	f	o	w	13/14
7	G	P	X	7	g	p	x	13/15
8	H	Q	Y	8	h	q	y	14/0
9	I	R	Z	9	i	r	z	14/1
8-2	[]	\	:	12/4	12/11	13/2	14/2
8-3	.	\$,	#	12/5	12/12	13/3	14/3
8-4	<	*	%	@	12/6	12/13	13/4	14/4
8-5	()	-	'	12/7	12/14	13/5	14/5
8-6	+	:	>	=	12/8	12/15	13/6	14/6
8-7	! ①	^ ②	?	"	12/9	13/0	13/7	14/7

12	11	0		12	12	11	12
				0	11	0	11
				0	0	0	0
10/8	11/1	11/9	`	12/3	12/10	13/1	13/8
SOH	DC1	8/1	9/1	10/0	10/9	9/15	11/11
STX	DC2	8/2	SYN	10/1	10/10	11/2	11/12
ETX	DC3	8/3	9/3	10/2	10/11	11/3	11/13
9/12	9/13	8/4	9/4	10/3	10/12	11/4	11/14
HT	8/5	LF	9/5	10/4	10/13	11/5	11/15
8/6	BS	ETB	9/6	10/5	10/14	11/6	12/0
DEL	8/7	ESC	EOT	10/6	10/15	11/7	12/1
9/7	CAN	8/8	9/8	10/7	11/0	11/8	12/2
8/13	EM	8/9	9/9	NUL	DLE	8/0	9/0
8/14	9/2	8/10	9/10	14/8	14/14	15/4	15/10
VT	8/15	8/11	9/11	14/9	14/15	15/5	15/11
FF	FS	8/12	DC4	14/10	15/0	15/6	15/12
CR	GS	ENQ	NAK	14/11	15/1	15/7	15/13
SO	RS	ACK	9/14	14/12	15/2	15/8	15/14
SI	US	BEL	SUB	14/13	15/3	15/9	15/15

① may be "I".
② may be "¬".

Appendixes

(These Appendixes are not a part of American National Standard Hollerith Punched Card Code, X3.26-1970, but are included for information purposes only.)

Appendix A Design Considerations

A1. Introduction

The standard Hollerith representation was designed to provide for representation of the full ASCII character set in punched cards, in a code which incorporates and extends commonly used Hollerith practices. Such a code thus permits continued use in many applications of existing equipment, files, tabulating procedures and data code structures based on a subset of the full ASCII. The potential benefits of a capability for full interchange of cards and data from users of the subset to the full set and limited interchange in the reverse direction are thus extended to the large body of producers and users of current card equipment.

The punch card is unique as an input/output medium for data processing systems, in the variety of types of usage to which it is put. In some applications it serves as the unit record for storage of data, being created, processed, stored and reprocessed repeatedly over a long life cycle in a single machine facility and handled exclusively by trained operators. In other applications it is punched solely for the purpose of a single reading into an electronic data processing system, and having served that purpose is immediately destroyed. In a different situation, it is punched as a result of a data processing operation, distributed to clerical staffs or the general public, and after considerable manual handling is returned to a data processing facility, not necessarily its originator, to serve as an input medium to further processing. The majority of cards used for these various purposes have to date been punched with Hollerith coding, which has thus acquired the status of a de facto standard. The ability of the code to serve this variety of purposes, together with the large investment in hardware and software based on the code, warrants its extension to include the full ASCII character set and provide for an additional 128-character set.

A2. Commonly Used Hollerith Codes

The Hollerith coding in general usage has many requisites of a standard specification. The majority of punched card equipments and hence the applications employing them have a set of 48 characters. This set provides:

Blank or space	-	1 character
Digits 0—9	-	10 characters
Letters A—Z	-	26 characters

for a total of 37 characters, leaving 11 character positions for assignment to punctuation or other special symbols. For the basic 37 characters there is almost complete uniformity in the hole-pattern assigned to each graphic.

Further assignments of hole-patterns were then made to accommodate the remaining ASCII graphics. The previous Hollerith practices had not contained the ASCII control characters. However, EBCDIC, which is an extension of Hollerith practices used on a number of existing equipments (see Appendix B), contains a number of controls. For those control characters contained in both ASCII and EBCDIC, the EBCDIC hole-patterns were selected. The remaining ASCII control characters were assigned hole-patterns having a translation relationship to ASCII.

For the 11 positions in the set remaining for special symbols, there are a number of different subsets developed by producers and users. However the majority of applications are found to use one of two common groupings of special symbols, identified in Fig. A1.

The same 48 hole-patterns are assigned in all cases, but between the two sets shown in Fig. A1, the last five of the graphics listed are different for the same hole pattern.

In addition to these 48, some punched card equipments have sets containing as many as 16 additional, for totals up to 64 characters. These vary widely, both in the graphics and in the hole-patterns assigned in the extension to the basic set.

Set A	SP	0-9	A-Z	°	,	*	/	-	\$	&	@	#	%	⊠
Set H	SP	0-9	A-Z	°	,	*	/	-	\$	+	'	=	()

Fig. A1

A3. Extension

Since there are almost no deviations in the hole-pattern assignments to the digits and letters, these code assignments were placed directly in the Hollerith punched card code.

Surveys of existing installations showed the single most widely used groupings of special symbols to be Set A. Accordingly, the hole-patterns assigned to these symbols were incorporated in the standard. However since the lozenge (⊠) is not an ASCII character, the hole-pattern assigned to it in Set A has been assigned to the ASCII character "less than" (<).

On some Hollerith-related data processing equipments certain hole-patterns were assigned to control characters such as Group Mark, Record Mark, Segment Mark, Tape Mark, Word Separator, and Substitute Blank.

In general, identifying graphics were assigned to these control characters. However, neither these control characters nor their graphic representations are in ASCII. To preserve the usefulness of existing punches which produce these hole-patterns, these hole-patterns were reassigned to ASCII graphics in this standard.

Further assignments of hole-patterns were then made to accommodate the remaining ASCII graphics. The previous Hollerith practices had not contained the ASCII control characters. However, EBCDIC, which is an extension of Hollerith practices used on a number of existing equipments (see Appendix B), contains a number of controls. For those control characters contained in both ASCII and EBCDIC, the EBCDIC hole-patterns were selected. The remaining ASCII control characters were assigned hole-patterns having a translation relationship to ASCII.

Appendix B EBCDIC Card Code

Table B1 shows the relation of the Hollerith punched card code to EBCDIC.

A particular hole-pattern may be referred to as being in a Code Table position according to a hexadecimal column/row convention. Both columns and rows are numbered 0, 1, 2, 3, 4, 5,

6, 7, 8, 9, A, B, C, D, E, F. The Code Table position is given as "xy," where "x" is the column hexadecimal number and "y" is the row hexadecimal number.

EXAMPLE: In Table B1, hole-pattern 11-8-4 is in position 5C.

1	3
2	4

- Block 1. Zone punches at top, digit punches at left, of table.
- Block 2. Zone punches at bottom, digit punches at left, of table.
- Block 3. Zone punches at top, digit punches at right, of table.
- Block 4. Zone punches at bottom, digit punches at right, of table.

Fig. B1

Table B1
EBCDIC Card Code

		00				01				10				11					
		00	01	10	11	00	01	10	11	00	01	10	11	00	01	10	11	Bit Positions 0,1	
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	Bit Positions 2,3	
		12				12	12		12	12	12		12	12				First Hexadecimal Digit	
			11				11	11	11		11	11	11		11			Zone Punches	
				0		0		0	0	0		0	0			0		Digit Punches	
		9	9	9	9	9	9	9	9										
Bit Positions 4, 5, 6, 7	Second Hexadecimal Digit																		
Digit Punches																			
0000	0 8-1	① NUL	② DLE	③	④	⑤ SP	⑥ &	⑦ -	⑧					⑨ {	⑩ }	⑪ \	⑫ 0	8-1	
0001	1 1	SOH	DC1					⑬ /		o	j	~		A	J	⑭	1	1	
0010	2 2	STX	DC2		SYN					b	k	s		B	K	S	2	2	
0011	3 3	ETX	DC3							c	l	t		C	L	T	3	3	
0100	4 4									d	m	u		D	M	U	4	4	
0101	5 5	HT		LF						e	n	v		E	N	V	5	5	
0110	6 6		BS	ETB						f	o	w		F	O	W	6	6	
0111	7 7	DEL		ESC	EOT					g	p	x		G	P	X	7	7	
1000	8 8		CAN							h	q	y		H	Q	Y	8	8	
1001	9 8-1		EM							i	r	z		I	R	Z	9	9	
1010	A 8-2					}		⑮	.									8-2	
1011	B 8-3	VT				\$,	#										8-3	
1100	C 8-4	FF	FS		DC4	<	*	%	@									8-4	
1101	D 8-5	CR	GS	ENQ	NAK	()	_	'									8-5	
1110	E 8-6	SO	RS	ACK		+	;	>	=									8-6	
1111	F 8-7	SI	US	BEL	SUB	!	^	?	"									8-7	
		12				12				12	12			12	12			Zone Punches	
			11				11				11	11	11		11	11	11		
				0				0		0		0	0	0		0	0		
		9	9	9	9									9	9	9	9		

Card Hole Patterns

- | | | | |
|-----------------|--------------|---------|------------|
| ① 12-0-9-8-1 | ⑤ No Punches | ⑨ 12-0 | ⑬ 0-1 |
| ② 12-11-9-8-1 | ⑥ 12 | ⑩ 11-0 | ⑭ 11-0-9-1 |
| ③ 11-0-9-8-1 | ⑦ 11 | ⑪ 0-8-2 | ⑮ 12-11 |
| ④ 12-11-0-9-8-1 | ⑧ 12-11-0 | ⑫ 0 | |

Table B2
EBCDIC Code Table Arranged for Ease of Reference

	12	11	0		12	12	11	12
					0	11	0	11
								0
	&		∅	SP	{	!	}	70
1	A	J	/	1	a	j	~	B1
2	B	K	S	2	b	k	s	B2
3	C	L	T	3	c	l	t	B3
4	D	M	U	4	d	m	u	B4
5	E	N	V	5	e	n	v	B5
6	F	O	W	6	f	o	w	B6
7	G	P	X	7	g	p	x	B7
8	H	Q	Y	8	h	q	y	B8
9	I	R	Z	9	i	r	z	B9
8-2	[]	\	:	8A	9A	AA	BA
8-3	.	\$.	#	8B	9B	AB	BB
8-4	<	*	%	@	8C	9C	AC	BC
8-5	()	-	'	8D	9D	AD	BD
8-6	+	:	>	=	8E	9E	AE	BE
8-7	!①	^②	?	"	8F	9F	AF	BF

12	11	0		12	12	11	12
				0	11	0	11
							0
49	59	69	~	80	90	A0	B0
SOH	DC1	21	31	41	51	E1	71
STX	DC2	22	SYN	42	52	62	72
ETX	DC3	23	33	43	53	63	73
O4	14	24	34	44	54	64	74
HT	15	LF	35	45	55	65	75
O6	BS	ETB	36	46	56	66	76
DEL	17	ESC	EOT	47	57	67	77
O8	CAN	28	38	48	58	68	78
O9	EM	29	39	NUL	DLE	20	30
O A	1A	2A	3A	CA	DA	EA	FA
VT	1B	2B	3B	CB	DB	EB	FB
FF	FS	2C	DC4	CC	DC	EC	FC
CR	GS	ENQ	NAK	CD	DD	ED	FD
SO	RS	ACK	3E	CE	DE	EE	FE
SI	US	BEL	SUB	CF	DF	EF	FF

① may be "I".

② may be "¬".

The card hole-patterns are found by the heavy lines partitioning Table B1 into four blocks as shown in Fig. B1.

Table B2 shows the 256 hole-patterns rearranged for ease of reference. The table con-

tains two types of entries. One type consists of the 128 assigned character representations from columns 0 through 7 of the Code Table. The remaining 128 entries consist of the hexadecimal column/row designations described above that refer to Table B1.

Appendix C

Subsets

There exist several recognized subsets of the punched card code.

(1) A subset of 63 characters (including space) consisting of the characters of column 2, 3, 4 and 5, exclusive of the "reverse slash" (position 5/12), is normally associated with typewriter-like keyboards limited to 44 keys (see also the 89 character subset).

(2) A subset of 89 characters which includes the 63 characters above and the 26 lower case characters of the alphabet (position 6/1 to

6/15 and 7/0 to 7/10) also normally associated with 44 key, typewriter-like keyboards.

(3) A subset of 64 characters consisting of the characters of columns 2, 3, 4 and 5, exclusive of position 5/11 (12-8-2) and 5/13 (11-8-2) and inclusive of position 7/11 (12-0) and 7/13 (11-0) normally used in keypunches intended for a six-bit environment.

(4) A subset of 66 characters consisting of the characters of columns 2, 3, 4 and 5, and those

of position 7/11 (12-0) and 7/13 (11-0) used primarily in existing keypunches.

(5) A subset of 95 or more characters; 95 of these characters are the graphic characters of ASCII, columns 2, 3, 4, 5, 6 and 7, exclusive of

position 7/15. Additional characters may be selected from columns 0 and 1 and may include position 7/15.

(6) A subset of 128 characters consisting of all the characters of columns 0-7 of the Code Table (see Table 1) for "full ASCII" keyboard devices.


Appendix D Related Standards


American National Standard Code for Information Interchange, X3.4-1968.

American National Standard Specification for General Purpose Paper Cards for Information Processing, X3.11-1969.

American National Standard Rectangular Holes in Twelve-Row Punched Cards, X3.21-1967.

American National Standard Recorded Magnetic Tape for Information Interchange (800 CPI, NRZI), X3.22-1967.

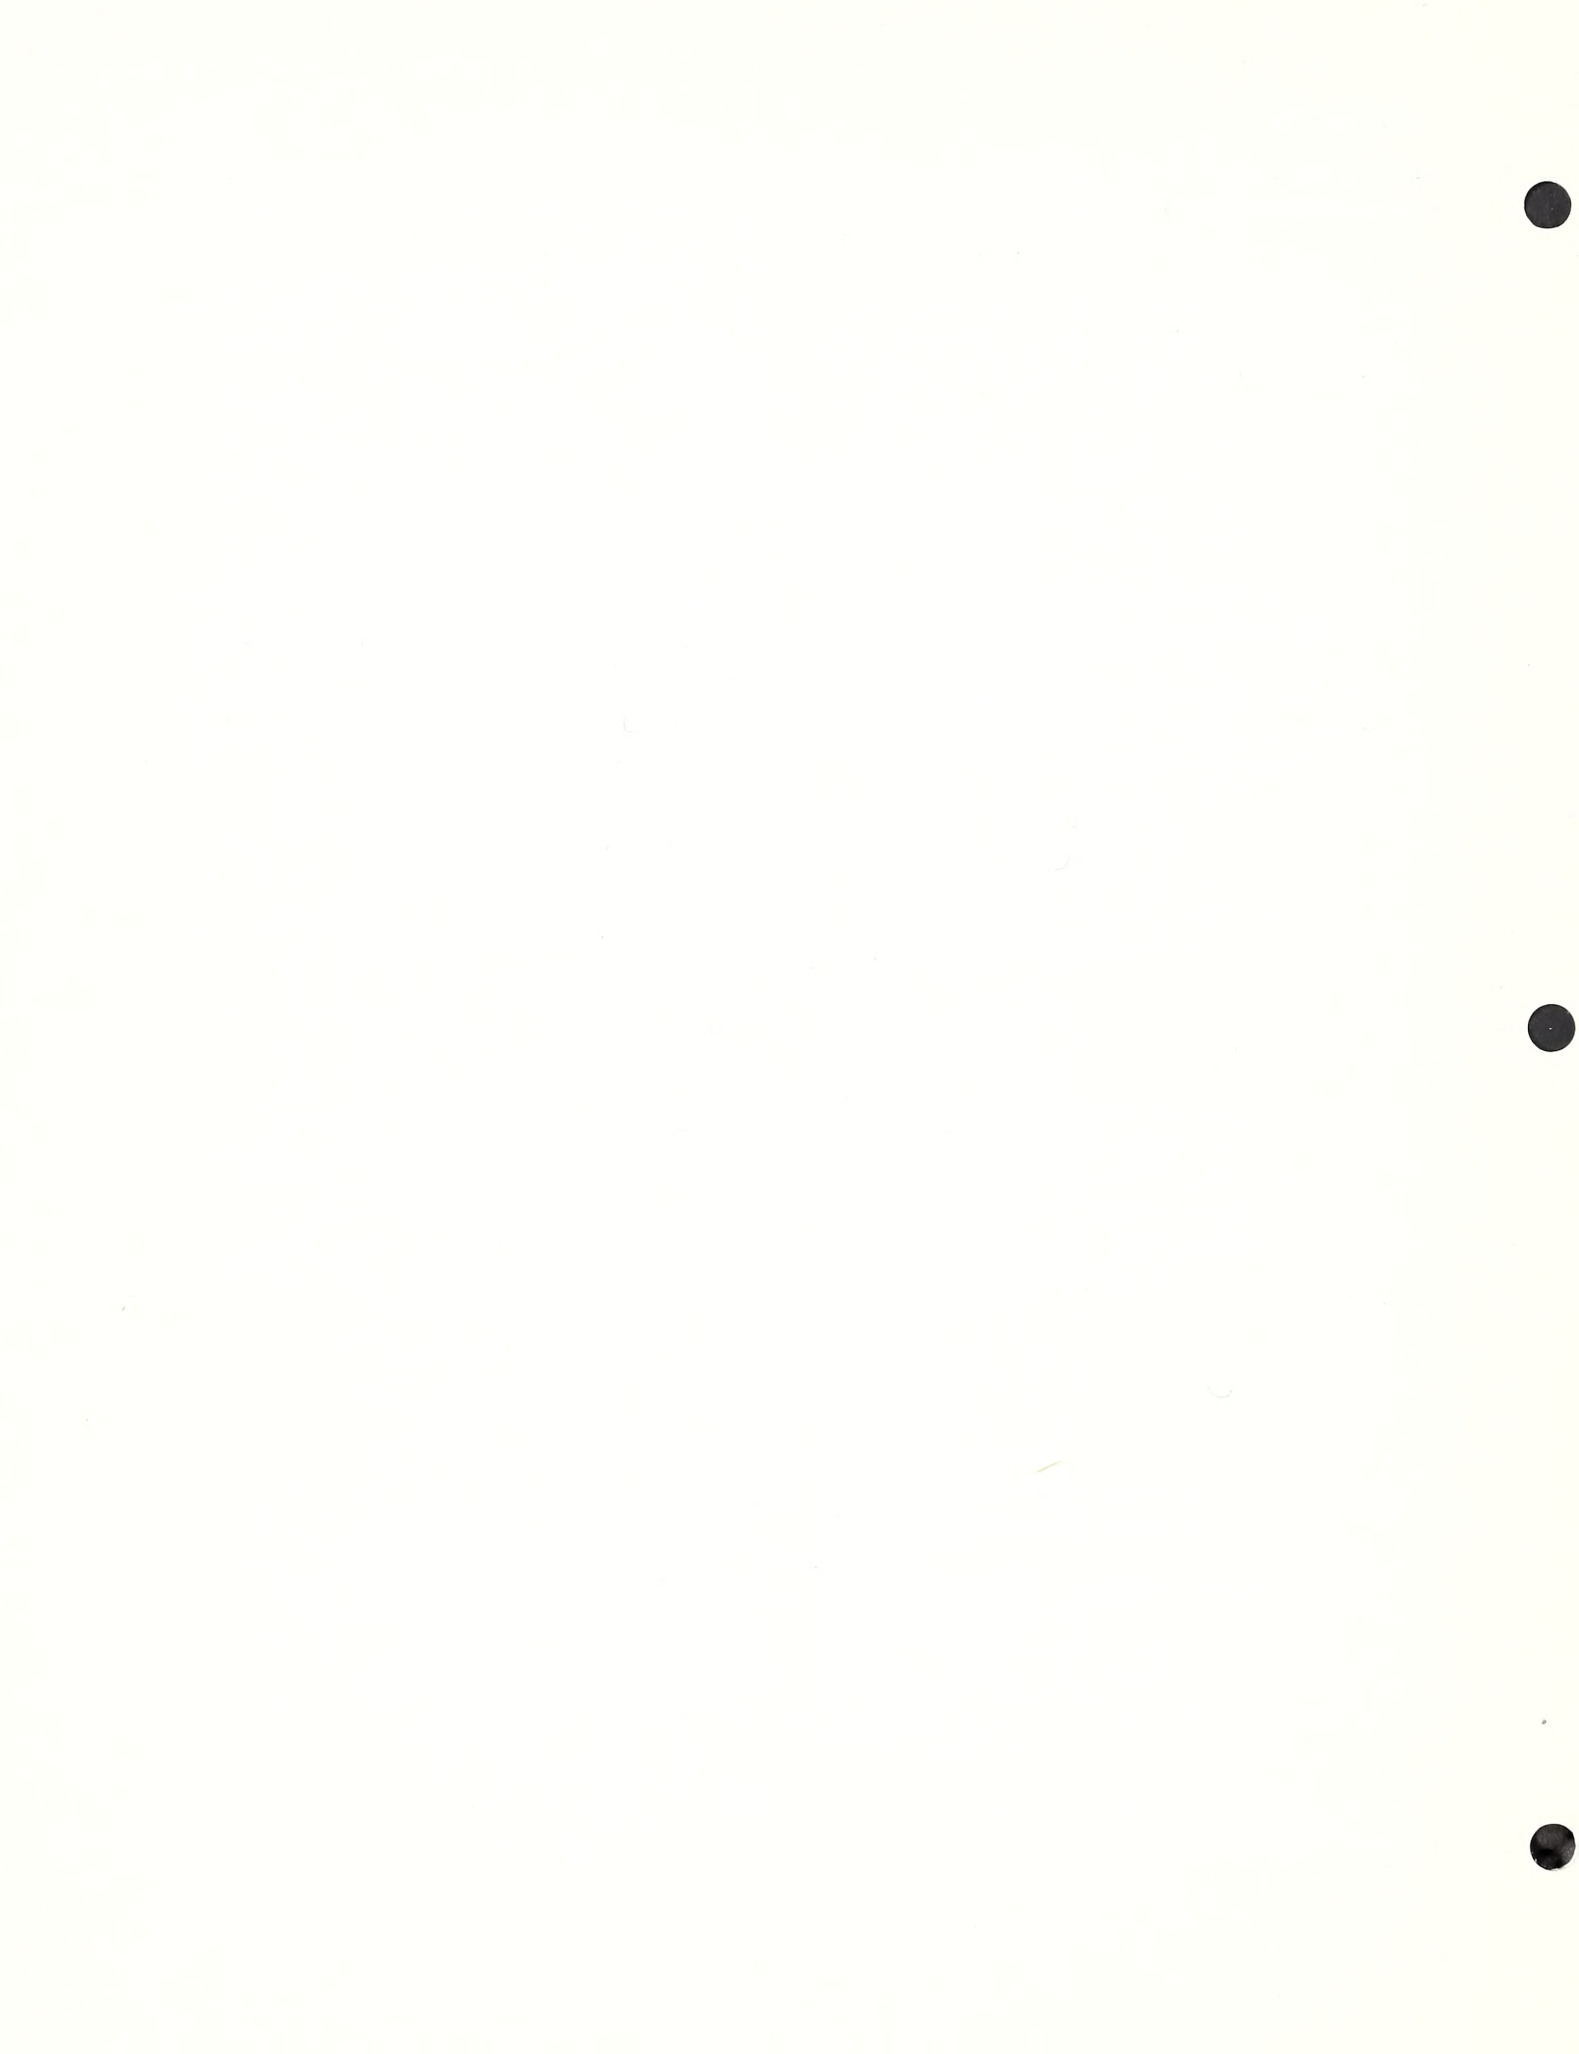

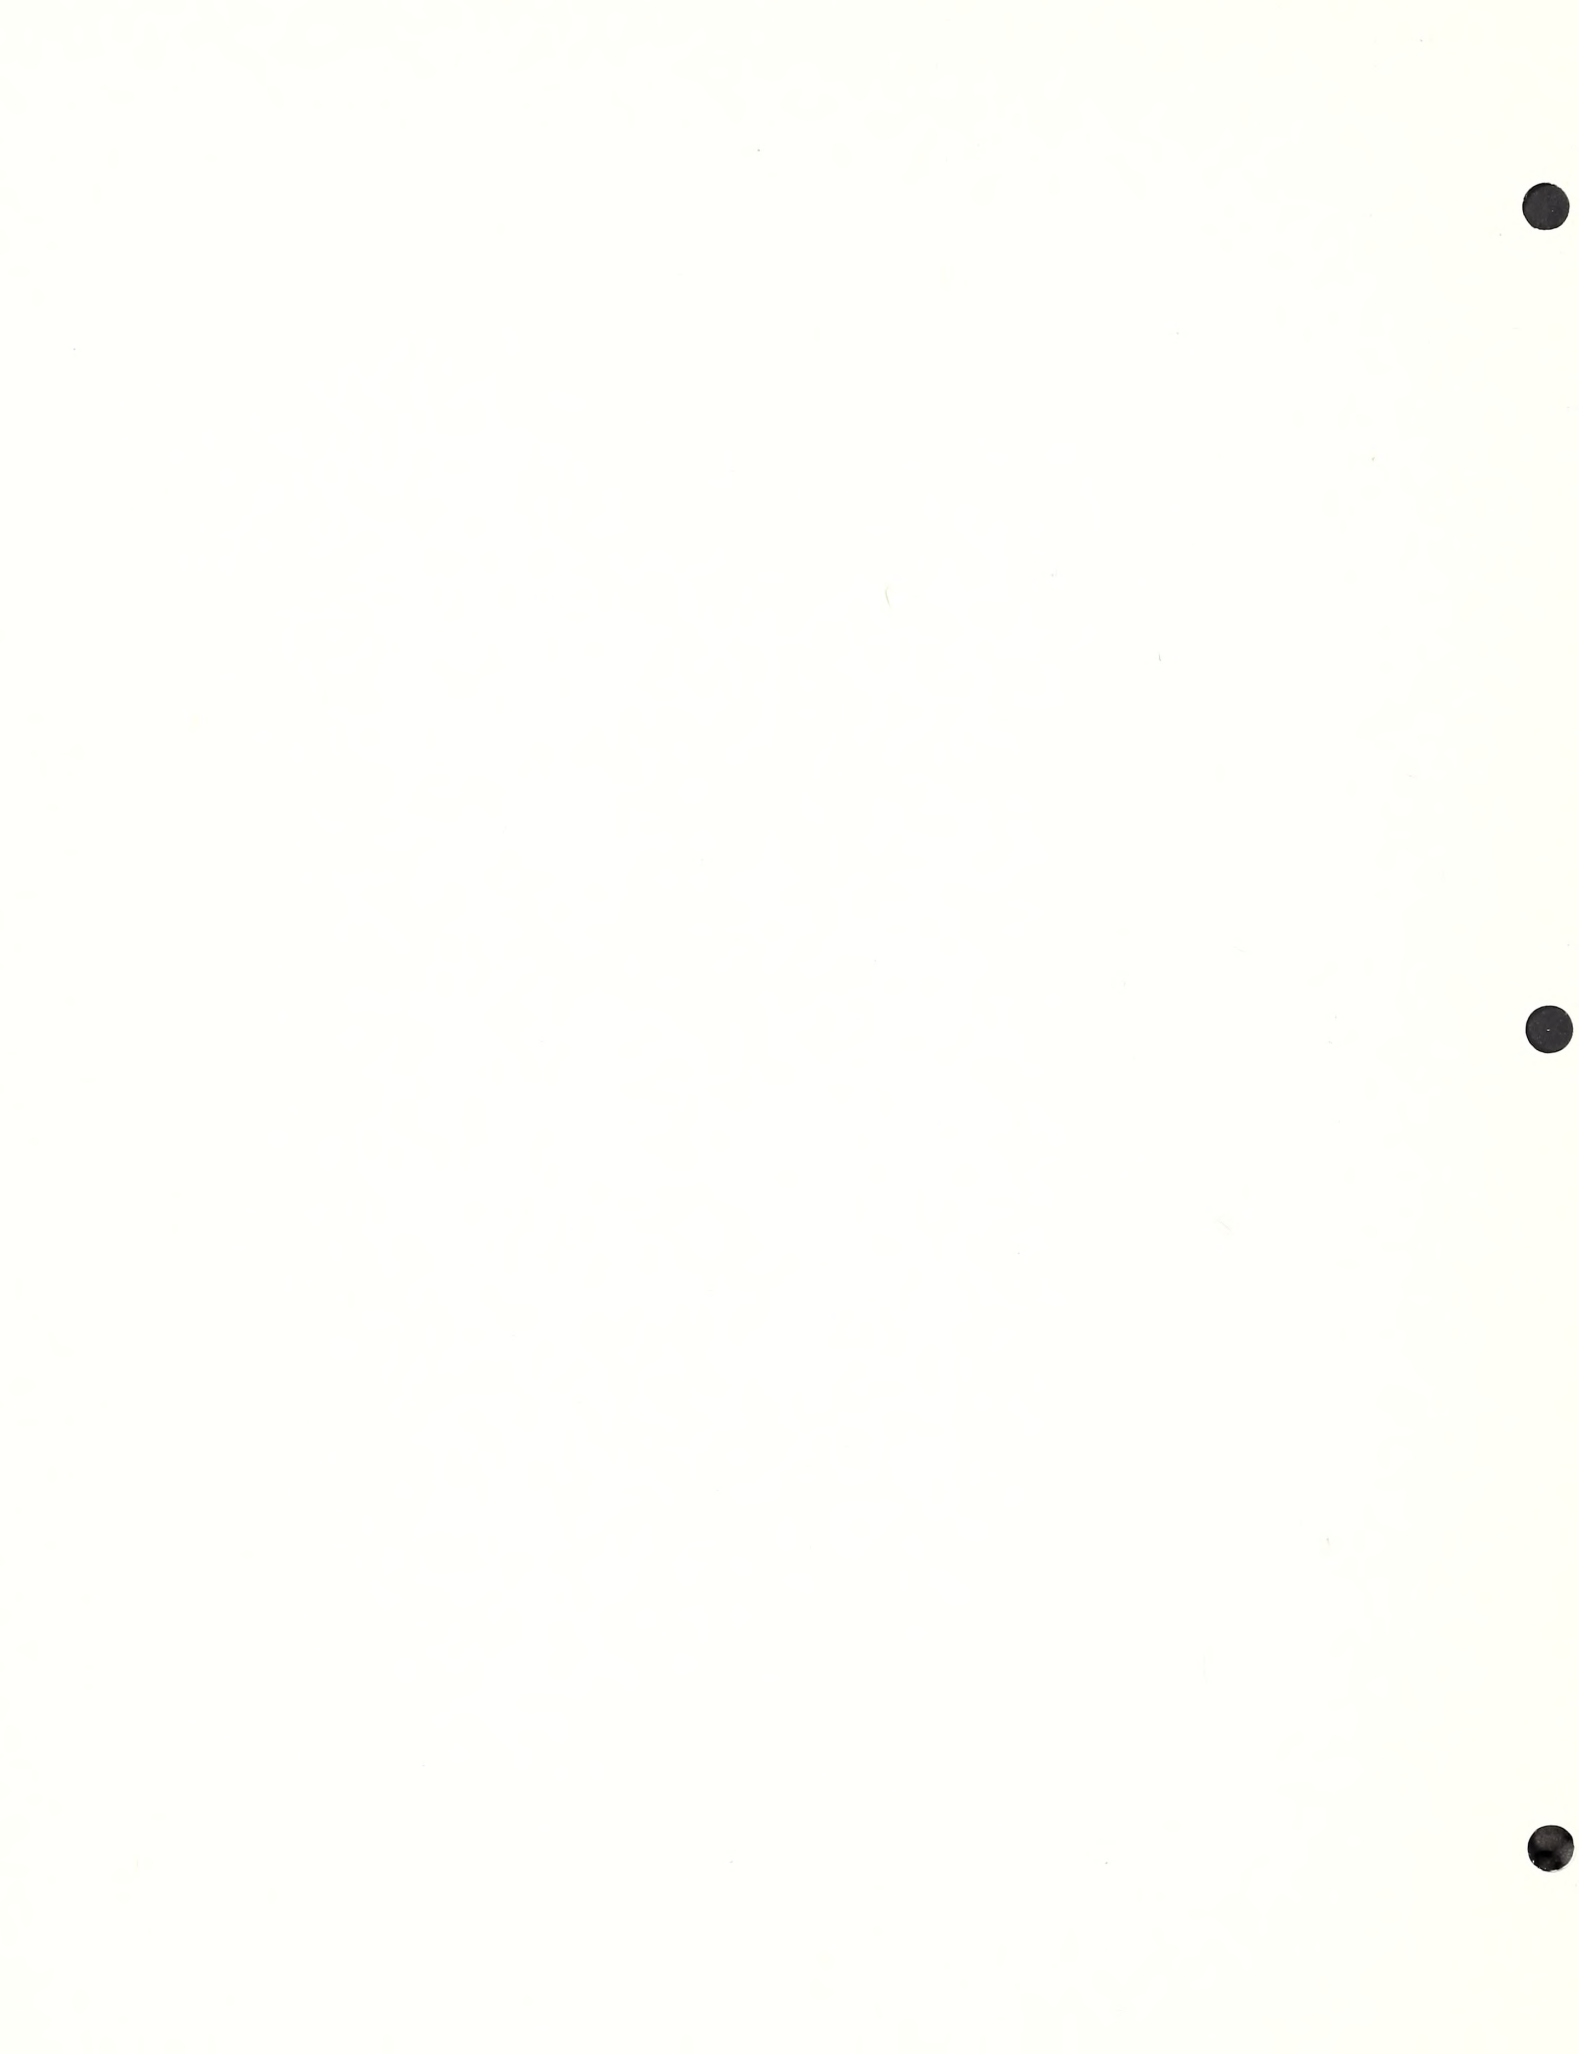



American National Standards on Computers and Information Processing

- X3.1-1969** Synchronous Signaling Rates for Data Transmission
- X3.2-1970** Print Specifications for Magnetic Ink Character Recognition
- X3.3-1970** Bank Check Specifications for Magnetic Ink Character Recognition
- X3.4-1968** Code for Information Interchange
- X3.5-1970** Flowchart Symbols and Their Usage in Information Processing
- X3.6-1965 (R 1973)** Perforated Tape Code for Information Interchange
- X3.9-1966** FORTRAN
- X3.10-1966** Basic FORTRAN
- X3.11-1969** Specification for General Purpose Paper Cards for Information Processing
- X3.12-1970** Vocabulary for Information Processing
- X3.14-1973** Recorded Magnetic Tape for Information Interchange (200 CPI, NRZI)
- X3.15-1966** Bit Sequencing of the American National Standard Code for Information Interchange in Serial-by-Bit Data Transmission
- X3.16-1966** Character Structure and Character Parity Sense for Serial-by-Bit Data Communication in the American National Standard Code for Information Interchange
- X3.17-1974** Character Set and Print Quality for Optical Character Recognition (OCR-A)
- X3.18-1974** One-Inch Perforated Paper Tape for Information Interchange
- X3.19-1974** Eleven-Sixteenths Inch Perforated Paper Tape for Information Interchange
- X3.20-1967 (R 1974)** Take-Up Reels for One-Inch Perforated Tape for Information Interchange
- X3.21-1967** Rectangular Holes in Twelve-Row Punched Cards
- X3.22-1973** Recorded Magnetic Tape for Information Interchange (800 CPI, NRZI)
- X3.23-1974** Programming Language COBOL
- X3.24-1968** Signal Quality at Interface Between Data Processing Terminal Equipment and Synchronous Data Communication Equipment for Serial Data Transmission
- X3.25-1968** Character Structure and Character Parity Sense for Parallel-by-Bit Communication in the American National Standard Code for Information Interchange
- X3.26-1970** Hollerith Punched Card Code
- X3.27-1969** Magnetic Tape Labels for Information Interchange
- X3.28-1976** Procedures for the Use of the Communication Control Characters of American National Standard Code for Information Interchange in Specified Data Communication Links
- X3.29-1971** Specifications for Properties of Unpunched Oiled Paper Perforator Tape
- X3.30-1971** Representation for Calendar Date and Ordinal Date for Information Interchange
- X3.31-1973** Structure for the Identification of the Counties of the United States for Information Interchange
- X3.32-1973** Graphic Representation of the Control Characters of American National Standard Code for Information Interchange
- X3.34-1972** Interchange Rolls of Perforated Tape for Information Interchange
- X3.36-1975** Synchronous High-Speed Data Signaling Rates between Data Terminal Equipment and Data Communication Equipment
- X3.37-1974** Programming Language APT
- X3.38-1972** Identification of States of the United States (Including the District of Columbia) for Information Interchange
- X3.39-1973** Recorded Magnetic Tape for Information Interchange (1600 CPI, PE)
- X3.40-1973** Unrecorded Magnetic Tape for Information Interchange (9-Track 200 and 800 CPI, NRZI, and 1600 CPI, PE)
- X3.41-1974** Code Extension Techniques for Use with the 7-Bit Coded Character Set of American National Standard Code for Information Interchange
- X3.42-1975** Representation of Numeric Values in Character Strings for Information Interchange
- X3.44-1974** Determination of the Performance of Data Communication Systems
- X3.45-1974** Character Set for Handprinting
- X3.46-1974** Unrecorded Magnetic Six-Disk Pack (General, Physical, and Magnetic Characteristics)
- X3.49-1975** Character Set for Optical Character Recognition (OCR-B)
- X3.50-1976** Representations for U.S. Customary, SI, and Other Units to Be Used in Systems with Limited Character Sets
- X3.51-1975** Representations of Universal Time, Local Time Differentials, and United States Time Zone References for Information Interchange

For a free and complete list of all American National Standards, write:

American National Standards Institute, Inc
1430 Broadway
New York, N.Y. 10018