



DOCUMENT

RESEARCH

INSTITUTE

NBS REPORT

6060

ATMOSPHERIC LIMITATIONS ON ELECTRONIC
DISTANCE MEASURING EQUIPMENT

by

Moody C. Thompson, Jr., Harris B. Janes, and Frank E. Freethey



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
BOULDER LABORATORIES
Boulder, Colorado

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to Government Agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. A major portion of the Bureau's work is performed for other Government Agencies, particularly the Department of Defense and the Atomic Energy Commission. The scope of activities is suggested by the listing of divisions and sections on the inside back cover.

Reports and Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers and reports. Reports are issued to the sponsoring agency of a particular project or program. Published papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three monthly periodicals, available from the Government Printing Office: The Journal of Research, which presents complete papers reporting technical investigations; the Technical News Bulletin, which presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions, which provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: The Applied Mathematics Series, Circulars, Handbooks, Building Materials and Structures Reports, and Miscellaneous Publications.

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

8390-11-8303

NBS REPORT

6060

May 29, 1959

ATMOSPHERIC LIMITATIONS ON ELECTRONIC DISTANCE MEASURING EQUIPMENT

by

Moody C. Thompson, Jr., Harris B. Janes, and Frank E. Freethy

The research contained in this
report was sponsored in part
by the Air Force Ballistic Missile
Division - AF 04 (647) - 134.



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
BOULDER LABORATORIES
Boulder, Colorado

IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS
Documents intended for use with
this report are subjected to additional evaluation,
revision, or open-literature listing
mission is obtained in writing
25, D. C. Such permission is
been specifically prepared if

Approved for public release by the
Director of the National Institute of
Standards and Technology (NIST) on
October 9, 2015.

* progress accounting documents
is formally published in
this report, reprinting, reproduction,
not authorized unless permission
of Standards, Washington
for which the Report has
been for its own use.

ATMOSPHERIC LIMITATIONS ON ELECTRONIC DISTANCE MEASURING EQUIPMENT

by

Moody C. Thompson, Jr., Harris B. Janes, and Frank E. Freethy

The development of electronic distance measuring techniques during the past twenty years has resulted in radical changes in both the technical and economic aspects of surveying. The measurement of base lines which formerly required many man-days or weeks may now be made to the same precision by two men literally in a matter of minutes in many cases.

The geodesists are to be commended for their willingness to adopt these new methods and for the effective manner in which they have employed the equipment made available to them.

The physical basis for these techniques is essentially the simple expression that distance is the product of speed and time. More specifically, if we know the speed at which a radio or light signal travels through the atmosphere, and the time required for it to progress from one point to another, we can easily calculate the distance as the product of these two quantities. It follows immediately that the precision of this calculation is dependent upon the precision with which we can make these two independent determinations.

Each of these measurements involves an area of physics which is of importance to the National Bureau of Standards. The time measurement involves the sciences of electronics and time standards; the speed measurement is a problem fundamental to electromagnetic wave propagation. Consequently, our work at the Bureau has led us to detailed consideration of these problems and particularly to a study of the factors

which limit the precision of such measuring techniques. Although means may later be developed to circumvent what appear to be "basic" limitations today, it is felt that some of the presently recognized factors will influence significantly the practical limits of precision for all of the systems which have been publicly described to date.


Historically, the Radio Propagation Engineering Division of the Boulder Laboratories, National Bureau of Standards, has been conducting an experimental and theoretical study of the general problem since November 1954. During this time, the work has been supported almost completely by the United States Air Force and, because of the needs of the sponsor, was directed almost exclusively at one aspect of the general problem, namely the specific question of the effect of atmospheric turbulence.

Because the lower atmosphere of the earth is generally turbulent, the air density and composition at every point vary with time. Similarly, at any given time these physical characteristics vary from point to point. Since the speed of propagation of radio or optical signals through the atmosphere depends upon the composition of the latter, several effects are observed in actual atmospheric propagation paths which restrict our use of such signals. Accordingly, the Bureau's work in this area has been generally aimed at evaluating and, wherever possible, systematically classifying these atmospheric effects.

The following will be confined chiefly to a discussion of these atmospheric characteristics. We can express this in another way by stating that we will neglect the uncertainties in \underline{t} in the following equation, and assume that errors in \underline{L} are due solely to errors in \underline{v} .

$$L = vt$$

Now consider the physical situation shown in Fig. 1. This is the

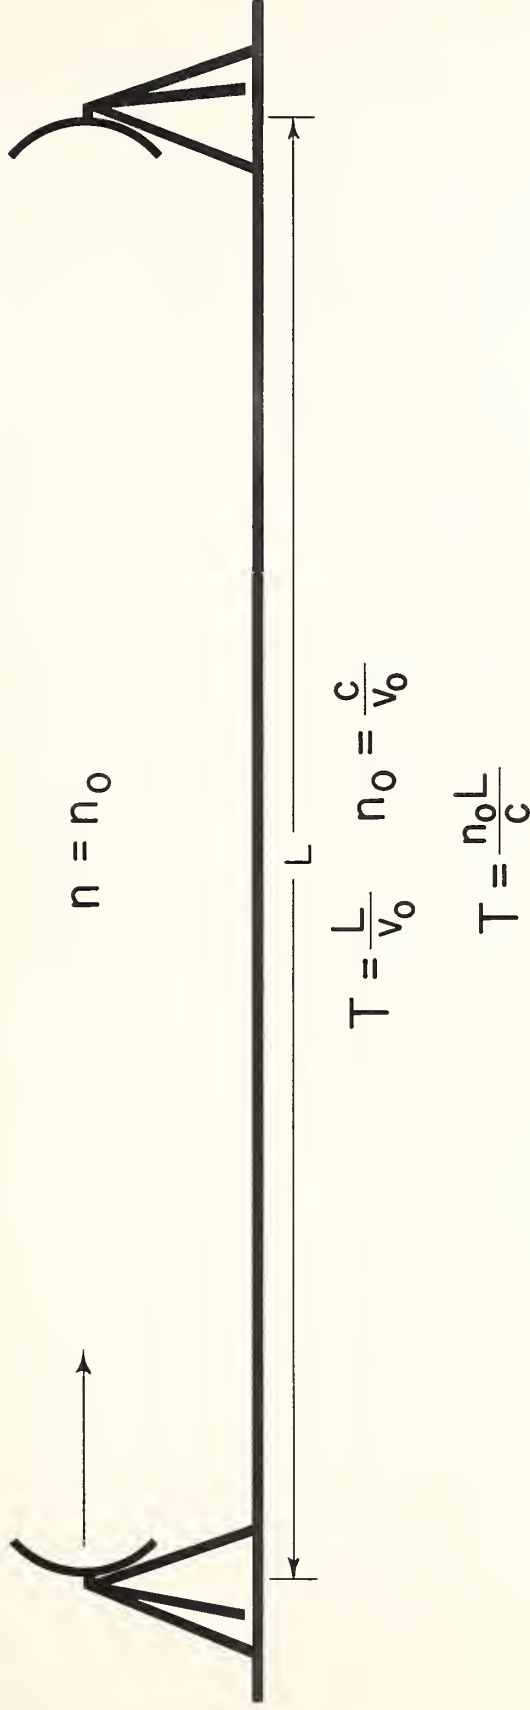

PROPAGATION THROUGH IDEALIZED HOMOGENEOUS ATMOSPHERE

Figure 1

idealized, but trivial case in which the speed is a constant value v_0 at all points along the path. If we knew this situation to exist, we would need only to measure v_0 at any point in the medium to make the necessary conversion of our time measurement to distance. Furthermore, the error in our calculated distance would be determined by the precision with which we could measure v_0 .

In reality, this situation is not even approximated often and we are, in general, faced with the case illustrated in Fig. 2 in which, due to the heterogeneity of atmospheric composition, the speed of propagation is a function of location. If we express this fact mathematically as $n = n(x)$ then the actual conversion factor from our time measurement to distance should be the space-average defined as

$$\bar{n} = \frac{1}{L} \int_0^L n(x) dx$$

Now since we are always limited, physically, to determining $n(x)$ at some finite number of values of x , the above expression may be interpreted to mean that even though we made errorless determinations of the index at each of k sampling points, our average would always be subject to a finite sampling error to the extent that

$$\frac{1}{k} (n_1 + n_2 + \dots + n_k) \neq \frac{1}{L} \int_0^L n(x) dx$$

This is the error which our experiments are aimed at evaluating.

The early experiments were conducted in the Pike's Peak region of Colorado. ¹ Subsequently, a series of measurements were made on the island of Maui, T.H., and we are presently set up in the Boulder area.


The experimental approach has consisted of a rather straightforward process in which the two radio instruments were set up on rigid pedestals. These latter varied with the particular antennas being used, but generally they were columns about 2 feet across and from 2 to 5 feet high. Fig. 3 shows 4 feet and 18 inch diameter dishes. The signal from the electronic time measuring circuit was recorded continuously by means of both paper chart and magnetic tape recorders. In addition to the slow variations, such as day to night, variations in transit time up to the 10 cycles/second components were quantitatively measured.

During this period of radio observations psychrometer and barometer observations were made from which the corresponding values of radio refractive index could be computed.

In the Maui experiments recordings were made of temperature, pressure and relative humidity at three intermediate stations in addition to the two ends of the radio path. The path geometry and the locations of these stations are shown in Figs. 4 and 5. These data have been analyzed in the following way.

At each hourly interval the variation in path length was calculated in two ways; first, by using the index measurements from only the two end points as the velocity correction and then by using the data from all five meteorological stations weighted according to their differences in elevation. Fig. 6 shows these two curves as well as the uncorrected variations. For each curve the standard deviation has also been computed.

The effects of averaging the observations to different degrees are illustrated in Fig. 7. The ordinates in these curves are the running averages of the points plotted in Fig. 6. The results of this process are summarized in Fig. 8 which shows the decrease in standard

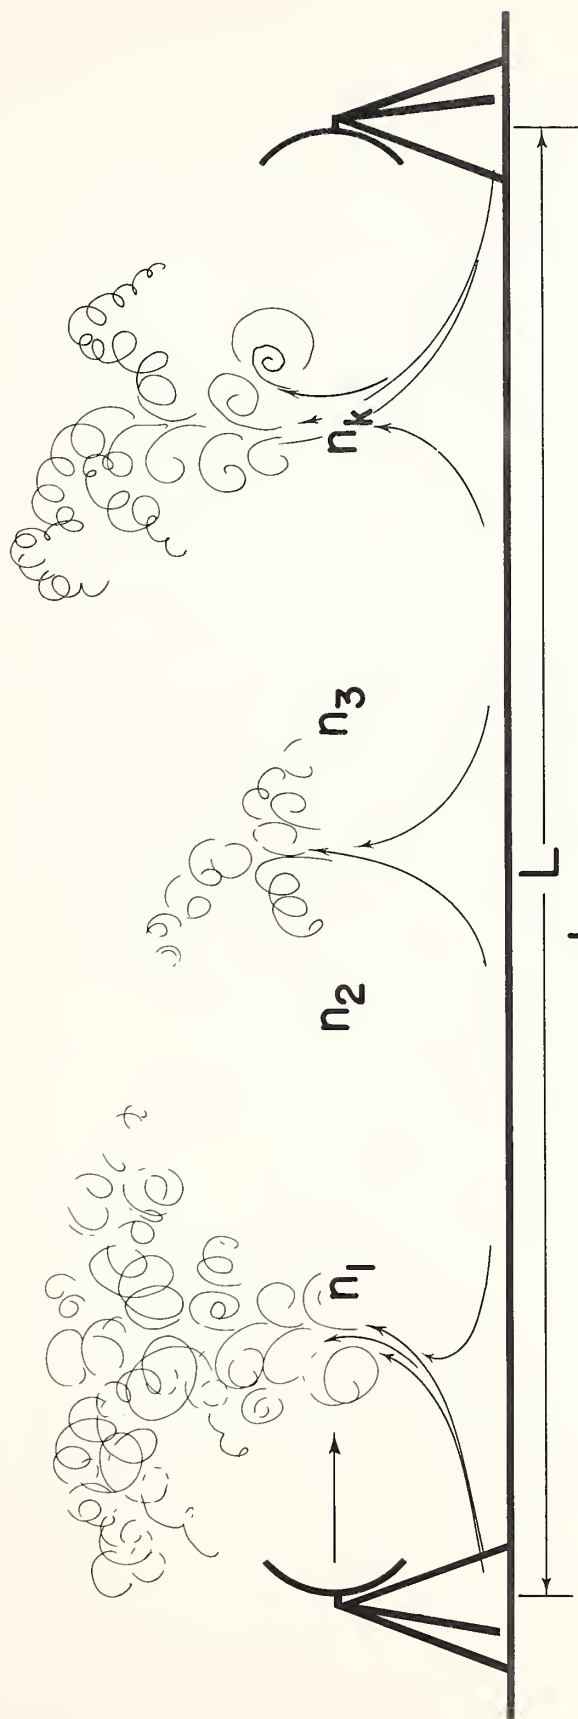

$$T = \frac{1}{c} \int_0^L n(x) dx = \frac{L \bar{n}}{c}$$

PROPAGATION THROUGH REALISTIC TURBULENT ATMOSPHERE

Figure 2

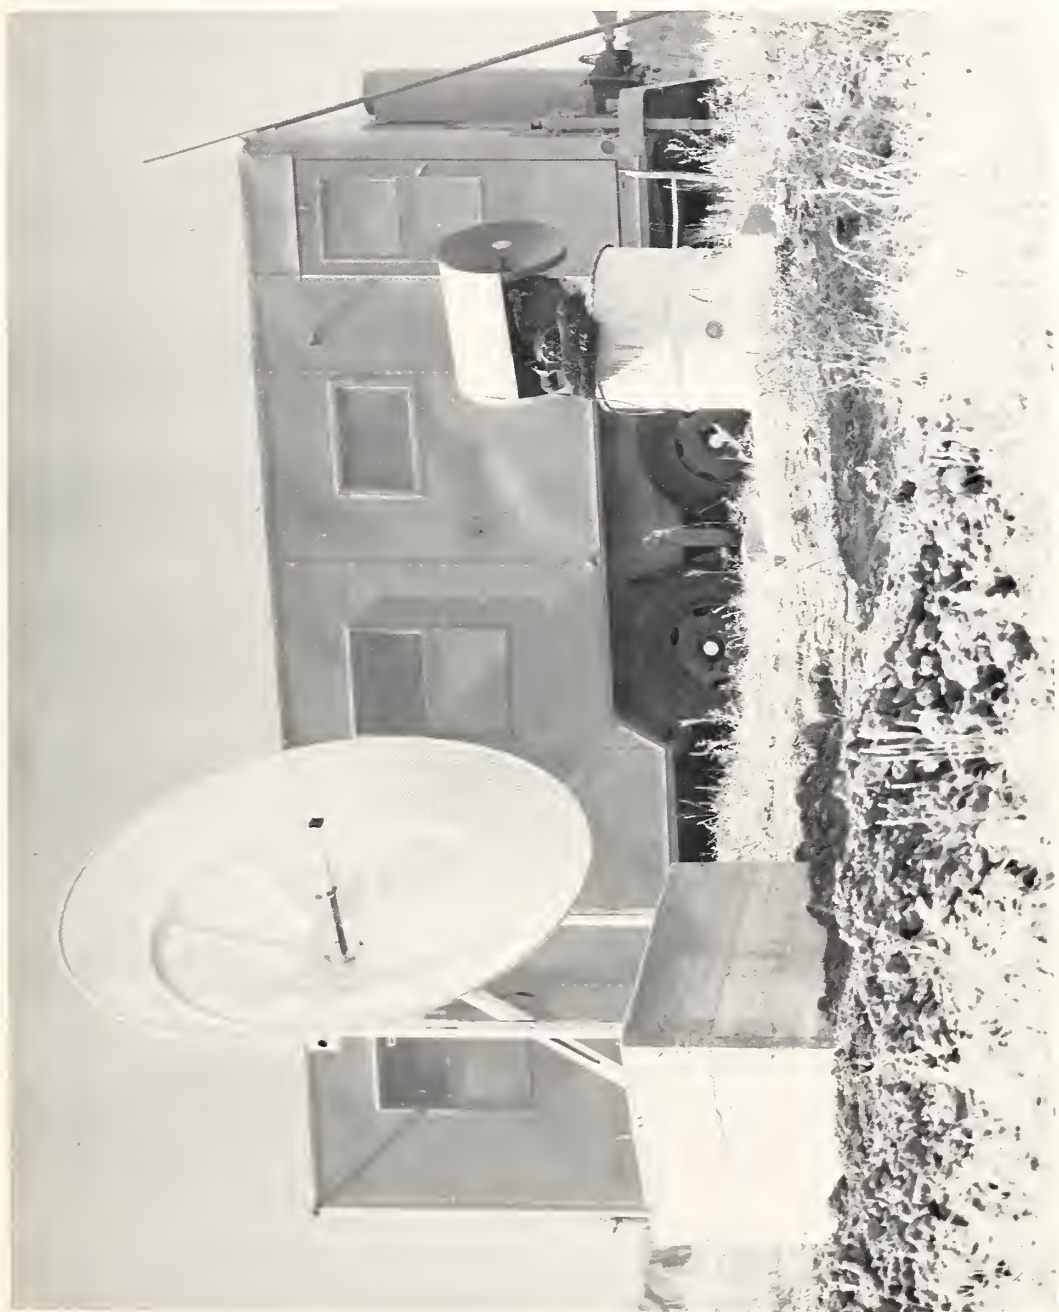


Figure 3 GREEN MT. MESA TERMINAL

TERRAIN PROFILE FOR MAUI PHASE MEASUREMENTS


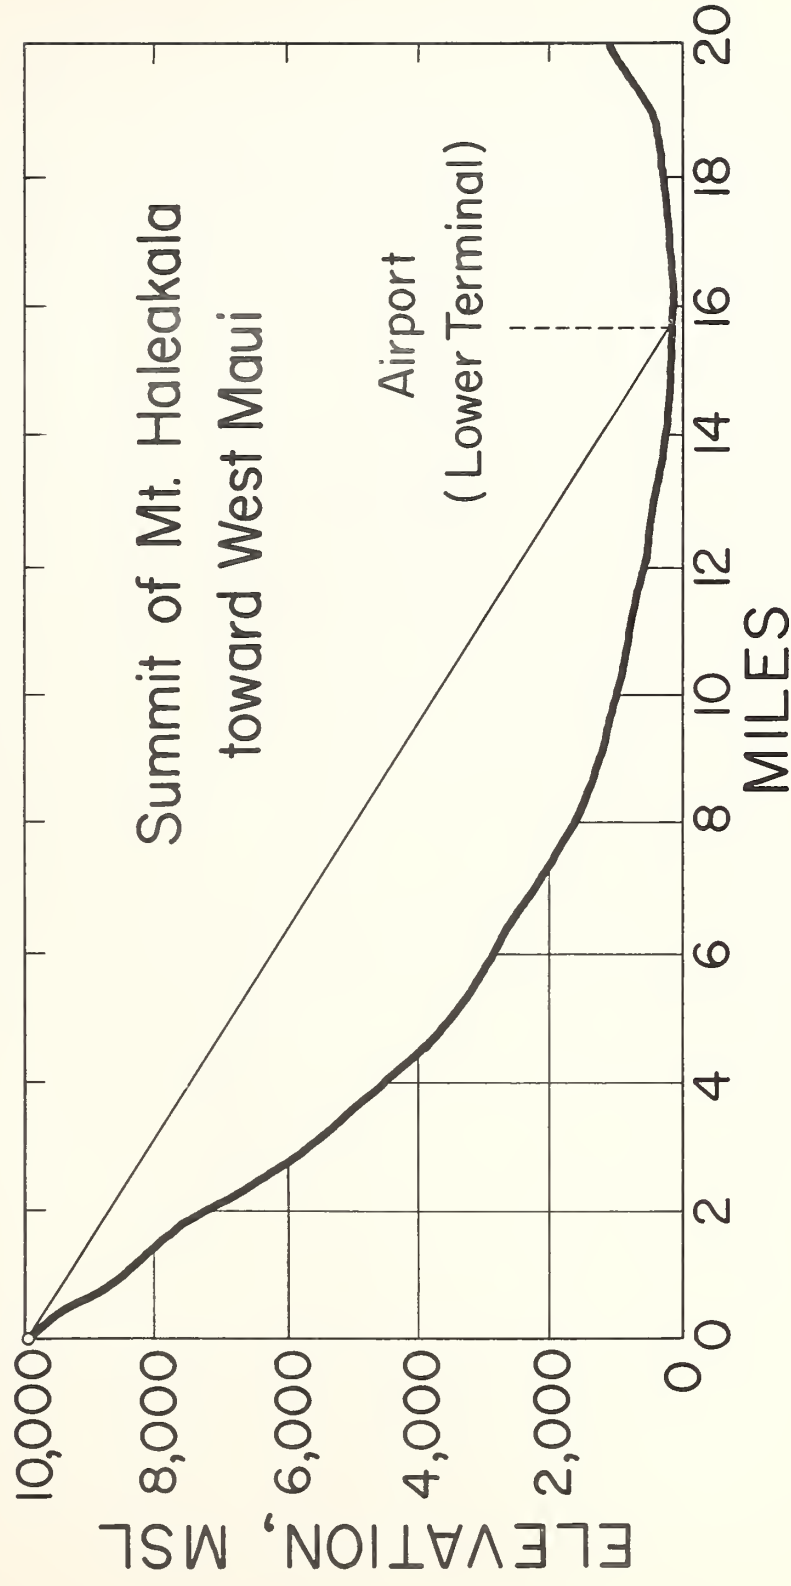


Figure 4



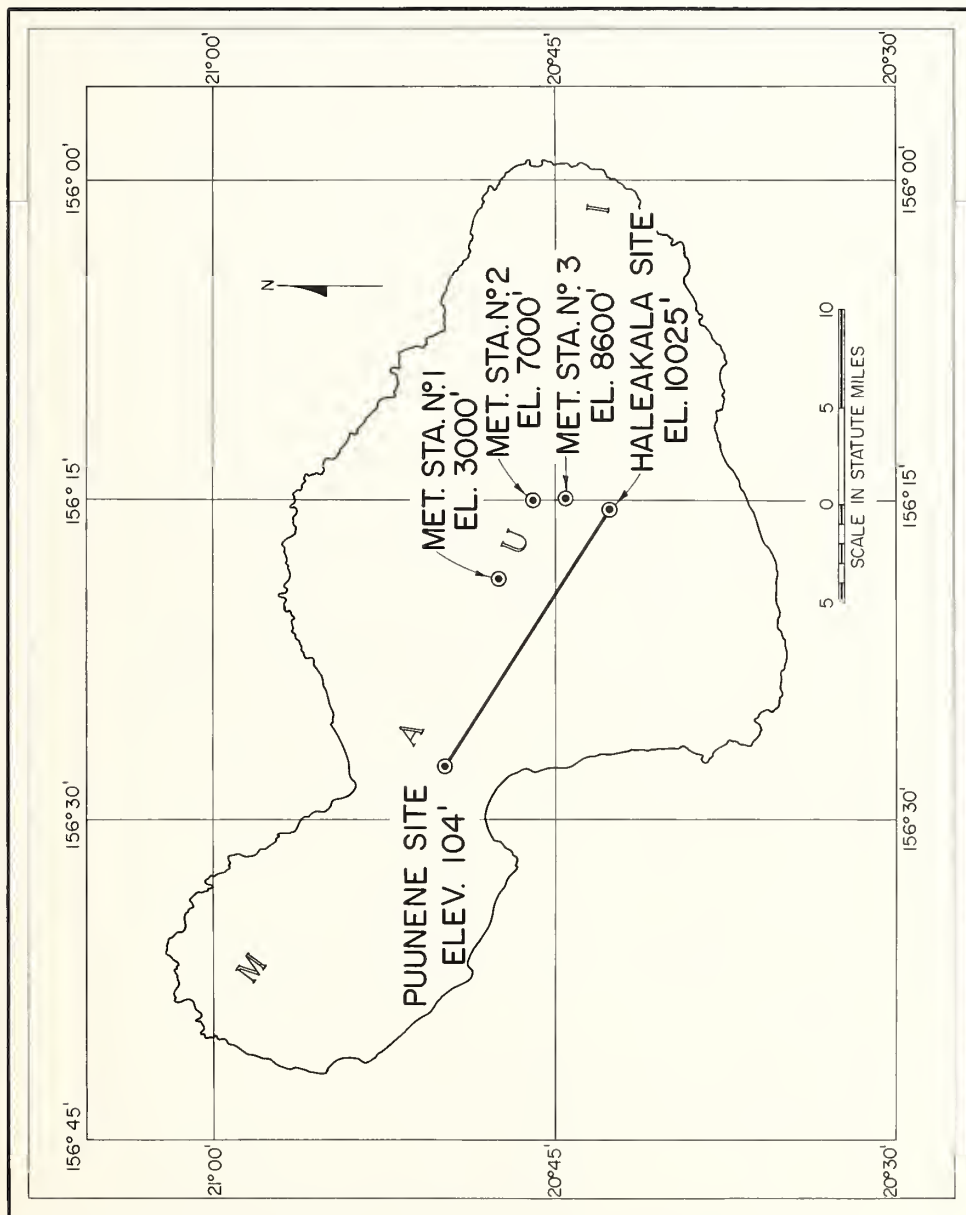

LOCATION OF PROPAGATION PATH
USED IN MAUI EXPERIMENT

Figure 5

TIME VARIATIONS IN APPARENT DISTANCE

MAUI PATH

NOMINAL DISTANCE : 15.46 mi.

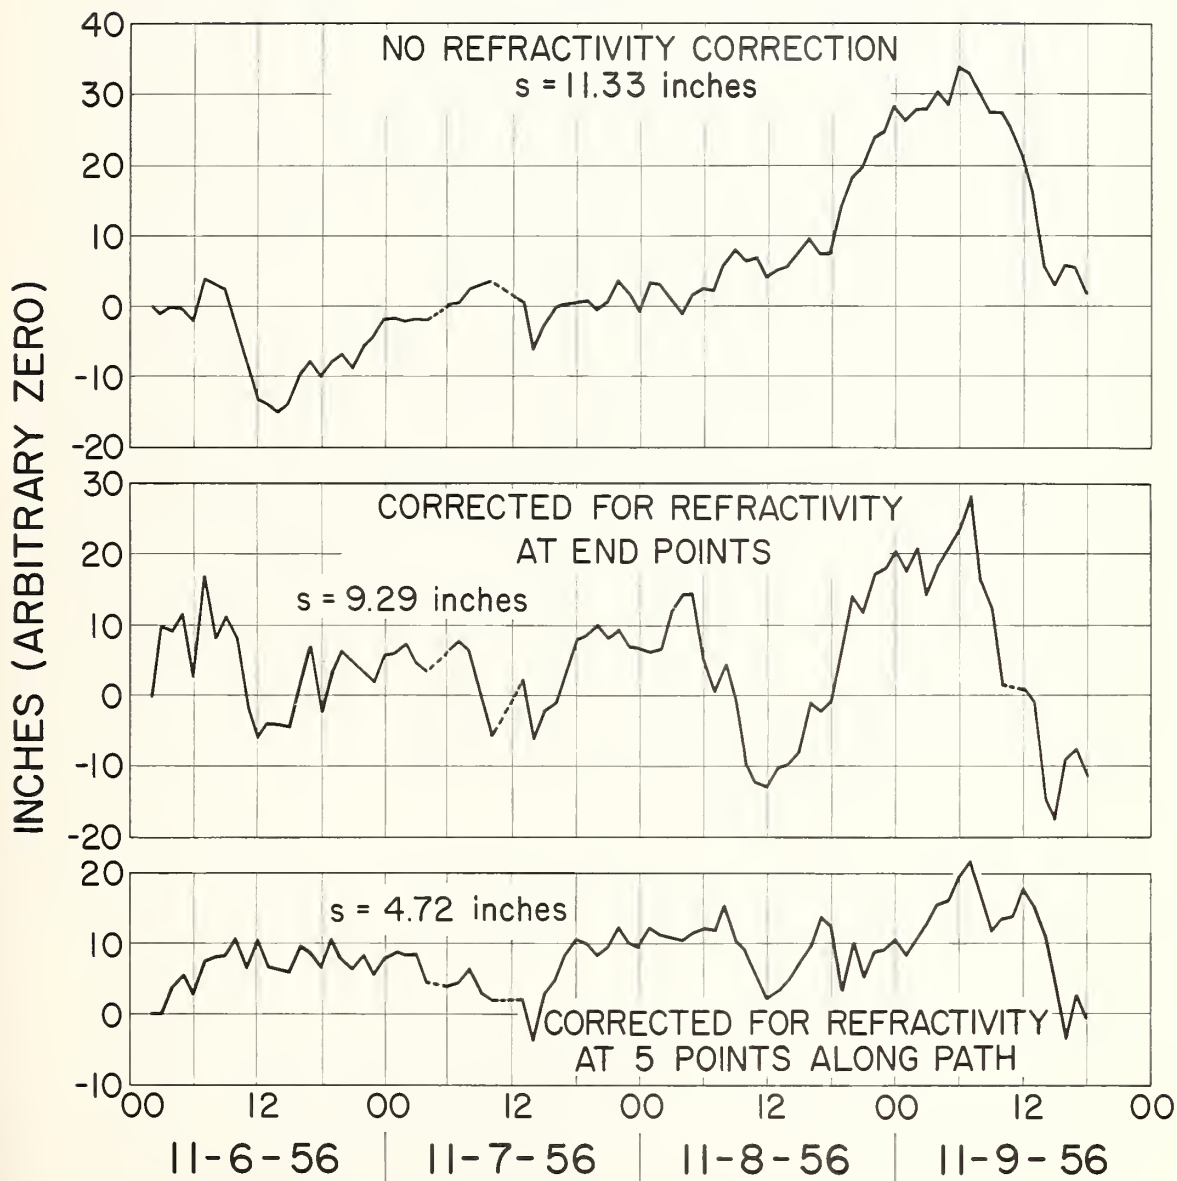


Figure 6

EFFECT OF AVERAGING VARIATIONS IN APPARENT DISTANCE

DATA CORRECTED FOR REFRACTIVITY AT END POINTS

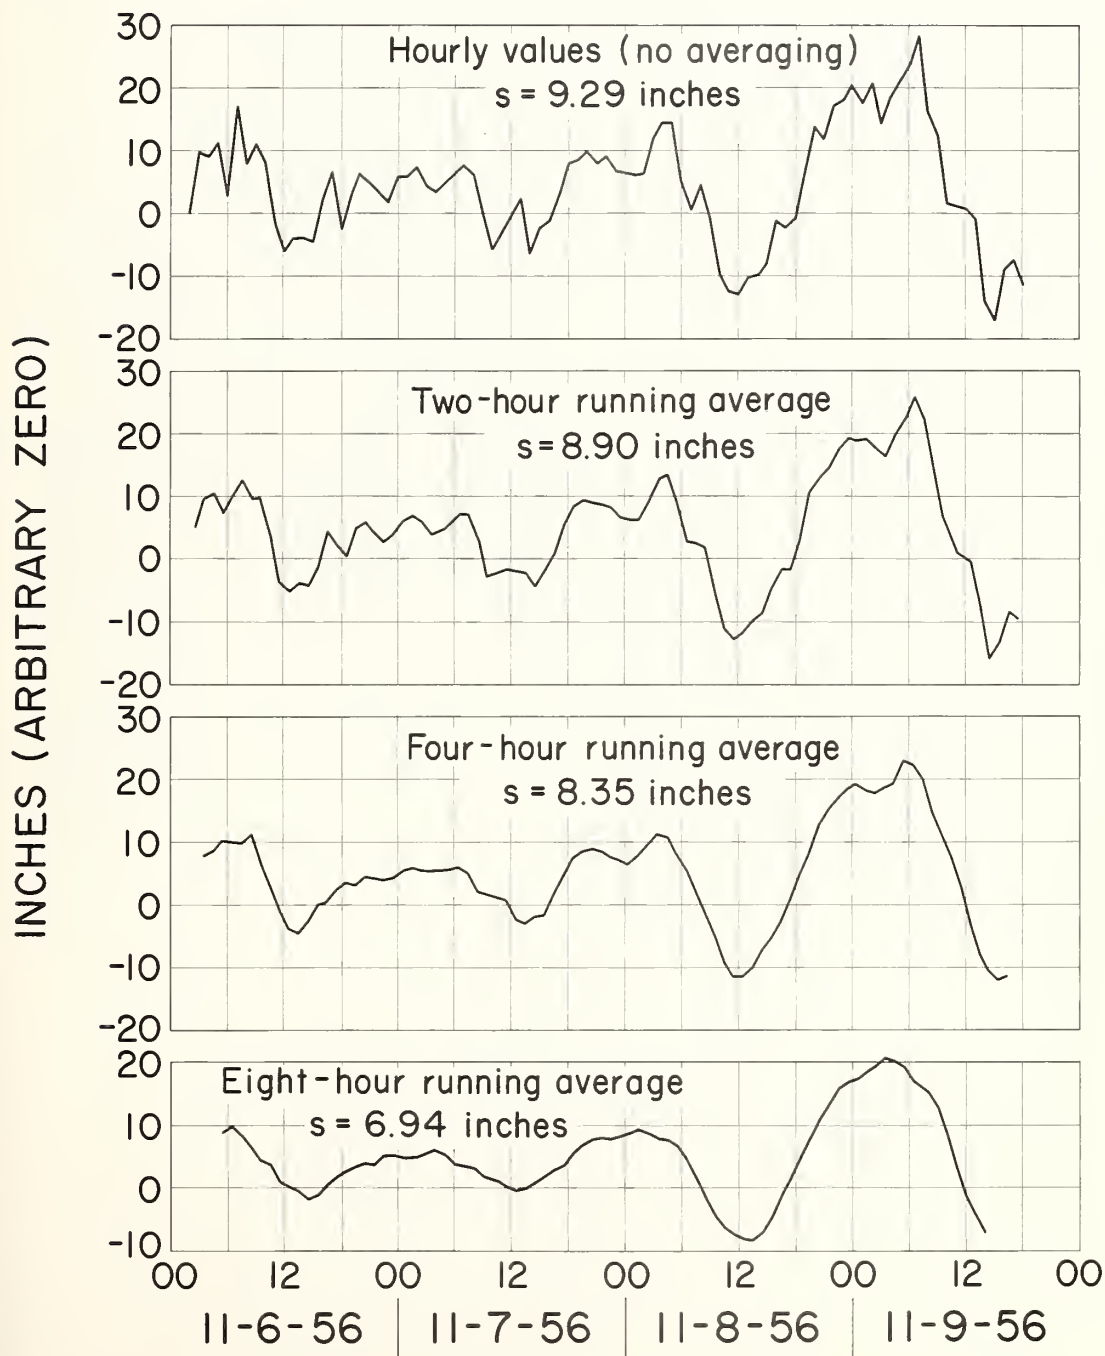


Figure 7



APPARENT DISTANCE VARIATIONS VERSUS AVERAGING TIME

MAUI PATH NOV. 6-9, 1956

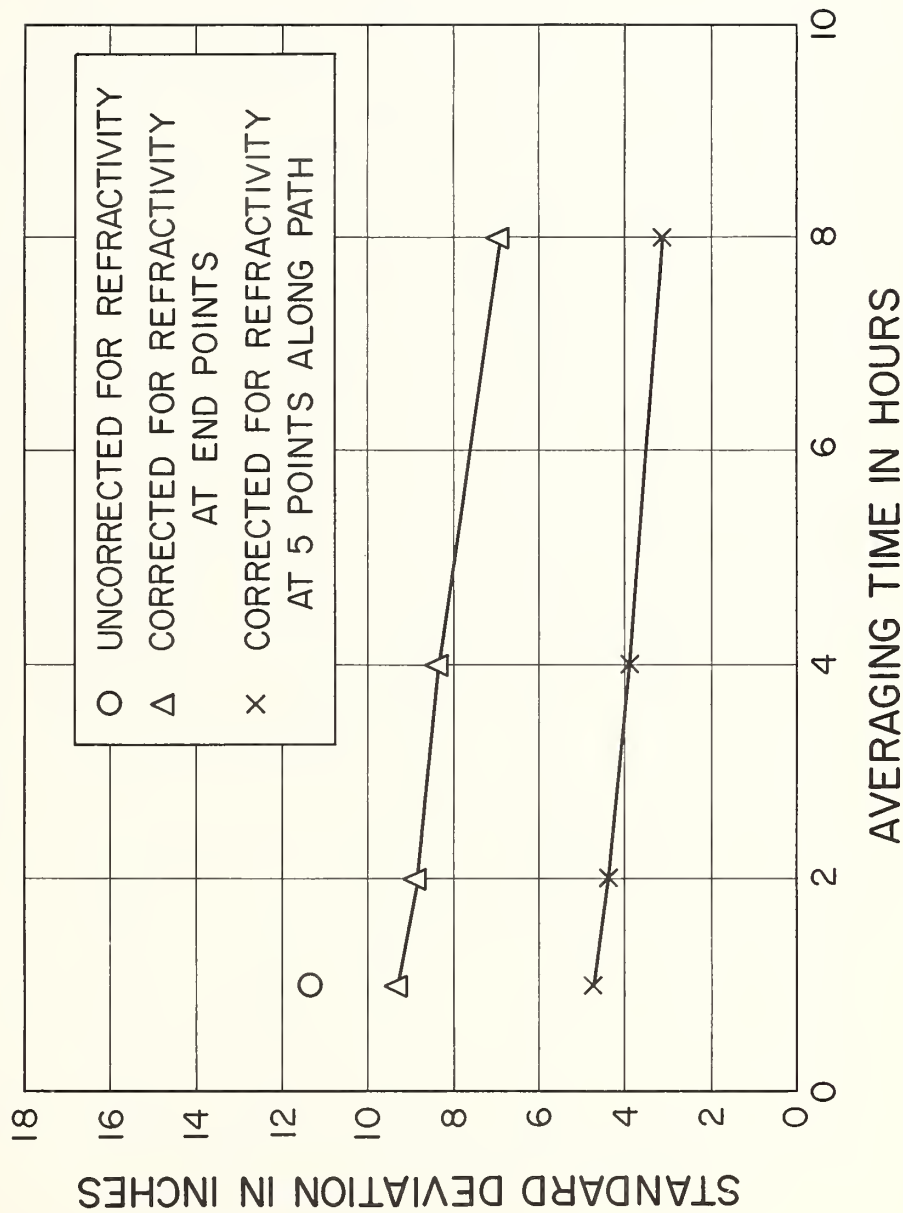


Figure 8

deviation as a function of the averaging interval for the different correction processes.

Although this work has been in progress for more than four years, only a small part of the data has been analyzed in the manner just illustrated. The primary interest of the United States Air Force as sponsor of this work has been, and is currently, with short-term variability rather than actual distance measurement. Consequently, the experiments have always been designed to emphasize the former while making no attempt to pursue the latter. Fortunately, a great deal of the data contains information relevant to the latter application and may be of value in assessing the performance to be expected from distance-measuring systems.

The National Bureau of Standards experiments have been designed from the beginning not simply to observe the turbulence effects, but to study them quantitatively. Thus, we were forced to develop instrumentation whose noise level was significantly lower than the variations in transit time resulting from turbulence. 2/

One might say that our signal--to be studied quantitatively-- is the electronic surveyor's noise level. This has resulted in equipment whose stability is such that variations of transit time of less than one micro - microsecond can be detected and the normal atmospheric variations can be recorded with an accuracy of a few per cent. At the same time, although for different purposes, we have had to develop instruments such as the National Bureau of Standards microwave refractometer which can record variations in radio refractive index to a few parts in ten million.

In a homogeneous atmosphere, we are, thus, already instrumented to make electronic distance measurements to the order of better than

one part per million. However, our experimental observations as described above, indicate that we are limited to accuracy of the order of several parts per million in the field.

It thus appears that we are clearly to the point where our lack of knowledge of atmospheric turbulence is the limiting factor and that, if we are to extend the precision of these electronic techniques, our first approach should be to pursue this area further both experimentally and theoretically.

References1 /

J. W. Herbstreit and M. C. Thompson, Jr., "Measurements of the Phase of Radio Waves Received over Transmission Paths with Electrical Lengths Varying as a Result of Atmospheric Turbulence," Proceedings of the IRE, Vol. 43, No. 10, Pages 1391-1401, October 1955.

2 /

M. C. Thompson, Jr. and M. J. Vetter, "Single Path Phase Measuring System for Three-Centimeter Radio Waves," The Review of Scientific Instruments, Vol. 29, No. 2, Pages 148-150, February 1958.

U. S. DEPARTMENT OF COMMERCE

Sinclair Weeks, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of the scientific program of the National Bureau of Standards at laboratory centers in Washington, D. C., and Boulder, Colorado, is given in the following outline:

Washington, D.C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Engine Fuels. Free Radicals.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Nuclear Physics. Radioactivity. X-rays. Betatron. Nucleonic Instrumentation. Radiological Equipment. AEC Radiation Instruments.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analogue Systems. Application Engineering.

• Office of Basic Instrumentation

• Office of Weights and Measures

Boulder, Colorado

BOULDER LABORATORIES

F. W. Brown, *Director*

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionosphere Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Ionospheric Communications Systems.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Systems. Navigation Systems. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Radio Systems Application Engineering.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

Department of Commerce
National Bureau of Standards
Boulder Laboratories
Boulder, Colorado

Official Business



Postage and Fees Paid
U. S. Department of Commerce