

NBS SPECIAL PUBLICATION **236**
1973 EDITION

NBS FREQUENCY AND TIME BROADCAST SERVICES

RADIO STATIONS
WWV, WWVH, WWVB, WWVL

A UNITED STATES
DEPARTMENT OF
COMMERCE
PUBLICATION



ANNIVERSARY

WWVH &
ATOMIC CLOCK

WWV

U.S.
DEPARTMENT
OF
COMMERCE

National
Bureau
of
Standards

NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards¹ was established by an act of Congress March 3, 1901. The Bureau's overall goal is to strengthen and advance the Nation's science and technology and facilitate their effective application for public benefit. To this end, the Bureau conducts research and provides: (1) a basis for the Nation's physical measurement system, (2) scientific and technological services for industry and government, (3) a technical basis for equity in trade, and (4) technical services to promote public safety. The Bureau consists of the Institute for Basic Standards, the Institute for Materials Research, the Institute for Applied Technology, the Center for Computer Sciences and Technology, and the Office for Information Programs.

THE INSTITUTE FOR BASIC STANDARDS provides the central basis within the United States of a complete and consistent system of physical measurement; coordinates that system with measurement systems of other nations; and furnishes essential services leading to accurate and uniform physical measurements throughout the Nation's scientific community, industry, and commerce. The Institute consists of a Center for Radiation Research, an Office of Measurement Services and the following divisions:

Applied Mathematics — Electricity — Mechanics — Heat — Optical Physics —
Linac Radiation² — Nuclear Radiation² — Applied Radiation² — Quantum
Electronics³ — Electromagnetics³ — Time and Frequency³ — Laboratory
Astrophysics³ — Cryogenics³.

THE INSTITUTE FOR MATERIALS RESEARCH conducts materials research leading to improved methods of measurement, standards, and data on the properties of well-characterized materials needed by industry, commerce, educational institutions, and Government; provides advisory and research services to other Government agencies; and develops, produces, and distributes standard reference materials. The Institute consists of the Office of Standard Reference Materials and the following divisions:

Analytical Chemistry—Polymers—Metallurgy—Inorganic Materials—Reactor
Radiation—Physical Chemistry.

THE INSTITUTE FOR APPLIED TECHNOLOGY provides technical services to promote the use of available technology and to facilitate technological innovation in industry and Government; cooperates with public and private organizations leading to the development of technological standards (including mandatory safety standards), codes and methods of test; and provides technical advice and services to Government agencies upon request. The Institute also monitors NBS engineering standards activities and provides liaison between NBS and national and international engineering standards bodies. The Institute consists of a Center for Building Technology and the following divisions and offices:

Engineering and Product Standards—Weights and Measures—Invention and
Innovation—Product Evaluation Technology—Electronic Technology—Technical
Analysis—Measurement Engineering—Building Standards and Code Services⁴—
Housing Technology⁴—Federal Building Technology⁴—Structures, Materials
and Life Safety⁴—Building Environment⁴—Technical Evaluation and
Application⁴—Fire Technology.

THE INSTITUTE FOR COMPUTER SCIENCES AND TECHNOLOGY conducts research and provides technical services designed to aid Government agencies in improving cost effectiveness in the conduct of their programs through the selection, acquisition, and effective utilization of automatic data processing equipment; and serves as the principal focus within the executive branch for the development of Federal standards for automatic data processing equipment, techniques, and computer languages. The Center consists of the following offices and divisions:

Information Processing Standards—Computer Information—Computer Services
—Systems Development—Information Processing Technology.

THE OFFICE FOR INFORMATION PROGRAMS promotes optimum dissemination and accessibility of scientific information generated within NBS and other agencies of the Federal Government; promotes the development of the National Standard Reference Data System and a system of information analysis centers dealing with the broader aspects of the National Measurement System; provides appropriate services to ensure that the NBS staff has optimum accessibility to the scientific information of the world, and directs the public information activities of the Bureau. The Office consists of the following organizational units:

Office of Standard Reference Data—Office of Technical Information and
Publications—Library—Office of International Relations.

¹ Headquarters and Laboratories at Gaithersburg, Maryland, unless otherwise noted; mailing address Washington, D.C. 20234.

² Part of the Center for Radiation Research.

³ Located at Boulder, Colorado 80302.

⁴ Part of the Center for Building Technology.

NBS

FREQUENCY AND TIME

BROADCAST SERVICES

RADIO STATIONS WWV, WWVH, WWVB, and WWVL

Peter P. Viezbicke, Editor

Time and Frequency Division
Institute for Basic Standards
National Bureau of Standards
Boulder, Colorado 80302



U.S. DEPARTMENT OF COMMERCE, Frederick B. Dent, *Secretary*
NATIONAL BUREAU OF STANDARDS, Richard W. Roberts, *Director*

Issued May 1973

National Bureau of Standards Special Publication 236

(Supersedes NBS Special Publication 236, 1972 and previous editions)

Nat. Bur. Stand. (U.S.), Spec. Publ. 236, 19 pages (May 1973)

CODEN: XNBSAV

Contents

	Page
Services provided by NBS standard frequency and time stations	1
Introduction	1
1. WWV and WWVH Broadcast Services	2
1.1. Standard Radio Frequencies	2
(a) Program	2
(b) Accuracy and Stability	2
(c) Corrections	2
1.2. Standard Audio Frequencies	3
(a) Program	3
(b) Accuracy	3
1.3. Standard Musical Pitch	3
1.4. Standard Time Intervals	3
1.5. Time Signals	3
(a) Program	3
(b) Corrections	5
(c) Coding of UT1 Corrections	6
1.6. Official Announcements	6
(a) Propagation Forecasts	6
(b) Geophysical Alerts	6
(c) Weather Information	7
(d) ATM Skylab Messages	7
1.7. WWV/WWVH Time Code	8
1.8. Station Identification	8
1.9. Radiated Power, Antennas and Modulation	8
(a) Radiated Power	8
(b) Transmitting Antennas	8
(c) Modulation	8
2. WWVB Broadcast Services	9
(a) Program	9
(b) Accuracy and Stability	9
(c) Station Identification	9
(d) Radiated Power, Antenna and Coverage	9
2.1. WWVB Time Code	10
(a) Code and Carrier	10
(b) Marker Generation	10
(c) Marker Order and Groups	10
(d) Information Sets	10
(e) Digital Information	11
3. WWVL Experimental Broadcasts	11
(a) Program Format	11
(b) Accuracy and Stability	11
(c) Station Identification	11
(d) Radiated Power, Antenna	11
4. How NBS Controls the Transmitted Frequencies	11
5. References	13

Services Provided by NBS Standard Frequency and Time Stations

Peter P. Viezbicke

Detailed descriptions are given of the technical services provided by the National Bureau of Standards (NBS) radio stations WWV, WWVH, WWVB, and WWVL. These services are: 1. Standard radio frequencies; 2. Standard audio frequencies; 3. Standard musical pitch; 4. Standard time intervals; 5. Time signals; 6. UT1 corrections; and 7. Official announcements. In order to provide users with the best possible services, occasional changes in broadcasting schedules are required. This publication shows the schedules in effect on January 1, 1973. Annual revisions will be made. Current data relating to standard frequencies and time signals are available monthly in the Time and Frequency Services Bulletin. Advance notice of changes occurring between revisions will be sent to users of NBS broadcast services who request such notice on the basis of need.¹

Key words: Broadcast of standard frequencies; high frequency; low frequency; standard frequencies; time signals; very low frequency.

Introduction

In March 1923 NBS started transmitting standard radio frequencies on a regularly announced schedule from radio station WWV. The WWV transmitter, originally located at NBS, Washington, D.C., has moved several times. Between 1931 and 1967 the station was moved successively to College Park, to Beltsville, to Greenbelt, Maryland, and finally to Fort Collins, Colorado, where it went on the air at 0000 hours Universal Time on December 1, 1966.

The move to Fort Collins was prompted by several considerations: the need for wider and more uniform coverage in the continental U.S. from a more central location; the advantage of more precise control from the NBS Time and Frequency Division at Boulder, Colorado; and improvement in radiation patterns obtained by location in a less congested area.

Original broadcast frequencies were accurate to within a few parts in a thousand. Their transmitted accuracy today is on the order of a part in 10^{12} — approaching the accuracy of the NBS frequency standard itself.

To supplement the coverage of WWV, broadcasts from WWVH, Hawaii, were instituted in 1948. These play an increasingly important role in various types of operations, both military and civilian, in the Pacific and Far East. In 1971, WWVH was moved from its former site on Maui to its present location near Kekaha, Kauai.

WWVB began broadcasting from Boulder, Colorado in 1956, and WWVL, an experimental station, from Sunset, Colorado in 1960. Both of these stations have been located at Fort Collins, Colorado, since July, 1963. Operations from WWVL were curtailed on July 1, 1972, and WWVL now broadcasts very low frequency (VLF) experimental programs only on an intermittent basis contingent

upon need and funds. WWVB, transmitting on low frequency (LF), provides widespread distribution of the NBS frequency and time scale. The WWVB broadcasts are used to coordinate operations of continental networks of missile and satellite stations and to provide a highly accurate standard of frequency that is readily available to many users for electronic research and development. WWVB serves as a national time and frequency reference for many U.S. electric utilities and as a timing reference by government contractor groups for a large number of sensing stations which monitor seismological events.

Thus in the 50 years since the beginning of its radio broadcasts, NBS has expanded these services so that they are making major contributions today to the nation's space and defense programs, to world-wide transportation and communications, and to a multitude of industrial operations, as well as providing convenient time services to thousands of listeners.

Visiting hours are observed at WWV, WWVB, and WWVL every Wednesday, except holidays, from 1:00 p.m. to 4:00 p.m. Special tours may be scheduled at other times only by prior arrangement with the Engineer-in-Charge.

Correspondence pertaining directly to station operations may be addressed to:

John Stanley, Engineer-in-Charge
NBS Radio Stations WWV/WWVB/WWVL
2000 East County Road 58
Fort Collins, CO 80521
Telephone (303) 484-2372

Charles Trembath, Engineer-in-Charge
NBS Radio Station WWVH
P.O. Box 417
Kekaha, Kauai, HI 96752
Telephone (808) 335-4217

¹Inquiries concerning the Time and Frequency Services Bulletin or the NBS broadcast service policies may be addressed to Frequency-Time Broadcast Services Section, Time and Frequency Division, NBS, Boulder, CO 80302.

1. WWV and WWVH Broadcast Services

1.1. Standard Radio Frequencies

(a) Program

Both WWV and WWVH transmit frequencies and time coordinated through the Bureau International de l'Heure (BIH), Paris, France, in accord with international agreements. Transmissions are based upon the international time scale, Universal Coordinated Time (UTC).

WWV broadcasts on radio carrier frequencies of 2.5, 5, 10, 15, 20, and 25 MHz. WWVH broadcasts on radio carrier frequencies of 2.5, 5, 10, 15, and 20 MHz. The broadcasts of both stations are continuous, day and night.

The broadcasts of WWV may also be heard via telephone by dialing (303) 499-7111, Boulder, Colorado. The telephone user will hear the live broadcasts as transmitted from the station. Considering the instabilities and variable delays of propagation by telephone, the listener should not expect accuracy of the telephone time signals to be better than 30 milliseconds. This service is automatically limited to 3 minutes per call.

TABLE 1. Services and coordinates of the NBS broadcast stations

Station	Date in Service	Radio Frequencies	Audio Frequencies	Musical Pitch	Time Intervals	Time Signals	UT1 Corrections	Official Announcements
WWV	1923	✓	✓	✓	✓	✓	✓	✓
WWVH	1948	✓	✓	✓	✓	✓	✓	✓
WWVB	1956	✓			✓	✓	✓	
WWVL	1960	✓						

The coordinates of these NBS radio stations are as follows:

WWV	40° 40' 49.0" N	105° 02' 27.0" W
WWVB	40° 40' 28.3" N	105° 02' 39.5" W
WWVL	40° 40' 51.3" N	105° 03' 00.0" W
WWVH	21° 59' 26.0" N	159° 46' 00.0" W

(b) Accuracy and Stability

Since December 1, 1957, the standard radio transmissions from WWV and WWVH have been held as nearly constant as possible with respect to the atomic frequency standards maintained and operated by NBS. Relative to the primary frequency standard of NBS, there are very small intentional offsets which may be of the order of one part in 10^{12} . Up-to-date information on these small offsets can be obtained from the monthly Time and Frequency Services Bulletin.

Atomic frequency standards have been shown to realize the ideal cesium resonance frequency, f_{Cs} , to within a few parts in 10^{13} . The present NBS frequency standard and time scale system realizes this resonance frequency to an uncertainty of about 5 parts in 10^{13} [1]².

The definitions for time and frequency are based on the same physical process: "The second is the duration of 9,192,631,770 periods of the radiation corresponding to the transition between the two hyperfine levels of the ground state of the cesium-133 atom" as was decided in October 1967 by the XIIIth General Conference of Weights and Measures. For frequency, the hertz is one cycle per second.

On January 1, 1960, the NBS standard was brought into agreement with this definition as quoted above by increasing its assigned value by 74.5 parts in 10^{10} . Frequency measurements in terms of the NBS standard between December 1, 1957 and January 1, 1960 need to take the above correction into account [2].

All carrier and modulation frequencies at WWV and WWVH are derived from cesium-controlled oscillators and are held stable to better than ± 2 parts in 10^{11} at all times. Deviations are normally less than 1 part in 10^{12} from day to day.

Changes in the propagation medium (causing Doppler shifts, diurnal shifts, etc.) result in fluctuations in the carrier frequencies as received which may be very much greater than the uncertainties quoted above.

(c) Corrections

Incremental frequency adjustments not exceeding 1 part in 10^{11} are made at WWV as necessary. Frequency adjustments at WWVH do not exceed 2 parts in 10^{11} . Corrections to the transmitted frequency or phase are determined regularly with respect to the NBS time standard and are published monthly (since March 1966) in the NBS Time and Frequency Services Bulletin.

In conformity with the UTC scale, the carrier and modulation frequencies of WWV and WWVH are no longer offset significantly from nominal values. At the recommendation of the International Radio Con-

²Figures in brackets indicate the literature references at the end of this publication.

sultative Committee (CCIR), the frequency offset of UTC was made permanently zero relative to International Atomic Time (TAI) effective 0000 hours UTC January 1, 1972. Previously, the fractional frequency offset was -150 parts in 10^{10} during 1960 and 1961; -130 parts in 10^{10} during 1962 and 1963; -150 parts in 10^{10} during 1964 and 1965; and -300 parts in 10^{10} from 1966 through 1971.

1.2. Standard Audio Frequencies

(a) Program

The hourly broadcast format of WWV and WWVH is presented in figure 1. Standard audio frequencies of 440 Hz, 500 Hz, and 600 Hz are broadcast on each radio carrier frequency by the two stations. The duration of each transmitted standard tone is approximately 45 seconds. A 600-Hz tone is broadcast during odd minutes by WWV and during even minutes by WWVH. A 500-Hz tone is broadcast during alternate minutes unless voice announcements or silent periods are scheduled. The 440-Hz tone is broadcast beginning one minute after the hour at WWVH and two minutes after the hour at WWV. The 440-Hz tone period is omitted during the first hour of the UTC day.

No audio tones or special announcements are broadcast during a semi-silent period from either station. The periods are from 45 minutes to 50 minutes after the hour at WWV, and from 15 minutes to 20 minutes after the hour at WWVH.

(b) Accuracy

The audio frequencies are derived from the carrier and have the same basic accuracy as transmitted. Changes in the propagation medium sometimes result in fluctuations in the audio frequencies as received.

While the 100-Hz subcarrier (sec. 1.7) is not considered one of the standard audio frequencies, the modified IRIG-H time code transmitted continuously from WWV and WWVH does contain this frequency and may be used as a standard with the same accuracy as the audio and radio frequencies.

1.3. Standard Musical Pitch

The frequency 440 Hz, for the note A above middle C, is the standard of the music industry in many countries and has been in the United States since 1925. The radio broadcast of this standard was commenced by the National Bureau of Standards in 1937. The 440-Hz tone is broadcast for approximately 45 seconds beginning 1 minute after the hour at WWVH and 2 minutes after the hour at WWV. The tone is omitted during the zero hour of each UTC day. In addition to its application as a musical standard, the 440-Hz tone may be used to provide an hourly marker for chart recorders or other automated devices.

1.4. Standard Time Intervals

Seconds pulses at precise intervals are derived from the same frequency standard that controls the radio carrier frequencies; i.e., they commence at intervals of 5,000,000 cycles of the 5-MHz carrier. They are given by means of double-sideband amplitude modulation on each radio carrier frequency. Every minute, except the first of the hour, begins with an 800-millisecond tone of 1000 Hz at WWV and 1200 Hz at WWVH. The first minute of every hour begins with an 800-millisecond tone of 1500 Hz at both stations.

The 1-second markers are transmitted throughout all programs of WWV and WWVH except that the 29th and 59th markers of each minute are omitted. As noted above, the seconds marker which begins the minute is lengthened to 800 milliseconds. All other markers consist of a 5-millisecond pulse of 1000 Hz at WWV and 1200 Hz at WWVH, commencing at the beginning of the second (fig. 2).

The seconds pulse spectrum is composed of Fourier frequency components as shown in figure 2. Each pulse is preceded by 10 milliseconds of silence and followed by 25 milliseconds of silence. These 40-millisecond interruptions do not appreciably degrade the intelligibility of voice announcements.

1.5. Time Signals

(a) Program

Because of common usage of the name Greenwich Mean Time, the time announcements of WWV and WWVH are referred to by this name.³ More precisely, the actual reference time scale is the Coordinated Universal Time Scale maintained by the National Bureau of Standards, UTC(NBS). The UTC(NBS) scale is affected by very small frequency offsets relative to the NBS primary frequency standard as mentioned in section 1.1.(b).

The 0 to 24 hour system is used starting with 0000 for midnight at the Greenwich Meridian (longitude zero). The first two figures give the hour, and the last two figures give the number of minutes past the hour when the tone returns. The time announcement refers to the end of an announcement interval, i.e., to the time when the next 800-millisecond tone begins after the announcement.

At WWV a voice announcement of Greenwich Mean Time is given during the 7.5 seconds immediately preceding the minute. Just before 1035 GMT, for instance, the voice announcement (given in English) is: "At the tone—ten hours, thirty-five minutes Greenwich Mean Time."

At WWVH a voice announcement of Greenwich Mean Time occurs during the period 15 seconds to 7.5 seconds preceding the minute. It should be noted that the voice announcement for WWVH precedes

³As noted in a resolution of Commission 31 of the International Astronomical Union, August 1970: "The terms of 'GMT' and 'Z' are accepted as the general equivalents of UTC in navigation and communication." Standard time zones are established at intervals of 15° longitude east and west of the zero meridian. Local standard time differs from GMT by an integral number of hours.

FORMAT



FIGURE 1. *The hourly broadcast schedules of WWV and WWVH.*

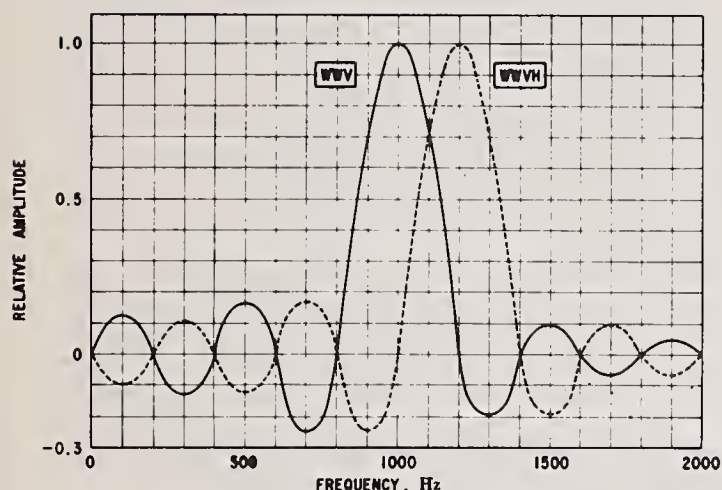


FIGURE 2. Sample characteristics of time pulse broadcast from NBS radio stations WWV and WWVH.

that of WWV by 7.5 seconds. However, the tone markers referred to in both announcements occur simultaneously, though they may not be so received due to propagation effects.

(b) Corrections


Prior to January 1, 1972, time signals broadcast from WWV and WWVH were kept in close agreement with UT2 (astronomical time) by making step adjustments of 100 milliseconds as necessary. On December 31, 1971 at 23h 59m 60.107600s UTC, the UTC(NBS) scale was retarded 0.107600 second to give it an initial difference of 10 seconds late with respect to the TAI scale as maintained by BIH. As of January 1, 1973, the UTC scale was 12 seconds late with respect to TAI.

Since the new UTC rate (effective January 1, 1972) is no longer adjusted periodically to agree with the earth's rotation rate, UTC departs more rapidly than before from earth rotation time (known as UT1), gaining about 1 second per year. Corrections to UTC are now made in step adjustments of exactly 1 second (called a leap second) as directed by BIH. The leap second adjustments ensure that UTC signals as broadcast will never differ from UT1 by more than about ± 0.7 second. (Note: the corrections no longer relate to UT2). BIH announces the occurrence of a leap second two months in advance.

The leap second adjustments are made as necessary at the end of the UTC month, preferably on 31 December or 30 June. Thus, when required, a leap second is inserted between the end of the 60th second of the last minute of the last day of a month and the beginning of the next minute.⁴ This is

WWV AND WWVH SECONDS PULSES


THE SPECTRA ARE COMPOSED OF DISCRETE FREQUENCY COMPONENTS AT INTERVALS OF 1.0 Hz. THE COMPONENTS AT THE SPECTRAL MAXIMA HAVE AMPLITUDES OF 0.005 VOLT FOR A PULSE AMPLITUDE OF 1.0 VOLT. THE WWV PULSE CONSISTS OF FIVE CYCLES OF 1000 Hz. THE WWVH PULSE CONSISTS OF SIX CYCLES OF 1200 Hz.

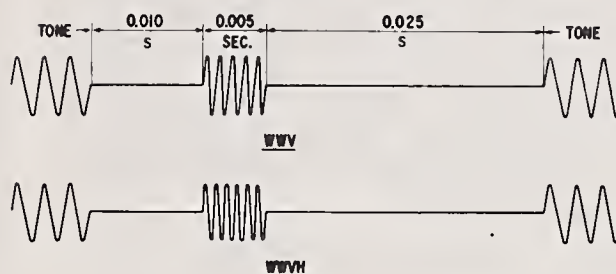

analogous to adding an extra day (which could be called a leap day) during a leap year. Figure 3 illustrates how events are dated in the vicinity of a leap second.


A positive leap second was inserted in the transmissions of all NBS broadcast stations at the end of June 1972 and December 1972 as announced by BIH.

NORMAL MINUTE (NO LEAP SECOND ADDED)

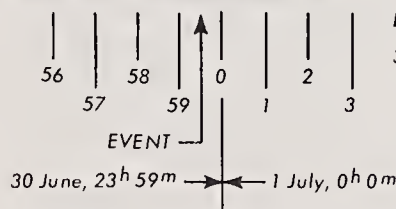

Dating of Event Shown:
30 June, 23h 59m 59.5s UTC

MINUTE WITH LEAP SECOND ADDED

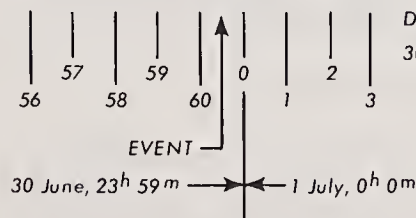

Dating of Event Shown:
30 June, 23h 59m 60.5s UTC

FIGURE 3. Illustration of how events will be dated in the vicinity of a leap second.

⁴Effective January 1, 1972: During the minute in which a one-second step correction occurs, that minute will contain either 59 or 61 seconds depending on whether the correction is negative or positive.

(c) Coding of UT1 Corrections

The method of coding UT1 corrections uses a system of double seconds pulses. The first through the seventh seconds pulses, when doubled, indicate a "plus" correction, and from the ninth through the fifteenth a "minus" correction. The eighth seconds pulse is not used. The amount of correction in units of 0.1 second is determined by counting the number of seconds pulses that are doubled. For example, if the first, second, and third seconds pulses are doubled, the UT1 correction is "plus 0.3 second." Or if the ninth, tenth, eleventh, twelfth, thirteenth, and fourteenth seconds pulses are doubled, the UT1 correction is "minus 0.6 second." To obtain UT1, use the algebraic relationship,

$$UT1 = \text{Broadcast} + \text{Correction}$$

That is, add the correction to the time broadcast if "plus" is transmitted; subtract if "minus" is transmitted. Thus, a clock keeping step with the time signals broadcast will be early with respect to UT1 if a "minus" is broadcast. These corrections will be revised as needed, the new value appearing for the first time during the hour after 0000 UTC.

UT1 corrections are also encoded in the time code (sec. 1.7) transmitted continuously on a 100-Hz subcarrier from WWV and WWVH. The value of the correction is indicated by the weight of the control functions that occur at the end of the code frame. The "plus or minus" indication is encoded in the first control function. If control function #1 is a binary one, the correction is positive; if it is a binary zero, the correction is negative. The correction is expressed to the nearest 0.1 second.

1.6. Official Announcements

The 45-second announcement segments available every other minute from WWV and WWVH are offered on a subscription basis to other agencies of the Federal Government to disseminate official and public service information. The accuracy and content of these announcements is the responsibility of the originating agency—not necessarily NBS.

All segments except those reserved for NBS use and the semi-silent periods are available. Arrangements for use of segments at the two stations may be made through the Frequency-Time Broadcast Services Section, 273.02, National Bureau of Standards, Boulder, CO 80302.

(a) Propagation Forecasts

A forecast of radio propagation conditions is broadcast in voice from WWV at 14 minutes after every hour. The announcements are short-term forecasts and refer to propagation along paths in the North Atlantic area, such as Washington, D.C. to London or New York to Berlin. These forecasts are also applicable to high latitudes provided the appropriate time correction is made for other latitudes.

The forecasts are prepared by the Telecommunications Service Center, OT, Boulder, Colorado.⁵

The broadcast consists of the statement, "The radio propagation quality forecast at. . . (one of the following times: 0100, 0700, 1300, or 1900 GMT) is. . . (one of the following adjectives: excellent, very good, good, fair-to-good, fair, poor-to-fair, poor, very poor, or useless). Current geomagnetic activity is. . . (one of the following characteristics: quiet, unsettled, or disturbed)."

The propagation forecast announcements are repeated in synoptic form comprised of a phonetic and a numeral. The phonetic (Whiskey, Uniform, or November) identifies the radio quality at the time the forecast is made. The numeral indicates on a scale of 1 to 9 the radio propagation quality expected during the six-hour period after the forecast is issued. The meaning of the phonetics and numerals are:

<u>Phonetic</u>	<u>Meaning</u>
Whiskey	disturbed
Uniform	unsettled
November	normal
<u>Numeral</u>	<u>Meaning</u>
One	useless
Two	very poor
Three	poor
Four	poor-to-fair
Five	fair
Six	fair-to-good
Seven	good
Eight	very good
Nine	excellent

If, for example, propagation conditions are normal and expected to be good during the next six hours, the coded forecast announcement would be "November Seven."

(b) Geophysical Alerts

Current geophysical alerts (Geoalerts) as declared by the World Warning Agency of the International Ursigram and World Days Service (IUWDS) are broadcast in voice from WWV at 18 minutes after each hour and from WWVH at 45 minutes after each hour. The messages are changed daily at 0400 UTC with provisions to provide real-time data alerts of outstanding occurring events. These are followed by a summary of selected solar and geophysical events during the previous 24 hours. Messages concerning these forecasts are prepared by the Space Environment Laboratory, NOAA, Boulder, Colorado.⁶

⁵For details regarding these forecasts, write Kent D. Boggs, Telecommunications Services Center, OT, Boulder, CO 80302.

⁶For details of these announcements, write Miss J. Virginia Lincoln, Deputy Secretary IUWDS, NOAA, Boulder, CO 80302.

(c) Weather Information

Weather information about major storms in the Atlantic and Pacific areas is broadcast from WWV and WWVH respectively.⁷ The brief messages are designed to tell mariners of storm threats in their areas. If there are no warnings in the designated areas, the broadcasts will so indicate. The ocean areas involved are those for which the U.S. has warning responsibility under international agreement. The regular times of issue by the National Weather Service are 0500, 1100, 1700 and 2300 UTC for WWV and 0000, 0600, 1200, and 1800 UTC for WWVH. These broadcasts are updated effective with the next scheduled announcement following the time of issue.

WWV broadcasts information about storms in the western North Atlantic, and WWVH lists storms in the eastern and central part of the North Pacific. These broadcasts are given in voice from WWV at 10 and 12 minutes after each hour and from WWVH at 49 and 51 minutes after each hour.

Sample broadcasts that exemplify the type of information mariners might expect to receive from WWV, for instance, are as follows:

"North Atlantic weather, West of 35 West at 1700 GMT: Hurricane Donna, intensifying, 24 North, 60

West, moving Northwest, 20 knots, winds 75 knots; storm, 65 North, 35 West, moving East, 10 knots, winds 50 knots, seas 15 feet."

(d) ATM Skylab Messages

In January 1973, WWV and WWVH began transmitting information messages regarding the Apollo Telescope Mount (ATM) observation missions which are scheduled during the Skylab Program.⁸ These announcements, designed to coordinate efforts of participating ground stations throughout the world, include actual ATM observation program accomplishments and planned programs to be executed throughout the mission. The regular times of issue by the Space Environment Laboratory, NOAA, are at 0222, 0622, 1022, 1422, 1822 and 2222 from WWV and at 0225, 0625, 1025, 1425, 1825 and 2225 from WWVH. These broadcasts are updated effective with the next scheduled announcement with provisions to provide real time alert messages in the event of unusual solar activity. The messages are given in voice from WWV at 22 and 24 minutes after the hour and repeated from WWVH at 25 and 27 minutes after the hour.

⁷For information regarding these broadcasts, contact George P. Cressman, Director, National Weather Service, Silver Spring, MD 20910.

⁸For further information regarding these messages, write Robert B. Doeker, Chief, Space Environment Services Center, NOAA, Boulder, CO 80302.

FORMAT H, SIGNAL HDD1, IS COMPOSED OF THE FOLLOWING:

- 1) 1 ppm FRAME REFERENCE MARKERS R = (P₀ AND 1.D3 SECOND "HOLE")
- 2) BINARY CODED DECIMAL TIME-OF-YEAR CODE WORO (23 DIGITS)
- 3) CONTROL FUNCTIONS (9 DIGITS) USED FOR UT₁ CORRECTIONS, ETC.
- 4) 6 ppm POSITION IDENTIFIERS (P₀ THROUGH P₅)
- 5) 1 ppm INDEX MARKERS

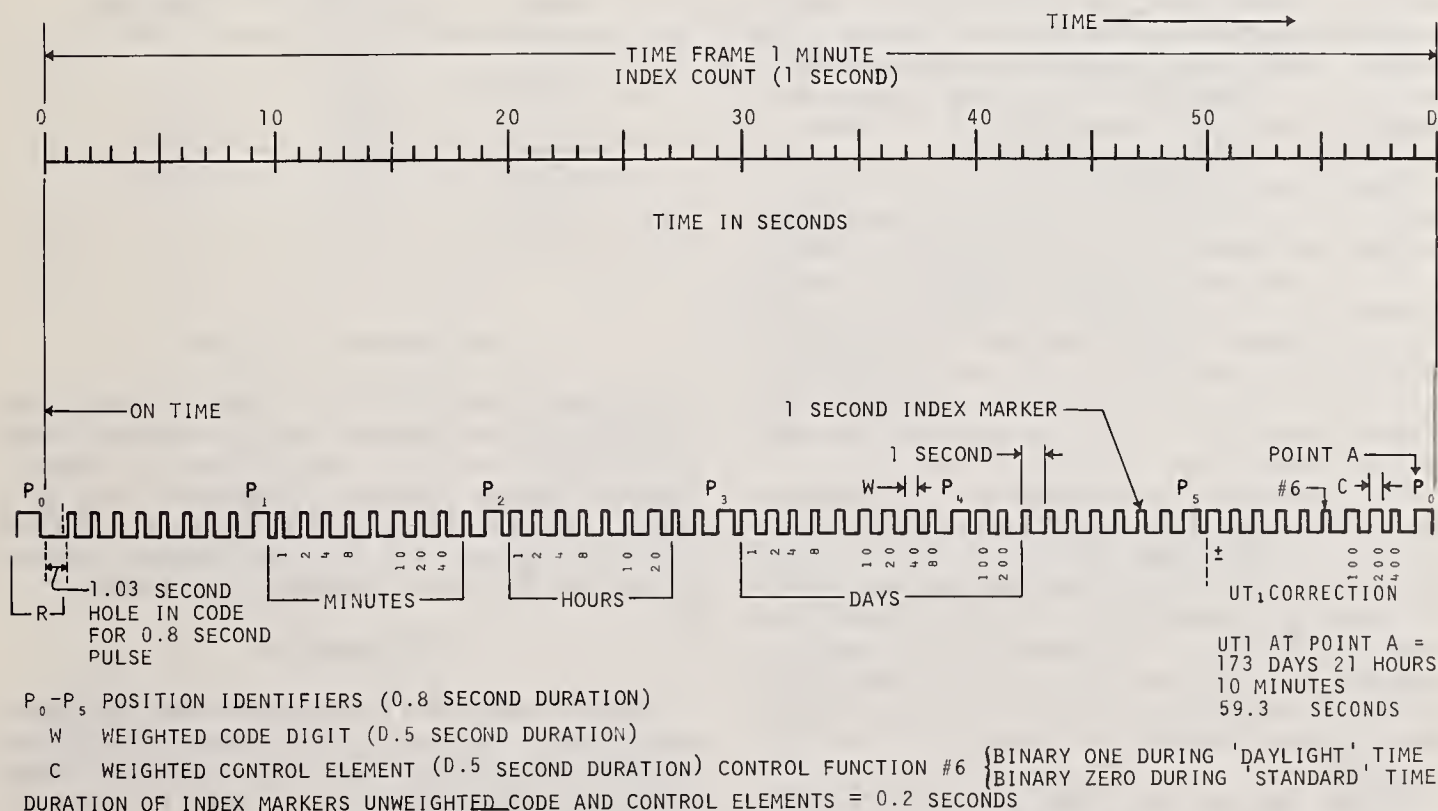


FIGURE 4. Chart of time code transmissions from NBS radio stations WWV and WWVH.

1.7. WWV/WWVH Time Code

On July 1, 1971, WWV commenced broadcasting the time code shown in figure 4. The time code is now transmitted continuously by both WWV and WWVH on a 100-Hz subcarrier. This time code provides a standardized timing base for use when scientific observations are made simultaneously at widely separated locations. It may be used, for instance, where signals telemetered from a satellite are recorded along with the time code; subsequent analysis of the data is then aided by having unambiguous time markers accurate to about 10 milliseconds.

The code format being broadcast is a modified IRIG-H time code. The code is produced at a 1-pps rate and is carried on 100-Hz modulation. The 100-Hz subcarrier is synchronous with the code pulses so that 10-millisecond resolution is readily obtained.

The code contains UTC time-of-year information in minutes, hours, and day of year. Seconds information may be obtained by counting pulses.

The binary coded decimal (BCD) system is used. Each minute contains seven BCD groups in this order: two groups for minutes, two groups for hours, and three groups for day of year. The code digit weighting is 1-2-4-8 for each BCD group multiplied by 1, 10, or 100 as the case may be. A complete time frame is 1 minute. The binary groups follow the 1-minute reference marker.

In the standard IRIG-H format, "on-time" occurs at the leading edge of all pulses. A binary zero pulse comprises 20 cycles of 100-Hz amplitude modulation; a binary one pulse comprises 50 cycles of 100-Hz amplitude modulation. Because of the 40-millisecond hole that accompanies each seconds marker in the WWV/WWVH format, however, the leading 30-millisecond portion in the WWV/WWVH time code is deleted. The leading edge of each pulse coincides with a positive-going zero-axis crossing of the 100-Hz modulating frequency.

Based upon a clocking rate of 60 markers per minute, the code contains six position identification markers per minute and a minute reference marker. Each 6-per-minute position identification marker consists of a 0.8-second pulse preceding a code group. The 1-per-minute reference marker consists of a 0.8-second pulse followed by a 1.03-second hole in the code and eight binary zero pulses in succession. The minute begins with the 1.03-second hole preceding the first binary zero.

UT1 corrections to the nearest 0.1 second are encoded via control function pulses during the final ten seconds of the frame. Control function #1, which occurs as the 50th second pulse, discloses the sense of the correction. Control function #1 is a binary zero when the UT1 correction is negative and a binary one when the correction is positive. Control function #7, #8, and #9, which occur as the 56th, 57th, and 58th second pulses, identify the magnitude of the UT1 correction.

Control function #6, which occurs as the 55th second pulse, is programmed as a binary one

throughout those weeks when Daylight Saving Time is in effect and as a binary zero when Standard Time is in effect. The setting of this function is changed at 0000 GMT on the last Sunday of April and October respectively. Throughout the U.S. mainland this schedule allows several hours for the function to be received before the change becomes effective locally, i.e., at 2:00 AM. Thus, control function #6 provides a feature through which clocks or digital recorders operating on local time can be programmed to make an automatic one-hour adjustment in changing from Daylight Saving Time to Standard Time and vice versa.

1.8. Station Identification

WWV and WWVH identify by voice every 30 minutes. The station identification voice announcements are automatically synchronized recordings, not live broadcasts. The regular announcer for WWV is Mr. Don Elliott of Atlanta, Georgia; the regular announcer for WWVH is Mrs. Jane Barbe, also of Atlanta.

1.9. Radiated Power, Antennas and Modulation

(a) Radiated Power

Frequency MHz	Radiated Power, kW	
	WWV	WWVH
2.5	2.5	5
5	10	10
10	10	10
15	10	10
20	2.5	2.5
25	2.5	---

(b) Transmitting Antennas

The broadcasts on 5, 10, 15, and 20 MHz from WWVH are from phased vertical half-wave dipole arrays. They are designed and oriented to radiate a cardioid pattern directing maximum gain in a westerly direction. The 2.5-MHz antenna at WWVH and all antennas at WWV are half-wave vertical dipoles which radiate omnidirectional patterns.

(c) Modulation

At WWV and WWVH, double sideband amplitude modulation is employed with 50 percent modulation on the steady tones, 25 percent for the IRIG-H code, 100 percent for seconds pulses, and 75 percent for voice.

2. WWVB Broadcast Services

WWVB transmits a standard radio frequency, standard time signals, time intervals, and UT1 corrections. The station is located near WWV on the same site. The coordinates of WWVB are

40° 40' 28.3" N 105° 02' 39.5" W.

Alternating its scheduled maintenance periods with those of experimental and intermittently operated station WWVL, it suspends operation for several hours between 1300 UTC and 2400 UTC every other Tuesday. Otherwise the service is continuous.

(a) Program

WWVB broadcasts a standard radio carrier frequency of 60 kHz with no offset. It also broadcasts a time code consistent with the internationally coordinated time scale UTC(NBS).

(b) Accuracy and Stability

The frequency of WWVB is normally within its prescribed value to better than 2 parts in 10^{11} .


Deviations from day to day are less than 1 part in 10^{12} . Effects of the propagation medium on received signals are relatively minor at low frequencies (LF); therefore, the accuracy of the transmitted signals may be fully utilized by employing appropriate receiving and averaging techniques [3, 4].

(c) Station Identification

WWVB identifies itself by advancing its carrier phase 45° at 10 minutes after every hour and returning to normal phase at 15 minutes after the hour. WWVB can also be identified by its unique time code.

(d) Radiated Power, Antenna, and Coverage

The effective radiated power from WWVB is 13 kW. The antenna is a 122-meter, top-loaded vertical installed over a radial ground screen. Some measured field intensity contours are shown in figure 5.

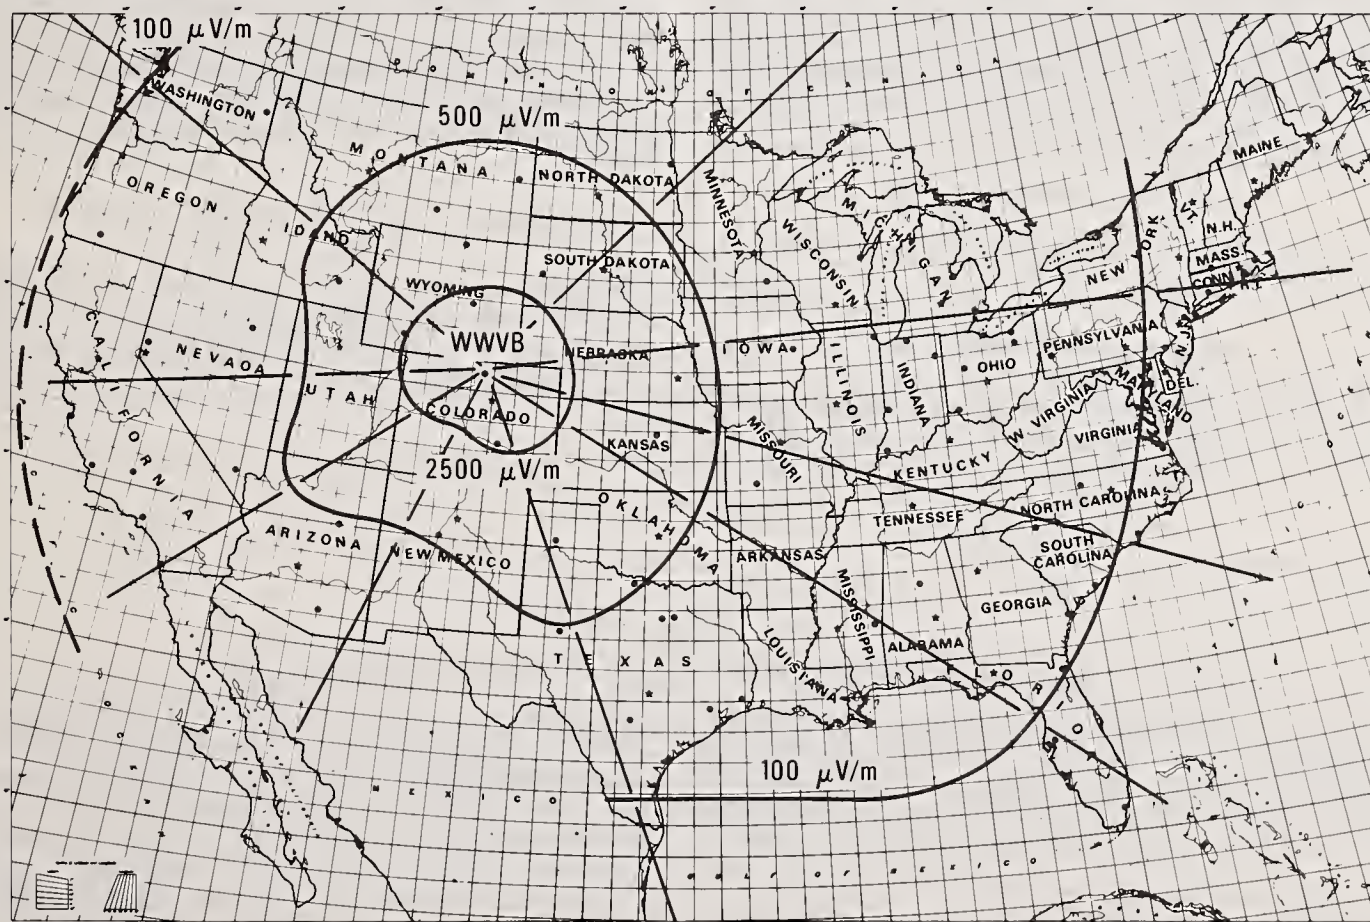

MEASURED FIELD INTENSITY CONTOURS: WWVB @13 kW ERP

FIGURE 5. Measured field intensity contours: WWVB @ 13 kW ERP

2.1. WWVB Time Code

(a) Code and Carrier

On July 1, 1965, WWVB began broadcasting time information using a carrier-level-shift time code. The code, which is binary coded decimal (BCD), is broadcast continuously and is synchronized with the 60-kHz carrier signal. Features of the WWVB time code are shown in figure 6.

(b) Marker Generation

The signal consists of 60 markers each minute, with one marker occurring during each second. (Time progresses from left to right.) Each marker is generated by reducing the power of the carrier by 10 dB at the beginning of the corresponding second and restoring it 0.2 second later for an uncoded marker or a binary zero, 0.5 second later for a binary one, and 0.8 second later for a 10-second position marker or for a minute reference marker. The leading edge of every negative-going pulse is on time.

(c) Marker Order and Groups

The 10-second position markers, labeled P0 through P5 in figure 6, occur respectively as the 59th, 9th, 19th, 29th, 39th, and 49th second pulses of each minute.⁹ The minute reference marker begins at zero

⁹Effective January 1, 1972: During the minute in which a one-second step correction occurs, that minute will contain either 59 or 61 seconds.

seconds. Uncoded markers occur periodically as the 4th, 14th, 24th, 34th, 44th, and 54th seconds pulses and also as the 10th, 11th, 20th, 21st, 35th, 55th, 56th, 57th, and 58th seconds pulses of each minute. Thus every minute contains twelve groups of five markers, each group ending either with a position marker or an uncoded marker.

(d) Information Sets

Once every minute the code presents complete UTC(NBS) time-of-year information in minutes, hours, and day of the year as well as the estimated difference between UTC and UT1. Seconds information can be obtained by counting pulses.

The first two groups in the frame specify the minute of the hour. The third and fourth groups comprise a set which specifies the hour of the day. The fifth, sixth, and seventh groups form a set which specifies the day of the year. A set made up of the ninth, tenth, and eleventh groups specifies the number of milliseconds that must be added to or subtracted from the time as broadcast in order to obtain UT1. The twelfth group is not used.

The positive or negative relationship of the UT1 scale with respect to UTC is indicated by the eighth group. If UT1 is late with respect to UTC, a binary one (labeled SUB in figure 6) will be broadcast in the eighth group as the 37th second pulse of the minute. If UT1 is early with respect to the code time, binary ones (labeled ADD) will be broadcast in the eighth group as the 36th and 38th second pulses of the minute.

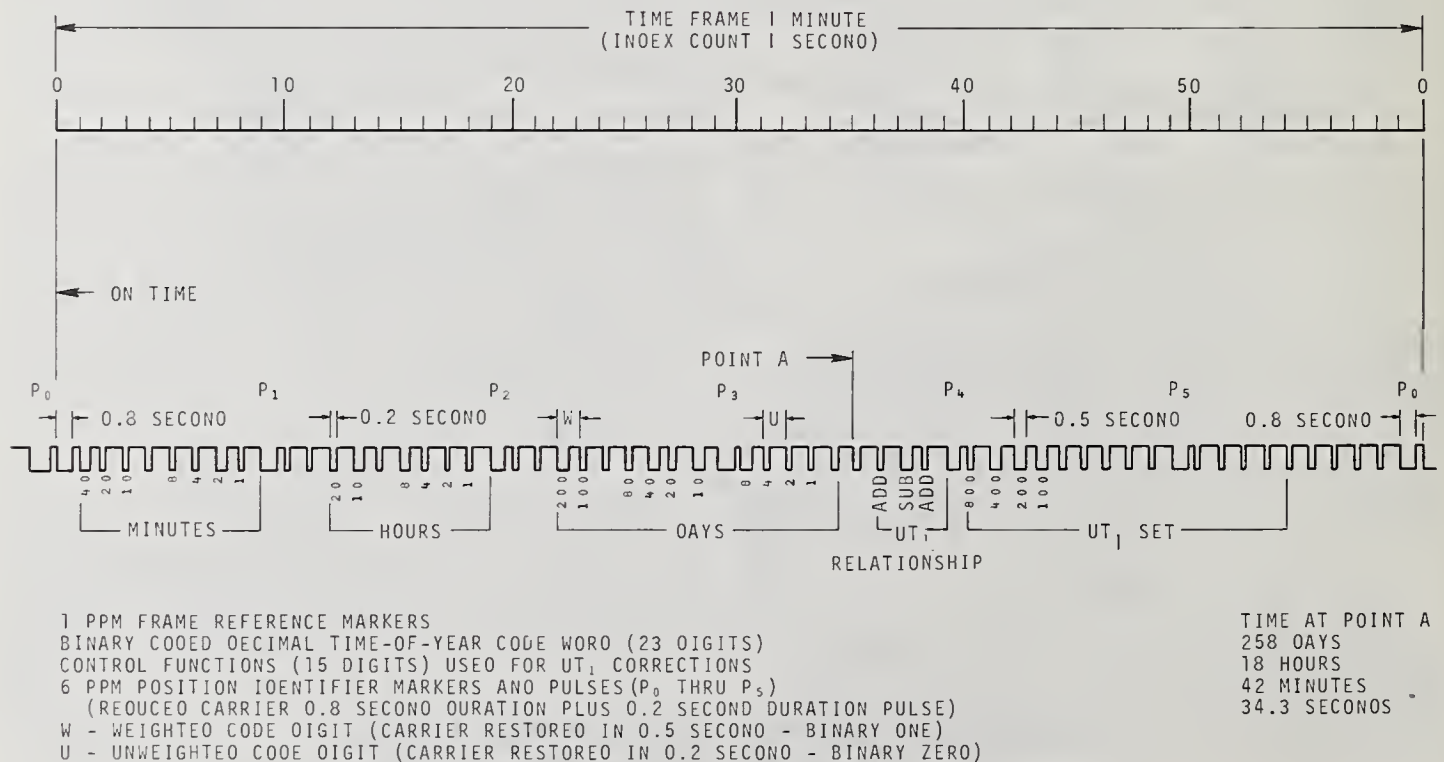


FIGURE 6. Chart of time code transmissions from NBS radio station WWVB.

(e) Digital Information

When used to convey numerical information, the four coded markers used as digits in a BCD group are indexed 8-4-2-1 in that order. Sometimes only the last two or three of the coded markers in a group are needed, as in the first groups of the minutes, hours, and days sets. In these cases, the markers are indexed 2-1, or 4-2-1, accordingly. The indices of the first group in each set which contains two groups are multiplied by 10, those of the second group of such a set are multiplied by 1. The indices of the first group in each set which contains three groups are multiplied by 100, those of the second group by 10, and those of the third group by 1.

Example

A specific example is indicated in figure 6. The occurrence of two binary ones in the "minutes set" indicates that the minute contemplated is the $40 + 2 = 42$ nd minute. Similarly, the two binary ones in the "hours set" indicate the $10 + 8 = 18$ th hour of the day, while the four binary ones in the "day set" indicate the $200 + 40 + 10 + 8 = 258$ th day of the year. It is seen from the "UT1 Relationship" group and the "UT1 Set" that one should *subtract*, from any second in this minute, $400 + 200 + 100 = 700$ milliseconds to get an estimate of UT1. For example, the 35th UT1 interval would end 700 milliseconds (or 0.7 second) *later* than the end of the 35th second. In other words, the UT1 scale reading for the end of the 35th second would be 18h 42m 34.3s, since $35.0s - 0.7s = 34.3s$.

3. WWVL Experimental Broadcasts

WWVL broadcasts experimental programs, usually involving multiple frequencies. The station is located in the same building with WWVB and on the same site with WWV. The coordinates of WWVL are:

40°40'51.3" N 105°03'00.0" W.

4. How NBS Controls the Transmitted Frequencies

A simplified diagram of the NBS frequency control system [5] is shown in figure 7. The entire system depends upon the basic frequency reference shown in this diagram as the Cesium (Cs) Atomic Beam. This standard is used to calibrate the oscillators, dividers and clocks which generate the controlled frequency and the NBS time scales.

Utilizing the line-10 horizontal synchronizing pulses from a local television station, the Fort Collins master clock is compared on a daily basis with the NBS master clock [6]. All other clocks and time-code

Effective 0h UTC, 1 July 1972, regularly scheduled transmissions from WWVL were discontinued. Contingent upon need and availability of funds this station now broadcasts experimental programs on an intermittent basis only. Transmissions can be made available on a subscription basis to civil organizations as well as agencies of the Federal government. Arrangements for use of WWVL should be made through the Frequency-Time Broadcast Services Section, 273.02, National Bureau of Standards, Boulder, CO 80302.

(a) Program Format

WWVL transmits only carrier frequencies with no modulation. In accordance with the new UTC system the frequency offset used prior to January 1, 1972, was reduced to zero on that date. The format and frequencies used by WWVL are subject to change to meet the requirements of the particular experiment being conducted.

(b) Accuracy and Stability

The transmitted frequencies from WWVL are normally within their prescribed values to better than 2 parts in 10^{11} . Deviations from day to day are less than 1 part in 10^{12} . Because of the excellent coverage and phase stability in the very low frequency (VLF) region, this mode of transmission permits the frequencies to be received with an accuracy approaching that of signals at the transmitter itself.

(c) Station Identification

WWVL is identified only by its unique program format.

(d) Radiated Power, Antenna

The effective radiated power from WWVL is 2 kW. The antenna is a 122-meter, top-loaded vertical installed over a radial ground screen.

generators at the Fort Collins site are then compared with the Fort Collins master clock. Frequency corrections of the WWVB and WWVL quartz crystal oscillators are based on their phase relative to the NBS master clock.

The transmissions from WWV and WWVH are controlled by three cesium standards located at each site. To ensure accurate time transmissions from each station, the time-code generators are compared with the station's master clock several times each day.

NATIONAL BUREAU OF STANDARDS FREQUENCY AND TIME FACILITIES

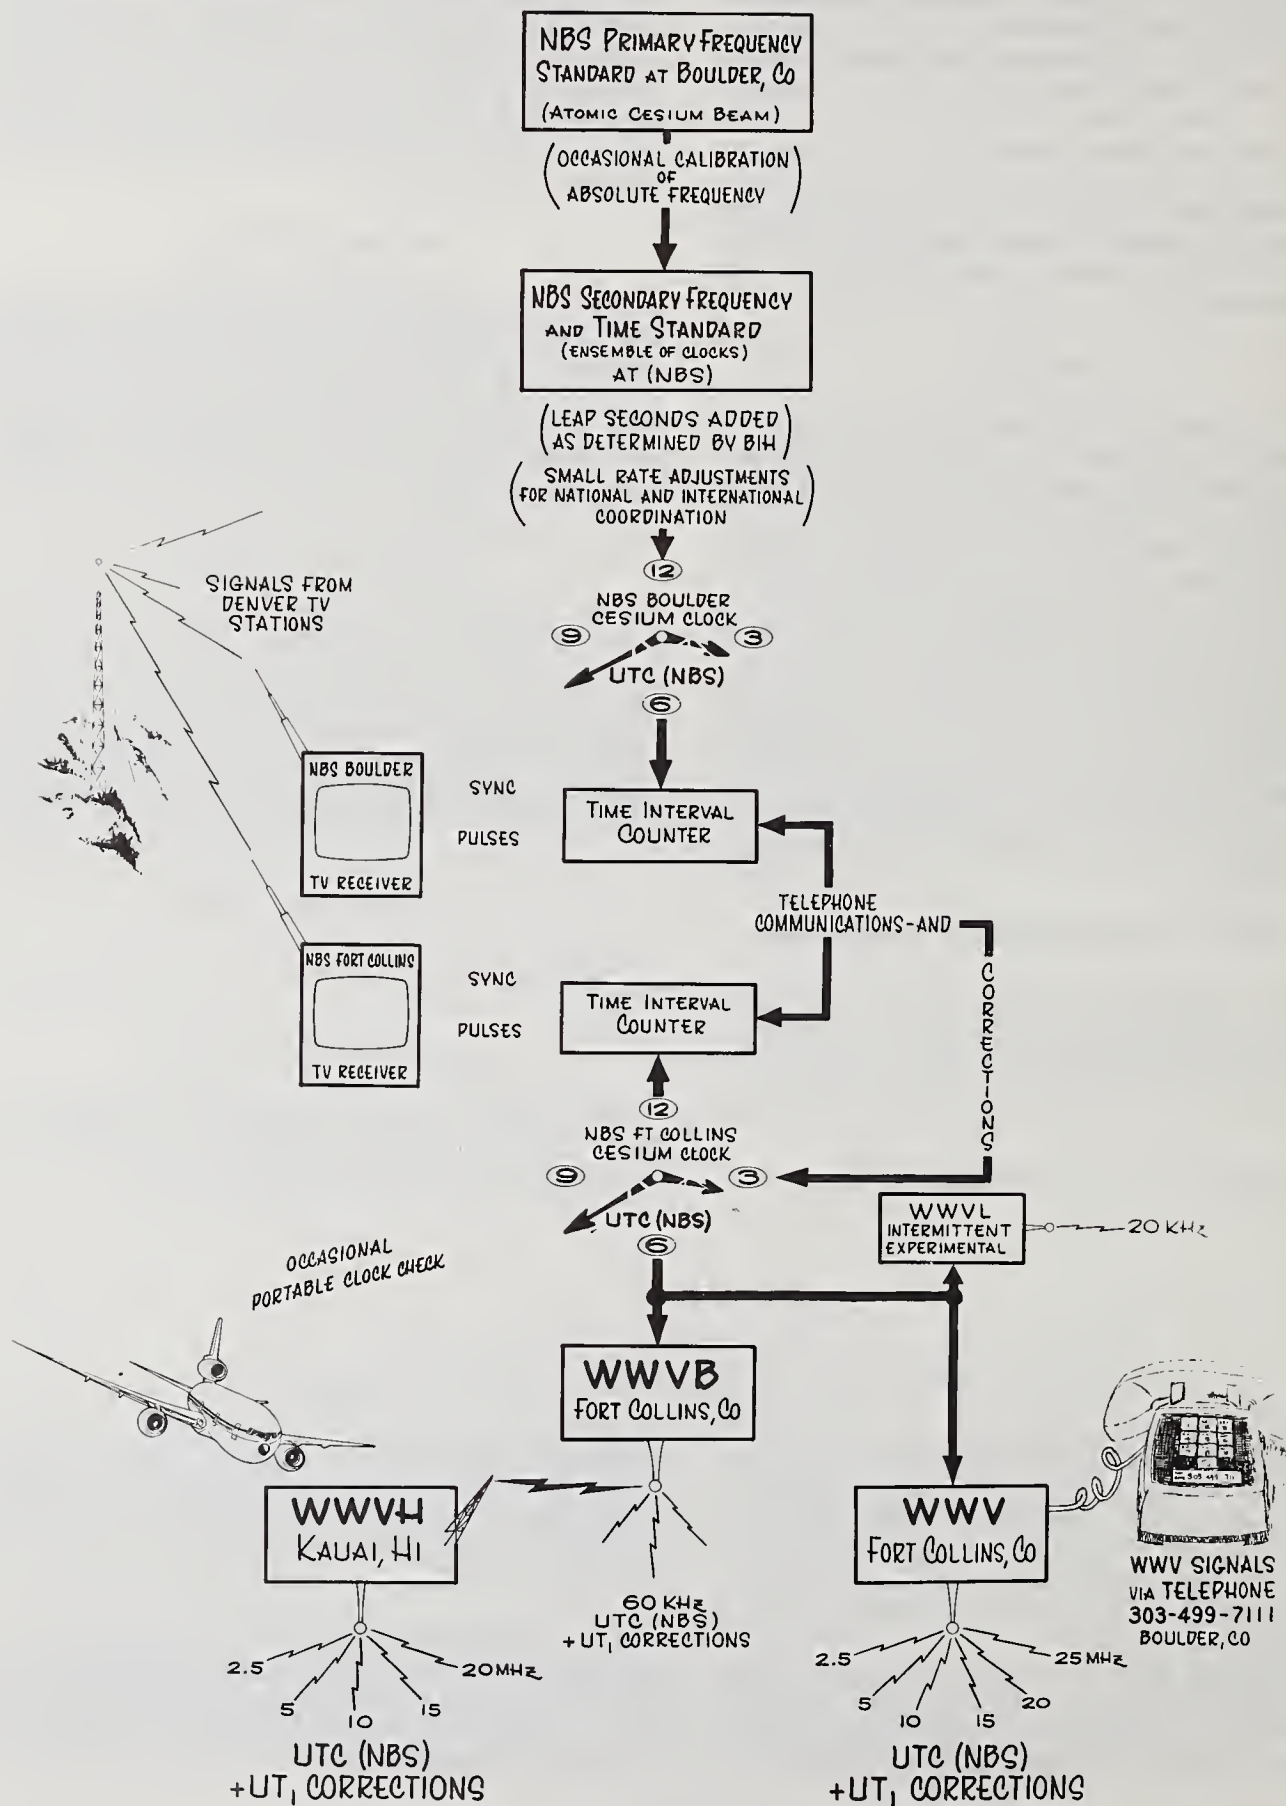


FIGURE 7. NBS frequency control system.

Control of the signals transmitted from WWVH is based not only upon the cesium standards, but upon signals from WWVB as received by phase-lock receivers. The cesium standards controlling the transmitted frequencies and time signals are continuously compared with the received signals.

To ensure that systematic errors do not enter into the system, the NBS time scale is often compared with the transmitting station clocks by the use of a very precise portable clock.

5. References

- [1] Glaze, D.J., Improvements in Atomic Beam Frequency Standards at the National Bureau of Standards, *IEEE Trans. on Instr. and Meas.*, **IM-19**, No. 3, 156-160 (Aug. 1970).
- [2] National Standards of Time and Frequency in the United States, *Proc. IRE*, **IRE-48**, No. 105 (1960).
- [3.] Allan, D.W., and Barnes, J.A., Some Statistical Properties of LF and VLF Propagation, AGARD Conf. Proc. No. 33, Phase and Frequency Instabilities in Electromagnetic Wave Propagation (Proc. AGARD/EPC 13th Symp., Ankara, Turkey, Oct. 9-12, 1967). K. Davies, Ed., Chapter 15 (Technivision Services, Slough, England, in press).
- [4.] Guetrot, A., Higbie, L.S., Lavanceau, J., and Allan, D.W., An Application of Statistical Smoothing Techniques on VLF Signals for Comparison of Time Between USNO and NBS, (Summary) *Proc. 23rd Annual Symp. on Frequency Control*, Fort Monmouth, NJ, (May 6-8, 1969), p. 248.
- [5.] Milton, J.B., Standard Time and Frequency: Its Generation, Control, and Dissemination from the National Bureau of Standards Time and Frequency Division, NBS Technical Note 379 (Aug. 1969).
- [6.] Tolman, J., Ptacek, V., Soucek, A., and Stecher, R., Microsecond clock comparisons by means of TV synchronizing pulses, *IEEE Trans.—Instr. and Meas.* **IM-16**, No. 3, (Sept. 1967). pp. 247-254.



NBS Fort Collins facility showing WWV transmitter building.



WWVH transmitter building, Kekaha, Kauai, Hawaii.



WWVB/WWVL transmitter building and antennas.

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET	1. PUBLICATION OR REPORT NO. NBS SP-236, 1973 ed.	2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE NBS Frequency and Time Broadcast Services--Radio Stations WWV, WWVH, WWVB, WWVL		5. Publication Date May 1973	
		6. Performing Organization Code	
7. AUTHOR(S) P. P. Viezbicke, Editor		8. Performing Organization	
9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS, Boulder Labs. DEPARTMENT OF COMMERCE Boulder, Colorado 80302		10. Project/Task/Work Unit No. 2730121	
		11. Contract/Grant No.	
12. Sponsoring Organization Name and Address Same as 9.		13. Type of Report & Period Covered Final	
		14. Sponsoring Agency Code	
15. SUPPLEMENTARY NOTES			
16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.) Detailed descriptions are given of the technical services provided by the National Bureau of Standards radio stations WWV, WWVH, WWVB and WWVL. These services are: 1. Standard radio frequencies; 2. Standard audio frequencies; 3. Standard musical pitch; 4. Standard time intervals; 5. Time signals; 6. UT1 corrections; and 7. Official announcements. In order to provide users with the best possible services, occasional changes in broadcasting schedules are required. This publication shows the schedules in effect on January 1, 1973. Annual revisions will be made. Current data relating to standard frequencies and time signals are available monthly in the Time and Frequency Services Bulletin. Advance notices of changes occurring between revisions will be sent to users of NBS broadcast services who request such notice on the basis of need.			
17. KEY WORDS (Alphabetical order, separated by semicolons) Broadcast of standard frequencies; high frequency; low frequency; standard frequencies; time signals; very low frequency.			
18. AVAILABILITY STATEMENT <input checked="" type="checkbox"/> UNLIMITED. <input type="checkbox"/> FOR OFFICIAL DISTRIBUTION. DO NOT RELEASE TO NTIS.		19. SECURITY CLASS (THIS REPORT) UNCLASSIFIED	21. NO. OF PAGES 19
		20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED	22. Price \$ 45 Domestic post- paid, \$ 35 G.P.O. Bookstore.

NBS DISTRIBUTION OF FREQUENCY AND TIME


STANDARD RADIO
TRANSMITTING SITE
FT. COLLINS



WWVL

WWV

WWVB



BOULDER

HAWAII WWVH

REFERENCE
SIGNAL



U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards
Washington, D.C. 20234

 OFFICIAL BUSINESS

Penalty for Private Use, \$300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE
COM-215

