NIST Standard Reference Materials® Catalog

SRM

NIST SP 260
JANUARY 2006







To order:
www.nist.gov/srm
Phone: 301-975-6776
Fax: 301-948-3730
Email: srminfo@nist.gov

NIST
National Institute of Standards and Technology
Technology Administration
U.S. Department of Commerce

Mail Orders

Mail Orders (in English) for all NIST SRMs/RMs should be directed to:

Standard Reference Materials Program
National Institute of Standards and Technology
100 Bureau Drive, Stop 2322
Gaithersburg, MD 20899-2322
USA

Telephone: (301) 975-6776
Fax: (301) 948-3730
E-Mail: srminfo@nist.gov
www.nist.gov/srm

Each purchase order should give the number of units, SRM number, and name of each reference material requested.

Example:
1 unit, SRM 930e Glass Filters for Spectrophotometry

The following information must be included with each order:

- end user contact information
- shipping address
- billing address
- telephone number
- fax number
- purchase order number
- a customer identification number, i.e., a social security number (SSN) for consumer customers, tax identification number (TIN) for commercial customers, or agency code (ALC) for U.S. Government customers

Note: NIST SRMs/RMs are only distributed in the units of issue listed in this catalog and its supplement (price list). All purchase orders must be in English.

Receipt of an order does not imply acceptance of provisions set forth in the order that are contrary to the policies, practices, or regulations of the National Institute of Standards and Technology or the United States Government.

NIST SP 260 - 2006

Standard Reference Materials® Catalog

January 2006

Editors: Regina R. Montgomery and Joan C. Sauerwein

Standard Reference Materials Program
Technology Services
National Institute of Standards and Technology
Gaithersburg, MD 20899-2320

U.S. Department of Commerce
Carlos M. Gutierrez, Secretary

Technology Administration
Michelle O'Neill, Acting Under Secretary of Commerce for Technology

National Institute of Standards and Technology
William A. Jeffrey, Director

Please visit our website
www.nist.gov/srm

Certain commercial entities, equipment, or materials may be identified in this document in order to describe an experimental procedure or concept adequately. Such identification is not intended to imply recommendation or endorsement by the National Institute of Standards and Technology, nor is it intended to imply that the entities, materials, or equipment are necessarily the best available for the purpose.

National Institute of Standards and Technology
Special Publication 260
Supersedes NIST SP 260, 2005
144 pages (January 2006)
CODEN: NSPUE2

U.S. GOVERNMENT PRINTING OFFICE
WASHINGTON: 2006

For sale by the Superintendent of Documents,
U.S. Government Printing Office
Internet: bookstore.gpo.gov
Phone: (202) 512-1800
Fax: (202) 512-2250
Mail: Stop SSOP, Washington, DC 20402-0001

NIST Standard Reference Materials® (SRMs®) are used by industry, government, and academia to ensure the highest quality measurements. This catalog lists over 1100 individual reference materials produced and sold by NIST, each with carefully assigned values for chemical composition and physical properties.

SRMs find use in calibrating instruments and in assuring the long-term integrity of quality assurance programs. They are also key mechanisms for verifying important measurement results and in developing new measurement methods. SRMs provide users with tools to assist in establishing traceability of measurement results to NIST.

Each SRM comes carefully packaged with documentation containing assigned values with stated uncertainties and a material safety data sheet, if applicable. Details on use, stability, and NIST analytical methods are also included.

For further information and prices, contact us at:

Telephone: (301) 975-6776
Fax: (301) 948-3730
E-mail: srminfo@nist.gov
www.nist.gov/srm

Engineering Materials

Food & Agriculture

Health & Clinical

Forensics

Environmental

High Purity Materials

Industrial Materials

Table of Contents

Physical Properties

Radioactivity

Industrial Hygiene

Engineering Materials

SIZING

Particle Size

These SRMs are used for particle size measuring instruments, including light scattering, electrical zone flow-through counters, optical and scanning electron microscopes, sedimentation systems, and wire cloth sieving devices.

SRM	Particle Diameter (Mesh Size)	Unit Size (g)
Glass Beads, Soda Lime		
1021	2 µm to 12 µm	4
1003c	20 µm to 50 µm (No. 635 to No. 325)	28
1004b	53 µm to 125 µm (No. 270 to No. 120)	43
1017b	106 µm to 355 µm (No. 140 to No. 45)	70
1018b	250 µm to 710 µm (No. 60 to No. 25)	87
1019b	850 µm to 2000 µm (No. 20 to No. 10)	200
Sand		
RM 8010	(No. 30 to No. 325)	3 × 150 g
Silicon Nitride (equiaxed)		
659	0.2 µm to 10 µm	5 × 2.5 g
Zirconium Oxide (irregular)		
1978	0.2 µm to 10 µm	5
1982	10 µm to 150 µm	10
Tungsten Carbide/Cobalt (spheroidal)		
1984	9 µm to 30 µm	14
1985	18 µm to 55 µm	14
Polystyrene Spheres *Unit Size: 5 mL vial (unless otherwise noted)*		
1690 (0.5 % in H_2O)	0.895 µm	
1691 (0.5 % in H_2O)	0.269 µm	
1692 (0.25 % in H_2O)	2.982 µm	
1961* (0.5 % in H_2O)	29.64 µm	
1963** (0.5 % in H_2O)	0.1007 µm	
1964 (0.5 % in H_2O)	—	
1965 (Slide Mounted: 1 slide)	9.94 µm (hexagonal array) 9.89 µm (unordered clusters)	

**Developed in cooperation with NASA*
***This SRM is limited to the calibration of electron microscope and surface scanning inspection systems (not suitable for applications where monosize, unagglomerated spheres are necessary).*

Cement Turbidity and Fineness

This SRM is suitable for use with ASTM C 430-92, C 115-93, and C 204-92.

SRM	Description	Properties Certified	Value	Unit Size
114q	Portland Cement	Sieve Residue (45 µm (No. 325) Sieve)	8.24 %	20 pouches × 10 g
		Specific Surface Area (Wagner Turbidimeter)	2086 $cm^2 \cdot g^{-1}$	
		Specific Surface Area (Blaine Air Permeability)	3774 $cm^2 \cdot g^{-1}$	

Specific Surface Area (SSA) of Powders (Brunauer, Emmett, and Teller Method)

SRM	Description	Surface Area (m^2/g)			Unit Size (g)
		Multi-point	*Calculated*	*Single Point*	
1897	Specific Surface Area Standard	258.32		253.08	7
1899	Specific Surface Area Standard	10.52		10.67	4
1900	Specific Surface Area Standard	2.85		2.79	4
2696	Silica Fume		(22.92)*		70

**The surface area for 2696 was calculated from a combination of single-point, and multi-point calibrations.*

Mercury Porosimetry Standards

SRM	Description	Unit Size (g)
1917	Mercury Porosimetry Standard (Alumina Beads)	10
1918	Mercury Porosimetry Standard (Extruded Silica-Alumina)	12

Particle Count Materials

These SRMs are suitable for use with particle sizing instrumentation, including optical counters, in accordance with National Fluid Power Association (NFPA) T2.9.6 R2-1998 and ISO/DIS 11171.

SRM	Description	Particle Concentration	Unit Size
2806a	Medium Test Dust in Hydraulic Fluid	2.8 mg/L	400 mL
RM 8631	Medium Test Dust	1 µm to 50 µm	20 g
RM 8632	Ultrafine Test Dust	1 µm to 20 µm	20 g

SURFACE FINISH

Abrasive Wear

This SRM is suitable for use with ASTM G 65, Procedure A.

SRM	Description	Unit Size
1857	D-2 Tool Steel	2 blocks: 0.78 cm × 2.5 cm × 7.6 cm

Surface Roughness

Unit Size: 25 mm × 34 mm × 12 mm

These SRMs are used for calibrating stylus instruments that measure surface roughness. These electroless-nickel coated steel blocks have a sinusoidal roughness profile machined on the top surface.

SRM	Roughness, R_a (µm)	Wavelength, D (µm)
Sinusoidal Roughness (Knoop Hardness 500)		
2071b	0.3137	100
2073a	0.034	100
2074	0.025	40
2075	0.012	800

FIRE RESEARCH

Surface Flammability

This SRM is suitable for checking the operation of radiant panel test equipment in accordance with ASTM E 162-78.

SRM	Description	Certification	Unit Size (cm)
1002d	Hardboard Sheet	Flame Spread Index, I = 203 Heat Evolution Factor, Q = 42.0	4 sheets: 15.2 × 45.7 × 0.6

Smoke Density Chamber

These SRMs are suitable for use with National Fire Protection Agency (NFPA) 258-1998. SRM 1006d is also suitable for use with ASTM E 662-95.

SRM	Description	Maximum Specific Optical Density (D_m (corr.))	Unit Size (cm)
1006d	Non-Flaming Exposure Condition (paper)	193	9 sheets: 17.2 × 25.4 × 0.165
1007b	Flaming Exposure Condition (plastic)	388 to 512	1 sheet: 25.4 × 25.4 × 0.076

Smoke Toxicity

SRM	Description	Combustion Mode	Observation Time	Values LC_{50}	Values N-Gas	Unit Size
1048	Cup Furnace Smoke Toxicity Method Standard (ABS copolymer)	Flaming	WE*	27	1.4	8 sheets: (16 × 16 × 0.76) mm
			WE & PE**	25	1.5	
		NonFlaming	WE*	58	1.2	
			WE & PE**	53	1.4	
1049	University of Pittsburgh I Smoke Toxicity Method Standard (Nylon 6/6)		30 min exposure, plus 10 min post-exposure	4.4		150 g

**WE = within 30 minutes*
***WE & PE = 30 minutes + 14 days*

Flooring Radiant Panel

This SRM is suitable for use with ASTM E 648-78 and NFPA 253-1978.

SRM	Description	Critical Radiant Flux	Unit Size (cm)
1012	Flooring Radiant Panel (Kraft Paperboard)	0.36 W/cm^2	3 sheets: 104.1 × 25.4 × 0.305

NONDESTRUCTIVE EVALUATION

Artificial Flaw for Eddy Current NDE

RM	Description	Flaw Size	Unit Size
8458	Artificial Flaw (Aluminum Alloy)	3.0 mm × 0.1 mm	7 cm × 7 cm × 2 cm

PERFORMANCE ENGINEERING MATERIALS

Fracture Toughness of Steels (Charpy V-Notch Test Blocks)

Unit Size: set of 10 mm × 10 mm × 54 mm specimens

These SRMs are suitable for use with ASTM E 23 and ISO/DIS 12736.

SRM	Description	Energy Range (J)
2092	Low Energy (4340 Alloy Steel)	13 to 20
2096	High Energy (4340 Alloy Steel)	88 to 136
2098	Super High Energy (Maraging Steel)	176 to 244

Rockwell Hardness

Unit size: 60 mm diameter × 15 mm

SRM	Description	Nominal Hardness (HRC)
2810	Rockwell C Scale Hardness - Low Range	25
2811	Rockwell C Scale Hardness - Mid Range	45
2812	Rockwell C Scale Hardness - High Range	62

Microindentation Hardness (Knoop and Vickers Test Blocks)

Unit Size: 1.15 cm × 1.15 cm (unless otherwise noted)

These SRMs are suitable for use with ASTM E 384.

SRM	Description	Load (N)	Hardness (kg/mm²)
Copper, Bright			
1893	Knoop	0.245, 0.49, 0.98	125
Nickel, Bright			
1894a	Vickers	0.245, 0.49, 0.98	125
1895	Knoop	0.245, 0.49, 0.98	600
1896a	Vickers	0.245, 0.49, 0.98	600
1905	Knoop	2.943	600
1906	Knoop	4.905	600
1907	Knoop	9.81	600
1908	Vickers	2.943	500
1909	Vickers	9.81	500
2798a	Vickers	4.905	600
Silicon Nitride, Ceramic			
2830 (22 mm diameter × 9.54 mm)	Knoop	19.6	1500
Tungsten Carbide, Ceramic			
2831 (25 mm diameter × 9.5 mm)	Vickers	9.8	1530

Coordinate Measuring Machine (CMM) Probe Performance

These SRMs are suitable for use with ANSI/ASME B89.4.1.

SRM	Description	Unit Size
2084	Tungsten Carbide Sphere	10 mm diameter (stem mounted with stand)
2084R	Tungsten Carbide Sphere	10 mm diameter (stem mounted)
2085	Stainless Steel Sphere	25 mm diameter (stem mounted)

Tape Adhesion Testing

This SRM is suitable for use with ASTM D 2860 and ASTM D 3654.

SRM	Description	Unit Size
1810a	Linerboard for Tape Adhesion Testing	50 sheets: 21.6 cm × 28 cm

Bleached Kraft Pulps

These RMs are intended primarily for use in fundamental studies on the physical properties of fibers and paper sheets. No extensive property measurements have been made on these materials beyond ensuring that they were within the control limits of the normal production run.

RM	Description	Unit Size
8495*	Northern Softwood	10 standard lap sheets: 0.5 kg each
8496*	Eucalyptus Hardwood	10 standard lap sheets: 0.5 kg each



**Developed in cooperation with the Pulp Material Research Committee*

Secondary Ferrite Number (FN) Materials

The RMs are suitable for use with ANSI/AWS A4.2 and ISO 8249.

RM	Ferrite Number	Unit Size (mm)
8480	0 to 30	10 × 12 × 20
8481	30 to 120	10 × 12 × 20

Fracture Toughness of Ceramics

Unit Size: 3 mm × 4 mm × (45 to 47) mm

SRM	Description	Fracture Toughness ($MPa \cdot m^{1/2}$)	No. of Specimens
2100	Silicon Nitride Flexure Specimens	4.57	5

Magnetic Moment Standards

SRM	Description	Certified Property	Unit Size
762	Nickel Disk	Specific Magnetization	disk: 6 mm diameter × 0.13 mm
772a	Nickel Sphere	Magnetic Moment	sphere: 2.383 mm diameter sphere
2853	Yttrium Garnet Sphere	Magnetic Moment	sphere: 1 mm diameter (2.8 mg)

Food & Agriculture

Nutrition Composition

These SRMs and RMs are for use in determining the nutritional content of foods. The SRMs have values assigned for such dietary constituents as proximates (solids, ash, protein, carbohydrate, and fat), calories, cholesterol, selected fatty acids, selected vitamins, minerals and trace elements. NOTE: Only selected constituents are shown for information. Consult the relevant certificate or report of investigation for all available certified and reference values.

SRM	Description	Certified Constituents**	Unit Size (g)
1544	Fatty Acids and Cholesterol in Frozen Diet Composite	Cholesterol, Fatty Acids, Calcuim, Iron, Sodium	4 × 15 g
1546	Meat Homogenate	Cholesterol, Fatty Acids, Proximates, Minerals	4 × 85 g
1548a	Typical Diet	Minerals, Trace Elements,	2 × 6.5 g
1563	Cholesterol and Fat-Soluble Vitamins in Coconut Oil	Cholesterol, dl-α-Tocopheryl Acetate	10 ampoules: 5 fortified, 5 natural
1566	Oyster Tissue	Trace Elements	25 g
1570a	Trace Elements in Spinach Leaves	Trace Elements, Minerals	60 g
1845	Cholesterol in Whole Egg Powder	Cholesterol	35 g
1846	Infant Formula (milk-based)	Vitamins, Iodine	10 × 30 g
1946	Lake Superior Fish Tissue	Fat, Fatty Acid, Pesticides, Polychlorinated Biphenyls (PCBs), Mercury, Methylmercury	5 × 7 g to 9 g
1974b	Organics in Mussel Tissue	Mercury, PAHs, PCB Congeners, Pesticides	8 g to 10 g
2383	Baby Food Composite	Carotenoids, Vitamins	4 × 70 g
2384	Baking Chocolate	Fat, Fatty Acids, Calcium, Iron, Caffeine, Theobromine, Catechins	5 × 91 g
2385	Slurried Spinach	Elements, Carotenoids,	4 × 70 g
2387	Peanut Butter	Fat, Fatty Acids, Elements, Tocopherols	3 × 170 g
3244	Ephedra-Containing Protein Powder	Ephedrine Alkaloids, Caffeine, Elements, Vitamins	12 g x 10
RM 8415*	Whole Egg Powder	—	35 g
RM 8418*	Wheat Gluten	—	50 g
RM 8432*	Corn Starch	—	50 g
RM 8433*	Corn Bran	—	50 g
RM 8435*	Whole Milk	—	40 g
RM 8436*	Durum Wheat Flour	—	50 g

* *Developed by Agriculture Canada in cooperation with NIST: reference values assigned for proximates and elements*

** *Proximates are provided as reference values.*

NIST Food-Matrix SRMs and RMs

1. SRM 1563
2. SRM 2384
3. SRM 2387
4. SRM 1546
   RM 8415
5. SRM 2383
   RM 8432
   RM 8433
   RM 8436
6. SRM 1846
   RM 8435
   SRM 1548a
   SRM 1544
7. SRM 1566b
   SRM 1570a
   SRM 2385
9. SRM 1946
   SRM 1947
   SRM 1974a
   RM 8418

Trace Elements in Food and Agricultural Products

These SRMs and RMs are for use in evaluating analytical methods and instruments used for the determination of major, minor, and trace constituent elements.

SRM	Description	Unit Size (g)
1548a	Typical Diet	2 × 6.5 g
1549	Non-fat Milk Powder	100
1566b	Oyster Tissue	25
1567a	Wheat Flour	80
1568a	Rice Flour	80
1570a	Spinach Leaves	60
1577b	Bovine Liver	50
RM 8412*	Corn Stalk *(Zea mays)*	34
RM 8413*	Corn Kernel *(Zea mays)*	47
RM 8414*	Bovine Muscle Powder	50
RM 8436*	Durum Wheat Flour	50
RM 8437*	Hard Red Spring Wheat Flour	50
RM 8438*	Soft Winter Wheat Flour	50

* *Developed by Agriculture Canada in cooperation with NIST: reference values assigned*

Fertilizers (powder form)

These SRMs are intended for use as working standards in the calibration and standardization of procedures employed in the fertilizer industry.

SRM	Description	Unit Size (g)
120c	Phosphate Rock (Florida)	90
193	Potassium Nitrate	90
194	Ammonium Dihydrogen Phosphate	90
200a	Potassium Dihydrogen Phosphate	90
694	Phosphate Rock (Western)	90

Wheat Hardness

This Reference Material (RM) was prepared and analyzed by the Federal Grain Inspection Service (FGIS) program, Grain Inspection Packers and Stockyards Administration of the U.S. Department of Agriculture. It is intended primarily for use in calibrating instruments used for determination of hardness of bulk or single kernel wheat.

RM	Description	Wheat Numbers
8441a*	Wheat Hardness	Hard-1 through Hard-5; 5 × 5 pouches each (20 g/pouch) Soft-1 through Soft-5; 5 × 5 pouches each (20 g/pouch)

** Developed by the U.S. Department of Agriculture*

Trace Elements in Botanicals

These SRMs and RMs are for use in evaluating the reliability of analytical methods for the determination of major, minor, and trace elements in botanical materials, agriculture food products, and materials of similar matrix. The materials can be used for quality assurance when assigning values to in-house control materials.

SRM	Description	Unit Size (g)
1515	Apple Leaves	50
1547	Peach Leaves	50
1570a	Spinach Leaves	60
1573a	Tomato Leaves	50
2695*	Fluoride in Vegetation	2 × 25 g

** Developed in cooperation with Aluminum Association, Inc.*

Whole Biomass Feedstock*

These RMs are intended for use in evaluating analytical methods for the determination of summative composition of lignocellulosic materials (hardwood, softwood, herbaceous biomass, and agriculture residues). The RMs can also be used for quality assurance when assigning values to in-house control materials.

RM	Description	Reference Constituents
8491	Sugarcane Bagasse	Ash, Ethanol Extractives, Acid-Soluble Lignin, Acid-Insoluble Lignin, Total Lignin, Glucuronic Acid, Arabinan, Xylan, Mannan, Galactan, Glucan
8492	Populus Deltoides	
8493	Monterey Pine	
8494	Wheat Straw	

** Developed by the International Atomic Energy Agency (IAEA) Biomass Annex, and NIST*

HEALTH & CLINICAL

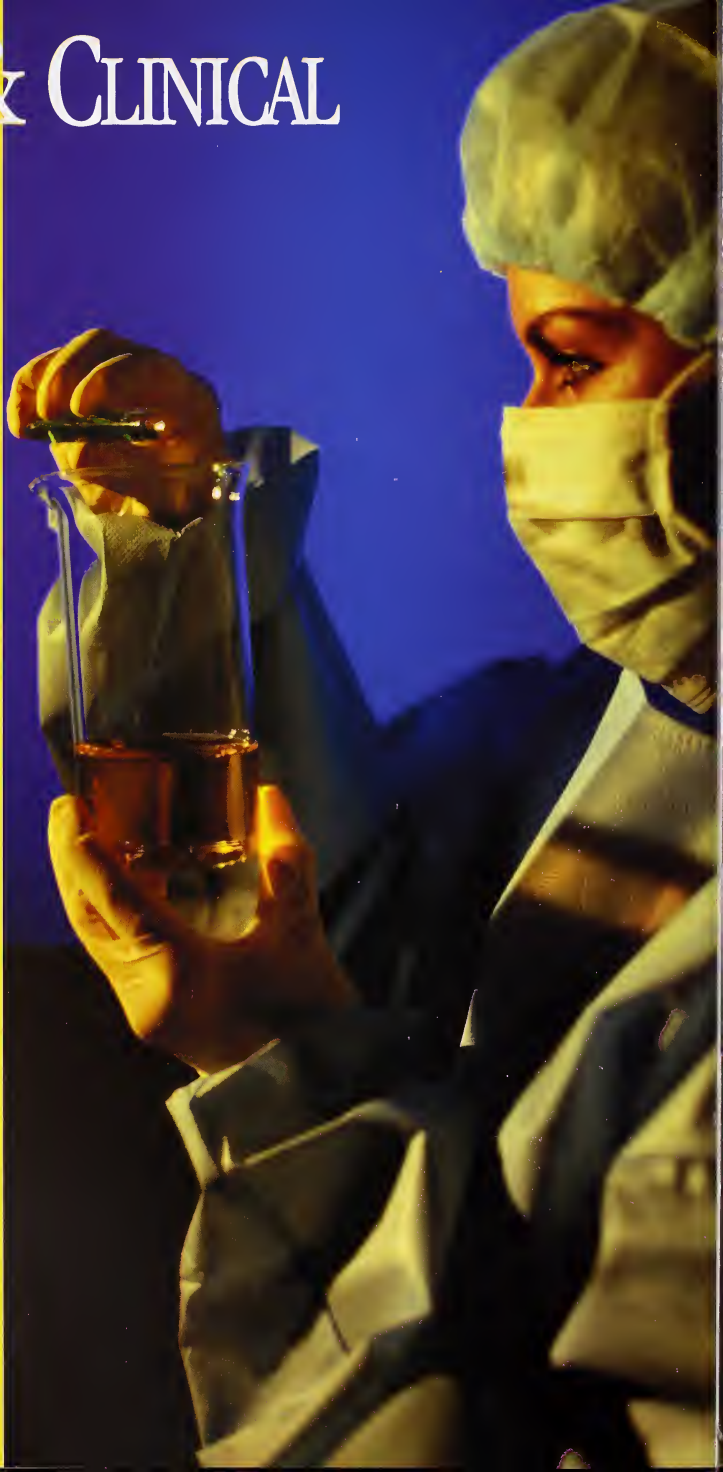



Pure Crystalline Standards

The materials in the table are primary reference compounds that can be used to calibrate reference measurement procedures and some field methods. These substances are traceable to the mole and thus, provide high order traceability.

SRM	Description	Purity (%)	Unit Size (g)
998	Angiotensin I (Human)	94.1	0.5
916a	Bilirubin	98.3	0.1
915a	Calcium Carbonate	99.9	20
911b	Cholesterol	99.8	2
921	Cortisol (Hydrocortisone)	98.9	1
914a	Creatinine	99.7	10
917b	D-Glucose (Dextrose)	99.7	50
920	D-Mannitol	99.8	50
937	Iron Metal (Clinical)	99.90	50
928	Lead Nitrate	100.00	30
924a	Lithium Carbonate	99.9	30
929a	Magnesium Gluconate Dihydrate	5.403 Mg	5
918a	Potassium Chloride	99.9817	30
919a	Sodium Chloride	99.8	30
910	Sodium Pyruvate	98.7	25
1595	Tripalmitin	99.5	2
912a	Urea	99.9	25
913a	Uric Acid	99.6	10
925	VMA (4-hydroxy-3-methoxy-DL-mandelic acid)	99.4	1

**Values in parentheses are not certified and are given for information only.*

Human Serum

NIST has a number of human serum based SRMs shown in the table below. These are intended to be used as accuracy checks to determine if a measurement system is in control. If they are to be used as control materials or as calibrators, one must be sure that these materials are commutable with fresh serum in the measurement system. The SRMs in frozen serum are generally more commutable across the various commercial systems than are the lyophilized materials. However, the lyophilized materials may work as well as the frozen materials when analyzed with more robust field methods or with higher order reference measurement procedures.

SRM	Description	Certified Constituents	Reference	Form	No. of Levels
909b	Human Serum	Calcium, Chloride, Cholesterol, Creatinine, Lithium, Magnesium, Potassium, Sodium,Total Glycerides, Triglycerides, Urea, and Uric Acid	Bilirubin	Lyophilized	2

Human Serum (continued)

SRM	Description	Certified Constituents	Reference	Form	No. of Levels
1951b	Lipids in Frozen Human Serum	Total Cholesterol, Total Glycerides, Triglycerides		Frozen	2
956b	Electrolytes in Frozen Human Serum	Total Ca, Li, Mg, K, Na	Ionized Ca	Frozen	3
965a	Glucose in Frozen Human	Glucose		Frozen	3
Serum					
970	Ascorbic Acid in Frozen Human Serum	Total Ascorbic Acid		Frozen	2
1952a	Cholesterol in Human Serum (Freeze-dried)	Cholesterol		Lyophilized	3
968c	Fat-Soluble Vitamins, Carotenoids, and Cholesterol in Human Serum	Vitamins (4), Cholesterol, Carotenoids (4)	Carotenoids (8), Vitamin D	Lyophilized	2
1589a	PCBs, Pesticides, and Dioxins/Furans in Human Serum	PCB Congeners (16), Chlorinated Pesticides (5), Total Cholesterol	PCB Congeners (9), Chlorinated Pesticides (5), Total Cholesterol, Triglycerides, "Free" Cholesterol, Phospholipids	Lyophilized	1
1599	Anticonvulsant Drug Level Assay (valproic acid and carbamazepine)	valproic acid carbamazepine		Lyophilized	1
900	Antiepilepsy Drug Level Assay	Antiepileptics (4)		Lyophilized	3
1955	Homocysteine and Folate in Human Serum	Homocysteine 5-Methyltetrahydrofolic acid	Total Folate, Folic Acid	Frozen	3

Bovine Serum

SRM	Description	Certified Constituents	Reference Constituents	Form	No. of Levels
1598	Inorganic Constituents in Bovine Serum	Elements (13)	—	Frozen	1
955b	Lead in Bovine Blood	Pb	—	Frozen	4
966	Toxic Elements in Bovine Blood	Pb, Cd	Pb, Cd, Total Hg, Inorganic Hg	Frozen	2

Calibration Solutions for Determination of Proteins and Amino Acids

SRM	Description	Certified Constituents	Reference Values	Form	No. of Levels
927c	Bovine Serum Albumin (7 % Solution)	Protein Concentration	11 values	Solution	1
2921	Cardiac Troponin Complex	cTnI Concentration	cTnT, cTnC	Solution	1
2389	Amino Acids in HCl	17 Amino Acids	—	Solution	1



Toxic Substances in Urine

SRMs 2670a, 2671a and 2672a are for determining toxic substances in human urine. They consist of freeze-dried urine and are provided in sets of four 30 mL bottles - two each at low and elevated levels.



SRM	Description	Unit Size
2670a	14 Elements	2 × 20 mL
2671a	Fluoride	2 × 20 mL
2672a	Mercury	2 × 20 mL

Biomaterials

Biomaterials are materials that are applied for use in medical devices that require intimate contact with tissues and body fluids. SRM 2910 is intended for use in evaluating the physical and chemical properties of calcium apatites of biological, geological, and synthetic origins. RM 8456 an ultra high molecular weight polyethylene is used in mechanical characterization of material properties and laboratory-simulated performance.

SRM	Description	Certified Properties	Reference Properties	Unit Size
2910	Calcium Hydroxyapatite	Calcium Phosphorus Specific Surface Area Ca/P Molar Ratio Solubility Product		5 g (powder)
RM 8456	Ultra High Molecular Weight Polyethylene		Young's Modulus Yield Strength Ultimate Strength Elongation	3 in diameter × 60 in (bar) (7.62 cm diameter × 152.4 cm)

Miscellaneous Health-Related Materials

SRM 2389 is a solution of 17 amino acids used in the calibration of chromatographic instrumentation. SRM 1400, and 1486 are intended for use in evaluating analytical methods for the determination of selected major, minor, and trace elements in bone and in material of a similar matrix.

SRM	Description	Certified Constituents	Form	Unit Size
2389	Amino Acids in 0.1 mol/L HCl	Amino Acids (17)	Solution	5 ampoules
1400	Bone Ash	Elements (8)	Powdered	50 g
1486	Bone Meal	Elements (8)	Powdered	50 g

FORENSICS

Ethanol Solutions

These SRMs are for use in the calibration of instruments and techniques for the determination of ethanol (ethyl alcohol) in breath and blood.

SRM	Description
1828b	Ethanol-water Solution (Blood-alcohol Testing: six levels)
1847	Ethanol-water Solution (Breath-alcohol Testing: three levels)
2891	Ethanol-water Solution (nominal 0.02% by mass)
2892	Ethanol-water Solution (nominal 0.04% by mass)
2893	Ethanol-water Solution (nominal 0.08% by mass)
2894	Ethanol-water Solution (nominal 0.1% by mass)
2895	Ethanol-water Solution (nominal 0.2% by mass)
2896	Ethanol-water Solution (nominal 0.3% by mass)
2897	Ethanol-water Solution (nominal 2% by mass)
2898	Ethanol-water Solution (nominal 6% by mass)
2899	Ethanol-water Solution (nominal 25% by mass)
2900	Ethanol-water Solution (nominal 95.6% by mass)

SRM/RMs for Crime Scene Investigations

SRM	Description	Certified/Reference Constituents	Unit Size
2285	Arson Test Mixture in Methylene Chloride	15 components	5 x 1.2mL
RM 8107	Additives in Smokeless Powder	4 components	5g

DNA Profiling/Crime Scene Investigations

SRMs 2390, and 2391b are intended for use in the standardization of forensic and paternity quality assurance procedures and instructional law enforcement or non-clinical research purposes.

SRM	Description	Unit Size
2390	DNA Profiling Standard - RFLP	20 components
2391b	PCR-Based DNA Profiling Standard	12 components
2392	Human Mitochondrial DNA Sequencing	3 components
2392-I	Human Mitochondrial DNA Sequencing	1 component
2394	Heteroplasmic Mitochondrial DNA Mutation Detection Standard	10 components
2395	Human Y-Chromosome DNA Profiling Standard	6 components
2396	Oxidative DNA Damage Mass Spectrometry Standard	12 components: 1 box
2399	Fragile X Human DNA Triplet Repeat Standard	9 components: 1 box

Drugs of Abuse in Human Hair

SRM	Description	Certified Constituents	Unit Size
2379	Drugs of Abuse in Human Hair I	6	100 mg
2380	Drugs of Abuse in Human Hair II	4	100 mg

Drugs of Abuse in Urine

SRM	Description	Certified Constituents	Reference Constituent	Form	Unit Size
1508a	Cocaine Metabolite in Urine	Benzoylecgonine		Lyophilized	3 levels, plus 1 blank
RM 8444	Cotinine in Urine		Cotinine (nicotine metabolite)	Lyophilized	2 levels, plus 1 blank
1507b	Marijuana Metabolite in Urine	THC-9-COOH		Lyophilized	3 levels, plus 1 blank
2381	Morphine and Codeine in Urine	Morphine and Codeine		Lyophilized	3 levels, plus 1 blank
2382	Morphine Glucuronide in Urine	Free Morphine		Lyophilized	3 levels, plus 1 blank
1511	Multi Drugs of Abuse in Urine	Drugs of Abuse (5)		Lyophilized	1 level

ENVIRONMENTAL

CALIBRATION MATERIALS

Calibration Solutions, Organic

SRM/RM	Description	Certified Constituents	Reference Constituents	Unit Size
3000	Benzene in Methanol	1	—	2 x 2.5 mL
3001	Toluene in Methanol	1	—	2 x 2.5 mL
3002	Ethylbenzene in Methanol	1	—	2 x 2.5 mL
3003	o-Xylene in Methanol	1	—	2 x 2.5 mL
3004	m-Xylene in Methanol	1	—	2 x 2.5 mL
3005	p-Xylene in Methanol	1	—	2 x 2.5 mL
3006	Carbon Tetrachloride in Methanol	1	—	2 x 2.5 mL
3008	Methylene Chloride in Methanol	1	—	2 x 2.5 mL
3009	1,2-Dichloropropane in Methanol	1	—	2 x 2.5 mL
3010	Tetrachloroethene (Tetrachloroethylene) in Methanol	1	—	2 x 2.5 mL
3011	1,1,1-Trichloroethane in Methanol	1	—	2 x 2.5 mL
3012	1,2-Dichloroethane in Methanol	1	—	2 x 2.5 mL
3014	1,2,3-Trichloropropane in Methanol	1	—	2 x 2.5 mL
3015	Isopropylbenzene in Methanol	1	—	2 x 2.5 mL
3016	sec-Butylbenzene in Methanol	1	—	2 x 2.5 mL
3063	2,3,7,8-Tetrachlorodibenzo-p-dioxin (2,3,7,8-TCDD) in Methanol	1	—	5 x 1.2 mL
3064	Endothall in Water	1	—	5 x 1.2 mL
3067	Toxaphene in Methanol	Total Toxaphene	—	5 x 1.2 mL
3068	Chlordane in Methanol	Total Chlordane	—	5 x 1.2 mL
3071	Glyphosate in Water	1	—	5 x 1.2 mL
3072	Diquat Dibromide Monohydrate in Water	1	—	5 x 1.2 mL
3074	Phalates/Adipate in Methanol	6	1	5 x 1.2 mL
3075	Aroclor 1016 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3076	Aroclor 1232 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3077	Aroclor 1242 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3078	Aroclor 1248 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3079	Aroclor 1254 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3080	Aroclor 1260 in Transformer Oil	Total Aroclor	—	5 x 1.2 mL
3081	Aroclor 1016 in Methanol	Total Aroclor	—	5 x 1.2 mL
3082	Aroclor 1232 in Methanol	Total Aroclor	—	5 x 1.2 mL
3083	Aroclor 1242 in Methanol	Total Aroclor	—	5 x 1.2 mL
3084	Aroclor 1248 in Methanol	Total Aroclor	—	5 x 1.2 mL
3085	Aroclor 1254 in Methanol	Total Aroclor	—	5 x 1.2 mL
3086	Aroclor 1260 in Methanol	Total Aroclor	—	5 x 1.2 mL
3090	Aroclors in Transformer Oil (set SRMs 3075-3080)	Total Aroclor	—	6 x 1.2 mL
3091	Aroclors in Methanol (set SRMs 3081-3086)	Total Aroclor	—	6 x 1.2 mL

Calibration Solutions, Organic (continued)

SRM/RM	Description	Certified Constituents	Reference Constituents	Unit Size
1582	Petroleum Crude Oil	PAHs (5), PASH (1)	PAHs (5), Phenols (2), PANH (1)	5 ampoules
1584	Priority Pollutant Phenols in Methanol	Phenols (10)	Phenols (1)	5 x 1.2 mL
1586	Isotopically Labeled and Unlabeled Priority Pollutants in Methanol	Priority pollutants (10)	—	6 x 1.2 mL
1639	Halocarbons (in Methanol) for Water Analysis	Halocarbons (7)	—	5 x 1.2 mL
1494	Aliphatic Hydrocarbons in 2, 2, 4- Trimethylpentane	(20)	—	5 x 1.2 mL
1647e	Priority Pollutant PAHs (in Acetonitrile)	PAHs (16)	—	5 x 1.2 mL
1491a	Methyl-substituted Polycyclic Aromatic Hydrocarbons in Toluene	PAHs (18)	—	5 x 1.2 mL
2260a	Aromatic Hydrocarbons in Toluene	PAHs (36)	—	5 x 1.2 mL
2269	Perdeuterated PAH-I	Perdeuterated PAHs (5)	—	5 x 1.2 mL
2270	Perdeuterated PAH-II	Perdeuterated PAHs (6)	—	5 x 1.2 mL
1587	Nitrated PAHs in Methanol	Nitro-PAHs (6)	Nitro-PAHs (1)	4 x 1.2 mL
1596	Dinitropyrene Isomers and 1-Nitropyrene in Methylene Chloride	Nitro-PAHs (4)	—	5 x 1.2 mL
1493	Chlorinated Biphenyl Congeners in 2,2,4 -Trimethylpentane	PCBs (18)	PCBs (2)	5 x 1.2 mL
2262	Chlorinated Biphenyl Congeners in 2,2,4-Trimethylpentane	PCBs (25)	PCBs (4)	5 x 1.2 mL
2274	PCB Congener Solution-II	PCBs (11)	—	5 x 1.2 mL
2276	Three Planar PCBs in Solution	PCBs (3)	—	5 x 1.2 mL
RM 8466	g-HCH (Lindane) (neat)	—	—	Vial: 100 mg
RM 8467	4,4'-DDE (neat)	—	—	Vial: 100 mg
RM 8469	4,4'-DDT (neat)	—	—	Vial: 100 mg
1492	Chlorinated Pesticides in Hexane	Pesticides (15)	—	5 x 1.2 mL
2261	Chlorinated Pesticides in Hexane	Pesticides (15)	—	5 x 1.2 mL
2273	DDTs and Metabolites in Solution	DDTs, Metabolites (7)	—	5 x 1.2 mL
2275	Chlorinated Pesticide Solution-II	Pesticides (9)	—	5 x 1.2 mL
1614	Dioxin (2,3,7,8-TCDD) in Isooctane	Dioxins (2)	Dioxins (2)	6 x 1.2 mL
869a	Column Performance Test Mixture for Liquid Chrometography (PAHs)	Shape Selectivity: PAHs (3)	Acetonitrile	5 × 1 mL



Calibration Solutions, Organic (continued)

SRM/RM	Description	Certified Constituents	Reference Constituents	Unit Size
870	Mixtures for Liquid Chrometography Column Performance Test Mixture for Liquid Chrometography	Silanol Activity,Trace Metal Activity, Hydrophobic Retention, Methylene Selectivity	Methanol	1 5 × 1 mL
877	Chiral Selectivity Test	various Chiral components	Ethanol	5 × 1 mL
1543	GC/MS System Performance Standard	(20)	—	4 × 1 mL
RM 8443	Consists of 5 units of SRM 1543	—	—	—

Calibration Solutions, Inorganic

SRM/RM	Description	Certified Constituents	Unit Size
1641d	Mercury in Water	Mercury	10 x 10 mL
3101a	Aluminum Standard Solution	Aluminum	50 mL
3102a	Antimony Standard Solution	Antimony	50 mL
3103a	Arsenic Standard Solution	Arsenic	50 mL
3104a	Barium Standard Solution	Barium	50 mL
3105a	Beryllium Standard Solution	Beryllium	5 x 10 mL
3106	Bismuth Standard Solution	Bismuth	5 x 10 mL
3107	Boron Standard Solution	Boron	50 mL
3108	Cadmium Standard Solution	Cadmium	50 mL
3109	Calcium Standard Solution	Calcium	50 mL
3110	Cerium Standard Solution	Cerium	5 x 10 mL
3111a	Cesium Standard Solution	Cesium	50 mL
3112a	Chromium Standard Solution	Chromium	5 x 10 mL
3113	Cobalt Standard Solution	Cobalt	5 x 10 mL
3114	Copper Standard Solution	Copper	5 x 10 mL
3115a	Dysprosium Standard Solution	Dysprosium	5 x 10 mL
3116a	Erbium Standard Solution	Erbium	5 x 10 mL
3117a	Europium Standard Solution	Europium	5 x 10 mL

Calibration Solutions, Inorganic (continued)

SRM/RM	Description	Certified Constituents	Unit Size
3118a	Gadolinium Standard Solution	Gadolinium	5 x 10 mL
3119a	Gallium Standard Solution	Gallium	5 x 10 mL
3120a	Germanium Standard Solution	Germanium	50 mL
3121	Gold Standard Solution	Gold	5 x 10 mL
3122	Hafnium Standard Solution	Hafnium	50 mL
3123a	Holmium Standard Solution	Holmium	5 x 10 mL
3124a	Indium Standard Solution	Indium	5 x 10 mL
3126a	Iron Standard Solution	Iron	5 x 10 mL
3127a	Lanthanum Standard Solution	Lanthanum	5 x 10 mL
3128	Lead Standard Solution	Lead	50 mL
3129a	Lithium Standard Solution	Lithium	5 x 10 mL
3130a	Lutetium Standard Solution	Lutetium	5 x 10 mL
3131a	Magnesium Standard Solution	Magnesium	50 mL
3132	Manganese Standard Solution	Manganese	5 x 10 mL
3133	Mercury Standard Solution	Mercury	5 x 10 mL
3134	Molybdenum Standard Solution	Molybdenum	5 x 10 mL
3135a	Neodymium Standard Solution	Neodymium	5 x 10 mL
3136	Nickel Standard Solution	Nickel	5 x 10 mL
3137	Niobium Standard Solution	Niobium	50 mL
3138	Palladium Standard Solution	Palladium	5 x 10 mL
3139a	Phosphorous Standard Solution	Phosphorous	5 x 10 mL
3140	Platinum Standard Solution	Platinum	5 x 10 mL
3141a	Potassium Standard Solution	Potassium	50 mL
3142a	Praseodymium Standard Solution	Praseodymium	5 x 10 mL
3143	Rhenium Standard Solution	Rhenium	50 mL
3144	Rhodium Standard Solution	Rhodium	5 x 10 mL
3145a	Rubidium Standard Solution	Rubidium	5 x 10 mL
3147a	Samarium Standard Solution	Samarium	5 x 10 mL
3148a	Scandium Standard Solution	Scandium	5 x 10 mL
3149	Selenium Standard Solution	Selenium	5 x 10 mL
3150	Silicon Standard Solution	Silicon	5 x 10 mL
3151	Silver Standard Solution	Silver	5 x 10 mL
3152a	Sodium Standard Solution	Sodium	5 x 10 mL
3153a	Stronium Standard Solution	Stronium	5 x 10 mL
3154	Sulfur Standard Solution	Sulfur	5 x 10 mL
3155	Tantalum Standard Solution	Tantalum	50 mL

Calibration Solutions, Inorganic (continued)

SRM/RM	Description	Certified Constituents	Unit Size
3156	Tellurium Standard Solution	Tellurium	5 x 10 mL
3157a	Terbium Standard Solution	Terbium	5 x 10 mL
3158	Thallium Standard Solution	Thallium	5 x 10 mL
3159	Thorium Standard Solution	Thorium	50 mL
3160a	Thulium Standard Solution	Thulium	5 x 10 mL
3161a	Tin Standard Solution	Tin	50 mL
3162a	Titanium Standard Solution	Titanium	50 mL
3163	Tungsten Standard Solution	Tungsten	50 mL
3164	Uranium Standard Solution	Uranium	5 x 10 mL
3165	Vanadium Standard Solution	Vanadium	5 x 10 mL
3166a	Ytterbium Standard Solution	Ytterbium	5 x 10 mL
3167a	Ytterium Standard Solution	Ytterium	5 x 10 mL
3168a	Zinc Standard Solution	Zinc	50 mL
3169	Zirconium Standard Solution	Zirconium	50 mL
3181	Sulfate Anion Solution	Sulfate	5 x 10 mL
3182	Chloride Anion Solution	Chloride	5 x 10 mL
3183	Fluoride Anion Solution	Fluoride	50 mL
3184	Bromide Anion Solution	Bromide	5 x 10 mL
3185	Nitrate Anion Solution	Nitrate	5 x 10 mL
3186	Phosphate Anion Solution	Phosphate	5 x 10 mL

Organo - Metallic

SRM	Description	Elemental Composition (Percent)
1075a	Aluminum 2-Ethylhexanoate	8.07 Al
1051b	Barium Cyclohexanebutyrate	28.7 Ba
1080a	Bis (1-phenyl-1,3-butanediono)copper (II)	16.37 Cu
1052b	Bis(1-phenyl-1,3-butanediono)oxovanadium (IV)	13.01 V
1053a	Cadmium Cyclohexanebutyrate	24.8 Cd
1057b	Dibutyltin bis (2-ethylhexanoate) (tin)	22.95 Sn
1059c	Lead Cyclohexanebutyrate	37.5 Pb
1060a	Lithium Cyclohexanebutyrate	4.1 Li
1065b	Nickel Cyclohexanebutyrate	13.89 Ni
1066a	Octaphenylcyclotetrasiloxane	14.14 Si
1077a	Silver 2-Ethylhexanoate	42.60 Ag
1069b	Sodium Cyclohexanebutyrate	12.0 Na
1070a	Strontium Cyclohexanebutyrate	20.7 Sr
1071b	Triphenyl Phosphate	9.48 P
1078b	Tris (1-phenyl-1,3-butanediono)chromium (III)	9.6 Cr
1079b	Tris (1-phenyl-1,3-butanediono)iron (III)	10.45 Fe
1073b	Zinc Cyclohexanebutyrate	16.66 Zn

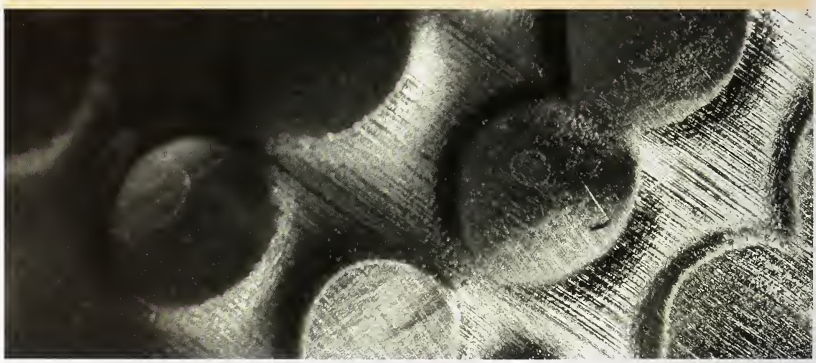

BIOLOGICAL TISSUES

SRM	Description	Certified Constituents	Reference Constituents	Unit Size
1566b	Oyster Tissue	22 Elements, Methylmercury	8 Elements, 8 Fatty Acids, Proximates, Caloric Content	25 g
1974b	Organics in Mussel Tissue *(Mytilus Edulis)* (Frozen)	PAHs (22), PCBs (31), Pesticides (7), Total Mercury	Trace Elements (11), PAHs (16), PCBs (8), Pesticides (6), Methylmercury	5 × 8 g
2976	Mussel Tissue	Methylmercury, Total Mercury, Trace Elements (7)	Trace elements (20)	25 g
2977	Mussel Tissue	PAHs (14), PCB Congeners (25), Pesticides (7), Trace Elements (6), Methylmercury	PAHs (16), Trace Elements (9)	10 g
1946	Lake Superior Fish Tissue	PCBs (30), Pesticides (15) Fat and Fatty Acids (14), Total Mercury, Methylmercury, Arsenic, Iron	PCBs (12), Pesticides (2), Fatty Acids (12), Proximates, Caloric Content, Trace Elements (9)	5 × 7–9 g
1947	Lake Michigan Fish Tissue	8 Elements; Methylmercury; PCBs (32), Pesticides (15), PBDEs (7)	PCBs (13), Pesticides (2) PBDEs (2),Proximates, Caloric Content, Fatty Acids (17)	5 × 8 g
1945	Organics in Whale Blubber (Frozen)	PCBs (27), Pesticides (15)	PCBs (2), Pesticides (2)	2 × 10 g
1588b	Organics in Cod Liver Oil	PCBs (27), Pesticides (15) Fatty Acids (14)	PCDDs/PCDFs (7), PCBs (47), Pesticides (3), Fatty Acids (6) PBDEs (6), Toxaphene (3)	4 × 1.2 mL
1577b	Bovine Liver	18 Elements	—	50 g
1515	Apple Leaves	Elements (24)	—	50 g
1547	Peach Leaves	Elements (24)	—	50 g
1570a	Trace Elements in Spinach Leaves	Elements (18)	Elements (5), Proximates	60 g
1573a	Tomato Leaves	Elements (21)	—	50 g
1575a	Trace Elements in Pine Needles	Elements (12)	Elements (11)	50 g

SOILS, SEDIMENTS, PARTICULATES AND WATER

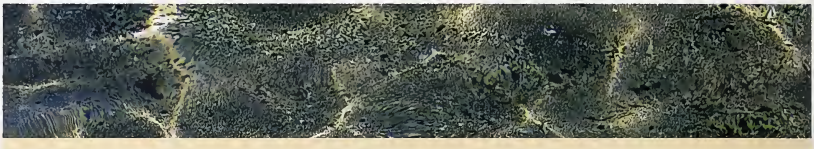

SRM	Description	Certified Constituents	Reference Constituents	Unit Size
1640	Natural Water	Elements (17)	Elements (10)	250 mL
1643e	Trace Elements in Water	—	Elements (29)	250 mL
2586	Trace Elements in Soil Containing Lead from Paint (Nominal 500 mg/kg Lead)	Elements (4)	Elements (18)	55 g
2587	Trace Elements in Soil Containing Lead from Paint (Nominal 3000 mkg Lead)	Elements (4)	Elements (14)	55 g
2709	San Joaquin Soil	Elements (27)	Elements (22)	50 g
2710	Montana Soil Highly Elevated Trace Element Concentrations	Elements (22)	Elements (26)	50 g
2711	Montana Soil Moderately Elevated Trace Element Concentrations	Elements (25)	Elements (26)	50 g
2780	Hard Rock Mine Waste	Elements (12)	Elements (7)	50 g
2781	Domestic Sludge	Elements (10)	Elements (11)	40 g
2782	Industrial Sludge	Elements (10)	Elements(16)	70 g
1646a	Estuarine Sediment	Elements (19)	Elements (20)	70 g
1939a	PCB (Congeners) in River Sediment	PCBs (20) Pesticides (3)	PCBs (4)	50 g
1941b	Organics in Marine Sediment	PAHs (24), PCBs (29), Pesticides (7)	PAHs (44), PCBs (13), Pesticides (2), TOC	50 g
1944	NY/NJ Waterway Sediment	PAHs(24), PCBs (35), Pesticides(4) Elements (9)	PAHs (32) Pesticides (7), Elements (19), PCDDs/PCDFs(17), TOC, percent extractable, particle-size characteristics	50 g
2702	Inorganics in Marine Sediment	Elements (25)	Elements (8)	50 g
2703	Sediment for Solid Sampling (Small Sample) Analytical Techniques	Elements (22)	Elements (7)	5 g
RM 8704	Buffalo River Sediment		Elements (25)	50 g

SOILS, SEDIMENTS, PARTICULATES AND WATER (continued)

SRM	Description	Certified Constituents	Reference Constituents	Unit Size
1597a	Complex Mixture of PAHs from Coal Tar	PAHs (34)	PAHs (36)	3 x 1.3 mL
1648	Urban Particulate Matter	Elements (15)	Elements (21)	2 g
1649a	Urban Dust	PAHs (22), PCBs (35), Pesticides (8), Total carbon	PAHs (22), Pesticides (1), PCDDs/PCDFs (17), Elements (32), Mutagenic activity, Particle-size characteristics, Chemical & isotopic carbon	2.5g
2783	Air Particulate on Filter Media	Elements (18)	Elements (9)	2 loaded and 2 blank filters
1650b	Diesel Particulate Matter	PAHs (31), nitro-PAHs (6)	PAHs (20), nitro-PAHs (16), Particle-size distribution	200 mg
1975	Diesel Particulate Extract	PAHs(8)	PAHSs (23), nitro-PAHs (18), mutagenicity	4 x 1.2 mL
2975	Diesel Particulate Matter (Industrial Forklift)	PAHs (11)	PAHs (28) Particle-size distribution, Total extractable mass	1 g
2583	Trace Elements in Indoor Dust (nominal 90 mg/kg lead)	Elements (5)	—	8 g
2584	Trace Elements in Indoor Dust (nominal 1 % lead)	Elements (5)	Elements (10)	8 g
2585	Organic Contaminants in House Dust	PAHs (33), PCBs (30), Pesticides (4), PBDEs (15)	PAHs (33) PCBs (12), Pesticides (10), PBDEs (12)	10 g
RM 8785	Air Particulate Matter on Filter Media for Carbon Composition	—	2	3 filters
RM 8786	Blank Filter for RM 8785	—	—	1 blank filter

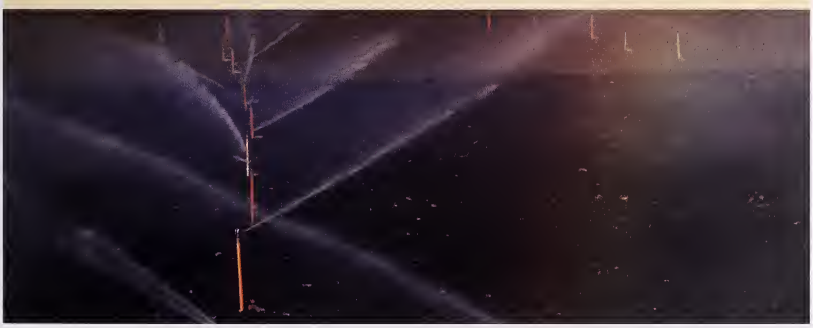

GEOLOGICAL MATERIALS AND ORES

Ores

SRM	Description	Certified Constituents	Reference Constituents	Unit Size (g)
699	Alumina (Reduction Grade)	13	—	60
69b	Bauxite, Arkansas	15	3	60
697	Bauxite, Dominican	15	—	60
698	Bauxite, Jamaican	15	—	60
696	Bauxite, Surinam	15	3	60
1835	Borate Ore	15	15	60
330	Copper Ore Mill Heads	3	—	100
331a	Copper Ore Mill Tails	3	—	100
79a	Fluorspar, Customs Grade	1	—	120
180	Fluorspar, High Grade	1	—	120
886	Gold Ore, Refractory	2	10	200
670	Iron Ore, Canada	6	—	90
690	Iron Ore, Canada	11	—	100
692	Iron Ore, Labrador	11	—	100
693	Iron Ore, Nimba	11	—	100
691	Iron Oxide, Reduced	9	—	100
182	Lithium Ore (Petalite)	1	—	45
181	Lithium Ore (Spodumene)	1	—	45
183	Lithium Ore (Lepidolite)	1	—	45
25d	Manganese Ore	8	—	60
120c	Phosphate Rock, Florida	8	10	90
694	Phosphate Rock, Western	13	—	90
600	Rutile Ore	16	—	90
2430	Scheelite Ore	6	—	100
277	Tungsten Concentrate	1	—	45
113b	Zinc Concentrate	10	—	100

Ore Bioleaching Substrate

This RM is for use as a bioleaching substrate and for testing bioleaching rates.

RM	Description	Reference Constituents	Unit Size (g)
8455	Pyrite Ore	Rate of bioleaching	100

Clays

SRM	Description	Certified Constituents	Unit Size (g)
679	Brick Clay	12	75
97b	Flint Clay	12	60
98b	Plastic Clay	12	60

Chinese Ores

Unit Size: 100 g

These RMs are a well characterized series of skarn deposit ores developed and certified by the Hubei Geological Research Laboratory, Hubei Province, China.

RM	Description	Reference Constituents
8603	Lead	56 Elements and Oxides
8606	Molybdenum	54 Elements and Oxides
8607	Tungsten	56 Elements and Oxides
8608	Tungsten	56 Elements and Oxides

Rocks and Minerals

SRM	Description	Certified Constituents	Reference Constituents	Unit Size (g)
688	Basalt Rock	14	—	60
70a	Feldspar, Potash	10	—	40
99a	Feldspar, Soda	11	—	40
81a	Glass Sand	5	—	75
165a	Glass Sand (Low Iron)	4	—	75
1413	Glass Sand (High Alumina)	9	—	75
1d	Limestone, Argillaceous	12	5	70
88b	Limestone, Dolomite	11	—	75
278	Obsidian Rock	18	—	35

Refractories

SRM	Description	Certified Constituents	Unit Size (g)
76a	Burnt Refractory (Al203-40 %)	12	75
77a	Burnt Refractory (Al203-60 %)	12	75
78a	Burnt Refractory (Al203-70 %)	12	75
198	Silica Brick	12	45
199	Silica Brick	12	45
154c	Titanium Dioxide	1	90

MICROANALYSIS

Elements in Metals

SRM	Description	Certified Constituents	Unit Size (g)
482	Gold-Copper Wires for Microprobe Analysis	2	wires: 6
481	Gold-Silver Wires for Microprobe Analysis	2	wires: 6
480	Tungsten-20 % Molybdenum Alloy Electron Microprobe Standard	2	rod:1
2061	Ti-Al Alloy for Microanalysis	—	—
2062	Ti-Al Alloy for Microanalysis	—	—

Elements in Synthetic Glasses

SRM	Description	Certified Constituents	Unit Size (g)
1873	Barium-Zinc Silicate Glasses for Microanalysis (K-458, K-489, K-963)	2	rod: 2 mm × 2 mm × 20 mm
2066	Glass Microspheres (K-411)	4 certified: 1 reference	glass microspheres: 50 mg
1872	Lead-Germanate Glasses for Microanalysis (K-453, K-491, K-968)	2	rod: 2 mm × 2 mm × 20 mm

FOSSIL FUELS AND RELATED MATERIALS

SRM	Description/Pb Concentration	Certified Constituents	Reference Constituents	Unit Size
1634c	Trace Elements in Fuel Oil "No. 6" (As, Co, Ni, Pb, S, Se, V)	5	—	100 mL
2713	Lead in Reference Fuels (19.4 µg/g Pb)	1	—	6 × 20 mL
2714	Lead in Reference Fuels (28.1 µg/g Pb)	1	—	6 × 20 mL
RM 8505	Vanadium in Crude Oil	—	1	250 mL
RM 8590	High Sulfur Gas Oil Feed	—	1	946 mL
1580	Organics in Shale Oil	9	—	5 × 1.2 mL
1632c	Trace Elements in Coal (Bituminous)	15	26	50 g
1635	Trace Elements in Coal (Subbituminous)	16	—	75 g
1633b	Trace Elements in Coal Fly Ash	23	—	75 g
2689	Coal Fly Ash	13	19	3 × 10 g
2690	Coal Fly Ash	13	19	3 × 10 g
2691	Coal Fly Ash	13	19	3 × 10 g
2718	Green Petroleum Coke	6	2	50 g
2719	Calcined Petroleum Coke	6	2	50 g
2775	Foundry Coke	1	2	50 g
2776	Furnace Coke	1	2	50 g
1829	Alcohols in Reference Fuel	4	—	6 × 20 mL
1837	Methanol (9 volume percent) and t-Butanol (6 volume percent) in Reference Fuel	2	—	5 × 20 mL

High Purity Liquids for Fuel Rating

Unit Size: 100 mL

SRM	Description	Purity (%)
1816a	Isooctane (2,2,4-Trimethylpentane)	99.987
1815a	n-Heptane	99.987



FOSSIL FUELS AND RELATED MATERIALS (continued)

SRM	Description/Pb Concentration	Certified Constituents	Reference Constituents	Unit Size
1838	Ethanol (10 volume percent) in Reference Fuel	1	—	5 × 20 mL
1839	Methanol (0.3 volume percent) in Reference Fuel	1	—	5 × 20 mL
2286	Ethanol in Reference Gasoline (Nominal 2.0 weight percent oxygen)	2	—	3 × 20 mL
2287	Ethanol in Reference Gasoline (Nominal 3.5 weight percent oxygen)	2	—	3 × 20 mL
2288	t-Amyl Methyl Ether in Reference Gasoline (Nominal 2.0 weight percent oxygen)	2	—	3 × 20 mL
2289	t-Amyl Methyl Ether in Reference Gasoline (Nominal 2.7 weight percent oxygen)	2	—	3 × 20 mL
2290	Ethyl t-Butyl Ether in Reference Gasoline (Nominal 2.0 weight percent oxygen)	2	—	3 × 20 mL
2291	Ethyl t-Butyl Ether in Reference Gasoline (Nominal 2.7 weight percent oxygen)	2	—	3 × 20 mL
2292	Methyl t-Butyl Ether in Reference Gasoline (Nominal 2.0 weight percent oxygen)	2	—	3 × 20 mL
2293	Methyl t-Butyl Ether in Reference Gasoline (Nominal 2.7 weight percent oxygen)	2	—	3 × 20 mL
2294	Reformulated Gasoline (11 % MTBE)	4	26	2 × 20 mL
2295	Reformulated Gasoline (15 % MTBE)	4	26	2 × 20 mL
2296	Reformulated Gasoline (13 % ETBE)	4	26	2 × 20 mL
2297	Reformulated Gasoline (10 % Ethanol)	4	26	2 × 20 mL
2890	Water Saturated 1-Octanol	1	—	5 × 2 mL
RM8506a	Water in Transformer Oil	—	1	5 × 9.5 mL
RM8507	Moisture in Mineral Oil	—	1	10 mL
RM8509	Moisture in Methanol (93 mg/kg)	—	1	5 mL
RM8510	Moisture in Methanol (325 mg/kg)	—	1	5 mL
2285	Arson Test Mixture in Methylene Chloride	15	—	5 × 1.2 mL



Materials for Sulfur and Mercury

SRM	Description	%S	Hg (µg/kg)	Unit Size
1616b	Sulfur in Kerosine	0.01462	—	100 mL
1617a	Sulfur in Kerosine	0.17307	—	100 mL
1619b	Sulfur in Residual Fuel Oil	0.6960	—	100 mL
1620c	Sulfur in Residual Fuel Oil	4.561	—	100 mL
1621e	Sulfur in Residual Fuel Oil	0.9480	—	100 mL
1622e	Sulfur in Residual Fuel Oil	2.1468	—	100 mL
1623c	Sulfur in Residual Fuel Oil	0.3806	—	100 mL
1624d	Sulfur in Diesel Fuel Oil	0.3882	—	10 × 10 mL
1632c	Trace Elements in Coal Bituminous	1.462	93.8	50 g
1635	Trace Elements in Coal (Subbituminous)	0.3616	10.9	75 g
2294	Reformulated Gasoline (nominal 11 % MTBE)	0.00409	—	2 × 20 mL
2295	Reformulated Gasoline (nominal 15 % MTBE)	0.0308	—	2 × 20 mL
2296	Reformulated Gasoline (nominal 13 % ETBE)	0.00400	—	2 × 20 mL
2297	Reformulated Gasoline (nominal 10 % Ethanol)	0.03037	—	2 × 20 mL
2298	Reformulated Gasoline	0.00047	—	5 × 20 mL
2299	Gasoline (High Octane)	0.00136	—	5 × 20 mL
2682b	Sulfur and Mercury in Coal (Subbituminous)	0.4917	108.8	50 g
2683b	Sulfur and Mercury in Coal	1.955	90.0	50 g
2684b	Sulfur and Mercury in Coal	3.076	97.4	50 g
2685b	Sulfur and Mercury in Coal	4.730	146.2	50 g
2692b	Sulfur and Mercury in Coal	1.170	133.3	50 g
2693b	Sulfur and Mercury in Coal	0.4571	37.3	50 g
2717a	Sulfur in Residual Fuel Oil	2.9957	—	100 mL
2718	Trace Elements in Green Petroleum Coke	4.7032	—	50 g
2719	Trace Elements in Calcined Petroleum Coke	0.8877	—	50 g
2721	Crude Oil	1.5832	0.0417	5 × 10 mL
2722	Crude Oil	0.21037	0.1292	5 × 10 mL
2723a	Sulfur in Diesel Fuel Oil	0.00110	—	10 × 10 mL
2724b	Sulfur in Diesel Fuel Oil	0.0425	—	10 × 10 mL
2770	Sulfur in Diesel Fuel Oil	0.004157	—	10 × 10 mL
2775	Foundry Coke	0.5816	—	50 g
2776	Furnace Coke	0.825	—	50 g
RM8771	Sulfur in Diesel Blend	0.071 mg/kg	—	100 mL

GASES

SRM	Nominal Amount-of-Substance (µmol/mol)
Ambient Non-Methane Organics in Nitrogen (15 components in large cylinder)	
1800b	5 nmol/mol
Volatile Organics in Nitrogen (30 components)	
1804c	5 nmol/mol
Carbon Dioxide in Air (Certified for CO_2)	
1671a	340
1672a	350
1676	365
Carbon Monoxide in Air (Certified for CO)	
2612a	10
2613a	20
2614a	45

GASES (continued)

SRM (µmol/mol)	Nominal Amount of Substance Fraction
Carbon Dioxide in Nitrogen (Certified for CO_2)	
1674b*	7 mol %
1675b*	14 mol %
2619a	0.5 mol %
2620a	1.0 mol %
2621a	1.5 mol %
2622a	2.0 mol %
2623a	2.5 mol %
2624a	3.0 mol %
2625a*	3.5 mol %
2626a	4.0 mol %
2745*	16 mol %
Carbon Monoxide in Nitrogen (Certified for CO)	
1677c*	10
1678c*	50
1679c*	100
1680b*	500
1681b*	1000
2635a*	25
2636a*	250
2637a*	2500
2638a*	5000
2639a	1 mol %
2640a	2 mol %
2641a	4 mol %
2642a*	8 mol %

**Available as a NIST Traceable Reference Material (NTRM); from commercial suppliers. A suppliers list is available on our website.*

GASES (continued)

SRM	Nominal Amount of Substance Fraction (µmol/mol)
Carbon Monoxide in Nitrogen (Certified for CO) *continued*	
2740a	10 mol %
2741a	13 mol %
Hydrogen Sulfide in Nitrogen (Certified for H_2S)	
2730	5
2731	20
Methane in Air (Certified for CH_4)	
1658a	1
1659a	10
1660a (also certified for C_3H_8)	4 (methane) 1 (propane)
2750	50
2751	100
Nitric Oxide in Nitrogen (Certified for NO)	
1683b*	50
1684b*	100
1685b*	250
1686b*	500
1687b*	1000
2629a*	20
2630*	1500
2631a*	3000
2735	800

**Available as a NIST Traceable Reference Material (NTRM); from commercial suppliers. A suppliers list is available on our website.*

GASES (continued)

SRM	Nominal Amount of Substance Fraction (µmol/mol)
Nitric Oxide in Nitrogen (Certified for NO)	
2736a	2000
2737	0.5
2738	1.0
Oxygen in Nitrogen (Certified for O_2)	
2657a*	2 mol %
2658a*	10 mol %
2659a*	21 mol %
Propane in Air (Certified for CH_4)	
1660a (also certified for C_3H_8)	4 (methane) 1 (propane)
1665b	3
1666b	10
1667b	50
1668b*	100
1669b	500
2764	0.25
Propane in Nitrogen (Certified for C_3H_8)	
2643a	100
2644a	250
2645a	500
2646a	1000
2647a	2500
2648a	5000
Oxides of Nitrogen in Air (Certified for NO_2)	
2660a*	100

**Available as a NIST Traceable Reference Material (NTRM); from commercial suppliers. A suppliers list is available on our website.*

The gas NTRM program was established in 1992 in partnership with the U.S. EPA and specialty gas companies as a means for providing end users with the wide variety of certified gas standards needed to implement the Emissions Trading Provision of the 1990 Clean Air Act.

GASES (continued)

SRM	Nominal Amount of Substance Fraction (µmol/mol)
Sulfur Dioxide in Nitrogen (Certified for SO_2)	
1661a*	500
1662a*	1000
1663a*	1500
1664a*	2500
1693a*	50
1694a*	100
1696a*	3500

**Available as a NIST Traceable Reference Material (NTRM); from commercial suppliers. A suppliers list is available on our website.*

The gas NTRM program was established in 1992 in partnership with the U.S. EPA and specialty gas companies as a means for providing end users with the wide variety of certified gas standards needed to implement the Emissions Trading Provision of the 1990 Clean Air Act.

INDUSTRIAL HYGIENE

Materials on Filter Media

These SRMs consist of potentially hazardous materials deposited on filters to be used to determine the levels of these materials in industrial atmospheres.

SRM/RM	Description	Set Size	Elemental Composition	Diameter (mm)	Pore Size (µm)
2679a	Quartz on Filter Media	2 × 3 levels, plus 2 blanks	Quartz, Clay	47	0.45
2783	Air Particulate on Filter	2 filters, plus 2 blanks	18 certified values 9 reference values	47	0.4
8785	Particulate Matter on Filters	3 filters	1 reference value 2 information values	37	—



Trace Constituent Elements in Blank Filters

SRMs 2678 and 2681 are for use in evaluating the performance of air sampling filter methods with either certified values (in µg) or limits of detection (X_0) for each of 30 constituent elements, as well as six leachable anions and cations.

SRM	Description	Diameter (mm)	Pore Size (µm)	Filter Weight (g)
2678	Cellulose Acetate Membrane	47	0.45	0.09
2681	Ashless Blank Filter	42.5	—	0.14

Respirable Silica

These SRMs are intended for use in determining, by X-ray diffraction, the levels of respirable silica in an industrial atmosphere according to the National Institute for Occupational Safety and Health (NIOSH) Analytical Method 7500 or equivalent methods.

SRM	Description	Mass Fraction/Mass Loading	Unit Size
1878a	Respirable Alpha Quartz	100.00% ± 0.21%	5 g
1879a	Respirable Cristobalite	95.6% ± 0.4%	5 g
2950	Respirable Alpha Quartz on Filter Media	(10, 20, 50, 100, 250, 500) µg/filter	set SRMs 2952-57
2951	Respirable Alpha Quartz on Filter Media	5 µg/filter	5 filters (5 blanks)
2952	Respirable Alpha Quartz on Filter Media	10 µg/filter	5 filters (5 blanks)
2953	Respirable Alpha Quartz on Filter Media	20 µg/filter	5 filters (5 blanks)
2954	Respirable Alpha Quartz on Filter Media	50 µg/filter	5 filters (5 blanks)
2955	Respirable Alpha Quartz on Filter Media	100 µg/filter	5 filters (5 blanks)
2956	Respirable Alpha Quartz on Filter Media	250 µg/filter	5 filters (5 blanks)
2957	Respirable Alpha Quartz on Filter Media	500 µg/filter	5 filters (5 blanks)
2958	Respirable Alpha Quartz on Filter Media	1000 µg/filter	5 filters (5 blanks)
2960	Respirable Alpha Cristobalite on Filter Media	(5, 10, 20, 50, 100, 250) µg/filter	set SRMs 2961-66
2961	Respirable Alpha Cristobalite on Filter Media	5 µg/filter	5 filters (5 blanks)
2962	Respirable Alpha Cristobalite on Filter Media	10 µg/filter	5 filters (5 blanks)
2963	Respirable Alpha Cristobalite on Filter Media	20 µg/filter	5 filters (5 blanks)
2964	Respirable Alpha Cristobalite on Filter Media	50 µg/filter	5 filters (5 blanks)
2965	Respirable Alpha Cristobalite on Filter Media	100 µg/filter	5 filters (5 blanks)
2966	Respirable Alpha Cristobalite on Filter Media	250 µg/filter	5 filters (5 blanks)
2967	Respirable Alpha Cristobalite on Filter Media	500 µg/filter	5 filters (5 blanks)

Lead in Paint, Dust, and Soil

These SRMs and RM have been developed in conjunction with the U.S. EPA to monitor paint, dust, and soil sources of lead.

SRM	Lead Concentration	Unit Size
Paint Film		
2570	<0.001 mg/cm^2	1 blank film
2571	3.58 mg/cm^2	1 film, plus 1 blank
2572	1.527 mg/cm^2	1 film, plus 1 blank
2573	1.040 mg/cm^2	1 film, plus 1 blank
2574	0.714 mg/cm^2	1 film, plus 1 blank
2575	0.307 mg/cm^2	1 film, plus 1 blank
2579a (Set of 6: SRMs 2570 to 2575)	0.307 to 3.58 mg/cm^2	5 films, plus 1 blank
2576 (High Level)	5.59 mg/cm^2	1 film, plus 1 blank
Powdered Paint		
2580	4.34 %	30 g
2581	0.449 %	35 g
2582	209.8 mg/kg	20 g
2589	9.99 %	35 g
Indoor Dust, Trace Elements in (As, Cd, Cr, Hg, Pb)		
2583	85.9 mg/kg	8 g
2584	9761 mg/kg	8 g
Soil, Trace Elements in		
2586	432 mg/kg	50 g
2587	3242 mg/kg	50 g
Paint on Fiberboard		
RM 8680	1 to 2 mg/cm^2	1 sheet: (10.2 × 15.2 × 1.3) cm

Asbestos

SRM	Description	Asbestos Type	Unit Size
1866b	Common Commercial Asbestos	chrysotile grunerite (Amosite) riebeckite (Crocidolite)	3 × 4 g
1876b	Chrysotile Asbestos for TEM	—	10 sections: 3 mm × 3 mm
RM 8411	Mixed Asbestos Research Filter	chrysotile asbestos grunerite (Amosite)	1 cm^2

High Purity Materials

Elemental Composition in High Purity Metals

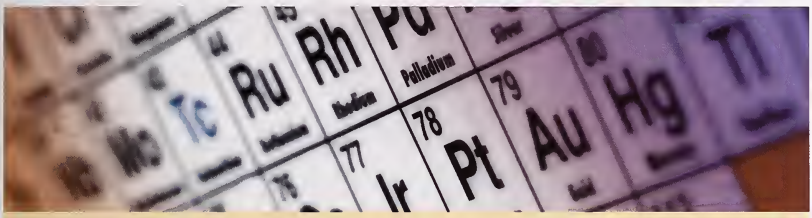

SRM	Description	Unit Size	
685R	High Purity Gold	rod:	5.9 mm diameter × 25 mm
685W	High Purity Gold	wire:	1.4 mm diameter × 102 mm
680a(L1)	High Purity Platinum	wire:	0.51 mm diameter × 10 cm
680a(L2)	High Purity Platinum	wire:	0.51 mm diameter × 1 m
682	High Purity Zinc	semicirc:	57 mm
885	Refined Copper	pin:	200 g
726	Selenium, Intermediate Purity	shot:	450 g
683	Zinc Metal	semicirc:	57 mm
728	Zinc, Intermediate Purity	shot:	450 g

Fine Gold Standards

These RMs are a series of fine gold and gold bullion products developed and certified by the Royal Canadian Mint (RCM), Ottawa, Canada and distributed by NIST. The fine gold RMs are primarily intended for use as calibration standards for the determination of trace elements by solid sample spectrometric methods; the gold bullion RMs are primarily intended for use as quality control check standards for fire assay. There are five sets of RMs in the gold bullion series (RMs 8068-8082) available in three forms: disc (25 mm diameter × 20 mm); wire (2 mm diameter); and foil (35 mm × 40 mm × 1 mm). There are six sets of RMs in the fine gold series (RMs 8050-8067) available in three forms: block (25 mm × 25 mm × 2.5 mm); wire (2 mm diameter); and turnings (25 g).

Stoichiometric Standards

These SRMs are defined as primary, working, and secondary standards in accordance with recommendations of the Analytical Chemistry Section of the International Union of Pure and Applied Chemistry [Ref. Analyst 90, 251 (1965)]. These definitions are as follows:

- Primary Standard: a commercially available substance of purity 100 % ± 0.02 % (Purity 99.98+ %)
- Working Standard: a commercially available substance of purity 100 % ± 0.05 % (Purity 99. 95+ %)
- Secondary Standard: a substance of lower purity which can be standardized against a primary grade standard

SRM/RM	Description	Certified Use	Stoichiometric Purity (%)	Unit Size (g)
951	Boric Acid	Acidimetric and Boron Isotopic Value	100.00	100
84k	Potassium Hydrogen Phthalate	Acidimetric Standard	99.9911	60
350a	Benzoic Acid	Acidimetric Standard	99.9958	30
351	Sodium Carbonate	Acidimetric Standard	99.9796	50
723d	Tris(hydroxymethyl)aminomethane	Acidimetric Standard	99.924	50
987	Strontium Carbonate	Assay and Isotopic Values	99.98	1
999a	Potassium Chloride	Assay Values for: 1. Potassium Chloride 2. Postassium 3. Chloride	 99.9817 52.4354 47.5463	60
136e	Potassium Dichromate	Oxidimetric Standard	99.984	60
17e	Sucrose	Polarimetric Standard	99.950	60
917b	D-Glucose (Dextrose)	Polarimetric Standard	99.7	50
8040	Sodium Oxalate	Reductometric Standard	99.972	60
83d	Arsenic Trioxide	Reductometric Standard	99.9926	60

Microchemistry

Unit Size: 2 g

SRM	Description	Certified Component
141d	Acetanilide	C, H, N, O
142	Anisic Acid	CH_3O-
143d	Cystine	C, H, N, S, O
2144	m-Chlorobenzoic Acid	Cl
148	Nicotinic Acid	C, H, N
2143	p-Flurobenzoic Acid	F
2141	Urea	N

Spectrometric Single Element Solutions

Unit Size: 50 mL

These SRMs are intended as standard solutions for use in calibrating instruments used in atomic spectrometry, including atomic absorption spectrometry, inductively coupled plasma optical spectrometry, and inductively coupled plasma mass spectrometry.

SRM	Element	Nominal Acid Concentration
3101a	Aluminum	HNO_3 10 %
3102a	Antimony	HNO_3 10 % + HF 2 %
3103a	Arsenic	HNO_3 15 %
3104a	Barium	HNO_3 1 %
3105a	Beryllium	HNO_3 10 %
3106	Bismuth	HNO_3 10 %
3107	Boron	H_2O
3108	Cadmium	HNO_3 10 %
3109a	Calcium	HNO_3 10 %
3110	Cerium	HNO_3 10 %
3111a	Cesium	HNO_3 1 %
3112a	Chromium	HNO_3 10 %
3113	Cobalt	HNO_3 10 %
3114	Copper	HNO_3 10 %
3115a	Dysprosium	HNO_3 10 %
3116a	Erbium	HNO_3 10 %
3117a	Europium	HNO_3 16 %
3118a	Gadolinium	HNO_3 10 %
3119a	Gallium	HNO_3 10 %
3120a	Germanium	HNO_3 10 % + HF 2 %
3121	Gold	HNO_3 5 % + HF 2 %
3122	Hafnium	HNO_3 10% + HF 2%
3123a	Holmium	HNO_3 16 %
3124a	Indium	HNO_3 10 %
3126a	Iron	HNO_3 10 %
3127a	Lanthanum	HNO_3 10 %
3128	Lead	HNO_3 10 %
3129a	Lithium	HNO_3 1 %
3130a	Lutetium	HNO_3 10 %
3131a	Magnesium	HNO_3 10 %
3132	Manganese	HNO_3 10 %

(continued)

Spectrometric Single Element Solutions (continued)

SRM	Element	Nominal Acid Concentration
3133	Mercury	HNO_3 10 %
3134	Molybdenum	HCl 10 %
3135a	Neodymium	HNO_3 10 %
3136	Nickel	HNO_3 10 %
3137	Niobium	HNO_3 10 % + HF 2 %
3138	Palladium	HCl 10 %
3139a	Phosphorus	HNO_3 0.8 %
3140	Platinum	HCl 10 %
3141a	Potassium	HNO_3 1 %
3142a	Praseodymium	HNO_3 10 %
3143	Rhenium	HNO_3 10 %
3144	Rhodium	HCl 10 %
3145a	Rubidium	HNO_3 1 %
3147a	Samarium	HNO_3 10 %
3148a	Scandium	HNO_3 10 %
3149	Selenium	HNO_3 10 %
3150	Silicon	H_2O
3151	Silver	HNO_3 10 %
3152a	Sodium	HNO_3 1 %
3153a	Strontium	HNO_3 10 %
3154	Sulfur	H_2SO_4 0.1 %
3155	Tantalum	HNO_3 10 % + HF 2 %
3156	Tellurium	HCl 20 %
3157a	Terbium	HNO_3 16 %
3158	Thallium	HNO_3 10 %
3159	Thorium	HNO_3 10 %
3160a	Thulium	HNO_3 10 %
3161a	Tin	HNO_3 5 % + HF 2 %
3162a	Titanium	HNO_3 10 % + HF 2 %
3163	Tungsten	HNO_3 7 % + HF 4 %
3164	Uranium	HNO_3 10 %
3165	Vanadium	HNO_3 10 %
3166a	Ytterbium	HNO_3 16 %
3167a	Yttrium	HNO_3 10 %
3168a	Zinc	HNO_3 10 %
3169	Zirconium	HNO_3 10 % + HF 2 %

Anion Chromatography Solutions

Unit Size: 50 mL

These SRMs are single component solutions prepared gravimetrically for use in anion chromatography or any other technique that requires aqueous standard solutions for calibration of control materials.

SRM	Description	Nominal Concentration (mg/kg)
3184	Bromide	1000
3182	Chloride	1000
3183	Fluoride	1000
3185	Nitrate	1000
3186	Phosphate	1000
3181	Sulfate	1000

Stable Isotopic Materials

SRM	Description	Chemical Form	Unit Size (g)
951	Boron Isotope Standard	Boric Acid	100
952	Enriched ^{10}B Isotope Standard	Boric Acid	0.25
975a	Chlorine Isotope Standard	Sodium Chloride	0.25
976	Copper Isotope Standard	Metal	disk: 0.4
977	Bromine Isotope Standard	Sodium Bromide	0.25
978a	Silver Isotope Standard	Silver Nitrate	0.25
979	Chromium Isotope Standard	Chromium Nitrate	0.25
980	Magnesium Isotope Standard	Metal	0.25
981	Lead Isotope Standard, Natural	Metal	wire: 1.0
982	Lead Isotope Standard, $^{208}Pb/^{206}Pb$ Equal Atom	Metal	wire: 1.0
983	Lead Isotope Standard, Radiogenic	Metal	wire: 1.0
984	Rubidium Isotope Standard	Rubidium Chloride	0.25
985	Potassium Isotope Standard	Potassium Chloride	1.0
986	Nickel Isotope Standard	Metal	0.5
987	Strontium Isotope Standard	Strontium Carbonate	1.0
990	Si Assay Isotopic	Silicon	—
991	Nitrate Spike Isotope Standard, ^{206}Pb	Nitric Acid	15
994	Gallium Isotope Standard	Metal	disk: 0.25
997	Thallium Isotope Standard	Metal	rod: 0.25
3230	Iodine-129, Isotopic (low levels)	Iodine	5 × 5 mL (plus blank)
3231	Iodine-129, Isotopic (high levels)	Iodine	5 × 5 mL (plus blank)

Light Stable Isotopic Materials

These RMs are distributed by NIST on behalf of the International Atomic Energy Agency (IAEA). At the request of the IAEA, quantities of these materials are limited to *one unit of each RM per laboratory every 3 years.*

Isotopic Ratio Legend:

1. D / H
2. ^{18}O / ^{16}O
3. ^{13}C / ^{12}C
4. ^{6}Li / ^{7}Li
5. ^{30}Si / ^{28}Si
6. ^{15}N / ^{14}N
7. ^{34}S / ^{32}S

RM	Description	Isotopic Ratios	Unit Size
8535	VSMOW-Water	1,2	20 mL
8536	GISP-Water	1,2	20 mL
8537	SLAP-Water	1,2	20 mL
8538	NBS30-Biotite	1,2,3	2 g
8539	NBS22-Oil	1,2,3	1 mL
8540	PEFI-Polyethylene	1,2,3	~2 mg
8541	USGS24-Graphite	1,2,3	0.8 g
8542	Sucrose ANU-Sucrose	1,2,3	1 g
8543	NBS18-Carbonatite	2,3	0.4 g
8544	NBS18-Limestone	2,3	0.4 g
8545	LSVEC-Lithium Carbonate	3,4	0.4 g
8546	NBS28-Silica Sand (Optical)	2,5	0.4 g
8547	IAEA-N1-Ammonium Sulfate	6	0.4 g
8548	IAEA-N2-Ammonium Sulfate	6	0.4 g
8549	IAEA-N3-Potassium Nitrate	6	0.4 g
8550	USGS25-Ammonium Sulfate	6	0.4 g
8551	USGS26-Ammonium Sulfate	6	0.4 g
8552	NSVEC-Gaseous Nitrogen	6	300 µmol
8553	Soufre de Lacq - Elemental Sulfur	2,7	0.5 g
8554	IAEA-S1-Silver Sulfide	2,7	0.5 g
8555	IAEA-S2-Silver Sulfide	2,7	0.5 g
8556	NBS123-Sphalerite	2,7	0.5 g
8557	NBS127-Barium Sulfate	2,7	0.5 g
8558	USGS32-Potassium Nitrate	6	0.5 g
8559	Natural Gas Isotopic	—	1 cylinder (0.1 mole)
8560	Natural Gas Isotopic	—	1 cylinder (0.1 mole)
8561	Natural Gas Isotopic	—	1 cylinder (0.1 mole)
8562	CO_2-Heavy, Paleomarine Origin	2,3	2 tubes: 9 mm diameter × 300 mm
8563	CO_2-Light, Petrochemical Origin	2,3	2 tubes: 9 mm diameter × 300 mm
8564	CO_2-Biogenic, Modern Biomass Origin	2,3	2 tubes: 9 mm diameter × 300 mm

Industrial Materials

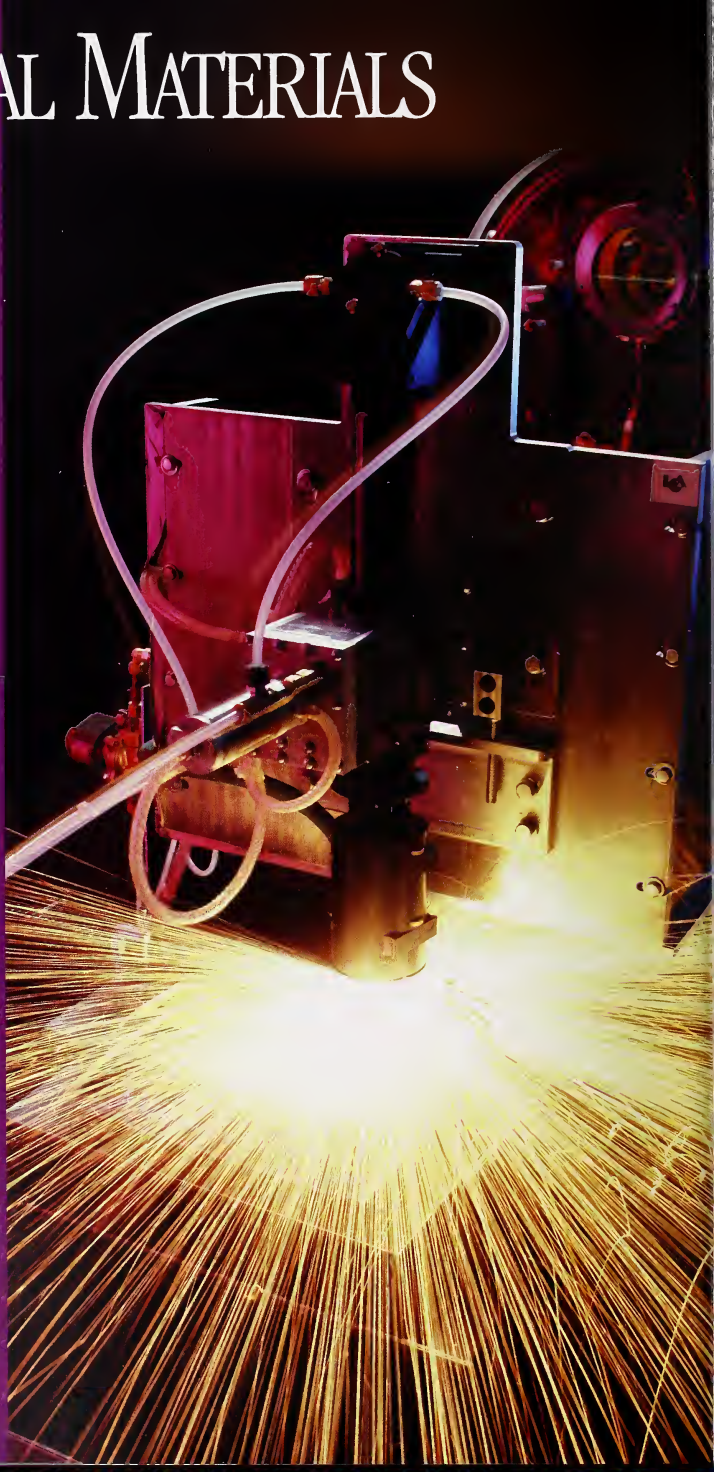

FERROUS METALS

Steels

These SRMs consist of selected steel alloys that provide a wide range of analytical values for relevant elements. Please visit our website to view the relevant certificate or report of investigation for all available certified and non-certified values.

Low Alloy Steels (chip)

Unit Size: 150 g (unless otherwise noted)

SRM	Description
72g	AISI 4130
293	AISI 8620 (Cr - Ni - Mo)
139b	AISI 8640 (Cr - Ni - Mo)
291	ASTM A213 (Cr - Mo)
163	Chromium Steel (100 g)
36b	Chromium-Molybdenum Steel
155	Chromium-Tungsten Steel
129c	SAE 112 High Sulfur
2171	HSLA 100 (6Ni - Cr - Cr - Cu - Mo)
106b	Nitralloy™ G (Cr - Mo - Al)
32e	SAE 3140 (Ni - Cr)
100b	SAE 340 (Mn)
33e	SAE 4820 (Ni)
30f	SAE 6150 (Cr - V)
16f	Basic Open Hearth Steel (1 % Carbon)
Silicon Steels	
179	High Silicon Steel
125b	High Silicon Steel, Calcium-Bearing
131g	Low Carbon Silicon Steel

Low Alloy Steels (disk and rod)

Nominal Sizes for Solid Steel SRMs:
600 Series: 3.2 mm diameter × 51 mm
1100 and 1200 Series: 31 mm diameter × 19 mm
1700 Series: 34 mm diameter × 19 mm
A "C" preceding the SRM number indicates a chill cast sample; 31 mm diameter × 19 mm.

SRM	Description
1270	2-1/4 Chromium - 1 Molybdenum Low Alloy Steel, A 336 (F-22)
C1285	A242, Modified
1224	AISI 1078, Carbon Steel
C1221	AISI 1211, Modified, Resulfurized/Rephosphorized
1269	AISI 1526, Modified (Line Pipe Steel)
1225	AISI 4130
661	AISI 4340
1262b	AISI 94B17 (Modified)
1254	Calcium in Low Alloy Silicon Steel
663	Chromium-Vanadium Steel, Modified
1263a	Chromium-Vanadium Steel, Modified
1265a	Electrolytic Iron
664	High Carbon Steel, Modified
1264a	High Carbon Steel, Modified
1135	High Silicon Steel
1134	High Silicon Steel
1768	High Purity Iron
1226	HY 130
1286	HY 80
1228	Basic Open Hearth Steel (0.1 % Carbon)
1227	Basic Open Hearth Steel (1 % Carbon)
1761	Low Alloy Steel
1762	Low Alloy Steel
1763	Low Alloy Steel
1764	Low Alloy Steel
1765	Low Alloy Steel
1766	Low Alloy Steel
1767	Low Alloy Steel
1768	High Purity Iron
1218	Low Carbon & Sulfur Silicon Steel
1271	Ni-Cr-Cu-Mo (HSLA100)

Plain Carbon Steels (chip)

Unit Size: 150 g (unless otherwise noted)

SRM	Description
178	0.4C Basic Oxygen Furnace Steel
13g	0.6 % Carbon Steel
20g	AISI 1045 Steel
14g	AISI 1078 Carbon Steel
368	AISI 1211 Steel
19h	Basic Electric Steel, 0.2 % Carbon
Basic Open-Hearth Steel	
15h	0.1 % Carbon
12h	0.4 % Carbon
152a	0.5 % Carbon (Tin-Bearing)
337a	1 % Carbon (300 g)

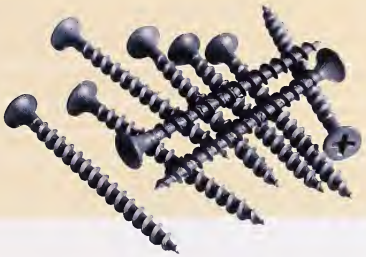

Stainless Steels (disk)

Unit Size: 32 mm diameter × 19 mm

SRM	Description
1219	AISI 431 (16Cr - 2Ni)
1172	AISI 348 (17Cr - 11Ni - 0.6Nb)
1223	Chromium Steel
1297	SAE 201
1295	SAE 405
C1296	SAE 460
C1153a	(17Cr - 9Ni)
C1152a	(18Cr - 11Ni)
1155	AISI 316 (18Cr - 12Ni - 2Mo)
C1154a	Stainless Steel, (19Cr - 13Ni)
C1151a	Stainless Steel, (23Cr - 7Ni)
1171	AISI 321 (17 Cr - 11Ni - 0.3Ti)
C1287	High Alloy (AISI 310 mod.)
C1288	High Alloy (A-743)

Stainless Steels (chip)

Unit Size: 150 g (unless otherwise noted)



SRM	Description
339	SAE 303Se (17Cr - 9Ni - 0.2Se)
101g	AISI 304 L (18Cr - 10Ni)
343a	AISI 431 (16Cr - 2Ni)
123c	AISI 348 (17Cr - 11Ni - 0.6Nb)
121d	AISI 321 (17Cr - 11Ni - 0.3Ti)
160b	AISI 316 (18Cr - 12Ni - 2Mo)
166c	AISI 316L Low Carbon Stainless Steel (100 g)
893	SAE 405 (Cr)
895	SAE 201 (Cr-Mn)
73c	SAE 420 (13 % Cr)
133b	CrMO

Special Low Alloy Steels (chip and pin)

Unit Size: 150 g (unless otherwise noted)

SRM	Description
2159	Low Alloy Steel (pin - 200 g)
2160	Low Alloy Steel (pin - 200 g)
2166	Low Alloy Steel
2167	Low Alloy Steel
361	AISI 4340 Steel
362	AISI 94B17, Modified
363	Chromium-Vanadium Steel, Modified
364	High Carbon Steel, Modified
2168	High Purity Iron



Specialty Steels (disk)

SRM	Description	Unit Size
1158	High Nickel Steel, 36 % Nickel	32 mm diameter × 19 mm
1772	S-7 Tool Steel	34 mm diameter × 19 mm
1157	AISI M2, Tool Steel	32 mm diameter × 19 mm
1233	Valve Steel	35 mm diameter × 19 mm

Tool Steels (chip)

Unit Size: 150 g

SRM	Description
134a	Molybdenum - Tungsten - Chromium - Vanadium Steel
2172	S-7 Tool Steel
132b	AISI M2, Tool Steel
50c	Tungsten - Chromium - Vanadium Steel



High Alloy Steels (chip)

Unit Size: 150 g (unless otherwise noted)

SRM	Description
345a	Cu Precipitation Hardening Steel (15Cr - 4Ni)
344	Mo Precipitation Hardening Steel (15Cr - 7Ni)
126c	High Nickel Steel (36 % Ni)
868	High Temperature Alloy (Fe-Ni-Co) (100 g)
348a	High Temperature Alloy A286 (Ni-Cr)
862	High Temperature Alloy L605 (100 g)
346a	Valve Steel

Steelmaking Alloys (fine powder)

Unit Size: 150 g

SRM	Description
57a	Silicon Metal
58a	Ferrosilicon (73 % Silicon-Regular Grade)
59a	Ferrosilicon
195	Ferrosilicon (75 % Silicon High Purity Grade)
196	Low Carbon Ferrochromium
64c	High Carbon Ferrochromium
68c	High Carbon Ferromanganese
90	Ferrophosphorus
347	Magnesium Ferrosilicon
689	Silicon Ferrochromium

Cast Irons (chip)

Unit Size: 150 g

SRM	Title
4L	Cast Iron
5m	Cast Iron
6g	Cast Iron
122i	Cast Iron
7g	High Phosphorus Cast Iron
115a	Copper-Nickel-Chromium Cast Iron
341	Ductile Cast Iron
334	Gray Cast Iron (Carbon and Sulfur)
890	High-Alloy White Cast Iron, HC 250+V
891	High-Alloy White Cast Iron, Nickel-Hard, Type I
892	High-Alloy White Cast Iron, Nickel-Hard, Type IV
82b	Nickel Chromium Cast Iron
107c	Nickel-Chromium-Molybdenum Cast Iron
342a	Nodular Cast Iron
338	White Cast Iron, Carbon and Sulfur

Cast Steels, White Cast Irons, and Ductile Irons (disk)

Unit Size: 32 mm diameter × 19 mm

SRM	Description
1138a	Cast Steel (No. 1)
1139a	Cast Steel (No. 2)
C1173	Cast Steel (No. 3)
C2423	Ductile Iron A
C2423a	Ductile Iron B
C2424	Ductile Iron C
C2424a	Ductile Iron D
C1291	High Alloy White Cast Iron, Ni-Hard, Type I
C1292	High Alloy White Cast Iron, Ni-Hard, Type IV
C1290	High Alloy White Cast Iron, HC-250+V
1173	Nickel-Chromium-Molybdenum-Vanadium Steel
C1137a	White Cast Iron
C1145a	White Cast Iron

High Temperature Alloys (chip and disk)

SRM	Description	Unit Size
866	Incoloy™ 800	100 g
867	Incoloy™ 825	100 g
1230	High Temperature Alloy A286	disk: 32 mm diameter × 19 mm
1246	Incoloy™ 800	disk: 35 mm diameter × 19 mm
1247	Incoloy™ 825	disk: 35 mm diameter × 19 mm
1250	High Temperature Alloy (Fe - Ni - Co)	disk: 32 mm diameter × 19 mm
C2400	High Alloy Steel, ACI 17/4 PH	disk: 32 mm diameter × 19 mm
C2401	High Alloy Steel ACI-CD-4M Cu	disk: 32 mm diameter × 19 mm

Gases in Metals: Iron and Steel (rod)

These SRMs are certified for oxygen content. Materials certified for nitrogen are noted.

SRM	Description	Rod Size (mm)
1089*	Gasometric Standard, set includes:	
	SRM 1095 AISI 4340 Steel	6.4 × 102
	SRM 1096 AISI 94B17 Steel, Modified**	6.4 × 102
	SRM 1097 Cr-V Steel, Modified	6.4 × 102
	SRM 1098 High Carbon Steel**	6.4 × 102
	SRM 1099 Electrolytic Iron	6.4 × 102
1754	AISI 4320 Oxygen in Low Alloy Steel,**	9.5 × 9.5 × 102
1090	Oxygen in Ingot Iron	6.35 × 102
1094	Oxygen in Maraging Steel	0.6 × 82
1091a	AISI 431 Oxygen in Stainless Steel	7.9 × 102
1093	Oxygen in Valve Steel	0.6 × 82

** These SRMs are sold only as a set designated SRM 1089.*
*** In addition to being certified for oxygen, these SRMs are also certified for nitrogen.*

NONFERROUS METALS

Aluminum Base Alloys (chip and disk)

SRMs 1710 through 1715 are specially prepared to include low levels of cadmium and lead encountered in the analysis of recycled aluminum.

SRM	Description	Unit Size
87a	Silicon - Aluminum Alloy	75 g
853a	Aluminum Alloy 3004	40g
855a	Aluminum Casting Alloy 356	30 g
856a	Aluminum Casting Alloy 380, Fine Millings	30 g
858	Alloy 6011, Modified	35 g
1258	Alloy 6011, Modified	disk: 35 mm diameter × 19 mm
1258-I	Alloy 6011, Modified	disk: 35 mm diameter × 19 mm
859	Alloy 7075	35 g
1240C	Aluminum Alloy 3004	disk: 63 mm diameter × 19 mm
1259	Alloy 7075	disk: 35 mm diameter × 19 mm
1710	Alloy 3004	disk: 63 mm diameter × 19 mm

(continued)



Aluminum Base Alloys (chip and disk) (continued)

SRM	Description	Unit Size
1711	Alloy 3004	disk: 63 mm diameter × 19 mm
1712	Alloy 3004	disk: 63 mm diameter × 19 mm
1713	Alloy 5182	disk: 63 mm diameter × 19 mm
1714	Alloy 5182	disk: 63 mm diameter × 19 mm
1715	Alloy 5182	disk: 63 mm diameter × 19 mm

Cobalt Base Alloys (chip and disk)

SRM	Description	Unit Size
862	High Temperature Alloy L605	chip: 100 g
1242	High Temperature Alloy L605	disk: 35 mm diameter × 19 mm
1775	Refractory Alloy MP-35-N	disk: 35 mm diameter × 19 mm
2175	Refractory Alloy MP-35-N	chip: 50 g

Copper "Benchmark" (chip and rod)

Unit Size: Chip: 50 g
Rod: 6.4 min × 103 mm

SRM		Description
Chip	*Rod*	
395	495	Unalloyed Copper - Cu II
396	496	Unalloyed Copper - Cu III
	457	Unalloyed Copper - Cu IV (6.6 mm diameter × 103 mm)
398	498	Unalloyed Copper - Cu V
399	499	Unalloyed Copper - Cu VI
400	500	Unalloyed Copper - Cu VII
454		Unalloyed Copper - Cu XI (35 g)
	C1251a	Phosphorus Deoxidized Copper VIII
	C1252a	Phosphorus Deoxidized Copper IX
	C1253a	Phosphorus Deoxidized Copper X

Copper Base Alloys (chip and rod)

SRM	Description	Unit Size (g)
158a	Silicon, Bronze	150
Beryllium-Copper		
458	C-17510	50
459	C-17200	50
460	C-17300	50
Phosphor-Bronze		
871	CDA 521	100
872	CDA 544	100
Cupro-Nickel		
874	10 % CDA 706, High-Purity	100
875	10 % CDA 706, Doped	100
Nickel-Silver		
879	CDA 762	100
880	CDA 770	100
1034	Unalloyed Copper	rod: 6.35 mm diameter × 103 mm
1035	Leaded-Tin Bronze Alloy	50

Copper Base Alloys (block and disk)

The 1100 series SRMs are wrought disks 32 mm diameter × 19 mm. The C1100 series SRMs are chill cast blocks 32 mm square × 19 mm. Both forms have nearly identical elemental compositions.

SRM		Description
Disk	*Block*	
1107		Naval Brass B
1108		Naval Brass C
1110		Red Brass B
1111		Red Brass C
1112	C1112	Gilding Metal A
1113	C1113	Gilding Metal B
1114	C1114	Gilding Metal C
1115	C1115	Commercial Bronze A
1116	C1116	Commercial Bronze B
1117	C1117	Commercial Bronze C
	C1122	Beryllium-Copper
1276a		CDA 715 Cupro-Nickel

Lead Base Alloys (disk and powder forms)

SRM		Description	Unit Size (g)	
Powder	*Disk*		*Powder*	*Disk*
1129		Solder 63Sn - 37Pb	200	
127b	1131	Solder 40Sn - 60Pb	150	32 mm diameter × 19 mm
53e	1132	Lead Base Bearing Metal (84Pb - 10Sb - 6Sn)	150	32 mm diameter × 19 mm
	1727	Anode Tin (block form)		(30 x 30 x 30 mm)

Lead Base Materials (disk)

Unit Size: 50 mm diameter × 16 mm

SRM	Description
C2415	Battery Lead
C2416	Bullet Lead
C2417	Lead Base Alloy
C2418	High Purity Lead

Solder Thickness (plate form)

SRM	Description	Unit Size (g)		
Disk		*Powder*	*Disk*	
2321	Tin-Lead Sn: 60 Alloy Pb: 40	6.8	295	7.5

Tin Base Alloys (chip)

SRM	Description	Unit Size
54d	Tin Base Bearing Metal	170 g
1727	Anode Tin	30 × 30 × 30 mm

Nickel Base Alloys (chip and disk)

SRM	Description	Unit Size
349a	Waspaloy™	150 g
861	Nickel-Based Superalloy	50 g
864	Inconel™ 600	100 g
865	Inconel™ 625	100 g
882	Nickel-Copper Alloy (65Ni - 31Cu - 3Al)	100 g
1159	Electronic and Magnetic Alloy Ni-Fe	disk: 31 mm diameter × 19 mm
1160	Electronic and Magnetic Alloy Ni-Mo	disk: 31 mm diameter × 19 mm
1243	Waspaloy™	disk: 34 mm diameter × 19 mm
1244	Inconel™ 600	disk: 35 mm diameter × 19 mm
1245a	Inconel™ 625	disk: 35 mm diameter × 19 mm
C1248	Nickel-Copper Alloy (66Ni - 30Cu)	disk: 32 mm diameter × 19 mm
1249	Inconel™ 718	disk: 41 mm diameter × 19 mm
C2402	Hastelloy™ C	disk: 32 mm diameter × 19 mm

Nickel Oxides (powder)

Unit Size: 25 g

SRM	Description
671	Nickel Oxide No. 1
672	Nickel Oxide No. 2
673	Nickel Oxide No. 3

Trace Elements in Nickel Base Superalloys (chip)

Unit Size: 35 g

SRM	Description	Unit Size (g)	Trace Composition (in mg/kg)			
			Pb	Se	Te	Tl
897	"Trace alloy" A	35	11.7	9.1	1.05	0.51
898	"Trace alloy" B	35	2.5	2.00	0.54	2.75
899	"Trace alloy" C	35	3.9	9.5	5.9	0.252

Titanium Base Alloys (chip and disk)

SRM	Description	Unit Size (g)
641	8 Mn (A)	disk: 32 mm diameter × 19 mm
642	8 Mn (B)	disk: 32 mm diameter × 19 mm
643	8 Mn (C)	disk: 32 mm diameter × 19 mm
647	6Al - 2Mo - 2Sn - 4Zr	50
648	5Al - 2Sn - 2Cr - 4Mo	50
649	15V - 3Al - 2Cr - 3Sn	50
650	Unalloyed Titanium A	30
651	Unalloyed Titanium B	30
654b	6Al - 4V	disk: 31 mm diameter × 19 mm
1128	15V - 3Al - 3Cr - 3Sn	disk: 35 mm diameter × 19 mm
2431	6Al - 2Sn - 4Zr - 6Mo	50
2432	10V - 2Fe - 3Al	50
2433	8Al - 1Mo - 1V	50
173c	6Al - 4V	50

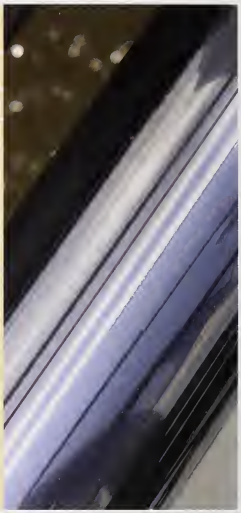

Hydrogen in Titanium (platelet)

SRM	Description	Unit Size
352c	Hydrogen in Unalloyed Titanium	20 g
2452	Hydrogen in Titanium Alloy	10 g
2453	Hydrogen in Titanium Alloy	10 g
2454	Hydrogen in Titanium Alloy	10 g

Zirconium Base Alloys (chip)

SRM	Description	Unit Size
360b	Zircaloy-4	100 g

Zinc Base Alloys (chip and disk)

SRM	Description	Unit Size
94c	Die Casting Alloy	chip: 150 g
625	ASTM AG 40A Die Casting Alloy	disk: 44 mm diameter × 19 mm
626	ASTM AG 40A Die Casting Alloy	disk: 44 mm diameter × 19 mm
627	ASTM AG 40A Die Casting Alloy	disk: 44 mm diameter × 19 mm
628	ASTM AC 41A Die Casting Alloy	disk: 44 mm diameter × 19 mm
629	ASTM AC 41A Die Casting Alloy	disk: 44 mm diameter × 19 mm
630	ASTM AC 41A Die Casting Alloy	disk: 44 mm diameter × 19 mm
631	Zinc spelter, Modified	disk: 45 mm diameter × 19 mm
1736	Zinc-Aluminum (.31 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1737	Zinc-Aluminum (.63 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1738	Zinc-Aluminum (.10 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1739	Zinc-Aluminum (.21 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1740	Zinc-Aluminum (.42 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1741	Zinc-Aluminum (.52 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
1742	Zinc-Aluminum (.79 % Al) Die Casting Alloy	disk: 50.8 mm diameter × 12.7 mm
2139	Zinc-Aluminum (.80 % Al) Die Casting Alloy	chip: 100 g

Microindentation Hardness (block form)

SRM	Description	Hardness Nominal (kgf/mm^2)
1893	Bright Copper (Knoop)	125
1894a	Bright Copper (Vickers)	125
1895	Bright Nickel (Knoop)	600
1896b	Bright Nickel (Vickers)	600
1905	Bright Nickel (Knoop)	600
1906	Bright Nickel (Knoop)	600
1907	Bright Nickel (Knoop)	600
1908	Bright Nickel (Vickers)	600
1909	Bright Nickel (Vickers)	600
2798a	Bright Nickel (Vickers)	600
2830	Ceramic, Silicon Nitride (Knoop)	1500
2831	Ceramic, Tungsten Carbide (Vickers)	1530

CERAMICS AND GLASSES

Carbides (powder)

SRM	Description	Unit Size (g)
112b	Silicon Carbide	80
276b	Tungsten Carbide	75

Cemented Tungsten Carbides (powder)

Unit Size: 100 g

SRM	Description
887	Cemented Carbide (83W - 10Co)
888	Cemented Carbide (64W - 25Co - 5Ta)
889	Cemented Carbide (75W - 9Co - 5Ta - 4Ti)

Trace Elements (powder and wafer)

These SRMs are for calibrating instruments and evaluating analytical techniques used to determine trace elements in inorganic matrices. SRMs 610 through 617 come in units of 6 wafers with wafer thicknesses of 3 mm for even numbered SRMs and 1 mm for odd numbered SRMs.

These SRMs also have values listed for Sr isotope ratios.

SRM	Description	Certified Elements
607	Trace Elements in Potassium Feldspar (5 g)	
Trace Elements in Glass		
610/611		33 elements
612/613		33 elements
614/615		33 elements
616/617		33 elements

Glasses (powder and solid)

SRM	Description	Unit Size (g)
81a	Glass Sand	75
89	Lead-Barium	45
92	Low-Boron Soda-Lime Powder	45
93a	High-Boron Boro-silicate	wafer: 32 mm diameter × 6 mm
165a	Glass Sand (low Iron)	75
620	Soda-Lime, Flat	3 platelets: 35 mm × 35 mm × 3 mm
621	Soda-Lime, Container	3 disks: 38 mm diameter × 5 mm
1411	Soft Borosilicate	10 platelets: 32 mm × 32 mm × 3 mm
1412	Multicomponent	8 platelets: 32 mm × 32 mm × 3 mm
1413	Glass Sand (high alumina)	75
1830	Soda-Lime, Float	3 platelets: 32 mm × 32 mm × 6 mm
1831	Soda-Lime, Sheet	3 platelets: 37 mm × 37 mm × 3 mm
1834	Fused Ore Glass	disk: 30 mm diameter × 3 mm

GLASS

Chemical Resistance [Durability] of Glass (solid form)

SRM	Description	Unit Size
622	Soda-Lime Silica	2.2 kg
623	Borosilicate	2.2 kg

Electrical Properties of Glass (bar form)

SRM	Description	Unit Size (cm)
624	Lead-Silica, for DC Resistivity	5 x 5 x 0.5
774	Lead-Silica, for Dielectric Constant	5 x 5 x 2.5

Viscosity of Glass (bar form)

SRM	Description	Unit Size
710a	Soda-Lime-Silica	10 x 10 x 4 cm
717a	Borosilicate	450 g

Glass Liquidus Temperature (solid form)

SRM	Description	Unit Size
773	Soda-Lime-Silica	2.5 cm x 2.5 cm x 0.6 cm
1416	Aluminosilicate	22 lengths of 12.7 cm tube (250 g)

Viscosity Fixpoints (solid forms)

SRM	Description	Unit Size
709	Extra Dense Lead Silica	4 cm x 4 cm x 5 cm
710a	Soda-Lime-Silica	10 cm x 10 cm x 4 cm
713	Dense Barium Crown 620/603	3.6 cm x 1.7 cm
714	Alkaline Earth Alumina Silicate	.6 cm x 15.2 cm
716	Neutral	1.2 cm x 15.2 cm
717a	Borosilicate	4.2 cm x 4.2 cm x 12.5 cm

Relative Stress Optical Coefficient (bar form)

SRM	Description	Unit Size
709	Extra Dense Lead Silica	4 cm x 4 cm x 5 cm

Density (solid form)

SRM	Description	Unit Size
1826b	Soda-Lime Glass	slab - 0.8 cm x 2.0 cm x 4.0 cm
1827a	Lead Silica Glass	slab - 2.5 cm x 2.5 cm x 1.2 cm

CEMENTS

Portland Cements (powder)

SRM	Unit Size
Calcium Aluminate Cement	
1882a	4 × 5 g
1883a	4 × 5 g
Portland Cement	
1880a	4 × 5 g
1881a	4 × 5 g
1884a	4 × 5 g
1885a	4 × 5 g
1886a	4 × 5 g
1887a	4 × 5 g
1888a	4 × 5 g
1889a	4 × 5 g
Silica Fume	
2696	1 × 70 g

Portland Cement Clinkers (solid)

SRM	Unit Size
Portland Cement Clinkers (5 phases certified)	
2686	3 × 10 g
2687	3 × 10 g
2688	3 × 10 g

LUBRICANTS

Lubricating Oil Ingredients

These SRMs are for determining the concentrations of a single element in lubricating base oil. SRMs 1818a and 1819a consist of five bottles, approximately 20 g of liquid each; SRM 1836 consists of four sets of four ampoules, each ampoule containing approximately 4 g of liquid.

SRM	Description	Elemental Composition (mg/kg)				
		I	II	III	IV	V
1818a	Total Chlorine	31.6	60.0	78.2	154.4	234.0
1836	Total Nitrogen	9.0	50.9	113.3	166.2	
1819a	Total Sulfur	423.5	741.1	4022	4689	6135
1848	Lubricating Oil Additive Package	100 mL				

Wear-Metals in Oil

SRM	Description	Unit Size
1084a	Wear-Metals	5 × 1.6 g
1085b	Wear-Metals	5 × 1.2 g
1083	Wear-Metals (Base Oil)	150 mL

Carbon Modified Silica

Unit Size: 3 × 1 g

This SRM is chemically modified microparticulate silica intended for the calibration of instruments used to measure total carbon.

SRM	Description	Bottle	Mass Fraction (%)
1216	Carbon Modified Silica	I	0.70
		II	9.06
		III	17.04

Used Auto Catalysts

Unit Size: 70 g

SRM	Description	Elemental Composition
2557	Recycled Monolith	Pt, Pd, Rh, Pb
2556	Recycled Pellet	

PHYSICAL PROPERTIES



ION ACTIVITY

pH Calibration

SRM	Description	pH(S) Values (at 25 °C)	Unit Size (g)
2193	Calcium Carbonate	—	—
723d	Tris(Hydroxymethyl) aminomethane	—	—
185h	Potassium Hydrogen Phthalate	4.006	60
188	Potassium Hydrogen Tartrate	3.557	60
189b	Potassium Tetroxalate	1.719	65
187e	Sodium Tetraborate Decahydrate (Borax)	9.182	30
Admixtures			
Unit Size: 30 g (unless otherwise noted)			
186g	pH Standards		Set
186lg	Potassium Dihydrogen Phosphate	6.860*	
186llg	Disodium Hydrogen Phosphate	7.414**	
191c	Sodium Bicarbonate (25 g)	10.015*	
192c	Sodium Carbonate		

**This pH results only when the two SRMs listed are used as an admixture in solution.*
*** Physiological buffer preparation.*

Biological Buffer Systems

Unit Size: 60 g

SRM	Description	pH(S) Values (at 37 °C)	
		0.05 molal	*0.08 molal*
2181 2182	HEPES Free Acid NaHEPESate	7.364*	7.373*
2183 2184	MOPSO Free Acid NaMOPSOate	6.699*	6.694*

**This pH results only when the two SRMs listed are used as an admixture in solution.*

pD Calibration

SRM	Description	pD(S) Values (at 25°C)	Unit Size (g)
2185	Potassium Hydrogen Phthalate	4.518	60
2186I 2186II	Potassium Dihydrogen Phosphate Disodium Hydrogen Phosphate	7.428*	30 30
2191a 2192a	Sodium Bicarbonate Sodium Carbonate	10.732*	30 30

**This pD results only when the two SRMs listed are used as an admixture in solution.*

Ion-Selective Electrode Calibration

SRM	Description	Certified Property	Unit Size (g)
2201	Sodium Chloride	pNa, pCl	125
2202	Potassium Chloride	pK, pCl	160
2203	Potassium Fluoride	pF	125

Electrolytic Conductivity

SRM	Description	Nominal Conductivity (µS/cm)
3190	HCl in Deionized Water	—
	KCl in Deionized Water	
3191		100
3192		500
3193		1000
3194		10 000
3195		100 000
	KCl in n-Propanol/Deionized Water	
3198		5
3199		15
	NaCl in deionized Water	
3196		—

Positive Electrophoretic Mobility

SRM	Description	Certified Property	Unit Size
1980	Goethite (α-FeOOH)	+µE, 2.53 µm • cm/V • s	40 mL

POLYMERIC PROPERTIES

Molar Mass/Molecular Weight (M_w)

SRM	M_w (g/mol)	Unit Size (g)
Poly(ethylene oxide)		
1924	$M_w \approx 120\,900$ ($M_w/M_n \approx 1.04$)	0.2
1923	$M_w \approx 26\,900$ ($M_w/M_n \approx 1.06$)	0.2
Poly(methylmethacrylate)		
1489*	$M_n \approx 115\,000$ ($M_w/M_n \leq 1.1$)	1.1
1488*	$M_n \approx 29\,300$ ($M_w/M_n \leq 1.1$)	2
1487*	$M_w \approx 6300$	2
Polyethylene/Polystyrene		
2887*	$M_w \approx 196\,400$	0.3
2885*	$M_w \approx 6280$	0.3
2886*	$M_w \approx 87\,000$	0.3
2888	$M_w \approx 7190$	0.3
Polyethylene, linear		
1475a*	$M_w \approx 52\,000$ ($M_w/M_n \approx 2.90$) (see also melt flow)	50
1484a*	$M_w \approx 119\,600$ ($M_w/M_n \approx 1.19$)	0.3
1482a*	$M_w \approx 13\,600$ ($M_w/M_n \approx 1.19$)	0.4
1483a*	$M_w \approx 32\,100$ ($M_w/M_n \approx 1.11$)	1
Polystyrene, linear, broad molecular weight distribution		
706a	$M_w \approx 285\,000$	18
Polystyrene, linear, narrow molecular weight distribution		
1478*	$M_w \approx 37\,400$ ($M_w/M_n \approx 1.04$)	2
705a*	$M_w \approx 179\,300$ ($M_w/M_n \approx 1.07$)	5
1479	$M_w \approx 1\,050\,000$	2
Polyurethane		
1480	$M_w \approx 47\,300$	1

** Also certified for viscosity*

Melt Flow Rate

SRM	Description	Melt Flow Rate (g/10 min)	Unit Size (g)
1473b	Polyethylene Resin, Low Density	1.13	50
1475a	Polyethylene, Linear	2.02	50
1474	Polyethylene Resin	5.03	60
1497	Polyethylene Gas Pipe Resin, Pigmented	0.186	9080
1496	Polyethylene Gas Pipe Resin, Unpigmented	0.26	908

Viscosity

SRM	Description	Unit Size (mL)
2490	Non-Newtonian Polymer Solution for Rheology (Polyisobutylene Dissolved in 2,6,10,14-Tetramethylpentadecane)	100
2491	Non-Newtonian Polymer Melt for Rheology	100

Biomaterials

RM	Description	Unit Size
8456	Ultra High Molecular Weight Polythylene *Properties:* - Young's Modulus - Yield Strength - Ultimate Strength - Elongation	bar: 7.62 cm diameter × 152.4 cm (3 in diameter × 60 in)
8457	Ultra High Molecular Weight Polythylene *Properties:* - Young's Modulus - Yield Strength - Ultimate Strength - Elongation	10 (0.5 cm) cubes

THERMODYNAMIC PROPERTIES

Calorimetry - Combustion

SRM	Description	Heat of Combustion (MJ/kg)*	Unit Size (g)
39j	Benzoic Acid	26.434	30
2692b	Coal, Bituminous: % S = 1.170	(32.81)**	50
2685b	Coal, Bituminous: % S = 4.730	(26.94)**	50
2682b	Coal, Sub-Bituminous: % S = 0.4917	(25.66)**	50
2151	Nicotinic Acid	22.184	25
2684b	Coal, Bituminous, Sulfur and Mercury: % S = 3.08; Hg = 97.4 µg/kg	28.56**	50
1657	Synthetic Refuse-Derived Fuel	13.87**	100
2683b	Sulfur and Mercury in Coal: % S = 1.955, Hg = 90.0 µg/kg	30.62	50
1656	Thianthrene	33.480	30
2152	Urea	10.536	25

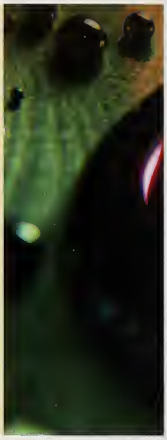

** The calorific values (MJ/kg) may decrease upon the aging or normal oxidation of the coals. NIST will continue to monitor these calorific values and report any substantive change to the purchaser.*

*** Gross calorific value or HHV (Higher Heating Value).*

Calorimetry - Solution

SRM	Description	Heat of Solution	Unit Size
1655	Potassium Chloride (Water Solution Calorimetry)	Absorbed (235.86 J/g)	30 g

Enthalpy and Heat Capacity

SRM	Description	Unit Size	Temperature Range (K)
RM 5	Copper	1.9 cm diameter 12 cm	25 to 300
781D2	Molybdenum	0.64 cm diameter 10 cm	273.15 to 2800
705a	Polystyrene (Molecular Weight: 170 900 g/mol)	5 g	10 to 350
720	Synthetic Sapphire	15 g	10 to 2250

Differential Scanning Calorimetry

SRM	Description	Melting Temperature (K)	Enthalpy of Fusion (J/g)	Unit Size
2222	Biphenyl (99.984 %)	342.41	120.41	1 g
2232	Indium (99.9999 %)	156.5985 °C	28.51	1 g
2234	Gallium for Thermal Analysis	—	—	—
2235	Bismuth for Thermal Analysis	—	—	—
2225	Mercury	234.30	11.469	2.5 g
2220	Tin (99.9995 %)	505.10	60.2	(2.5 × 2.5 × 0.0127) cm
1514	Thermal Analysis Purity Set	4 levels of p-ABA (0.0 mol % to 5.0 mol %)	—	4 × 0.5 g

Differential Thermal Analysis

RM	Description	Temperature Range (°C)	Unit Size
GM 754	ICTA Polystyrene DTA	97.8 to 107.5	10 g
8759	ICTA Set DTA	295 to 675	5 × 10 g
8760	ICTA Set DTA	570 to 940	5 × 10 g

Defining Fixed Points, International Temperature Scale of 1990, ITS-90

SRM	Description	Temperature (°C)	Unit Size (g)
Pure Metals			
743	Mercury (Triple Point)	-38.8344	ampoule: 680
1745	Indium (Freezing Point)	156.5985	ingot: 20 × 10 g
741a	Tin (Freezing Point)	231.928	shot: 200
740a	Zinc (Freezing Point)	419.527	shot: 200
1744	Aluminum (Freezing Point)	660.323	ingot: 200
1746	Silver (Freezing Point)	961.780	shot: 300
Devices (semi-open cell)			
1747	Tin (Freezing Point), 99.9999+ %	231.928	1071
1748	Zinc (Freezing Point), 99.9999+ %	419.527	1031

Reference Points

SRM	Description	Temperature (°C)	Unit Size (g)
742	Alumina, 99.9+ % (Melting Point)	2052	powder: 10
45d	Copper (Freezing Point)	1084.6	bar: 450
49e	Lead (Freezing Point)	327.453	bar: 600

Freezing Point, Melting Point, and Triple Point Cells (sealed cell)

SRM	Description	Temperature (°C)	Unit Size (g)
1751	Gallium Melting Point	—	200
1968	Gallium (Melting Point), 99.9999+ %	29.7646	25
1972	1,3-Dioxolan-2-one (Ethylene Carbonate) (Triple Point), 99.999+ %	36.3143	60
1969	Rubidium (Triple Point), 99.9+ %	39.30	154
1973	n-Docosane (Triple Point), 99.999+ %	43.879	60
1970	Succinonitrile (Triple Point), 99.999+ %	58.0642	60
1971	Indium (Freezing Point), 99.9999+ %	156.598	100

Thermal Expansion of Metal and Glass

SRM	Description	Temperature Range (K)	Unit Size (cm)
731L1	Borosilicate Glass	80 to 680	0.64 × 5.1
731L2	Borosilicate Glass	80 to 680	0.64 × 10.2
731L3	Borosilicate Glass	80 to 680	0.64 × 15.2
736L1	Copper	20 to 800	0.64 × 5.1
738	AISI 446 Stainless Steel	293 to 780	0.64 × 5.1

Thermal Resistance of Glass, Silica, and Polystyrene

SRM	Description	Temperature Range (K)	Thermal Resistance ($m^2 \cdot K \cdot W^{-1}$)	Unit Size (cm)
1453	Expanded Polystyrene Board	285 to 310	0.381 to 0.420	66 × 93 × 1.34
1450c	Fibrous Glass Board	280 to 340	0.661 to 0.818	61 × 61 × 2.54
1449	Fumed Silica Board	297	1.195 to 1.253	60 × 60 × 2.54
1459	Fumed Silica Board	297	1.195 to 1.253	30 × 30 × 2.54

Vapor Pressure of Metals

SRM	Description	Pressure Range (Pa) (K, ITS-90)	Temperature Range	Unit Size
745	Gold	10^{3} to 10^{2}	1300 to 2100	wire: 0.14 cm diameter × 15.2 cm
746	Cadmium	10^{6} to 10^{1}	350 to 594	rod: 0.64 cm diameter × 6.4 cm

Thermal Conductivity of Graphite and Iron

RM	Conductivity Range ($W \cdot m^{-1} \cdot K^{-1}$)	Unit Size
Electrolytic Iron (2 K to 1000 K)		
8420	12.32 to 32.98	0.64 cm diameter × 5.0 cm
Graphite (5 K to 2500 K)		
8424	0.0354 to 32.96	0.64 cm diameter × 5.0 cm

Laboratory Thermometer (mercury in glass)

Unit Size: 1 each

SRM	Description	Calibrated Points (°C)
934	Clinical Laboratory Thermometer	–0.20 to +0.20

Thermocouple Material, Platinum

Unit Size: 1 each

SRM	Description	Temperature Range
1749	Gold vs. Platinum Thermocouple Thermometer	0 °C to 1000 °C
1967	Platinum Wire, High Purity (99.999+ %)	-197 °C to 1768 °C
1750	Standard Platinum Resistance Thermometer	14 K to 430 K

OPTICAL PROPERTIES

Molecular Transmittance and Absorbance

SRM	Description	Wavelength Range	Unit Size
Crystalline and Solution Forms			
935a	Crystalline Potassium Dichromate, UV Absorbance	235 nm to 350 nm	15 g
1935	Potassium Dichromate Solution, UV Absorbance	235 nm to 350 nm	10 ampoules: 5 samples, plus 5 blanks
2032	Potassium Iodide, Stray Light	240 nm to 275 nm	25 g
931g	Liquid Filters, Absorbance	302 nm to 678 nm	12 ampoules: 3 × 3 levels, plus 3 blanks
Glass Filters, Transmittance			
930e	10 %, 20 %, 30 % Transmittance	440 nm to 635 nm	3 filters, plus 1 blank
1930	1 %, 3 %, 50 % Transmittance	440 nm to 635 nm	3 filters, plus 1 blank
2030a	30 % Transmittance	465.0 nm	1 filter, plus 1 blank
2031b	Metal-on-Quartz Filters 10 %, 30 %, 90 % Transmittance	250 nm to 635 nm	3 filters, plus 1 blank
2053	20 nm Ni-Cr Film on Silica	2 µm to 25 µm	25 mm diameter × 250 µm
2054	90 nm Ni-Cr Film on Silica	2 µm to 25 µm	25 mm diameter × 250 µm
2055	77 nm Cu-Ni Film on Silica	2 µm to 25 µm	25 mm diameter × 250 µm
2056	97 nm Cu-Ni Film on Silica	2 µm to 20 µm	25 mm diameter × 250 µm
2930	Ultimate Range Visible Absorbance Filters	—	3 filters & 1 blank



Transmittance Wavelength Standards

SRM	Description	Wavelength Range	Unit Size
2034	Holmium Oxide Solution	240 nm to 650 nm	1 sealed cuvette
2035	Near-IR Transmission	971 nm to 1949 nm	25 mm diameter × 1.5 mm
2036	Near-IR Wavelength/Wavenumber Reflection Standard	975 nm to 1946 nm	—
2037	Red Diesel Dye	—	100 mg
2065	Transmission Wavelength/Vacuum Wavenumber	ultraviolet–visible–near-infared	25 mm diameter × 1.5 mm
1921a	Infrared Transmission	3.2 µm to 18.5 µm	1 polystyrene film

Fluorescence

SRM/RM	Description	Wavelength Range	Unit Size
936a	Quinine Sulfate Dihydrate	375 nm to to 675 nm	1 g
1932	Fluorescein	488 nm to 191 nm	3 × 2 mL
8640	Fluorscein Labeled Microbead Suspension	—	—
2242	Relative Intensity Correction Standard, Raman Spectroscopy	—	1 artifact
2241	Relative Intensity Correction Standard, Raman Spectroscopy	785 nm	1 glass slide (10.7 × 30.4 × 2.0mm)
2243	Relative Intensity Correction Standard, Raman Spectroscopy	488 nm to 514.5 nm	1 glass slide

Specular Spectral Reflectance

SRM	Description	Wavelength Range	Unit Size
2026	Second Surface, Aluminum on Fused Quartz	250 nm to 2500 nm	5.1 cm diameter × 0.6 cm
2017	Multi-Angle White Reflectance Standard	360 nm to 780 nm	5.7 cm diameter × 1.3 cm
2040	PTFE Diffuser for Spectral Reflectance Factor	380 nm to 780 nm	5 × 26 g

Optical Rotation

SRM	Description	Wavelength Range	Unit Size
917b	D-Glucose (Dextrose)	546 nm to 589 nm	50 g
17e	Sucrose	546 nm to 633 nm	60 g

Liquid Refractive Index

SRM	Description	Wavelength Range	Unit Size
1922	Mineral Oil	468 nm to 589 nm	30 mL

X-ray and Photographic Imaging

SRM	Description	Unit Size
1010a	Microcopy Resolution Test Chart	5 charts
1008	Photographic Step Tablet	25.4 cm × 3.5 cm
1001	X-ray Film Step Tablet	25.4 cm × 3.5 cm

ELECTRICAL PROPERTIES

Electrical Resistivity and Conductivity of Electrolytic Iron and Graphite

Unit Size: rod: 0.64 cm diameter × 5.0 cm

RM	Resistivity Range (μΩ · m)	Unit Size
Electrolytic Iron (2 K to 1000 K)		
8420	0.004 to 0.909	0.64 cm diameter × 5.0 cm
Graphite (5 K to 2500 K)		
8424	28.78 to 12.59	0.64 cm diameter × 5.0 cm

Electrical Resistivity and Conductivity of Silicon

SRM	Resistivity (Ω · cm)	Type	
2526	Spreading Resistance	0.001 to 200	Set of 16:5 x 10 x 0.625
2541	Silicon Resistivity	0.01	100D x 0.625
2542	Silicon Resistivity	0.1	100D x 0.625
2543	Silicon Resistivity	1	100D x 0.625
2544	Silicon Resistivity	10	100D x 0.625
2545	Silicon Resistivity	25	100D x 0.625
2546	Silicon Resistivity	100	100D x 0.625
2547	Silicon Resistivity	200	100D x 0.625

OPTOELECTRONICS

SRM	Description	Unit Size
	Wavelength Calibration Standards	
2514	Wavelength Calibration Reference for 1560 nm to 1595 nm - Carbon Monoxide ($^{12}C^{16}O$)	Gas Absorption Cell
2515	Wavelength Calibration Reference for 1595 nm to 1630 nm - Carbon Monoxide ($^{13}C^{16}O$)	Gas Absorption Cell
2517a	High Resolution Wavelength Calibration Reference for 1510 nm to 1540 nm - Acetylene ($^{12}C_2H_2$)	Gas Absorption Cell
2519a	Wavelength Reference Absorption Cell for 1530 nm to 1560 nm Hydrogen Cyanide ($H^{13}C^{14}N$)	Gas Absorption Cell
	Polarization Mode Dispersion Standards	
2518	Polarization Mode Dispersion Standard	1 each
2538	Deterministic Polarization Mode Dispersion Standard	1 each
	Fiber and Fiber-Connector Geometry Standards	
2513	Mode Field Diameter Standard for Single-Mode Fiber	1 each
2520	Optical Fiber Diameter Standard	1 each
2522	Pin Gauge Standard for Optical Fiber Ferrules	1 wire-sizing bore
2523	Optical Fiber Ferrule Geometry Standard	1 ceramic connector ferrule
2553	Optical Fiber Coating Diameter (n = 1.504)	1 each: 250 µm diameter
2554	Optical Fiber Coating Diameter (n = 1.515)	1 each: 250 µm diameter

METROLOGY

Optical Microscope Linewidth Measurement

SRM	Linewidth (µm)	Pitch (µm)	Unit Size (cm)
	Linewidth Measurement Standards		
475	0.9 to 10.8	2 to 36	6.35 × 6.35 × 0.15
476	0.9 to 10.8	2 to 36	6.35 × 6.35 × 0.15
2800*			25 × 75 × 2.3

** SRM 2800 is used in calibrating magnification and consists of a pattern of parallel lines whose nominal distances from the centerline range from ± 1 µm to ± 5 mm. Certified values are given for the center-to-center distance of each line from the centerline; the linewidths are not certified.*

Scanning Electron Microscope (SEM)

SRM/RM	Description	Spacings	Unit Size (mm)
2069b	SEM Performance Standard	2 mm to 4 mm	12 mm diameter with 3 mm peg
8091	SEM Sharpness Standard		semiconductor chip: 2 mm × 2 mm
2800	Microscope Magnification Standard	1 µm to 5 mm	25 × 75 × 2.3

Thin Film for Transmission Electron Microscope

SRM	Description	Certified Element	Unit Size
2063a	Microanalysis Thin Film Mineral Glass	Ar, Ca, Fe, Mg, O, Si	1 glass film

Depth Profiling

SRM	Description	Value	Unit Size (cm)
2133	Phosphorus Implant in Silicon Depth Profile Standard	^{31}P: 0.04927 µg/cm^2 (9.58×10^{14} atoms/cm^2)	crystal 1 × 1
2134	Arsenic Implant in Silicon Profile Standard	^{75}As - 7×10^{14} atoms/cm^2	crystal: 1 × 1
2135c	Nickel-Chromium Thin-Film Depth Profile Standard	Cr: 41.3 µg/cm^2 Ni: 49.4 µg/cm^2	1 × 2.54 × 0.04
2137	Boron Implant in Silicon Depth Profile Standard	^{10}B - 1.018 v 1015 atoms/cm^2	1 × 1

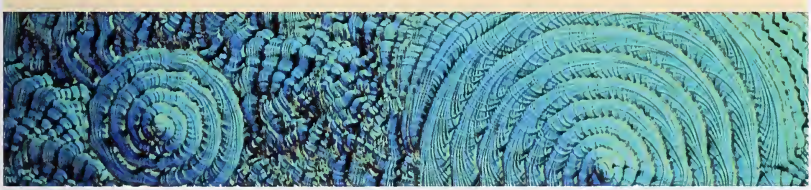

SILICON CRYSTAL

Solder Thickness for X-ray Fluorescense

Unit Size: plate: 15 mm × 15 mm

SRM	Description	Composition	Coating Mass/Area	Coating Thickness	
				(µm)	(µm)
2321	Tin-Lead Alloy	60 % Sn, 40 % Pb	6.8 mg/cm^2	295	7.5

Coating Thickness

Unit Size: 45 mm × 45 mm

These SRMs are suitable for calibrating instruments based on magnetic induction and magnetic pull-off techniques used in the measurement of organic and non-magnetic inorganic coatings over steel.

SRM	Nominal Coating Thickness (µm)	Nominal Coating Thickness (mils)
Chromium over Copper on Steel		
1358a	80, 255, 1000	3.1, 9.8, 39
1359b	48, 140, 505, 800	2.0, 5.5, 20, 32
1361b	6, 12, 25, 48	0.2, 0.5, 1.0, 2.0
1362b	40, 80, 140, 205	1.6, 3.1, 5.5, 7.9
1363b	255, 385, 505, 635	9.8, 16, 20, 26
1364b	800, 1000, 1525, 1935	32, 39, 59, 79

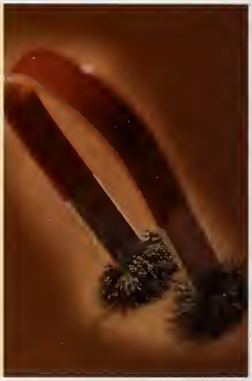

Ellipsometry

Unit Size: 76 mm substrate diameter

Each unit is certified for the ellipsometric parameters delta (Δ) and psi (ψ) at the vacuum wavelength $\lambda = 633.0$ nm, and for the derived values of the thicknesses and indexes of refraction of the silicon dioxide and silicon layers.

SRM	Thickness (nm)
Thin Film Thickness Standards	
2531	50
2534	25
2535	14

Oxygen Concentration in Silicon

SRM	Description	Unit Size (mm)	Concentration (mg/kg)
2551	Oxygen in Silicon	4 wafers: 25 × 25 × 2	Low: 10 Medium: 13 High: 15 FZ: (<0.1)

Superconducting Critical Current (wire form)

Unit Size: wire: 8.7 cm diameter × 2.2 m

SRM	Description	Magnetic Field Range (T)	Critical Current Range (A)
1457	Niobium-Titanium Wire	2.000 to 8.000	293.30 to 69.72

CERAMICS AND GLASSES

Chemical Resistance [Durability] of Glass

SRM	Description	mL of N/50 H_2SO_4	Unit Size (kg)
623	Borosilicate	0.34	2.2
622	Soda-Lime Silica	7.67	2.2

Electrical Properties of Glass

Unit Size: 5 cm × 5 cm × 2.5 cm

SRM 624 is suitable for use with ASTM C 657. SRM 774 is suitable for use with ASTM D 150.

SRM	Description	Unit Size (cm)	Value
624	Lead Silica for DC Volume Resistivity	5 × 5 × 2.5	$\log_{10}\rho \approx 9.9$ Ω-cm at 300 °C
774	Lead Silica for Dielectric Constant and ac Loss Characteristics	5 × 5 × 2.5	$K \approx 7.47$ at 100 Hz

Viscosity of Glass

SRM	Description	Unit Size (mm)
717a	Borosilicate Glass	block: 40 × 40 × 150
710a	Soda-Lime-Silica Glass	block: 100 × 100 × 40

Viscosity Fixpoints of Glass

These SRMs are for the calibration of equipment for the determination of the softening, annealing, and strain points of glass.

SRM	Description	Unit Size
714	Alkaline Earth Alumina Silicate	225 g
717a	Borosilicate	40 mm × 40 mm × 150 mm
713	Dense Barium Crown 620/603 Glass	225 g
709	Extra Dense Lead Silica	4 cm × 4 cm × 5 cm
716	Neutral Glass	250 g
710a	Soda-Lime-Silica	100 mm × 100 mm × 40 mm

Relative Stress Optical Coefficient

SRM	Description	Relative Stress Optical Coefficient (C) at λ = 546.1 nm (Value × 10^{-12} m^2/N)	Unit Size
709	Extra Dense Lead Silica	C = – 1.359	bar: 4 cm × 4 cm × 5 cm

Density

SRM	Description	Density (kg/m^3)	Unit Size
1827b	Lead Silica Glass	3593.800 at 20 °C	slab: 25 cm × 25 cm × 12 cm
211d	Toluene	871.476 at 15 °C	4 × 5 mL
2214	*Iso*octane	695.969 at 15 °C	4 × 5 mL



Glass Liquidus Temperature

SRM	Description	Unit Size	Method	Temperature (°C)
773	Soda-Lime-Silica	2.5 cm × 2.5 cm × 0.6 cm	A (boat) B (perforated plate)	988 991
1416	Aluminosilicate	22 lengths of 12.7 cm tube (250 g)		1147

X-RAY SPECTROMETRY

X-ray Diffraction

SRM	Description	XRD Application	Unit Size (g)
676	Alumina (Corundum Structure)	Quantitative Analysis	20
1976	Alumina Plate, Sintered	Instrument Response	45 mm × 45 mm × 1.6 mm
2910	Calcium Hydroxyapatite	Quantitative Analysis	5
660a	Lanthanum Hexaboride Powder	Line Position, Line Shape	6
675	Mica	Low 2θ (Large d-Spacing)	7.5
1879a	Respirable Cristobalite	Quantitative Analysis	5
1878a	Respirable Quartz	Quantitative Analysis	5
656	Silicon Nitride	Quantitative Analysis	2 × 10 g
640c	Silicon Powder 2~/d-Spacing	Line Position, Line Shape	7.5
674b	X-ray Powder Diffraction Intensity Set (α -Al_2O_3, CeO_2, Cr_2O_3, TiO_2, ZnO) (In Prep)	Quantitative Analysis	—
1990	Single Crystal Diffractometer Alignment Standard	Quantitative Analysis	3 spheres

X-ray Stage Calibration

SRM	Description	Unit Size (mm)
1842	Calibration Board (X and Y dimensions)	Board: 300 × 300 × 3
1843	Calibration Board (Z dimension)	Triangular Block: 37 × 20 × 12

RADIOACTIVITY

TABLE 1: Alpha Particle Solution Standards

Radionuclide	SRM Number	Approx. Bq·g^{-1}	Reference Time	Expanded Uncertainty	Solution Mass	Chemical Form (%)	Solution Composition (g)	Notes
Americium-241*	4322B	40	Sep 1991	1.0	5	$Am(NO_3)_3$	1 M HNO_3	
Americium-243*	4332D	40	May 1995	0.8	5	$Am(NO_3)_3$	1 M HNO_3	
Curium-243*	4329	70	Jun 1984	1.4	5	$Cm(NO_3)_3$	1 M HNO_3	
Curium-244*	4320A	35	Feb 1996	0.7	5	$Cm(NO3_3)_3$	1 M HNO_3	
Neptunium-237*	4341	100	Mar 1992	1.3	5	$Np(NO_3)_3$	2 M HNO_3	
Plutonium-238*	4323A	30	Feb 1994	0.7	5	$Pu(NO_3)_6$	3 M HNO_3	
Plutonium-239*	4330B	40	Dec 1995	0.7	5	$Pu(NO_3)_6$	3 M HNO_3	
Plutonium-240*	4338A	40	May 1996	0.8	5	$Pu(NO_3)_6$	3 M HNO_3	
Plutonium-242*	4334G	25	Jun 1994	0.8	5	$Pu(NO_3)_6$	3 M HNO_3	
Polonium-209**	4326	85	Mar 1994	0.4	5	$PoCl_4$	2 M HC1	
Radium-226	4969	3	Sep 1998	1.8	5	$RaCl_2$	1.5 M HC1	
Radium-226	4965	30	Sep 1991	1.2	5	$RaCl_2$	1.4 M HC1	
Radium-226**	4966	270	Sep 1991	1.2	5	$RaCl_2$	1.4 M HC1	
Radium-226**	4967A	2,500	Sep 2003	0.9	5	$RaCl_2$	1 M HC1	
Radon-222	4971	4 Total	#	#	0.2	$RaCl_2$	1 M HC1	a
Radon-222	4972	40 Total	#	#	0.2	$RaCl_2$	1 M HC1	a
Radon-222	4973	400 Total	#	#	0.2	$RaCl_2$	1 M HC1	a
Thorium-229	4328C	30	#	#	5	$Th(NO_3)_4$	1 M HNO_3	
Thorium-230	4342A	50	#	#	5	$Th(NO_3)_4$	1 M HNO_3	
Uranium-232	4324B	30	Jul 2002	0.8	5	$UO_2(NO_3)_2$	2 M HNO_3	
Uranium-238 (Natural)	4321C		Jan 1992		5	$UO_2(NO_3)_2$	1 M HNO_3	
Uranium-238		250		0.9				
Uranium-235		11		1.0				
Uranium-234		240		1.9				

* License Certification is required by NIST for this material. The form on the inside back page of this brochure may be used for this purpose.

** License Certification is not required by NIST for this material but a state-issued license may be required for possession. Contact your state Office of Radiation Safety for further information.

\# Material in preparation.

a) SRMs 4971, 4972, and 4973 are intended for the calibration of radon-222 measuring instruments. They consist of small heat-sealed polyethylene cylinders containing approximately 0.2 g of radium-226 solution. These SRMs are calibrated in terms of radium-226 activity and in terms of the emanation fraction of the radon-222 under specified conditions.

TABLE 2: Beta Particle and Electron Capture Solution Standards

Radionuclide	SRM Number	Approx. $Bq \cdot g^{-1}$	Reference Time	Expanded Uncertainty	Solution Mass (%)	Chemical Form (g)	Solution Composition	Notes
Barium-133 *	4251C	500,000	Sep 1993	0.5	5	$BaCl_2$	1 M HCl	
Carbon-14	4222C	50,000	Sep 1990	0.8	5	*n*-Hexadecane	*n*-Hexadecane	
Cesium-137 *	4233E	300,000	Jan 2004	0.7	5	CsC1	1 M HCl	
Chlorine-36	4943	10,000	Dec 1984	0.8	3	NaCl	H_2O	
Cobalt-60 *	4915E	75,000	Jan 1995	0.6	5	$CoC1_2$	1 M HCl	
Europium-152*	4370C	90,000	Feb 1987	1.1	5	$EuCl_3$	1 M HCl	
Holmium-166m*	4274	20,000	#	#	5	$HoCl_3$	1 M HCl	
Hydrogen-3†	4361C	2	Sep 1998	1.1	500	H_2O	H_2O	
Hydrogen-3	4926E	5,000	Sep 1998	1.1	20	H_2O	H_2O	
Hydrogen-3	4927F	600,000	Sep 1998	1.1	5	H_2O	H_2O	
Hydrogen-3	4947C	300,000	Mar 1987	1.2	4	Toluene	Toluene	
Iodine-129*	4949C	3,500	Mar 1993	0.7	5	NaI	0.01 M NaOH	
Iron-55	4929E	30,000	#	#	5	$FeCl_3$	1 M HCl	
Lead-210	4337	10,000	#	#	5	$Pb(NO_3)_2$	1 M HNO_3	
Nickel-63*	4226C	50,000	Aug 1995	0.9	5	$NiCl_2$	1 M HCl	
Plutonium-241*	4340B	500	#	#	5	$Pu(NO_3)_6$	3 M HNO_3	
Radium-228	4339B	200	#	#	5	$Ra(NO_3)_2$	1 M HNO_3	
Strontium-90*	4919H	4,000	Jul 1995	0.8	5	$SrCl_2$	1 M HCl	
Strontium-90*	4234A	2,500,000	Mar 1995	0.6	5	$SrCl_2$	1 M HCl	
Technetium-99	4288A	30,000	Sep 1996	1.2	5	$KTcO_4$	0.001 M KOH	

* License Certification is required by NIST for this material. The form on the inside back page of this brochure may be used for this purpose.

\# Material in preparation.

† This standard is not radioactive material for licensing or shipping purposes.

TABLE 3: Gamma Ray Point Source Standards

Radionuclide	SRM Number	Principal Photon Energies (keV)	Approx. Activity (Bq)	Reference Time	Expanded Uncertainty	Chemical Form (%)	Notes
Barium-133	4241C	81 - 384	60,000 to 140,000	Jan 1999	0.6	$BaCl_2$	a
Europium-152*	4218F	122 - 1400	60,000 to 140,000	Jan 1999	0.8	$EuCl_3$	a
Niobium-94*	4201B	702, 871	4,000	Apr 1970	1.5	NbO	a

* License Certification is required by NIST for this material. The form on the inside back page of this brochure may be used for this purpose.

a) This standard consists of a dried deposit, usually with a diameter of less than 0.5 cm, of the radionuclide sealed between two layers of 0.006 cm thick polyester tape that are supported on an aluminum annulus. The annulus has an outside diameter of 5.4 cm, an inside diameter of 3.8 cm, and a thickness of 0.05 cm.

TABLE 4: Radiopharmaceutical Standards

Radionuclide	SRM Number	Approx. $MBq \cdot g^{-1}$	Approx. Half Life	Expanded Uncertainty (%)	Solution Mass (g)	Chemical Form	Solution Composition	Notes
Gallium-67*	4416L	4	3 d	0.6	5	$GaCl_3$	2 M HCl	a
Indium-111*	4417L	5	3 d	0.6	5	$InCl_3$	3 M HCl	a
Iodine-125*	4407L	1	60 d	0.8	5	KI	0.01 M LiOH	a
Iodine-131*	4401L	5	8 d	0.7	5	KI	0.01 M LiOH	a
Molybdenum-99*	4412L	10	3 d	0.8	5	Na_2MoO_4	3 M HNO_3	a
Technetium-99m*	4410H	1000	6 h	0.7	5	$NaTcO_4$	0.15 M NaCl	a
Thallium-201*	4404L	4	3 d	0.8	5	$TlNO_3$	1 M HNO_3	a
Xenon-133*	4415L	500 Total	5 d	0.8	5 mL	Xe	Xe gas	a, b
Yttrium-90*	4427L	1	3 d	0.8	5	YCl_3	1 M HCl	a

* License Certification is required by NIST for this material. The form on the inside back page of this brochure may be used for this purpose.

a) Orders for these radionuclides must be received by the third day of the month in which the distribution is scheduled. For further information contact the NIST Radioactivity Group.

b) SRM 4415 consists of xenon-133 plus non-radioactive xenon, uncompressed, in a flame-sealed borosilicate glass ampoule. The ampoule has an outside diameter of 1.5 cm and a length of 4.5 cm.

TABLE 5: Beryllium Isotopic Ratio Standard

Nuclides	SRM Number	Approx. $Bq \cdot g^{-1}$	Isotopic Ratio	Reference Time	Expanded Uncertainty (%)	Solution Volume (mL)	Chemical Form	Solution Composition	Beryllium Concentration $(mg \cdot mL^{-1})$
Beryllium-10/ Beryllium-9†	4325	0.0002	3×10^{-11}	Aug 1986	5.1	50	$BeCl_2$	1 M HCl	5

† This standard is not radioactive material for licensing or shipping purposes.

TABLE 6: Radiocarbon Dating Contemporary Standard

Radionuclide	SRM Number	Approx. $Bq \cdot g^{-1}$	Reference Time	Expanded Uncertainty (%)	Mass (g)	Chemical Form	Physical Form	Notes
Carbon-14†	4990C	0.08	1980	1.6	225 (8 x 28)	Oxalic Acid	Crystalline Powder	a

† This standard is not radioactive material for licensing or shipping purposes

a) This SRM replaces SRM 4990, which has been in use in radiocarbon-dating laboratories since 1958. The material is part of a 450 kg lot of oxalic acid that was prepared by fermentation of French beet molasses from the 1977 spring, summer, and fall harvests. The ratio of the massic activity of SRM 4990C to that of SRM 4990, and the mass spectrometric ratios of carbon-13 to carbon-12 in each, were measured by eleven international carbon-dating laboratories in an intercomparison organized by L.M. Cavallo and W.B. Mann. See Proceedings of the 11th International Radiocarbon Dating Conference, M. Stuiver and R. Kra, Editors, *Radiocarbon* 25, No. 2 (1983).

TABLE 7: Environmental Natural Matrix Standards

SRM Number	Name	Mass (g)	Activity Certified	Activity Given But Not Certified	Other Data
4350B	River Sediment†	85	^{60}Co, ^{137}Cs, ^{152}Eu, ^{154}Eu, ^{226}Ra, ^{238}Pu, $^{239+240}$Pu, ^{241}Am	^{40}K, ^{55}Fe, ^{90}Sr, ^{228}Th, ^{230}Th, ^{232}Th, ^{234}U, ^{235}U, ^{238}U	a, b, c
4351	Human Lung†	45	^{232}Th, ^{234}U, ^{238}U, $^{239+240}$Pu, ^{238}Pu/($^{239+240}$Pu)	^{228}Th, ^{230}Th, ^{241}Am	c
4352	Human Liver†	45	^{238}Pu, $^{239+240}$Pu, ^{241}Am	^{228}Th, ^{230}Th, ^{232}Th, ^{234}U, ^{235}U, ^{238}U	c
4353A	Rocky Flats Soil II†	85	In preparation	In preparation	
4354	Lake Sediment†	25	^{60}Co, ^{90}Sr, ^{137}Cs, ^{228}Th, ^{232}Th, ^{235}U, ^{238}U, ^{238}Pu, $^{239+240}$Pu, ^{241}Am	^{210}Pb, ^{226}Ra, ^{230}Th, ^{234}U	a, c
4355	Peruvian Soil †	75	^{137}Cs, ^{228}Th, ^{230}Th, ^{232}Th, $^{239+240}$Pu, ^{241}Am, Upper limits on: ^{60}Co, ^{125}Sb, ^{152}Eu, ^{154}Eu, ^{155}Eu	^{40}K, ^{55}Fe, ^{90}Sr, ^{208}Tl, ^{214}Bi, ^{238}Pu	c
4356	Ashed Bone†	15	^{90}Sr, ^{226}Ra, ^{230}Th, ^{232}Th, ^{234}U, ^{238}U, ^{238}Pu, $^{239+240}$Pu, $^{243+244}$Cm	^{40}K, ^{210}Pb, ^{210}Po, ^{228}Ac, ^{228}Ra, ^{228}Th, ^{238}U, ^{241}Am	
4357	Ocean Sediment†	85	^{40}K, ^{90}Sr, ^{137}Cs, ^{226}Ra, ^{228}Th, ^{230}Th, ^{232}Th, ^{238}Pu, $^{239+240}$Pu	^{129}I, ^{155}Eu, ^{210}Pb, ^{228}Ra, ^{234}U, ^{235}U, ^{238}U, ^{237}Np, ^{241}Am	a, c
4358	Ocean Shellfish†	300	In preparation	In preparation	

† This standard is **not** radioactive material for licensing or shipping purposes.

a) Semi-quantitative elemental analysis by emission spectrographic measurements.
b) Analysis of plutonium isotopes by mass spectrometry.
c) Particle size distribution.

TABLE 8: Neutron Density Monitor Wire

SRM	Description	Cobalt Composition (weight %)	Unit Size
953	Cobalt in Aluminum Wire	0.116	0.5 mm diameter × 1 m

TABLE 9: Fission Track Glass

Each unit consists of four unirradiated glass wafers and two irradiated wafers.

SRM	Uranium Composition (μg/g)	Uranium-235 (Atom %)	Reactor Position	Neutron Fluence ($\times 10^{14}$ n/cm^2)	
				Copper Foil	*Gold Foil*
963a	0.823	0.2792	RT-4	39.5	43.0
			RT-3	41.2	45.8

Industrial Hygiene

Materials on Filter Media

These SRMs consist of potentially hazardous materials deposited on filters to be used to determine the levels of these materials in industrial atmospheres.

SRM/RM	Description	Set Size	Elemental Composition	Diameter (mm)	Pore Size (µm)
2679a	Quartz on Filter Media	2 × 3 levels, plus 2 blanks	Quartz, Clay	47	0.45
2783	Air Particulate on Filter	2 filters, plus 2 blanks	18 certified values 9 reference values	47	0.4
RM 8785	Particulate Matter on Filters	3 filters	1 reference value 2 information values	37	—

Trace Constituent Elements in Blank Filters

SRMs 2678 and 2681 are for use in evaluating the performance of air sampling filter methods with either certified values (in µg) or limits of detection (X_0) for each of 30 constituent elements, as well as six leachable anions and cations.

SRM	Description	Diameter (mm)	Pore Size (µm)	Filter Weight (g)
2678	Cellulose Acetate Membrane	47	0.45	0.09
2681	Ashless Blank Filter	42.5	—	0.14

Respirable Silica

These SRMs are intended for use in determining, by X-ray diffraction, the levels of respirable silica in an industrial atmosphere according to the National Institute for Occupational Safety and Health (NIOSH) Analytical Method 7500 or equivalent methods.

SRM	Description	Mass Fraction/Mass Loading	Unit Size
1878a	Respirable Alpha Quartz	100.00% ± 0.21%	5 g
1879a	Respirable Cristobalite	95.6% ± 0.4%	5 g
2950	Respirable Alpha Quartz on Filter Media	(10, 20, 50, 100, 250, 500) µg/filter	set SRMs 2952-57
2951	Respirable Alpha Quartz on Filter Media	5 µg/filter	5 filters (5 blanks)
2952	Respirable Alpha Quartz on Filter Media	10 µg/filter	5 filters (5 blanks)
2953	Respirable Alpha Quartz on Filter Media	20 µg/filter	5 filters (5 blanks)
2954	Respirable Alpha Quartz on Filter Media	50 µg/filter	5 filters (5 blanks)
2955	Respirable Alpha Quartz on Filter Media	100 µg/filter	5 filters (5 blanks)
2956	Respirable Alpha Quartz on Filter Media	250 µg/filter	5 filters (5 blanks)
2957	Respirable Alpha Quartz on Filter Media	500 µg/filter	5 filters (5 blanks)
2958	Respirable Alpha Quartz on Filter Media	1000 µg/filter	5 filters (5 blanks)
2960	Respirable Alpha Cristobalite on Filter Media	(5, 10, 20, 50, 100, 250) µg/filter	set SRMs 2961-66
2961	Respirable Alpha Cristobalite on Filter Media	5 µg/filter	5 filters (5 blanks)

(continued)

Respirable Silica (continued)

SRM	Description	Mass Loading	Unit Size
2962	Respirable Alpha Cristobalite on Filter Media	10 µg/filter	5 filters (5 blanks)
2963	Respirable Alpha Cristobalite on Filter Media	20 µg/filter	5 filters (5 blanks)
2964	Respirable Alpha Cristobalite on Filter Media	50 µg/filter	5 filters (5 blanks)
2965	Respirable Alpha Cristobalite on Filter Media	100 µg/filter	5 filters (5 blanks)
2966	Respirable Alpha Cristobalite on Filter Media	250 µg/filter	5 filters (5 blanks)
2967	Respirable Alpha Cristobalite on Filter Media	500 µg/filter	5 filters (5 blanks)

Lead in Paint, Dust, and Soil

These SRMs and RM have been developed in conjunction with the U.S. EPA to monitor paint, dust, and soil sources of lead.

SRM	Lead Concentration	Unit Size
Paint Film		
2570	<0.001 mg/cm^2	1 blank film
2571	3.58 mg/cm^2	1 film, plus 1 blank
2572	1.527 mg/cm^2	1 film, plus 1 blank
2573	1.040 mg/cm^2	1 film, plus 1 blank
2574	0.714 mg/cm^2	1 film, plus 1 blank
2575	0.307 mg/cm^2	1 film, plus 1 blank
2579a (Set of 6: SRMs 2570 to 2575)	0.307 to 3.58 mg/cm^2	5 films, plus 1 blank
2576 (High Level)	5.59 mg/cm^2	1 film, plus 1 blank
Powdered Paint		
2580	4.34 %	30 g
2581	0.449 %	35 g
2582	209.8 mg/kg	20 g
2589	9.99 %	35 g
Indoor Dust, Trace Elements in (As, Cd, Cr, Hg, Pb)		
2583	85.9 mg/kg	8 g
2584	9761 mg/kg	8 g
Soil, Trace Elements in		
2586	432 mg/kg	50 g
2587	3242 mg/kg	50 g
Paint on Fiberboard		
RM 8680	1 to 2 mg/cm^2	1 sheet: (10.2 × 15.2 × 1.3) cm

Asbestos

SRM	Description	Asbestos Type	Unit Size
1866b	Common Commercial Asbestos	chrysotile grunerite (Amosite) riebeckite (Crocidolite)	3 × 4 g
1876b	Chrysotile Asbestos for TEM	chrysotile	10 sections: 3 mm × 3 mm
RM 8411	Mixed Asbestos Research Filter	chrysotile asbestos grunerite (Amosite)	1 cm^2

ASBESTOS TESTING

Subject Index

C

D

E

F

G

H

I

N

O

P

Q

R

S

T

U

V

W

X

Y

Z

Numeric Index

SRM	Descriptor	Page
623	Borosilicate (Durability)	69, 91
624	Lead-Silica Glass for dc Resistivity	70, 91
625	Zinc-Base A	67
626	Zinc-Base B	67
627	Zinc-Base C	67
628	Zinc-Base D	67
629	Zinc-Base E-ASTM AC 41A	67
630	Zinc-Base F	67
631	Zinc Spelter (mod)	67
640c	Silicon Line Position (XRD)	93
641	Titanium Alloy, 8 Mn (A)	66
642	Titanium Alloy, 8 Mn (B)	66
643	Titanium Alloy, 8 Mn (C)	66
647	Titanium Alloy, Al-Mo-Sn-Zr	66
648	Titanium Alloy, Al-Sn-Zr-Cr-Mo	66
649	Titanium Alloy V-Al-Cr-Sn	66
650	Unalloyed Titanium A	66
651	Unalloyed Titanium B	66
654b	Titanium Alloy, Al-V	66
656	Silicon Nitride Quantitative Analysis	93
659	Silicon Nitride, Particle Size	1
660a	Line Profile LaB6	93
661	LA Steel (AISI 4340)	54
663	LA Steel, Cr-V (mod.)	54
664	LA Steel, High Carbon, (mod.)	54
670	Rutile Ore	30
671	Nickel Oxide 1	65
672	Nickel Oxide 2	65
673	Nickel Oxide 3	65
674b	X-Ray Powder Diffraction Intensity, set	93
675	Line Position, Mica (XRD)	93
676	Quantitative Analysis, Alumina (XRD)	91, 93
679	Brick Clay	31
680L1a	High Purity Platinum	45
680L2a	High Purity Platinum	45
682	High Purity Zinc	45
683	Zinc, Metal	45
685R	High Purity Gold	45
685W	High Purity Gold	45
688	Basalt Rock	32
689	Ferrochromium Silicon	58
690	Iron Ore (Canada)	30
691	Iron Oxide, Reduced	30
692	Iron Ore, Labrador	30
693	Iron Ore, Nimba	30
694	Phosphate Rock, Western	10, 30
696	Bauxite, Surinam	30
697	Bauxite, Dominican	30
698	Bauxite, Jamaican	30
699	Alumina (Reduction Grade)	30
705a	Polystyrene 179k Mol/Wt	78, 80
706a	Polystyrene 258k mol/wt	78
709	Extra Dense Lead	71, 92
710a	Soda-Lime Silica Glass	70, 71, 92
713	Barium Glass Anneal Pt	71, 92
714	Alumina Glass Anneal Pt	71, 92
716	Neutral Glass Anneal Pt	71, 92
717a	Hi Boron Glass Viscosity	70, 92
720	Sapphire Heat Capacity	80
723d	Tris (hydroxymethy) amionmethane	46, 75
726	Selenium, Inter-Purity	45
728	Zinc, Intermediate Purity	45
731L1	Borosilicate Glass - Thermal Expansion	82
731L2	Borosilicate Glass - Thermal Expansion	82
731L3	Borosilicate Glass - Thermal Expansion	82
736L1	Copper Thermal Expansion	82
738	Stainless Steel - Thermal Expansion	82
740a	Zinc (Freezing Point)	81
741a	Tin (Freezing Point)	81
742	Alumina (Reference Point)	82
743	Mercury (Triple Point)	81
745	Gold-Vapor Pressure	83
746	Cadmium-Vapor Pressure	83
762	Magnetic Moment Standard Nickel Disk	7
772a	Nickel Sphere for Magnetic Moment	7
773	Soda-Lime Silica (Glass Liquidus)	70, 93
774	Lead-Silica (Dielectric Constant)	70, 91
781D2	Molybdenum (Heat Capacity)	80
853a	Alloy 3004	60
855a	Aluminum Casting Alloy 356	60
856b	Aluminum Casting Alloy 380	60
858	Aluminum Alloy 6011	60
859	Aluminum Alloy 7075	62
861	Nickel-based Superalloy	65
862	High Temperature Alloy L-605	57, 61
864	Inconel 600	65
865	Inconel 625	65
866	Incoloy, 800	59
867	Incoloy, 825	59
868	High Temp Alloy Fe-Ni-Co	57

SRM	Descriptor	Page
2454	Hydrogen in Titanium Alloys	66
2490	Non-Newtonian Polymer Solution/Rheology	79
2491	Non-Newtonian Polymer Melt for Rheology	79
2513	Mode-Field Diameter of Single-Mode Fiber	88
2514	Wavelength Reference Absorption Cell-12CO	88
2515	Wavelength Reference Absorption Cell-13CO	88
2517a	Wavelength Reference Absorption Cell	88
2518	Polarization Mode Dispersion	88
2519a	Wavelength Reference Absorption	88
2520	Optical Fiber Geometry Standard	88
2522	Pin Gage for Optical Fiber Ferrules	88
2523	Optical Fiber Ferrule Geometry	88
2526	111 p-Type Silicon Resistivity Specimens	87
2527	111 n-Type Silicon Resistivity Specimens	85
2531	Si/SiO2 Thickness-50 nm	90
2534	Si/SiO2 Thickness-25 nm	90
2535	Si/SiO2 Thickness-14 nm	90
2538	Deterministic Polarization Mode Dispersion	86
2541	Silicon Resistivity	87
2542	Silicon Resistivity	87
2543	Silicon Resistivity	87
2544	Silicon Resistivity	87
2545	Silicon Resistivity	87
2546	Silicon Resistivity	87
2547	Silicon Resistivity	87
2551	Oxygen in Silicon	90
2553	Optical Fiber Coating Standard	88
2554	Optical Fiber Coating Standard	88
2556	Recycled Pellet (Autocatalyst)	73
2557	Recycled Monolith (Autocatalyst)	73
2570	Lead Paint Film White/Blank .001 mg/cm2	42, 102
2571	Lead Paint Film (Yellow) Nominal 3.5 mg/cm2	42, 102
2572	Lead Paint Film (Orange) Nominal 1.6 mg/cm2	42, 102
2573	Lead Paint Film (Red) Nominal 1.0 mg/cm2	42, 102
2574	Lead Paint Film (Gold) Nominal .7 mg/cm2	42, 102
2575	Lead Paint Film (Green) Nominal .3 mg/cm2	42,102
2576	Lead Paint Film, High Level	42, 102
2579a	Lead Paint Films for Portable XRF Analyz	42, 102
2580	Powdered Paint Nominal 4 % Lead	42, 102
2581	Powdered Paint Nominal 0.5 % Lead	42, 102
2582	Powdered Paint Nominal 200 mg/kg L	42, 102
2583	Trace Elements in Indoor Dust	29, 42, 102
2584	Trace Element in Indoor Dust	29, 42, 102
2585	Organic Contaminants in House Dust	29
2586	Trace Elements in Soil w/lead from paint	28, 42, 102
2587	Trace Elements in Soil w/Lead from Paint	28, 42, 102
2589	Powdered Paint Nominal 10 % Lead	42, 102
2612a	CO/Air 10 umol/mol	36
2613a	CO/Air 20 umol/mol	36
2614a	CO/Air 45 umol/mol	36
2619a	Carbon Dioxide in Nitrogen .5 % mol/mol	37
2620a	Carbon Dioxide in Nitrogen 1.0 % mol/mol	37
2621a	Carbon Dioxide in Nitrogen 5 % mol/mol	37
2622a	Carbon Dioxide in Nitrogen 2.0 % mol/mol	37
2623a	Carbon Dioxide in Nitrogen 2.5 % mol/mol	37
2624a	Carbon Dioxide in Nitrogen 3.0 % mol/mol	37
2625a	Carbon Dioxide in Nitrogen 3.5 % umol/mol	37
2626a	Carbon Dioxide in Nitrogen 4.0 % umol/mol	37
2629a	NO/N2, 20 umol/mol	38
2630	NO/N2, 1500 umol/mol	38
2631a	NO/N2, 3,000 umol/mol	38
2635a	CO/N2 25 umol/mol	37

SRM	Descriptor	Page
3199	Aqueous Electrolytic Conductivity 15 uS/cm	77
3230	Iodine-129, Isotopic (low levels)	50
3231	Iodine-129, Isotopic (high levels)	50
3244	Ephedra-Containing Protein Powder	9
3245	Ephedra Dietary Supplement Suite	10
4201B	Niobium-94 Point Source	97
4218F	Europium-152 Point Source	97
4222C	Carbon-14 (as hexadene)	96
4226C	Nickel-63 Solution	96
4233E	Cesium-137	96
4234A	Strontium/Yttrium	96
4241C	Barium-133 Point Source	96
4251C	Barium-133 Solution	96
4274	Holmium-166m	96
4288A	Technetium-99	96
4320A	Curium-244 Solution	95
4321C	Natural Uranium Solution	95
4322B	Americium-241 Solution	95
4323A	Plutonium-238 Solution	95
4324B	Uranium-232	95
4325	Beryllium-10/9 Solution	98
4326	Polonium-209 Solution	95
4328C	Thorium-299	95
4329	Curium-243 Solution	95
4330B	Plutonium-239 Solution	95
4332D	Americium-243 Solution	95
4334G	Plutonium-242 Solution	95
4337	Lead-210 Solution	96
4338A	Plutonium-240 Solution	95
4339B	Radium-228 Solution	96
4340B	Plutonium-241 Solution	96
4341	Neptunium-237 Solution	95
4342A	Thorium-230	95
4350B	River Sediment (Radioactivity)	99
4351	Human Lung Powder	99
4352	Human Liver Powder	99
4353A	Rocky Flats Soil II	99
4354	Lake Sediment Powder	99
4355	Peruvian Soil Powder	99
4356	Ashed Bone (Radioactivity)	99
4357	Ocean Sediment Powder	99
4358	Ocean Shellfish	99
4361C	Hydrogen-3 Water	96
4370C	Europium-152 Solution	96
4401L	Iodine-131 Solution	97
4404L	Thallium-201	97
4407L	Iodine-125 Solution	97
4410H	Technetium-99m	97
4412L	Molybdenum-99 Solution	97
4415L	Xenon-133 Solution	97
4416L	Gallium-67 Solution	97
4417L	Indium-111	97
4425	Samarim-153	95
4427L	Yttrium-90 Solution (Lot 5)	97
4915E	Cobalt-60 Solution	96
4919H	Strontium-90 Solution	96
4926E	Hydrogen-3 Water	96
4927F	Hydrogen-3 Water	96
4929E	Iron-55 Solution	96
4941	Neptunium-237	96
4943	Chlorine-36 Solution	96
4947C	Hydrogen-3 Toluene	96
4949C	Iodine-129 Solution	96
4965	Radium-226 Solution	95
4966	Radium-226 Solution	95
4967A	Radium-226 Solution	95
4969	Radium-226 Solution	95
4971	Radon-222	95
4972	Radon-222	95
4973	Radon-222	95
4990C	Oxalic Acid Powder	98
8010	Sand for Sand Sieve Analysis	1
8040	Sodium Oxalate	46
8091	SEM Sharpness Standard	89
8107	Additives in Smokeless Powder	18
8411	Mixed Asbestos Research Filter	43, 103
8412	Corn Stalk (Zea Mays)	10
8413	Corn Kernel (Zea Mays)	10
8414	Bovine Muscle Powder (Beef)	10
8415	Whole Egg Powder	9
8418	Wheat Gluten	9
8420	Iron Electrolytic	83, 87
8421	Iron Electrolytic	85
8424	Graphite Thermal Conductivity	83, 87
8432	Corn Starch	9
8433	Corn Bran	9
8435	Whole Milk Powder	9
8436	Durum Wheat Flour	9, 10
8437	Hard Red Spring Wheat Flour	10
8438	Soft Winter Wheat Flour	10
8441a	Wheat Hardness	11

NIST develops and promotes measurements, standards, and technology to enhance productivity, facilitate trade, and improve the quality of life. As the U.S. National Metrology Institute, NIST continually strives to meet the nation's measurement needs with Standard Reference Materials, Calibration Services, and Standard Reference Data. Please visit our website at www.nist.gov for further information.

National Institute of Standards and Technology
Technology Administration
U.S. Department of Commerce