



## **Federal Implementation Guideline for Electronic Data Interchange**

**ASC X12 Version/Release 003070  
FEDERAL CONVENTIONS FOR  
USING ASC X12 TRANSACTION SETS**

**Implementation Convention**



U.S. DEPARTMENT OF COMMERCE  
Technology Administration  
National Institute of  
Standards and Technology

**T**he National Institute of Standards and Technology was established in 1988 by Congress to “assist industry in the development of technology . . . needed to improve product quality, to modernize manufacturing processes, to ensure product reliability . . . and to facilitate rapid commercialization . . . of products based on new scientific discoveries.”

NIST, originally founded as the National Bureau of Standards in 1901, works to strengthen U.S. industry’s competitiveness; advance science and engineering; and improve public health, safety, and the environment. One of the agency’s basic functions is to develop, maintain, and retain custody of the national standards of measurement, and provide the means and methods for comparing standards used in science, engineering, manufacturing, commerce, industry, and education with the standards adopted or recognized by the Federal Government.

As an agency of the U.S. Commerce Department’s Technology Administration, NIST conducts basic and applied research in the physical sciences and engineering, and develops measurement techniques, test methods, standards, and related services. The Institute does generic and precompetitive work on new and advanced technologies. NIST’s research facilities are located at Gaithersburg, MD 20899, and at Boulder, CO 80303. Major technical operating units and their principal activities are listed below. For more information contact the Publications and Program Inquiries Desk, 301-975-3058.

---

### **Office of the Director**

- National Quality Program
- International and Academic Affairs

### **Technology Services**

- Standards Services
- Technology Partnerships
- Measurement Services
- Technology Innovation
- Information Services

### **Advanced Technology Program**

- Economic Assessment
- Information Technology and Applications
- Chemical and Biomedical Technology
- Materials and Manufacturing Technology
- Electronics and Photonics Technology

### **Manufacturing Extension Partnership Program**

- Regional Programs
- National Programs
- Program Development

### **Electronics and Electrical Engineering Laboratory**

- Microelectronics
- Law Enforcement Standards
- Electricity
- Semiconductor Electronics
- Electromagnetic Fields<sup>1</sup>
- Electromagnetic Technology<sup>1</sup>
- Optoelectronics<sup>1</sup>

### **Chemical Science and Technology Laboratory**

- Biotechnology
- Physical and Chemical Properties<sup>2</sup>
- Analytical Chemistry
- Process Measurements
- Surface and Microanalysis Science

### **Physics Laboratory**

- Electron and Optical Physics
- Atomic Physics
- Optical Technology
- Ionizing Radiation
- Time and Frequency<sup>1</sup>
- Quantum Physics<sup>1</sup>

### **Materials Science and Engineering Laboratory**

- Intelligent Processing of Materials
- Ceramics
- Materials Reliability<sup>1</sup>
- Polymers
- Metallurgy
- NIST Center for Neutron Research

### **Manufacturing Engineering Laboratory**

- Precision Engineering
- Automated Production Technology
- Intelligent Systems
- Fabrication Technology
- Manufacturing Systems Integration

### **Building and Fire Research Laboratory**

- Structures
- Building Materials
- Building Environment
- Fire Safety Engineering
- Fire Science

### **Information Technology Laboratory**

- Mathematical and Computational Sciences<sup>2</sup>
- Advanced Network Technologies
- Computer Security
- Information Access and User Interfaces
- High Performance Systems and Services
- Distributed Computing and Information Services
- Software Diagnostics and Conformance Testing

---

<sup>1</sup>At Boulder, CO 80303.

<sup>2</sup>Some elements at Boulder, CO.

# **Federal Implementation Guideline for Electronic Data Interchange**

## **ASC X12 Version/Release 003070 FEDERAL CONVENTIONS FOR USING ASC X12 TRANSACTION SETS**

Electronic Commerce Acquisition Program Management Office  
Standard Management Committee - Secretariat  
National Institute of Standards and Technology  
Gaithersburg, MD 20899-0001

Editor: Dr. Jean-Philippe Favreau

January 1998



**U.S. DEPARTMENT OF COMMERCE**  
William M. Daley, Secretary

**Technology Administration**  
Gary R. Bachula, Acting Under Secretary for Technology

**National Institute of Standards and Technology**  
Raymond G. Kammer, Director

## **Reports on Information Technology**

The National Institute of Standards and Technology (NIST)'s Information Technology Laboratory (ITL) develops standards and guidelines, provides technical assistance, and conducts research for computers and resources. As part of the overall federal effort to establish a single face to industry for conducting electronic commerce, ITL has been designated as the organization responsible for coordinating the development of Federal Implementation Conventions (ICs) for Electronic Data Interchange (EDI). ICs are defined by functional-area experts who create and select options from standard EDI Transaction Sets to yield the implementations to be used for practical EDI. These ICs are made available to federal agencies and industry by electronic means and this Special Publication Series.

**National Institute of Standards and Technology Special Publication 881-38**  
**Natl. Inst. Stand. Technol. Spec. Publ. 881-38, 70 pages (Jan. 1998)**  
**CODEN: NSPUE2**

**U.S. GOVERNMENT PRINTING OFFICE**  
**WASHINGTON: 1998**

---

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402

## 10.0 FEDERAL CONVENTIONS FOR USING ASC X12 TRANSACTION SETS

This part of the Federal Implementation Guidelines defines the Federal transaction set conventions. It includes the instructions for implementing the control and security structures and definitions of the usage indicators and applicable codes.

This version of Part 10 of the Federal Implementation Guidelines, based on the ANSI ASC X12 Version 003 Release 070 standards, supersedes and cancels the August 1994 version of Part 10.

Except where specifically otherwise indicated, this document directs how the agencies, components and activities of the United States Federal government will exchange Electronic Data Interchange (EDI) data formatted in accordance with the provisions of the ANSI ASC X12 standards.

### 10.1 INTRODUCTION

The power of the American National Standards Institute (ANSI) Accredited Standards Committee (ASC) X12 standard is in its building block concept, which standardizes the essential elements of business transactions. The concept is analogous to a "standard bill of material and the construction specifications," which gives the architect flexibility in what can be designed with standardized material and procedures. The Electronic Data Interchange (EDI) system designer, like the architect, uses the ASC X12 standards to build business transactions that are often different because of their function and yet utilize the ASC X12 standards. The "bill of material and the construction specification" of ASC X12 are the standards found in the published technical documentation.

ASC X12.3, December 1996 —The *Data Element Dictionary* specifies the data elements used in the construction of the segments that comprise the transaction sets developed by ASC X12.

ASC X12.5, December 1996 —The *Interchange Control Structure* provides the interchange control segment (also called an envelope), consisting of a header and trailer, for the EDI transmission; it also provides a structure to acknowledge the receipt and processing of the envelope.

ASC X12.6, December 1996 —The *Application Control Structure* defines the basic control structures, syntax rules, and semantics of EDI.

ASC X12.22, December 1996 —The *Data Segment Directory* provides the definitions and specifications of the segments used in the construction of transaction sets developed by ASC X12.



ASC X12.58, December 1996 -- The *Security Structures* define the data formats for authentication, encryption, and assurances in order to provide integrity, confidentiality, verification and non-repudiation of origin for two levels of exchange of Electronic Data Interchange (EDI) formatted data: functional group and transaction set level.

X12.59, December 1996 --The *Implementation of EDI Structure/Semantic Impact* provides a clear distinction between the syntax of X12 structures and the semantics of transaction set usage.

X12C/TG1/95-65 -- *Technical Report Reference Model for the Acknowledgment and Tracking of EDI Interchanges* summarizes the use of the ANSI ASC X12 control elements and standards for the acknowledgment and tracking of EDI interchanges.

International Telecommunication Union - Telecommunication Standardization Sector (ITU-T) Recommendation X.509 (1993)/ISO/IEC 9594-8 (1995), *Information Technology- Open Systems Interconnection- The Directory : Authentication Framework. The Directory*, defines a framework for the provision of authentication services by the Directory to its users. It specifies the form of authentication information held by the Directory, describes how authentication information may be obtained from the Directory, states the assumptions made about how authentication information is formed and placed in the Directory, defines three ways in which applications may use authentication information to perform authentication, and describes how other security services may be supported by authentication.

In addition to using existing standards to build specific transactions, the standards may be used to provide control and tracking of interchanges if accomplished in a specific standardized approach. ANSI ASC X12 has defined and approved several control structures and Transaction Sets intended to augment EDI auditing and control systems. It is the intent of these standards to provide a tracking mechanism for EDI data as it moves through the transmission cycle. Through the implementation of these tracking tools and analysis of the resulting information, delay or failures in delivery can be identified and corrected.

The work accomplished by ANSI ASC X12C in this area produced a generic acknowledgment model that has been adapted to support Federal Government EDI processes. Implementation of the acknowledgment mechanisms identified by this model will provide a basic capability to track interchanges as they flow from senders through Service Request Handlers (SRH) to receivers across the EC/EDI Infrastructure. (An SRH is a service provider whose primary function is to provide communications services between other components in the model.) This basic capability will provide functionality for each component to determine translation and transmission status, including current location and disposition of an

interchange. Use of the implemented acknowledgment mechanisms to determine singular event status can provide components with the information necessary to obtain some level of confidence that interchanges are flowing through the infrastructure properly. Taken as a sequence of acknowledgment events, the model provides senders with a means to track interchanges from generation to delivery to a Service Request Handler at the boundary of the infrastructure, without imposing the processing and communications overhead that would be required for true application to application acknowledgments.

In addition, the implemented acknowledgment mechanisms of this model will allow individual components to build upon or enhance their internal audit trail processes.

This part of the Federal Implementation Guidelines is meant to be an overarching architecture of the control and security structure which the government is implementing in the Electronic Commerce Infrastructure (ECI) and other government EC activities. However, not all the parts of the architecture will be implemented immediately. The specifics of which parts are actually implemented will be defined in agreements between actual components in the trading network and architecture, such as Value Added Networks (VANs) and government users of the ECI.

It is not the intent of this guideline to specify how the implemented acknowledgment mechanisms are to be used. While support of these mechanisms is required, their usage between infrastructure components will be as agreed between those components. As an example, the use of certain acknowledgment mechanisms between the government and VANs is specified in a VAN Licensing Agreement (VLA). Where there is a conflict between the implementation guidance provided in Part 10 and the VLA, the VLA shall take precedence. Also, the use of acknowledgments between Government Points of Translation (GPoT) and other infrastructure components can be as mutually agreed upon.

The Service Level Agreement (SLA) between the ECI and the respective government Automated Information Systems (AIS) acts in a similar manner as the VLA. Where there is a conflict between the implementation guidance provided in Part 10 and the SLA, the SLA shall take precedence.

By focusing on basic acknowledgment functionality that is independent of communications protocols, enhanced tracking of interchanges is accomplished without requiring individual components to adhere to or support a full accountability system.

For further clarification of acronyms, abbreviations, and codes, refer to ASC X12 published technical documentation. For copies, contact either the EDI focal point within your service or agency, or,

alternatively, contact the administering body (see Section 1.3 of these guidelines).



## 10.2 CONTROL SEGMENTS

In addition to communications control, the EDI interchange structure provides the standards user with multiple levels of control to ensure data integrity. It does so by using header and trailer control segments designed to identify uniquely the start and end of the interchange functional groups and transaction sets. The relationship of these control segments is shown in Figure 10.2-1. Control Segment specifications are defined in Section 10.6.

### 10.2.1 Description of Use


The interchange header and trailer segments (ISA/IEA) along with the optional interchange acknowledgment segments (TA1 and TA3) constitute the interchange control structure (i.e., an interchange envelope). Interchange control segments perform the following functions:

- Define data element separators, subelement separators and data segment terminators
- Provide control information
- Identify interchange sender and receiver
- Allow for authorization and security information.

The actual interchange control structure includes neither the group control structures nor the transaction control structures; these are defined by ASC X12 as application control structures, and their version and release may differ from those for the interchange envelope. An interchange envelope encompasses one or more functional groups (GS/GE), which, in turn, enclose one or more related transaction sets (ST/SE). The relationship for these structures is illustrated in Figure 10.2-1.

The purpose for GS/GE functional grouping is to provide an additional control envelope surrounding like transaction sets conforming with a unique Implementation Convention (IC). Their usage is prescribed as interchange control segments in order to present a consistent methodology for electronic data interchange within the government community and for commercial entities that conduct EDI business with the government.

**Implementation Note:** *The Federal Government Electronic Commerce Infrastructure (ECI) shall send and receive textual data ASCII encoded. If unencrypted binary segments are filtered, Base 64 filtering shall be used.*

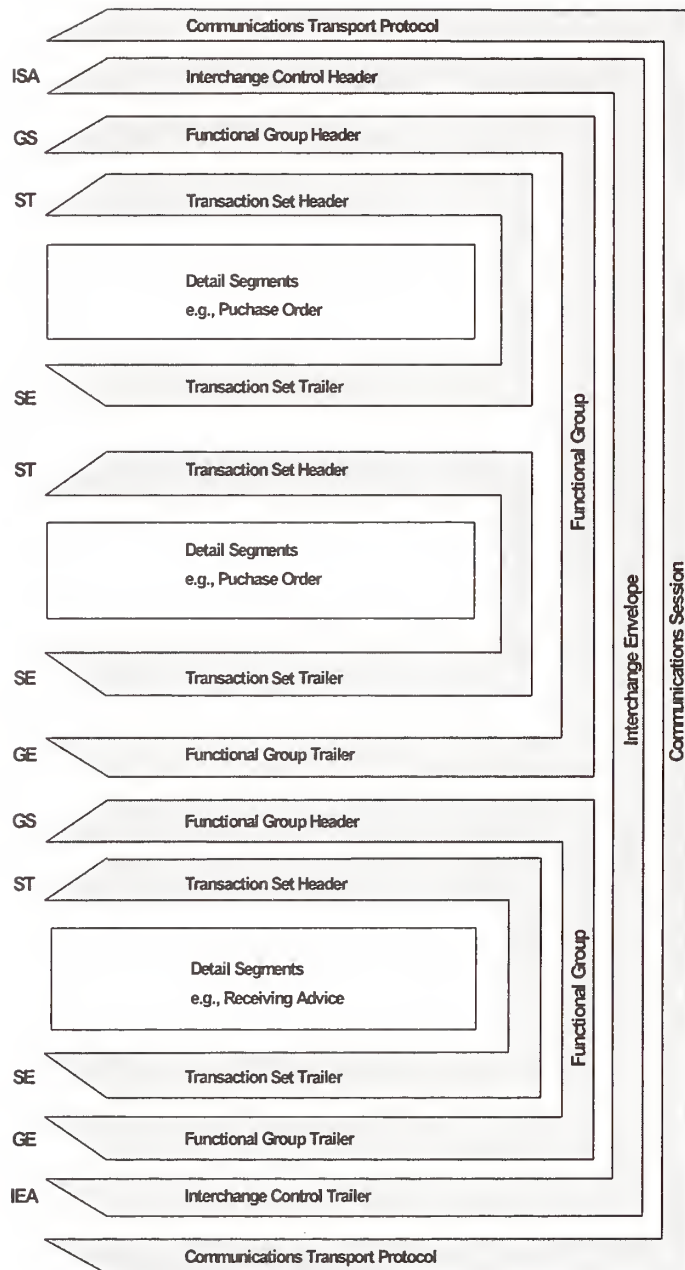

**Note:**

When an Interchange contains TA3s, it shall contain only TA3s. The TA3s replace all Functional Groups, Security Envelopes, Transaction Headers and Trailers, as well as Detail Segments in the above diagram.

Figure 10.2-1. Hierarchical Structure.

**10.2.1.1 Data Element, Data Segment, and Component Data Element Separation**

In ASC X12 documentation, the data element separator is graphically displayed as an asterisk (\*). The actual data element separator employed within the interchange envelope dictates the value for the entire interchange. The first occurrence of the data element separator is at the fourth byte of the interchange control header. The value appearing there dictates the data element separator used through the next interchange trailer.

In a similar manner, the interchange control header establishes the value to be used for segment termination within an interchange. ASC X12 documentation represents this graphically by a new line (N/L). The first instance of segment termination occurs immediately following the ISA16 data element, and the data value occurring there sets the value for the interchange.

Designation of a component data element separator differs from the other separators in that the ISA segment provides a discrete element (ISA16) for defining the component data element separator data value.

***Implementation Note::***

- 1. ASCII hexadecimal character 1C shall be used as the segment terminator in Federal Government interchanges.*
- 2. ASCII hexadecimal character 1D shall be used as the data element separator in Federal Government interchanges.*
- 3. ASCII hexadecimal character 1F shall be used as the component element separator in Federal Government interchanges.*
- 4. These characters are reserved for these purposes and shall not be used in data elements, except that they may be used in data element 785, Binary Data.*

**10.2.1.2 Identification of Implementation Convention**

The Federal Government develops and maintains Implementation Conventions (ICs) based on ASC X12 standards. All entities conducting EDI business within the Government or externally with the Government shall comply with all applicable ICs. ICs are available from National Institute of Standards and Technology acting as the secretariat for the Federal EDI Standards Management Coordinating Committee (FESMCC). Conventions on the use of interchange control structures are provided herein to document a consistent approach to control structure content. The functional group control structures include the ability to identify specific ICs to which the Transaction Sets contained within that group conform.

Interchange senders will provide the ASC X12 Version/Release/Subrelease and implementation convention identifier in GS08. This identifier uniquely identifies the convention to which the transaction set conforms.

***Implementation Note:** Envelope control segments have few options and, except for minor tailoring, are identical for every EDI interchange. The tailoring involves the code values selected for the GS01 and GS08 elements. GS01 classifies the particular transaction set(s) within a functional group and GS08 identifies the specific IC with which the transactions contained within the group comply. (Note: The version and release identified in ISA12 pertains to the interchange control envelope, not to the contained transaction sets.)*

The Version/Release/Industry Identifier Code (GS08) is structured as follows:

Positions 1 through 6: ANSI ASC X12 Version and Release number (e.g. 003010) upon which the IC is based.

Position 7 Organizational Scope

F = Federal

D = DOD

G = Government (transitional)

Positions 8 through 10 Transaction Set Identifier Code (e.g., 850).

Position 11: Derivative: A character used to differentiate between different functional implementations of the same transaction set.

If the convention is not a derivative, an underscore ( ) will appear in this position.

Position 12: A sequential number starting with 0 and incremented by 1 each time the convention is re-issued.

An example of the Version/Release/ Industry Identifier Code for X12 Version 003050, Federal Specific IC, revision 1, Commercial Invoice (810C) is 003050F810C1.

### 10.2.1.3 Control Numbers

ASC X12 standards provide for syntax control on three levels: interchange, group, and transaction. Within each level, control numbers exhibit a positive match between the header segment and its corresponding trailer (i.e., ISA/IEA, GS/GE, and ST/SE). Assignment of these control numbers, at each level, is as follows:

**Implementation Note:** *ISA/IEA Interchange Control Numbers (ISA13/IEA02).*

1. *The nine-digit interchange control number is usually assigned by the originator's translation software. Originating organizations may use any numbering scheme consistent with their business practices.*
2. *The scheme must provide sufficient uniqueness to identify each interchange. Unique identification is defined as the triplet: Interchange Sender ID, (ISA05, ISA06), the Interchange Receiver ID, (ISA07, ISA08) and the nine-digit Interchange Control Number (ISA13). This triplet shall be unique within a reasonably extended time frame.*
3. *If there is no TA3, Interchange Delivery Notice, after 2 hours, then retransmit with the same interchange control number (ISA13).*
4. *If an interchange is rejected, the corrected interchange shall have a new interchange control number (ISA13).*

**Implementation Note:** *GS/GE Data Interchange Control Numbers (GS06/GE02).*

1. *This is a one to nine-digit number usually assigned by the originator's translation software. This number uniquely identifies functional groups transmitted between sending and receiving application pairs. Originating organizations may use any numbering scheme consistent with their business practices.*
2. *The scheme must provide sufficient uniqueness to identify each functional group. The Group Control Number value (GS06), together with the Application Sender's Code (GS02), Application Receiver's Code (GS03), and Functional Identifier Code (GS01), shall be unique within an extended time frame -- such as a year.*

**Implementation Note:** *ST/SE Transaction Set Control Numbers (ST02/SE02). The originator's translation software usually assigns the transaction set control number. Originating organizations may use any numbering scheme consistent with their business practices. The scheme must provide sufficient uniqueness to identify each transaction set, within the context of the functional group.*

The control numbers within corresponding header and trailer segments must match. This provides a means to detect loss of data.



## 10.3 ADDRESSING

The purpose of addressing is to provide an unambiguous reference to a transmission's sender and intended receiver. The addressing model used by the Federal Government for ASC X12 EDI transmissions is graphically depicted in Figure 10.3-1. In this model, there is addressing for two types of transmissions. The first is an interchange. It consists of control segments and application data. The second type is application data. Application data flow from the sending to the receiving applications and is transported within an interchange. Since interchanges are assembled by the sending translation point and disassembled by the receiving translation point, the flow of an interchange is defined to be from translation point to translation point. Application data must be provided to the sending translation point by the sending application and is depicted as a User Defined File (UDF). It must also be provided to the receiving application by the receiving translation point and is also depicted as a UDF.

While the model depicts data flow from the government to a vendor, it is equally applicable in the reverse flow.

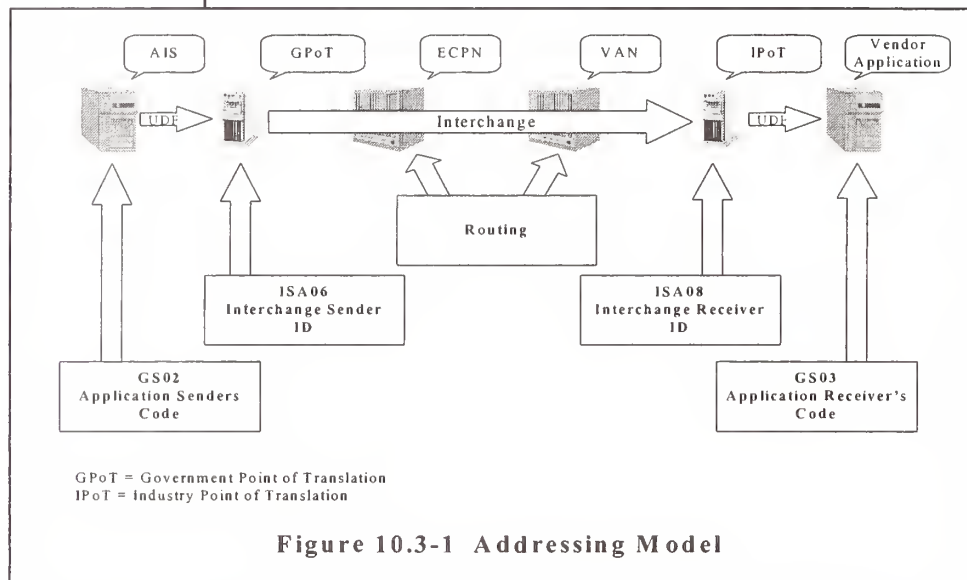


Figure 10.3-1 Addressing Model

### 10.3.1. Interchanges

Interchanges flow between translation locations. The Government Point of Translation (GPoT) can be implemented as part of the government Application Information System (AIS), as part of the Electronic Commerce Processing Node (ECPN), or as a stand-alone function. Likewise, the Industry Point of Translation (IPoT) on the



vendor side can be in the Vendor Application, as part of the VAN's services, or as a stand-alone function.

The GPoT and IPoT are addressed by the Interchange Sender ID (ISA05 and ISA06) and Interchange Receiver ID (ISA07 and ISA08) data elements. These, combined with the Interchange Control Number (ISA13), create a triplet that defines a globally unique identifier for the interchange. The ASC X12 Interchange flows between these translation points.

***Implementation Note:***

- 1. When an interchange contains one-to-one transactions, the Interchange Sender ID (ISA06) and Interchange Receiver ID (ISA08) data elements shall be the addresses of the interchange translation points (both government and non-government).*
- 2. Translation Points (ISA06 and ISA08) shall be identified via a unique identifier from one of the sources listed as allowable codes in the ISA05 definition in section 10.6. The Data Universal Numbering System (D-U-N-S) number and D-U-N-S +4 are the preferred identifiers.*
- 3. All commercial and government entities conducting business electronically shall provide their translation point (ISA06/ISA08) codes during registration.*
- 4. In the ECI, when an interchange contains public transactions the ISA08 will be addressed individually to all certified VANs, not necessarily each IPoT. The ISA06 will contain the ECPN's address.*

### **10.3.2 Application Sender and Receiver Codes**

Application data is transported within the interchange via groups. Group addressing (GS02/GS03) must define the user application end points shown in figure 10.3-1 as the AIS and the Vendor Application. These addresses are locally unique and are defined between the translation point and its customers. The data that flows between the translation points and the Application Senders and Receivers are not defined by ASC X12, but are in a format agreed between the applications and their translation points.

ASC X12 standards provide for the identification of senders and receivers on two levels, the interchange and the group. The group level identifies application senders and receivers. Depending on where translation is performed, the sender/receiver IDs may be the same at the interchange and group levels and may use any number of available naming schemes.

At the GS/GE level, D-U-N-S and D-U-N-S plus 4 are recommended, especially for identifying government organizations. Other identifiers may be used.

A D-U-N-S number may be acquired from Dun and Bradstreet and the plus 4 portion of the number is assigned and maintained internally by each entity. Specific use of these numbers is provided for in the control structures section of this document.

***Implementation Note:***

- 1. The GS02/03 identifiers need be unique only within the context of the associated ISA address.*
- 2. All commercial and government entities conducting business electronically shall provide their Application Sender and Receiver (GS02/GS03) codes during registration.*

## 10.4 ACKNOWLEDGMENTS

The successful conduct of business via EDI requires that trading partners be able to determine when transactions were received, not received, received in error, or otherwise did not complete the transmission or receiver application processing cycle. The generation or handling of these events may be communications based, EDI processing based, or both. In addition, senders may desire to know such information on an exception basis, such as reporting only for error conditions, or they may need regular indication of the status of delivery to allow them to maintain local, internal audit information. Also, providers of communications services may need to know when interchanges for which they have accepted responsibility were forwarded and accepted by the next service provider in the transmission path, or whether forwarding was not successful.

In either scenario, the transmission or processing of interchanges can be viewed as an acknowledgment event in a general sense, creating the need for some response. From a sender's perspective, the acceptance of their interchange by a translator or communications provider is an acknowledgment event that could either be indicated by a simple receipt, or a more thorough reporting of what actions were taken after receipt. For a service provider, forwarding interchanges can also result in an acknowledgment event being created that calls for an acknowledgment action to take place.

Taken as a set of acknowledgment requirements, these and other events can be considered as a set of circumstances which results in or require some acknowledgment action to take place. Rather than consider every possible action and event, a basic sub-set of these events can be defined that describes the majority of cases that form a generalized picture of tracking interchanges. Together with acknowledgment mechanisms that relate to those events and specific components that create or respond to those events, an acknowledgment model can be described.

ANSI ASC X12C has worked in this area, having produced a generic Acknowledgments Model in X12C/TG1/95-65 -- *Technical Report Reference Model for the Acknowledgment and Tracking of EDI Interchanges*. This technical report identifies specific entities in the EDI communications and processing path that serve as the event generators or handlers, as well as identifying X12 standards based acknowledgment mechanisms. Also, the senders and receivers of the interchanges are recognized as being the terminating application systems for which the EDI transactions are sent from or sent to, regardless of where translation occurs. The government has taken the ANSI X12 approach to an acknowledgments model, refining it through identification of specific entities and acknowledgment events. Support for this model will provide users and service providers with the ability to track interchanges and respond to requests for status of such

interchanges. In addition, the internal audit trail processes of each entity will be enhanced with the availability of specified event mapping.

#### **10.4.1 Description of Acknowledgment Model**

As adapted from the generic model developed within ASC X12C, the Government Acknowledgment Model identifies specific components, acknowledgment events, and X12 mechanisms that are related to those events. Based upon the Electronic Commerce Processing Node (ECPN) as a central component, the model establishes a view of the EC/EDI Infrastructure as encompassing commercial and government entities, as well as service providers and users.

In this model, service providers are those components that provide translation services, communications services, or some EDI processing services. Specifically, the model identifies the ECPNs, VANs and Translation Points as service providers. A Service Request Handler (SRH) is a service provider whose primary function is to provide communications services between other components in the model. Users include Trading Partners (TPs) and Automated Information Systems (AISs).

The acknowledgment mechanisms identified in the model include unspecified as well as X12 based mechanisms. Where the model has identified an acknowledgment event but does not specify a mechanism for handling that event, it is implied that components involved in that event will agree on what mechanism will be used.

X12 based acknowledgment mechanisms include control segment structures in addition to transaction sets. The Interchange Delivery Notice (TA3) segment, Data Status Tracking (242) transaction set and the Functional Acknowledgment (997) transaction set all have distinct properties and functions. However, their use in a general sense as acknowledgment mechanisms allows a sequence of communications and processing events to be tied together in a logical stream. Each acknowledgment event is mapped to an X12 standards based mechanism according to where the event takes place, what type of event occurred, and what role the receiving or generating component plays in the data flow stream.


The TA3 can provide information on the status of delivery of an interchange, the time an interchange was received, or the disposition of an interchange, and is used to report such information between Service Request Handlers. The Data Status Tracking (242) transaction set, in addition to providing the ability to represent the information contained in the TA3, allows transmission status information to be conveyed from service request handlers to senders. The Functional Acknowledgment (997) transaction set indicates the status of translation of the interchange header and trailer information. These mechanisms are more fully described later in this section.

The model, as depicted in Figures 10.4-1, 10.4-2, 10.4-3, and 10.4-4, identifies the sets of events that, through implementation and use of the specified acknowledgment mechanisms, provides for the tracking of interchanges across the infrastructure.

***Implementation Note:***

- 1. While the requirement for acknowledgments from Government Points of Translation (GPoT) to supported AISs was identified, no single mechanism could be identified. It is therefore left to agreement between them as described in the Service Level Agreement.*
- 2. TAI is not supported in this acknowledgment model implementation.*
- 3. The government translation function can be implemented as part of the government Application Information System (AIS), as part of the Electronic Commerce Processing Node (ECPN), or as a stand-alone function. GPoT acknowledgment responsibilities reside at the location performing translation.*
- 4. The vendor translation function can be implemented as part of the Vendor Application, Value Added Network (VAN) or as a stand-alone function. IPoT acknowledgment responsibilities reside at the location performing translation.*



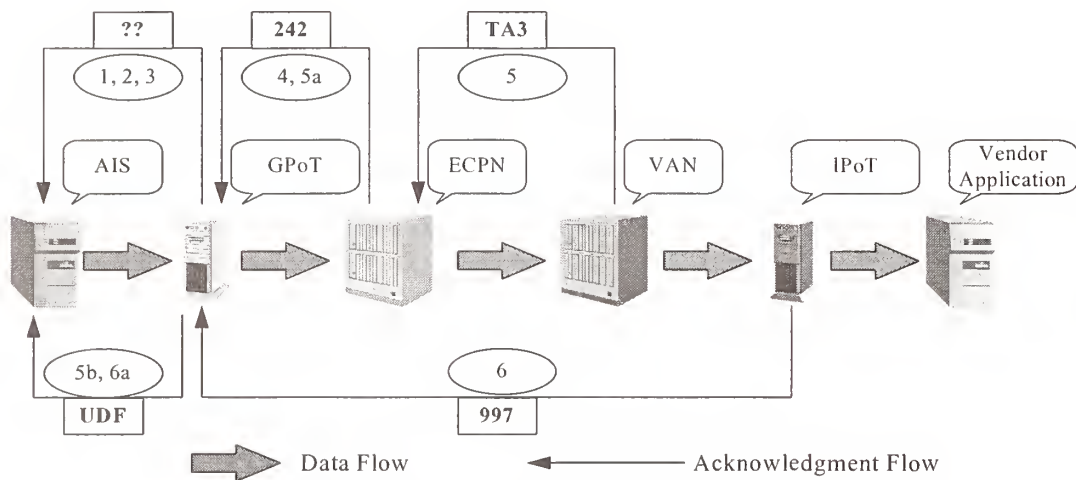

Notes:

- The GPoT translation function may be performed by the ECPN, AIS, or by a separate entity.
- For the purposes of the model, the govt-to-govt scenario is represented by replacing the VAN-Translation components with a GPoT component.
- The IPoT may be operated by the VAN, the Vendor, or a third party. In all cases, the IPoT is the ultimate recipient of the interchange for the purposes of acknowledgment in this model.
- 997s and 242s can be mapped at the GPoT to UDFs & forwarded to the AIS as agreed between the GPoT and their customer base. 242s will not be acknowledged by 997s.
- UDF is User Defined File (flat file, proprietary file).
- The use of 824s are not precluded by this model.
- Support for the model acknowledgment mechanisms is mandatory. The manner of their usage is as detailed further in the Federal EDI Implementation Guidelines Part 10, or other agreements.

Figure 10.4-1 Acknowledgment Model, Commercial to Government


Sequence / Event	Mechanism	From	To
1. Receipt of UDF by GpoT	TBD	GPoT	AIS
2. Translation Result	TBD	GPoT	AIS
3. Disposition (Acknowledge that interchange has left GPoT)	TBD	GPoT	AIS
4. Interchange receipt by ECPN	242	ECPN	GPoT
5. Interchange Disposition at SRH (Government to Government)	TA3	VAN	ECPN
	TA3	GPoT	ECPN
5a Report of Interchange Disposition at SRH	242	ECPN	GPoT
5b. Report of Interchange Disposition at SRH	UDF	GPoT	AIS
6. Translation Result	997	IPoT	GPoT
6a Translation Result	UDF	GPoT	AIS

Notes:

- Not all events 1, 2 or 3 may occur or need to be acknowledged
- TBD indicates the acknowledgment mechanism is to be determined, or as agreed to between components
- UDF: User Defined File (flat file, proprietary file format)

Figure 10.4-2 Acknowledged Events, Commercial to Government



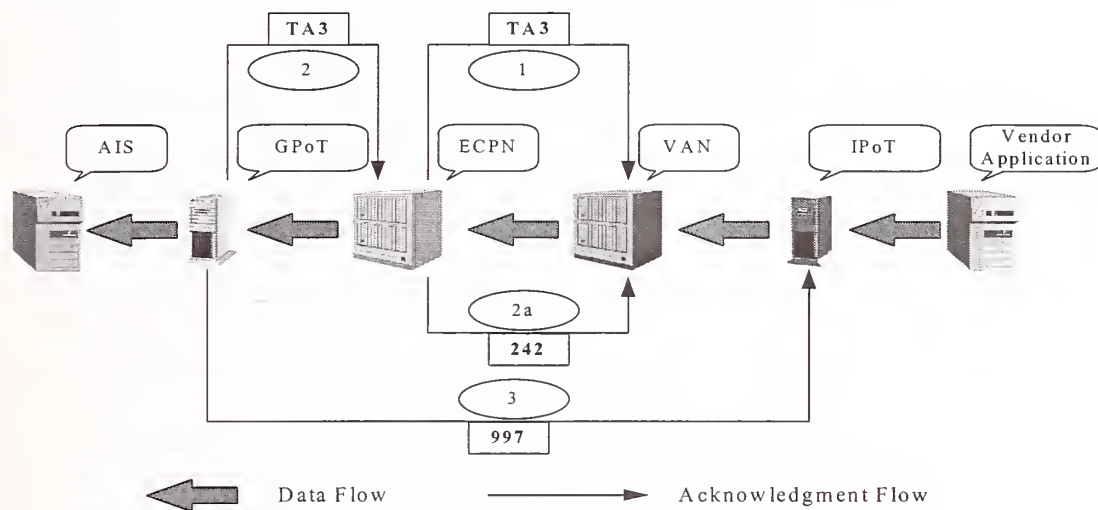

Notes:

- Acknowledgments among VANs, Translation Points and their customers are matters to be decided by them and are not defined in the government Acknowledgment Model.
- Some GPoTs may generate a second 242, with the ECPN acting as a pass-through.
- For government to government scenario, replace the VAN with a GPoT. The ECPN will generate 242s in lieu of TA3s in step 1.

Figure 10.4-3 Acknowledgment Model, Government to Commercial

Sequence / Event	Mechanism	From	To
1. Interchange receipt by ECPN (Government to Government)	TA3	ECPN	VAN
	TA3	ECPN	GPoT
2. Interchange Disposition at GpoT	TA3	GPoT	ECPN
2a. Report of Interchange Disposition at GPoT (Government to Government)	242	ECPN	VAN
	242	ECPN	GPoT
3. Translation Result	997	GPoT	IPoT

Note:

In step 2a, the disposition report carried in a TA3 is mapped to a 242

Figure 10.4-4 Acknowledged Events, Government to Commercial

## 10.4.2 Interchange Acknowledgment

At the interchange level, acknowledgments can occur for a number of events. Successful translation, syntax error, or a more detailed acknowledgment of the disposition of an interchange can be reported. The available X12 mechanisms for such interchange acknowledgments includes the Functional Acknowledgment (997) transaction set, the Interchange Acknowledgment (TA1), and the Interchange Delivery Notice Segment (TA3). In general, the 997 is used exclusively for reporting the status of syntactical analysis of the interchange by the receiving translator, although it could be used as an indication that an interchange was received. The Interchange Acknowledgment (TA1) is not supported in this acknowledgment model. The Interchange Delivery Notice (TA3) provides the ability for reporting on the status of actions taken on a particular interchange. The manner in which these mechanisms are used, and the features within each that are utilized, provides a set of tools for building a sequence of acknowledgments for the life cycle of an interchange as it flows across an infrastructure.

### 10.4.2.1 TA3

The purpose of the TA3 is to provide a notice from the receiving SRH to the sending SRH that an interchange was delivered, not delivered, refused, purged, or transferred to the next SRH. It provides a notification of action taken, notice of time/date action was taken, and the ability to report on more than one event.

As an acknowledgment mechanism in this model, the TA3 is used between the ECPN and VANs, as Service Request Handlers, to indicate the status of interchanges sent from the government to commercial components, as well as the reverse scenario. To indicate outbound delivery status, the information contained in this TA3 is further translated into a 242 transaction set and sent to GPOTs for their use, which may include supplying this information to the interchange sender. The government uses the TA3 to indicate interchange delivery status to the sending commercial infrastructure components.

#### *Implementation Note:*

- 1. An interchange that contains a TA3 shall contain only TA3s.*
- 2. An interchange may contain multiple TA3s.*
- 3. Upon delivery to the interchange receiver's mailbox, a TA3 shall be generated.*
- 4. If delivery to the interchange receiver's mailbox is not made within 2 hours, a TA3 shall be generated indicating a non-delivery status. The appropriate reason codes will be specified. A TA3 shall be generated every 2 hours indicating non-delivery status*

*until the interchange is delivered to the receiver's mailbox. Upon delivery, note 3 above applies.*

*5. If an interchange is accepted but subsequently determined to be non-deliverable, a TA3 shall be generated indicating code RJ in TA312 and the appropriate reason code in TA303.*

*6. No acknowledgment is made for the receipt of a TA3.*

#### **10.4.2.2 Data Status Tracking (242) Transaction Set**

The Data Status Tracking (242) transaction set conveys status information from a service request handler to the interchange sender, interchange receiver, or both. It can be used to provide status information regarding an interchange as it flows from an interchange sender through one or more service request handlers to an interchange receiver during its transmission cycle.

In the acknowledgment model, the 242 transaction set is used for two events: (1) it conveys information from the TA3 that was generated by the VAN or GPoT that received the interchange, and (2) it is used to provide acknowledgment information between government components. Because it is a transaction set, translation sites can map that information into a UDF for the sending applications use. How this information is used depends on the internal business processes at the application site, and is not covered by the model. In addition, this information may be used by the GPoT in its capacity as a Service Request Handler for internal audit trail purposes.

##### ***Implementation Note:***

*1. For interchanges between government components, a 242 shall be generated upon delivery to the interchange receiver's mailbox. If delivery to the interchange receiver's mailbox is not made within 2 hours, a 242 shall be generated indicating a non-delivery status.*

*2. The 242 transaction set shall not be acknowledged (via a 997), nor shall it be used to report the final disposition of a 997 transaction set.*

*3. Additional 242 acknowledgments from interconnect service providers may be required by additional agreements among trading partners.*

#### **10.4.2.3 Interchange Acknowledgment Segment (TA1)**

The Interchange Acknowledgment Segment (TA1) is used to acknowledge receipt of one interchange header and trailer envelope.

***Implementation Note:*** *The TA1 is not supported in this acknowledgment model.*

#### 10.4.3 Application Advice (824) Transaction Set

Although it can provide acknowledgment functionality, use of the Application Advice (824) transaction set is not specified by this model. Currently, it is primarily used on an exception basis for reporting between applications, and its full use as an acknowledgment mechanism within the model would create substantial impact on the communications and processing systems.

#### 10.4.4 Functional Acknowledgments (997) Transaction Set

While the Functional Acknowledgment (997) transaction set is not part of the interchange control structure, it is integral to the overall process for interchange integrity, and for completeness of the acknowledgment model.

Support for the Functional Acknowledgment is required in all cases. The 997 verifies (or challenges) the syntactical correctness (e.g., ability to translate) of transaction-level data within a functional group.

*Implementation Note:*

1) Syntactic correctness shall be determined by comparison to the requirements of the applicable implementation convention, not simply the ASC X12 standard.

2) The 997 transaction set shall not be acknowledged.

3) When an X12 transaction containing "Not Used" segments and/or data elements is received by the Government, the transaction will be rejected and a 997 will be generated indicating why the transaction was rejected.

## 10.5 SECURITY

ASC X12.58, published in December, 1996, provides for the implementation of security services at the functional group and transaction set levels. The available security services include: data integrity, confidentiality, assurance, verification, and non-repudiation of origin. These services may be implemented individually or in any combination.

ASC X12.58 can meet several security objectives. Among these are:

- The recipient of an EDI transaction can verify the identity of the originator of the transaction.
- The recipient of an EDI transaction can verify the integrity of its contents.
- The originator of an EDI transaction can provide confidentiality for its contents.

ASC X12.58 provides a mechanism that can be applied to the X12 functional group or transaction set, in contrast to other alternatives which are usually applied to the entire interchange. ANSI X12.58 is transaction data independent. When X12.58 security mechanisms are applied inside the interchange, they can be handled and routed as standard X12 transactions without disrupting the end-to-end security. Since security services are applied within the interchange, they are independent of the mechanism used to transport them. Thus X12.58 can provide security even when the interchanges leave the boundaries of the ECI.

The Federal Government is committed to providing security services for ASC X12 compliant EDI via the constructs provided by ASC X12.58. However, very significant changes to those constructs have been made within various version/releases of the ASC X12 standards. Also, ASC X12.58 security constructs are not backward compatible. That is, 003070 constructs may not be applied to provide security services to the bulk of the current federal implementations, which are in version/release 3060, 003050, 3040 and earlier.

### 10.5.1 Authentication

- Message authentication is a procedure to verify that received messages have not been altered. A hash function, a public function that maps a message of any length into a fixed hash value, can be used as an authenticator when used in



conjunction with some form of data encryption, such as digital signature.

*Implementation Note: Assurance via the S2A/SVA segments shall be used in lieu of authentication.*

### 10.5.2 Confidentiality (Encryption)

The X12.58 standards allows for the implementation of various algorithms to encrypt X12 transactions. Cryptographic algorithms fall into two categories: secret key and public-key. Secret key algorithms are based on both the sender and receiver sharing the same secret key (i.e., key unknown to other parties). This key is used to encrypt the transaction prior to transmission and decrypt it upon receipt. Public-key algorithms are based on both sender and receiver having a pair of keys, one public and one private. All exchanges of keys between sender and receiver are limited to the public portion only, so the private key portion is protected. Initially, the Government will support the following encryption algorithms:

- Data Encryption Standard (DES)
- Triple DES (DE3)
- Rivest-Shamir-Adleman (RSA)
- SKIPJACK

*Implementation Note:*

1. Confidentiality services may be applied at either the functional group (GS/GE) level, the transaction set (ST/SE) level or both.
2. When applied, the SIS shall be inserted immediately after the GS segment and the SIE shall be inserted immediately prior to the GE segment
3. When applied, the S2S shall be inserted immediately after the ST segment and the S2E shall be inserted immediately prior to the SE segment.

### 10.5.3 Assurance (Digital Signatures)

A digital signature is an authentication technique that also includes measures to counter repudiation by the source. Assurances (S1A or S2A and SVA), as defined in X12.58, allow the originator of the transaction to express "business intent" via a digital signature. The Government will support implementation of the Digital Signature Standard. When used, one S2A and one SVA are inserted immediately before the SE segment of the transaction set being assured. If subsequent assurances are applied, additional S2A/SVA pairs are inserted between the previous assurance, and the SE



segment of the transaction set being assured. Detailed instructions for the use of the S2A and SVA segments are contained in section 10.6

**Implementation Note:**

1. Assurance (digital signature) may be applied at either the functional group (GS/GE) level, the transaction set (ST/SE) level or both.
2. When digital signature is applied at the group level, the S1A and SVA segment pair(s) shall be inserted immediately preceding the GE segment of the group being assured (digitally signed).
3. When digital signature is applied at the transaction set level, the S1A and SVA segment pair(s) shall be inserted immediately preceding the SE segment of the transaction set being assured (digitally signed).
4. When both assurance and confidentiality are applied, assurance (S1A or S2A and SVA) shall be applied first and then confidentiality (S1S and S1E or S2S and S2E).

#### 10.5.4 X12.58 Capabilities by Release

ANSI X12 Release	Authentication	ncryption	Assurance
3040	(Note 1)	(Note 3)	
3050	(Note 1)	(Note 3)	
3060	(Note 2)	X	X
3070	(Note 2)	(Note 3)	X

**NOTES:**

1. Authentication accomplished using a message authentication code (MAC). The MAC is a hash of the data.
2. Authentication accomplished as a by-product of the digital signature or by using the MAC defined in earlier releases of the ANSI X12 standard.
3. Private (symmetric) keys supported by this release. Asymmetric keying is possible but not without some "non-standard" use of data elements.

#### 10.5.5 Sequencing of Cryptographic Techniques

In practical situations, the users of the X12.58 standards will choose combinations of features rather than just a single feature. This is possible since all features are designed to be used in isolation or in any combination.

Authentication does not protect the confidentiality of the message because the information is interchanged in its plain text form. Message encryption

can be used to provide confidentiality while using authentication to provide integrity protection of the same data. When both authentication and encryption are used, the authentication is performed before encryption of the original plain text data.

Where more than one service is selected at a specific level, the order of processing is:

- a. Before applying any security services, the data must first be translated into an EDI format
- b. Addition of one or more assurances
- c. Authentication
- d. Compression
- e. Encryption
- f. Filtering for data communications

When assurance segments are used, they must be added to unsecured (not authenticated or encrypted) transactions. If a transaction set is received (with or without assurances) with encryption and/or authentication applied by the originator, the transaction set must be either decrypted or authenticated prior to the addition of any further assurances. Once any assurances have been added, the transaction set can be encrypted or authenticated prior to being forwarded to additional parties.

When applying security services at the functional group level, all security services at the transaction set level must be completed before applying security services at the functional group level.

The receiving organization processes the received message in the reverse order, starting with inverse filtering, followed by decryption, and then by decompression, validation of authentication and validation of the assurances. When processing inbound security services at the transaction set level, all security services at the functional group level must be removed before processing inbound security services at the transaction set level. In this manner the receiving organization unwraps the EDI message by processing the security services and removing the security segment pairs from the message before processing the next security service.

### 10.5.6 Transmission of Security Segments

Security services (authentication, encryption and assurances) are provided at two levels within ASC X12 in conjunction with the following envelopes:

- Functional Group (GS/GE envelope)
- Transaction Set (ST/SE envelope)

At each of these levels, authentication, encryption and assurances are each optional. Assurances are independent of authentication or encryption. In addition, any service used at one level is independent of a service used at the other level.

If encryption and/or authentication is provided, the security header segment (S1S or S2S) immediately follows the segment initiating the beginning of this level (GS or ST); the security trailer segment (S1E or S2E) precedes the segment terminating the level (GE or SE). If assurances are present, the S1A or S2A segments and its trailing SVA segment immediately precedes the SE or GE if authentication and/or encryption is not used and immediately proceed the S1E or S2E segment if authentication and/or encryption is used. If encryption and/or authentication at both levels is provided and if assurances are used at both levels, the sequence of segments, illustrating these levels, is:

ISA-Interchange Header

(Other Groups whether secured or not at Level 1)

GS-Functional Group Header

S1S-Security Header Level 1

(Other Transaction Sets whether secured or not at Level 2)

ST - Transaction Set Header

S2S-Security Header Level 2

(The Transaction Set Segments)

S2A - Security Assurance Level 2

SVA - Assurance Token Level 2

(Other optional S2A-SVA pairs at Level 2)

S2E-Security Trailer Level 2

SE-Transaction Set Trailer

(Other Transaction Sets whether secured or not at Level 2)

S1A - Assurance Segment Level 1

SVA - Assurance Token Level 1

(Other optional S1A-SVA pairs at Level 1)

S1E-Security Trailer Level 1

GE-Functional Group Trailer

(Other Functional Groups whether secured or not at Level 1)

IEA-Interchange Trailer

## 10.6 Interchange Control, Acknowledgment and Security Segment Specifications

This section contains the implementation conventions for the:

- Interchange Control Header (ISA), Version/release 003070
- Interchange Delivery Notice Segment (TA3)
- Functional Group Header (GS), Version/release 002003
- Functional Group Header (GS), Version/release 003010
- Functional Group Header (GS), Version/releases 003040 through 003070
- Security Header Level 1 (S1S), Version/releases 003040 and 003050
- Security Header Level 1 (S1S), Version/releases 003060 and 003070
- Security Header Level 2 (S2S), Version/releases 003040 and 003050
- Security Header Level 2 (S2S), Version/releases 003060 and 003070
- Security Assurance Level 2 (S2A), Version/releases 003060 and 003070
- Assurance Token Level 2 (S2A), Version/releases 003060 and 003070
- Security Trailer Level 2 (S2E), Version/releases 003060 and 003070
- Assurance Segment Level 1 (S1A), Version/releases 003060 and 003070
- Assurance Token Level 1 (SVA), Version/releases 003060 and 003070
- Security Trailer Level 1 (S1E), Version/releases 003060 and 003070
- Functional Group Trailer (GE),
- Interchange Control Trailer (IEA), Version/release 003070

**Segment:** **ISA** Interchange Control Header  
**Usage:** Mandatory  
**Max Use:** 1  
**Purpose:** To start and identify an interchange of zero or more functional groups and interchange-related control segments  
**Syntax Notes:**  
**Semantic Notes:**  
**Comments:**  
**Notes:**

*1. Use ASCII Hexadecimal 1D in the fourth byte of the Interchange Control Header. This first occurrence of an element separator dictates the value the translation software will employ throughout the interchange.*

*2. Use ASCII Hexadecimal 1C after ISA16. This first occurrence of a segment terminator dictates the value the translation software employs throughout the interchange.*

*3. See ISA16 for subelement separator usage.*

#### Data Element Summary

Ref.	Des.	Data Element	Name	Attributes
Must Use	ISA01	I01	Authorization Information Qualifier Code to identify the type of information in the Authorization Information	M ID 2/2
			00 No Authorization Information Present (No Meaningful Information in I02)	
			05 Department of Defense (DoD) Communication Identifier <i>Use to indicate the Department of Defense (DOD) as the information authorizer. Use this code even if the sender is not a DOD entity.</i>	
			06 United States Federal Government Communication Identifier <i>Use to indicate the Federal Government as the information authorizer. Use this code even if the sender is not a Federal Government entity.</i>	
Must Use	ISA02	I02	Authorization Information Information used for additional identification or authorization of the interchange sender or the data in the interchange; the type of information is set by the Authorization Information Qualifier (I01) <i>1. Use to provide additional identification or authorization for the data in the interchange. Otherwise, fill this field with blank characters.</i> <i>2. When used, it is recommended that the specific coding be exchanged between trading partner data security officials to ensure preservation of data security.</i>	M AN 10/10



Must Use	ISA03	I03	<b>Security Information Qualifier</b> <span style="float: right;">M ID 2/2</span> Code to identify the type of information in the Security Information 00 No Security Information Present (No Meaningful Information in I04) 01 Password <i>Use based on trading partner agreement.</i>
Must Use	ISA04	I04	<b>Security Information</b> <span style="float: right;">M AN 10/10</span> This is used for identifying the security information about the interchange sender or the data in the interchange; the type of information is set by the Security Information Qualifier (I03) <i>If ISA03 is code 00, fill this field with blank characters. Otherwise, enter a password as agreed between Trading Partners.</i>
Must Use	ISA05	I05	<b>Interchange ID Qualifier</b> <span style="float: right;">M ID 2/2</span> Qualifier to designate the system/method of code structure used to designate the sender or receiver ID element being qualified <i>D-U-N-S (Code 01) or D-U-N-S+4 (Code 16) are preferred.</i> 01 Duns (Dun & Bradstreet) 02 SCAC (Standard Carrier Alpha Code) 04 IATA (International Air Transport Association) 08 UCC EDI Communications ID (Comm ID) 09 X.121 (CCITT) 10 Department of Defense (DoD) Activity Address Code 16 Duns Number With 4-Character Suffix
Must Use	ISA06	I06	<b>Interchange Sender ID</b> <span style="float: right;">M AN 15/15</span> Identification code published by the sender for other parties to use as the receiver ID to route data to them; the sender always codes this value in the sender ID element <i>1. Enter the identifier of the sender's translation point.</i> <i>2. Left justify and pad on the right with blanks.</i>
Must Use	ISA07	I05	<b>Interchange ID Qualifier</b> <span style="float: right;">M ID 2/2</span> Qualifier to designate the system/method of code structure used to designate the sender or receiver ID element being qualified <i>D-U-N-S (Code 01) or D-U-N-S+4 (Code 16) are preferred.</i> 01 Duns (Dun & Bradstreet) 02 SCAC (Standard Carrier Alpha Code) 04 IATA (International Air Transport Association) 08 UCC EDI Communications ID (Comm ID) 09 X.121 (CCITT) 10 Department of Defense (DoD) Activity Address Code 16 Duns Number With 4-Character Suffix
Must Use	ISA08	I07	<b>Interchange Receiver ID</b> <span style="float: right;">M AN 15/15</span> Identification code published by the receiver of the data; When sending, it is used by the sender as their sending ID, thus other parties sending to them will use this as a receiving ID to route data to them <i>1. Enter the identifier of the receiver's translation point (both government and non-government).</i>



Must Use	ISA09	I08	<p>2. <i>Left justify and pad on the right with blanks.</i></p> <p>Interchange Date M DT 6/6</p> <p>Date of the interchange</p> <p>1. <i>Express the UTC (previously known as GMT) date that this interchange was created.</i></p>
Must Use	ISA10	I09	<p>2. <i>Express the date in a six-position (YYMMDD) format.</i></p> <p>Interchange Time M TM 4/4</p> <p>Time of the interchange</p> <p>1. <i>Express the UTC (previously known as GMT) time that this interchange was created.</i></p>
Must Use	ISA11	I10	<p>2. <i>Express the time in a four-position (HHMM) format.</i></p> <p>Interchange Control Standards Identifier M ID 1/1</p> <p>Code to identify the agency responsible for the control standard used by the message that is enclosed by the interchange header and trailer</p> <p>U U.S. EDI Community of ASC X12, TDCC, and UCS</p>
Must Use	ISA12	I11	<p>Interchange Control Version Number M ID 5/5</p> <p>This version number covers the interchange control segments</p> <p><i>Use to identify the ASC X12 version and release for the interchange envelope, not the transactions carried within the envelope.</i></p> <p>00307 Draft Standards for Trial Use Approved for Publication by ASC X12 Procedures Review Board through October 1996</p>
Must Use	ISA13	I12	<p>Interchange Control Number M N0 9/9</p> <p>A control number assigned by the interchange sender</p> <p><i>Originating activities may use any numbering scheme consistent with their business practices. However, the scheme must uniquely identify each interchange over a very long period of time.</i></p>
Must Use	ISA14	I13	<p>Acknowledgment Requested M ID 1/1</p> <p>Code sent by the sender to request an interchange acknowledgment (TA1)</p> <p><i>This request for acknowledgment applies only to return of a TA1, Interchange Acknowledgment. It does not apply to other acknowledgments (e.g. TA3 or transaction set 242) as required by Part 10 of the Federal Guidelines. Since the TA1 is not supported, no acknowledgment shall be requested.</i></p> <p>0 No Acknowledgment Requested</p> <p><i>Use this code to indicate an interchange acknowledgment via TA1 shall not be returned by the interchange receiver.</i></p>
Must Use	ISA15	I14	<p>Test Indicator M ID 1/1</p> <p>Code to indicate whether data enclosed by this interchange envelope is test or production</p> <p>P Production Data</p> <p><i>Use to identify all data other than test data.</i></p> <p>T Test Data</p> <p><i>Use when testing interchanges.</i></p>

Must Use ISA16

I15

**Component Element Separator**

M AN 1/1

Type is not applicable; the component element separator is a delimiter and not a data element; this field provides the delimiter used to separate component data elements within a composite data structure; this value must be different than the data element separator and the segment terminator

*Enter ASCII Hexadecimal 1F. The value of this element dictates the value the translation software employs for component element separation throughout the interchange.*

Segment:	<b>TA3</b> Interchange Delivery Notice Segment		
Usage:	Mandatory		
Max Use:	1		
Purpose:	To provide a notice from the receiving service request handler to the sending service request handler that an interchange was delivered or not delivered to the interchange receiver's mailbox, or some other ancillary service was performed, and that the interchange receiver retrieved, refused, or purged the interchange; TA3 is exchanged only between service request handlers; use of the TA3 segment is optional		
Syntax Notes:	<ol style="list-style-type: none"><li>1 If either TA322 or TA323 is present, then the other is required.</li><li>2 If either TA324 or TA325 is present, then the other is required.</li><li>3 If either TA326 or TA327 is present, then the other is required.</li></ol>		
Semantic Notes:	<ol style="list-style-type: none"><li>1 TA301 and TA302 identify the service request handlers processing the interchange being reported.</li><li>2 TA304 through TA311 and TA318 through TA321 are used to identify the interchange whose status is being reported.</li><li>3 TA312 through TA314 identify the action being reported and the date and time that action was performed. TA315 through TA317 provide a second set of interchange action code, date and time that can be included if a given TA3 is reporting on more than one event.</li><li>4 TA322 through TA327 contain optional information exchanged by service request handlers to supply additional information concerning actions taken upon the interchange being reported.</li></ol>		
Comments:			
Notes:	<ol style="list-style-type: none"><li>1. Only one interchange action may be reported per TA3. If multiple events are to be reported, multiple TA3s must be used.</li><li>2. Only one interchange control structure error may be reported per TA3. If multiple errors are to be reported, multiple TA3s must be used.</li></ol>		

## Data Element Summary

Ref.	Data	Name	Attributes
Des.	Element		
Must Use	TA301	I38 Service Request Handler ID Qualifier This is a code identifying the service request handler <i>Cite the code FG to indicate the Federal Government. Do so whether the originator is a public or private organization.</i>	M ID 2/2
Must Use	TA302	I39 Service Request Handler ID This is the identification code of the sending service request handler <i>Cite the D-U-N-S or D-U-N-S+4 of the service request handler providing this notice of interchange delivery.</i>	M AN 1/15
Must Use	TA303	I43 Error Reason Code The code indicates the error found or not found in processing the control structure or in delivery 000 No Errors 001 The Interchange Control Number in the Header and Trailer Do not Match; the Value from the Header is used in the Acknowledgment 002 This Standard as Noted in the Control Standards Identifier is not Supported	M ID 3/3

		003	This Version of the Controls is not Supported	
		004	The Segment Terminator is Invalid	
		005	Invalid Value as Shown in the Reported Interchange Control Number	
		006	Invalid Value as Shown in the Reported Interchange Date	
		007	Invalid Value as Shown in the Reported Interchange Time	
		008	Invalid Value as Shown in the Reported Interchange Sender ID Qualifier	
		009	Invalid Value as Shown in the Reported Interchange Sender ID	
		010	Invalid Value as Shown in the Reported Interchange Receiver ID Qualifier	
		011	Invalid Value as Shown in the Reported Interchange Receiver ID	
		016	Trading Partnership not Established	
		017	Invalid Number of Included Groups Value	
		018	Invalid Control Structure	
		019	Improper (Premature) End-of-file (Transmission)	
		020	Duplicate Interchange Control Number	
		021	Invalid Data Element Separator	
		022	Invalid Component Element Separator	
		023	Failure to Transfer Interchange to the next Service Request Handler	
		031	Receiver Not On-line	
		032	Abnormal Conditions	
Must Use	TA304	I44	<b>Reported Start Segment ID</b> M AN 2/3 This contains the start segment ID of the original interchange, functional group or transaction set <i>For ANSI ASC X12 interchanges, the start segment ID is always ISA.</i>	
Must Use	TA305	I45	<b>Reported Control Number</b> M AN 1/14 This is the control number value of the original interchange, functional group or transaction set <i>Cite the control number assigned in the original interchange control header (appearing in ISA13) for which notice is being provided. With this control number, the TA3 is linked to the original interchange envelope.</i>	
Must Use	TA306	I46	<b>Reported Date</b> M AN 1/8 This is the date value of original interchange or functional group <i>Cite the date appearing in ISA09 of the interchange for which delivery notice is being provided.</i>	
Must Use	TA307	I47	<b>Reported Time</b> M AN 1/8 This is the time value of original interchange or functional group <i>Cite the time appearing in ISA10 of the interchange for which delivery notice is being provided.</i>	
Must Use	TA308	I48	<b>Reported Interchange Sender ID Qualifier</b> M AN 1/4 This is the sender ID qualifier value appearing in original interchange <i>Cite the value appearing in ISA05 of the interchange for which delivery notice is being provided.</i>	



Must Use	TA309	I49	<b>Reported Sender ID</b> M AN 1/35 This is the sender ID value of original interchange or functional group <i>Cite the value appearing in ISA06 of the interchange for which delivery notice is being provided.</i>
Must Use	TA310	I50	<b>Reported Interchange Receiver ID Qualifier</b> M AN 1/4 This is the receiver ID qualifier value appearing in original interchange <i>Cite the value appearing in ISA07 of the interchange for which delivery notice is being provided.</i>
Must Use	TA311	I51	<b>Reported Receiver ID</b> M AN 1/35 This is the receiver ID value of original interchange or functional group <i>Cite the value appearing in ISA08 of the interchange for which delivery notice is being provided.</i>
Must Use	TA312	I40	<b>Action Code</b> M ID 2/2 This is a code indicating the action taken on the interchange or functional group by the service request handler or the receiver AK Transfer to the Next Service Request Handler has been Acknowledged BH Transfer to Service Request Handler not Capable of Reporting Further Status DL Delivered Interchange by Service Request Handler PU Purged by Interchange Receiver RD Redirected by Service Request Handler to an Alternate Receiver as Identified in the Reference Code RF Refused by Interchange Receiver RJ Rejected by Service Request Handler; See Error Reason Code for Cause RT Retrieved Interchange by Receiver TR Transferred to Next Service Request Handler by Service Request Handler, but not yet Acknowledged
Must Use	TA313	I41	<b>Action Date</b> M DT 6/6 This is the UTC date when the service request handler took action on the reported interchange or functional group <i>Express the UTC (previously known as GMT) date in a six-position (YYMMDD) format.</i>
Must Use	TA314	I42	<b>Action Time</b> M TM 4/6 This is the UTC time when the service request handler took action on the reported interchange or functional group <i>Express the UTC (previously known as GMT) time in a four-position (HHMM) format.</i>
Not Used	TA315	I40	<b>Action Code</b> O ID 2/2 This is a code indicating the action taken on the interchange or functional group by the service request handler or the receiver Refer to 003070 Data Element Dictionary for acceptable code values.
Not Used	TA316	I41	<b>Action Date</b> O DT 6/6 This is the UTC date when the service request handler took action on the reported interchange or functional group
Not Used	TA317	I42	<b>Action Time</b> O TM 4/6 This is the UTC time when the service request handler took action on the reported interchange or functional group
Not Used	TA318	I52	<b>First Reference ID Qualifier</b> O AN 1/4 This is the ID qualifier appearing in original interchange



Not Used	TA319	I53	<b>First Reference ID</b> This contains information from the original interchange, as defined by the First Reference ID Qualifier data element	O	AN 1/14
Not Used	TA320	I54	<b>Second Reference ID Qualifier</b> This contains ID qualifier information appearing in original interchange	O	AN 1/4
Not Used	TA321	I55	<b>Second Reference ID</b> This contains information from the original interchange, as defined by the Second Reference ID Qualifier data element	O	AN 1/14
	TA322	I56	<b>Reference Code Qualifier</b> This is a code defining the information contained in the Reference Code data element <i>If TA312 is code RD, use TA322 and TA323 to identify the organization to which the interchange was redirected.</i> 05 ID of Alternate Receiver to which Interchange Has Been Redirected	X	ID 2/2
	TA323	I57	<b>Reference Code</b> This contains reference information exchanged between service request handlers concerning the reported interchange as defined by the corresponding Reference Code Qualifier data element <i>Cite the identifier of the organization to which the interchange was redirected. The organization shall be identified via a unique identifier from one of the sources listed as allowable codes in the ISA05 definition in section 10.6 of the Federal EDI Guidelines. The Data Universal Numbering System (D-U-N-S) number and D-U-N-S +4 are the preferred identifiers.</i>	X	AN 1/35
Not Used	TA324	I56	<b>Reference Code Qualifier</b> This is a code defining the information contained in the Reference Code data element	X	ID 2/2
Not Used	TA325	I57	<b>Reference Code</b> This contains reference information exchanged between service request handlers concerning the reported interchange as defined by the corresponding Reference Code Qualifier data element	X	AN 1/35
Not Used	TA326	I56	<b>Reference Code Qualifier</b> This is a code defining the information contained in the Reference Code data element	X	ID 2/2
Not Used	TA327	I57	<b>Reference Code</b> This contains reference information exchanged between service request handlers concerning the reported interchange as defined by the corresponding Reference Code Qualifier data element	X	AN 1/35

**Segment:** **GS** Functional Group Header

**Usage:** Mandatory

**Max Use:** 1

**Purpose:** To indicate the beginning of a functional group and to provide control information

**Syntax Notes:**

**Semantic Notes:** The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02.

**Comments:** A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.

**Notes:**

1. Use to identify the functional group containing one or more related transactions.
2. Use to identify the specific implementation convention with which the transaction sets contained within the functional group envelope comply.
3. The version and release of the GS segment must be the same as the version and release of the transactions that follow it as specified in the Version / Release / Industry Identifier Code (GS08).
4. The GS segment represented here is valid for version 2003.

## Data Element Summary

Ref.	Data			
Des.	Element	Name	Attributes	
Must Use GS01	479	Functional Identifier Code	M	ID 2/2
Code identifying a group of application related transaction sets				
<i>Cite any valid code defined for data element 479 in the ASC X12 2003 Standards Data Element Dictionary providing a Federal implementation convention exists for the cited transaction set.</i>				
Must Use GS02	142	Application Sender's Code	M	AN 2/12
Code identifying party sending transmission .				
<i>1. Cite the sending application's identifier. This identifier must be unique within the domain of the sending application's translation point. Use of a Dun and Bradstreet number (DUNS) is recommended to provide universal uniqueness.</i>				
<i>2. Transmit the required number of characters without leading or trailing blanks.</i>				
Must Use GS03	124	Application Receiver's Code	M	AN 2/12
Code identifying party receiving transmission				
<i>1. Cite the receiving application's identifier. This identifier must be unique within the domain of the receiving application's translation point. Use of a Dun and Bradstreet number (DUNS) is recommended to provide universal uniqueness.</i>				
<i>2. Transmit the required number of characters without leading or trailing blanks.</i>				
<i>3. If the group contains PUBLIC transactions, enter the literal string</i>				

			<b>'PUBLIC'.</b>	
Must Use	GS04	29	<b>Data Interchange Date</b> Date sender generated a functional group of transaction sets. <i>1. Enter the UTC (previously known as GMT) date that this segment was created.</i> <i>2. Express the date in a six-position (YYMMDD) format.</i>	M DT 6/6
Must Use	GS05	30	<b>Data Interchange Time</b> Time (HHMM) when the sender generated a functional group of transaction sets (local time at sender's location). <i>1. Enter the UTC (previously known as GMT) time that this segment was created.</i> <i>2. Express the time in a four-position (HHMM) format.</i>	M TM 4/4
Must Use	GS06	28	<b>Data Interchange Control Number</b> Assigned number originated and maintained by the sender <i>1. Originating activities may use any numbering scheme consistent with their business practices.</i> <i>2. The scheme must provide sufficient uniqueness to identify each functional group. The Group Control Number value, together with the Application Sender's and Receiver's Codes, shall be unique within an extended time frame - such as a year.</i>	M NO 1/9
Must Use	GS07	455	<b>Responsible Agency Code</b> Code used in conjunction with Data Element 480 to identify the issuer of the standard X Accredited Standards Committee X12	M ID 1/2
Must Use	GS08	480	<b>Version / Release / Industry Identifier Code</b> Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used. Positions 1-3, Major Version Number; Positions 4-6, Release Level of Version; Positions 7-12, Industry or Trade Association ID (optionally assigned by user).	M AN 1/12

*Each Federal and DoD Implementation Convention, based on an ANSI ASC X12 transaction set, used by the government has a unique identifier specified as follow:*

*Positions 1 through 6: ANSI ASC X12 Version and Release number (e.g. 003010) upon which the IC is based.*

*Position 7: Organizational Scope*  
*F = Federal*  
*D = DOD*  
*G = Government (transitional)*

*Positions 8 through 10: Transaction Set Identifier Code (e.g. 850).*

*Position 11: Variant: A character used to differentiate between different*

*functional implementations of the  
same transaction set.*

*If the convention is not a variant, an  
underscore ( \_ ) will appear in this  
position.*

**Position 12:**

*A sequential number starting with 0  
and incremented by 1 each time the  
implementation convention is revised.*



**Segment:** **GS** Functional Group Header

**Usage:** Mandatory

**Max Use:** 1

**Purpose:** To indicate the beginning of a functional group and to provide control information

**Syntax Notes:**

**Semantic Notes:** The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02.

**Comments:** A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.

**Notes:**

1. Use to identify the functional group containing one or more related transactions.
2. Use to identify the specific implementation convention with which the transaction sets contained within the functional group envelope comply.
3. The version and release of the GS segment must be the same as the version and release of the transactions that follow it as specified in the Version / Release / Industry Identifier Code (GS08).
4. The GS segment represented here is valid for version 3010.

**Data Element Summary**

Ref. Des.	Data Element	Name	Attributes
Must Use GS01	479	Functional Identifier Code Code identifying a group of application related transaction sets <i>Cite any valid code defined for data element 479 in the ASC X12 3010 Standards Data Element Dictionary providing a Federal implementation convention exists for the cited transaction set.</i>	M ID 2/2
Must Use GS02	142	Application Sender's Code Code identifying party sending transmission . <i>1. Cite the sending application's identifier. This identifier must be unique within the domain of the sending application's translation point. Use of a Dun and Bradstreet number (DUNS) is recommended to provide universal uniqueness.</i> <i>2. Transmit the required number of characters without leading or trailing blanks.</i>	M AN 2/12
Must Use GS03	124	Application Receiver's Code Code identifying party receiving transmission <i>1. Cite the receiving application's identifier. This identifier must be unique within the domain of the receiving application's translation point. Use of a Dun and Bradstreet number (DUNS) is recommended to provide universal uniqueness.</i> <i>2. Transmit the required number of characters without leading or trailing blanks.</i>	M AN 2/12



			3. If the group contains <b>PUBLIC</b> transactions, enter the literal string ' <b>PUBLIC</b> '.	
Must Use	GS04	29	Group Date	M DT 6/6
			Date sender generated a functional group of transaction sets.	
			1. Enter the <b>UTC</b> (previously known as <b>GMT</b> ) date that this segment was created.	
			2. Express the date in a six-position ( <b>YYMMDD</b> ) format.	
Must Use	GS05	30	Group Time	M TM 4/4
			Time ( <b>HHMM</b> ) when the sender generated a functional group of transaction sets (local time at sender's location).	
			1. Enter the <b>UTC</b> (previously known as <b>GMT</b> ) time that this segment was created.	
			2. Express the time in a four-position ( <b>HHMM</b> ) format.	
Must Use	GS06	28	Group Control Number	M N0 1/9
			Assigned number originated and maintained by the sender	
			1. Originating activities may use any numbering scheme consistent with their business practices.	
			2. The scheme must provide sufficient uniqueness to identify each functional group. The Group Control Number value, together with the Application Sender's and Receiver's Codes, shall be unique within an extended time frame - such as a year.	
Must Use	GS07	455	Responsible Agency Code	M ID 1/2
			Code used in conjunction with Data Element 480 to identify the issuer of the standard	
			X	Accredited Standards Committee X12
Must Use	GS08	480	Version / Release / Industry Identifier Code	M AN 1/12
			Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used. Positions 1-3, Major Version Number; Positions 4-6, Release Level of Version; Positions 7-12, Industry or Trade Association ID (optionally assigned by user).	

*Each Federal and DoD Implementation Convention, based on an ANSI ASC X12 transaction set, used by the government has a unique identifier specified as follow:*

*Positions 1 through 6: ANSI ASC X12 Version and Release number (e.g. 003010) upon which the IC is based.*

*Position 7: Organizational Scope*  
*F = Federal*  
*D = DOD*  
*G = Government (transitional)*

*Positions 8 through 10: Transaction Set Identifier Code (e.g. 850).*

*Position 11: Variant: A character used to differentiate between different*

*functional implementations of the same transaction set.*

*If the convention is not a variant, an underscore ( \_ ) will appear in this position.*

**Position 12:**

*A sequential number starting with 0 and incremented by 1 each time the implementation convention is revised.*

<b>Segment:</b>	<b>GS</b> Functional Group Header
<b>Usage:</b>	Mandatory
<b>Max Use:</b>	1
<b>Purpose:</b>	To indicate the beginning of a functional group and to provide control information
<b>Syntax Notes:</b>	
<b>Semantic Notes:</b>	<ol style="list-style-type: none"> <li>1 GS04 is the group date.</li> <li>2 GS05 is the group time.</li> <li>3 The data interchange control number GS06 in this header must be identical to the same data element in the associated functional group trailer, GE02.</li> </ol>
<b>Comments:</b>	<ol style="list-style-type: none"> <li>1 A functional group of related transaction sets, within the scope of X12 standards, consists of a collection of similar transaction sets enclosed by a functional group header and a functional group trailer.</li> </ol>
<b>Notes:</b>	<ol style="list-style-type: none"> <li>1. Use to identify the functional group containing one or more related transactions.</li> <li>2. Use to identify the specific implementation convention with which the transaction sets contained within the functional group envelope comply.</li> <li>3. The version and release of the GS segment must be the same as the version and release of the transactions that follow it as specified in the Version / Release / Industry Identifier Code (GS08).</li> <li>4. The GS segment represented here is valid for version 3040 through 3070.</li> </ol>

#### Data Element Summary

Ref.	Data			
Des.	Element	Name	Attributes	
Must Use GS01	479	Functional Identifier Code	M ID 2/2	
		Code identifying a group of application related transaction sets		
		<i>Cite any valid code defined for data element 479 in the ASC X12 3040 through 3070 (as applicable) Standards Data Element Dictionary providing a Federal implementation convention exists for the cited transaction set.</i>		
Must Use GS02	142	Application Sender's Code	M AN 2/15	
		Code identifying party sending transmission; codes agreed to by trading partners		
		<i>1. Cite the sending application's identifier. This identifier must be unique within the domain of the sending application's translation point. Use of a Dun and Bradstreet number (DUNS or DUNS+4) is recommended to provide universal uniqueness.</i>		

Must Use	GS03	124	<i>2. Transmit the required number of characters without leading or trailing blanks.</i>	
			Application Receiver's Code	M AN 2/15
			Code identifying party receiving transmission. Codes agreed to by trading partners	
			<i>1. Cite the receiving application's identifier. This identifier must be unique within the domain of the receiving application's translation point. Use of a Dun and Bradstreet number (D-U-N-S or D-U-N-S+4) is recommended to provide universal uniqueness.</i>	
			<i>2. Transmit the required number of characters without leading or trailing blanks.</i>	
			<i>3. If the group contains PUBLIC transactions, enter the literal string 'PUBLIC'.</i>	
Must Use	GS04	373	Date	M DT 6/6
			Date (YYMMDD)	
			<i>1. Enter the UTC (previously known as GMT) date that this segment was created.</i>	
			<i>2. Express the date in a six-position (YYMMDD) format.</i>	
Must Use	GS05	337	Time	M TM 4/8
			Time expressed in 24-hour clock time as follows: HHMM, or HHMMSS, or HHMMSSD, or HHMMSSDD, where H = hours (00-23), M = minutes (00-59), S = integer seconds (00-59) and DD = decimal seconds; decimal seconds are expressed as follows: D = tenths (0-9) and DD = hundredths (00-99)	
			<i>1. Enter the UTC (previously known as GMT) time that this segment was created.</i>	
			<i>2. Express the time in a four-position (HHMM) format.</i>	
Must Use	GS06	28	Group Control Number	M N0 1/9
			Assigned number originated and maintained by the sender	
			<i>1. Originating activities may use any numbering scheme consistent with their business practices.</i>	
			<i>2. The scheme must provide sufficient uniqueness to identify each functional group. The Group Control Number value, together with the Application Sender's and Receiver's Codes, shall be unique within an extended time frame - such as a year.</i>	
Must Use	GS07	455	Responsible Agency Code	M ID 1/2
			Code used in conjunction with Data Element 480 to identify the issuer of the standard	
			X	Accredited Standards Committee X12
Must Use	GS08	480	Version / Release / Industry Identifier Code	M AN 1/12
			Code indicating the version, release, subrelease, and industry identifier of the EDI standard being used, including the GS and GE segments; if code in DE455 in GS segment is X, then in DE 480 positions 1-3 are the version number; positions 4-6 are the release and subrelease, level of the version; and positions 7-12 are the industry or trade association identifiers (optionally assigned by user); if code in DE455 in GS segment is T, then other formats are allowed	

*Each Federal and DoD Implementation Convention, based on an ANSI ASC X12 transaction set, used by the government has a unique identifier specified as follow:*

*Positions 1 through 6:      ANSI ASC X12 Version and Release number (e.g. 003010) upon which the IC is based.*

*Position 7:                Organizational Scope  
                                F = Federal  
                                D = DOD  
                                G = Government (transitional)*

*Positions 8 through 10:   Transaction Set Identifier Code (e.g. 850).*

*Position 11:              Variant: A character used to differentiate between different functional implementations of the same transaction set.*

*If the convention is not a variant, an underscore ( ) will appear in this position.*

*Position 12:              A sequential number starting with 0 and incremented by 1 each time the implementation convention is revised.*



**Segment:** **S1S** Security Header Level 1

**Usage:** Optional

**Max Use:** 1

**Purpose:** To initiate the beginning of a secured area and to provide the parameters needed for authentication or encryption of a functional group

**Syntax Notes:** 1 If either S1S04 or S1S05 is present, then the other is required.  
2 If any of S1S06 S1S07 S1S08 or S1S09 is present, then all are required.

**Semantic Notes:** 1 If S1S01 is ``AA" or ``BB", S1S04 is required.  
If S1S01 is ``BB" or ``EE", S1S06 is required.

**Comments:**

**Notes:**

1. X9 has a minimum length of 4 characters for S1S02 (the security originator); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier
2. X9 has a minimum length of 4 characters for S1S03 (the security recipient); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier
3. The S1S segment represented here is only valid for versions 3040 and 3050.

## Data Element Summary

Ref.	Data			
	<u>Des.</u>	<u>Element</u>	<u>Name</u>	<u>Attributes</u>
Must Use	S1S01	990	Security Type	M ID 2/2
			Code identifying the security algorithms and methods employed for this level of interchange.	
			EE Encryption, No Authentication	
Must Use	S1S02	824	Security Originator Name	M AN 4/16
			Unique designation (identity) of the cryptographic process that performs authentication or encryption on data to be interchanged, or originates a cryptographic service message	
			Note: X9 has a minimum length of 4 characters for the security originator; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
Must Use	S1S03	825	Security Recipient Name	M AN 4/16
			Unique designation (identity) of the cryptographic process that performs authentication or decryption on received data, or is the destination of a cryptographic service message	
			Note: X9 has a minimum length of 4 characters for the security recipient; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
	S1S04	991	Authentication Key Name	X AN 1/16
			Name of the key used for authentication. This name is mutually known to the security originator and the security recipient, is unique for this relationship, and allows a particular key to be specified.	
	S1S05	992	Authentication Service Code	X ID 1/1
			Authentication option	
		1	ANSI X9.9 Binary Data	
		2	ANSI X9.9 Coded Character Set, Entire Message, No Editing	



			Standard value for ANSI X9.17 authentication, with the data element separator expressed as an asterisk and the segment terminator expressed as a linefeed character for the calculation of the message authentication code (MAC)	
S1S06	993	<b>Encryption Key Name</b>		X AN 1/16
		Name of the key used for encryption. This name is mutually known to the security originator and the security recipient, is unique for this relationship, and allows a particular key to be specified.		
S1S07	994	<b>Encryption Service Code</b>		X ID 1/3
		Coded values representing options for encryption processing. The code defines the encryption mode and the transmission filter specification for filtering binary ciphertext data into transmittable text.		
	21	ANSI X9.23 Cipher Block Chaining (CBC), Hexadecimal Filter		
	22	ANSI X9.23 Cipher Block Chaining (CBC), ASCII Filter		
	41	ANSI X9.23 CFB-8 (Cipher Feedback), Hexadecimal Filter		
	42	ANSI X9.23 CFB-8 (Cipher Feedback), ASCII Filter		
S1S08	995	<b>Length of Data (LOD)</b>		X N 1/18
		Length of data is the number of character positions of the encrypted, filtered text.		
S1S09	996	<b>Initialization Vector (IV)</b>		X AN 16/16
		The archival representation of a 64-bit value expressed in hexadecimal notation as 16 ASCII characters from the set of characters (0..9, A..F); the 64-bit value is used as a starting point for encryption of a data sequence to increase security by introducing cryptographic variance and to synchronize cryptographic equipment; a new Initialization Vector (IV) shall be used for each message; the IV shall not be intentionally reused; the 64-bit binary value, not its ASCII representation, is used for the cryptographic process; in the interchange process, the resultant encrypted and filtered 64-bit IV is sent; the hexadecimal notation is the representation for archiving purposes; the IV shall be a random or pseudo-random number; when encrypted, the IV must be decrypted using the Electronic Code Book (ECB) mode and the same key used to encrypt the message		

Segment:	<b>S1S</b> Security Header Level 1
Usage:	Optional
Max Use:	1
Purpose:	To initiate the beginning of a secured area and to provide the parameters needed for authentication or encryption of a functional group
Syntax Notes:	<ol style="list-style-type: none"><li>1 If either S1S04 or S1S05 is present, then the other is required.</li><li>2 If any of S1S06 S1S07 S1S08 or S1S09 is present, then all are required.</li><li>3 If either C03204 or C03205 is present, then the other is required.</li><li>4 If either C03206 or C03207 is present, then the other is required.</li></ol>
Semantic Notes:	<ol style="list-style-type: none"><li>1 If S1S01 is "AA", "BB", "AC" or "BC", then S1S04 is required. If S1S01 is "BB", "EE", "AC" or "EC", then S1S06 is required.</li></ol>
Comments:	<ol style="list-style-type: none"><li>1 X9 has a required minimum length of four characters for S1S02 (security originator). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>2 X9 has a required minimum length of four characters for S1S03 (security recipient). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>3 In S1S04, the special name "01234567890ABCDEF" is reserved for the hexadecimal value 01234567890ABCDEF (i.e., a fixed, nonsecret value) to provide a well-known value for data-integrity testing only.</li></ol>
Notes:	<ol style="list-style-type: none"><li>1. <i>X9 has a minimum length of 4 characters for S1S02 (the security originator); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier</i></li><li>2. <i>X9 has a minimum length of 4 characters for S1S03 (the security recipient); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier</i></li><li>3. <i>The S1S segment represented here is only valid for versions 3060 and 3070.</i></li></ol>

## Data Element Summary

Ref.	Data		
Des.	Element	Name	Attributes
Must Use S1S01	990	Security Type	M ID 2/2
		Code identifying the security algorithms and methods applied for this level of interchange	
		EC	No Authentication, Compression, Encryption
		EE	No Authentication, No Compression, Encryption
Must Use S1S02	824	Security Originator Name	M AN 1/64
		Unique designation (identity) of the cryptographic process that performs authentication or encryption on data to be interchanged, or originates a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security originator; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
S1S03	825	Security Recipient Name	O AN 1/64
		Unique designation (identity) of the cryptographic process that performs authentication or decryption on received data, or is the destination of a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security recipient; no mechanism, or registration method is provided by X9 or X12 to guarantee the	

	S1S04	991	uniqueness of the identifier <b>Authentication Key Name</b>	X	AN 1/64
			Name of the key used for authentication; this name is mutually known to the security originator and the security recipient, is unique for this relationship, and is intended to allow the changing of the key from time to time		
			Note: The special key name "0123456789ABCDEF" is reserved for the hexadecimal value 0123456789ABCDEF (i.e. a fixed non-secret value) to provide a well-known value for data integrity testing only)		
	S1S05	992	<b>Authentication Service Code</b>	X	ID 1/1
			Authentication options		
		4	MD5 Hash		
		5	SHA Hash		
	S1S06	C031	<b>Encryption Key Information</b>	X	
			Information needed to identify or obtain the encryption key		
Must Use	C03101	993	<b>Encryption Key Name</b>	M	AN 1/64
			Name of the key used for encryption; this name is mutually known to the security originator and the security recipient, is unique for this relationship, and is intended to allow the changing of the key from time to time		
			Note: If any of the optional fields are present, the Key Name should contain either "PUBLIC" if a public key is being used to encrypt the one-time key or the actual name of the asymmetric key-encrypting-key used to encrypt the one-time key.		
	C03102	1564	<b>Protocol ID</b>	O	ID 3/3
			Code specifying protocol used to encrypt the session key		
		KEA	Key Encryption Algorithm		
		RSA	RSA Algorithm		
	C03103	1565	<b>Look-up Value</b>	O	AN 1/512
			Value used to identify a certificate containing the public key used to encrypt the one-time key		
	C03104	1566	<b>Keying Material</b>	O	AN 1/512
			Additional material required for decrypting the one-time key		
	C03105	1567	<b>One-time Encryption Key</b>	O	AN 1/512
			Hexadecimally filtered encrypted one-time key		
	S1S07	C032	<b>Encryption Service Information</b>	X	
			Information required by the encryption operation		
Must Use	C03201	994	<b>Encryption Service Code</b>	M	ID 1/3
			Coded values representing options for encryption processing, including the use of compression and filtering; the code either defines the encryption mode and the transmission filter specification for filtering binary data into transmittable text or specifies that the following subelements define these values		
		21	ANSI X9.23 Cipher Block Chaining (CBC), Hexadecimal Filter		
		22	ANSI X9.23 Cipher Block Chaining (CBC), ASCII Filter		
		41	ANSI X9.23 CFB-8 (Cipher Feedback), Hexadecimal Filter		

C03202	1568	42	ANSI X9.23 CFB-8 (Cipher Feedback), ASCII Filter		
		<b>Algorithm ID</b>		<b>O</b>	<b>ID 3/3</b>
		Algorithm used for Encryption			
		DE3	Triple DEA		
		DES	Data Encryption Standard (Same as DEA)		
			<i>As specified in FIPS 46-2.</i>		
		SKJ	Skipjack		
C03203	1569	<b>Algorithm Mode of Operation</b>		<b>O</b>	<b>ID 3/3</b>
		Mode of Operation of the Encryption Algorithm			
		CBC	Cipher Block Chaining		
C03204	1570	<b>Filter ID Code</b>		<b>X</b>	<b>ID 3/3</b>
		Code specifying the type of filter used to convert data code values			
		ASB	ASCII-Baudot Filter		
		ASC	ASCII Filter		
		HDC	Hexadecimal Filter		
		UUE	Uuencoding		
		ZZZ	Mutually Defined		
			<i>Use to indicate Base 64.</i>		
C03205	799	<b>Version Identifier</b>		<b>X</b>	<b>AN 1/30</b>
		Revision level of a particular format, program, technique or algorithm			
C03206	1571	<b>Compression ID</b>		<b>X</b>	<b>ID 3/3</b>
		Type of Compression Used			
		913	X9E13 Compression as defined by X9.32		
		ZZZ	Mutually Defined		
			<i>Use to indicate that each block has been compressed by using a combination of the Lempel-Ziv LZ77 algorithm and Huffman coding, in accordance with the Internet Engineering Task Force (IETF) Request for Comments (RFC) 1951 format.</i>		
C03207	799	<b>Version Identifier</b>		<b>X</b>	<b>AN 1/30</b>
		Revision level of a particular format, program, technique or algorithm			
		<i>Cite the version of the compression algorithm cited in S1S07 (C03206) above.</i>			
S1S08	995	<b>Length of Data</b>		<b>X</b>	<b>N 1/18</b>
		Length of data is the number of character positions of the compressed or encrypted/filtered text; when data is plain text, this field shall be absent			
S1S09	996	<b>Initialization Vector</b>		<b>X</b>	<b>AN 16/16</b>
		The archival representation of a 64-bit value expressed in hexadecimal notation as 16 ASCII characters from the set of characters (0..9, A..F); the 64-bit value is used as a starting point for encryption of a data sequence to increase security by introducing cryptographic variance and to synchronize cryptographic equipment; a new Initialization Vector (IV) shall be used for each message; the IV shall not be intentionally reused; the 64-bit binary value, not its ASCII representation, is used for the cryptographic process; in the interchange process, the resultant encrypted and filtered 64-bit IV is sent; the hexadecimal notation is the representation for archiving purposes; the IV shall be a random or pseudo-random number; when encrypted, the IV must be			

decrypted using the Electronic Code Book (ECB) mode and the same key used  
to encrypt the message



**Segment:** **S2S** Security Header Level 2

**Usage:** Optional

**Max Use:** 1

**Purpose:** To initiate the beginning of a secured area and to provide the parameters needed for authentication or encryption of a transaction set

**Syntax Notes:**

- 1 If either S2S04 or S2S05 is present, then the other is required.
- 2 If any of S2S06 S2S07 S2S08 or S2S09 is present, then all are required.

**Semantic Notes:**

- 1 If S2S01 is ``AA" or ``BB", S2S04 is required.  
If S2S01 is ``BB" or ``EE", S2S06 is required.

**Comments:**

**Notes:**

1. X9 has a minimum length of 4 characters for S2S02 (the security originator); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier
2. X9 has a minimum length of 4 characters for S2S03 (the security recipient); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier.
3. The S2S segment represented here is only valid for versions 3040 and 3050.

## Data Element Summary

Ref.	Data		
Des.	Element	Name	Attributes
Must Use S2S01	990	Security Type	M ID 2/2
		Code identifying the security algorithms and methods employed for this level of interchange.	
		EE Encryption, No Authentication	
Must Use S2S02	824	Security Originator Name	M AN 4/16
		Unique designation (identity) of the cryptographic process that performs authentication or encryption on data to be interchanged, or originates a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security originator; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
Must Use S2S03	825	Security Recipient Name	M AN 4/16
		Unique designation (identity) of the cryptographic process that performs authentication or decryption on received data, or is the destination of a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security recipient; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
S2S04	991	Authentication Key Name	X AN 1/16
		Name of the key used for authentication. This name is mutually known to the security originator and the security recipient, is unique for this relationship, and allows a particular key to be specified.	
S2S05	992	Authentication Service Code	X ID 1/1
		Authentication option	
S2S06	993	Encryption Key Name	X AN 1/16
		Name of the key used for encryption. This name is mutually known to the security originator and the security recipient, is unique for this relationship,	

S2S07	994	and allows a particular key to be specified.	
		<b>Encryption Service Code</b>	<b>X ID 1/3</b>
		Coded values representing options for encryption processing. The code defines the encryption mode and the transmission filter specification for filtering binary ciphertext data into transmittable text.	
		21 ANSI X9.23 Cipher Block Chaining (CBC), Hexadecimal Filter	
		22 ANSI X9.23 Cipher Block Chaining (CBC), ASCII Filter	
S2S08	995	41 ANSI X9.23 CFB-8 (Cipher Feedback), Hexadecimal Filter	
		42 ANSI X9.23 CFB-8 (Cipher Feedback), ASCII Filter	
		<b>Length of Data (LOD)</b>	<b>X N 1/18</b>
		Length of data is the number of character positions of the encrypted, filtered text.	
S2S09	996	<b>Initialization Vector (IV)</b>	<b>X AN 16/16</b>
		The archival representation of a 64-bit value expressed in hexadecimal notation as 16 ASCII characters from the set of characters (0..9, A..F); the 64-bit value is used as a starting point for encryption of a data sequence to increase security by introducing cryptographic variance and to synchronize cryptographic equipment; a new Initialization Vector (IV) shall be used for each message; the IV shall not be intentionally reused; the 64-bit binary value, not its ASCII representation, is used for the cryptographic process; in the interchange process, the resultant encrypted and filtered 64-bit IV is sent; the hexadecimal notation is the representation for archiving purposes; the IV shall be a random or pseudo-random number; when encrypted, the IV must be decrypted using the Electronic Code Book (ECB) mode and the same key used to encrypt the message	

Segment:	<b>S2S</b> Security Header Level 2
Usage:	Optional
Max Use:	1
Purpose:	To initiate the beginning of a secured area and to provide the parameters needed for authentication or encryption of a transaction set
Syntax Notes:	<ol style="list-style-type: none"><li>1 If either S2S04 or S2S05 is present, then the other is required.</li><li>2 If any of S2S06 S2S07 S2S08 or S2S09 is present, then all are required.</li><li>3 If either C03204 or C03205 is present, then the other is required.</li><li>4 If either C03206 or C03207 is present, then the other is required.</li></ol>
Semantic Notes:	<ol style="list-style-type: none"><li>1 If S2S01 is "AA", "BB", "AC" or "BC", then S2S04 is required. If S2S01 is "BB", "EE", "AC" or "EC", then S2S06 is required.</li></ol>
Comments:	<ol style="list-style-type: none"><li>1 X9 has a required minimum length of four characters for S2S02 (security originator). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>2 X9 has a required minimum length of four characters for S2S03 (security recipient). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>3 In S2S04 the special name "01234567890ABCDEF" is reserved for the hexadecimal value 01234567890ABCDEF (i.e., a fixed nonsecret value) to provide a well-known value for data-integrity testing only.</li></ol>
Notes:	<ol style="list-style-type: none"><li>1. <i>X9 has a minimum length of 4 characters for S2S02 (the security originator); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier</i></li><li>2. <i>X9 has a minimum length of 4 characters for S2S03 (the security recipient); no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier.</i></li><li>3. <i>The S2S segment represented here is only valid for versions 3060 and 3070.</i></li></ol>

## Data Element Summary

Ref.	Data		
Des.	Element	Name	Attributes
Must Use S2S01	990	Security Type	M ID 2/2
		Code identifying the security algorithms and methods applied for this level of interchange	
		EC	No Authentication, Compression, Encryption
		EE	No Authentication, No Compression, Encryption
Must Use S2S02	824	Security Originator Name	M AN 1/64
		Unique designation (identity) of the cryptographic process that performs authentication or encryption on data to be interchanged, or originates a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security originator; no mechanism, or registration method is provided by X9 or X12 to guarantee the uniqueness of the identifier	
S2S03	825	Security Recipient Name	O AN 1/64
		Unique designation (identity) of the cryptographic process that performs authentication or decryption on received data, or is the destination of a cryptographic service message	
		Note: X9 has a minimum length of 4 characters for the security recipient; no mechanism, or registration method is provided by X9 or X12 to guarantee the	

	S2S04	991	uniqueness of the identifier <b>Authentication Key Name</b>	X	AN 1/64
			Name of the key used for authentication; this name is mutually known to the security originator and the security recipient, is unique for this relationship, and is intended to allow the changing of the key from time to time		
			Note: The special key name "0123456789ABCDEF" is reserved for the hexadecimal value 0123456789ABCDEF (i.e. a fixed non-secret value) to provide a well-known value for data integrity testing only)		
	S2S05	992	<b>Authentication Service Code</b>	X	ID 1/1
			Authentication options		
		4	MD5 Hash		
		5	SHA Hash		
	S2S06	C031	<b>Encryption Key Information</b>	X	
			Information needed to identify or obtain the encryption key		
Must Use	C03101	993	<b>Encryption Key Name</b>	M	AN 1/64
			Name of the key used for encryption; this name is mutually known to the security originator and the security recipient, is unique for this relationship, and is intended to allow the changing of the key from time to time		
			Note: If any of the optional fields are present, the Key Name should contain either "PUBLIC" if a public key is being used to encrypt the one-time key or the actual name of the asymmetric key-encrypting-key used to encrypt the one-time key.		
	C03102	1564	<b>Protocol ID</b>	O	ID 3/3
			Code specifying protocol used to encrypt the session key		
		KEA	Key Encryption Algorithm		
		RSA	RSA Algorithm		
	C03103	1565	<b>Look-up Value</b>	O	AN 1/512
			Value used to identify a certificate containing the public key used to encrypt the one-time key		
	C03104	1566	<b>Keying Material</b>	O	AN 1/512
			Additional material required for decrypting the one-time key		
	C03105	1567	<b>One-time Encryption Key</b>	O	AN 1/512
			Hexadecimally filtered encrypted one-time key		
	S2S07	C032	<b>Encryption Service Information</b>	X	
			Information required by the encryption operation		
Must Use	C03201	994	<b>Encryption Service Code</b>	M	ID 1/3
			Coded values representing options for encryption processing, including the use of compression and filtering; the code either defines the encryption mode and the transmission filter specification for filtering binary data into transmittable text or specifies that the following subelements define these values		
		21	ANSI X9.23 Cipher Block Chaining (CBC), Hexadecimal Filter		
		22	ANSI X9.23 Cipher Block Chaining (CBC), ASCII Filter		
		41	ANSI X9.23 CFB-8 (Cipher Feedback), Hexadecimal Filter		



		42	ANSI X9.23 CFB-8 (Cipher Feedback), ASCII Filter		
C03202	1568	<b>Algorithm ID</b>		O	ID 3/3
		Algorithm used for Encryption			
		DE3	Triple DEA		
		DES	Data Encryption Standard (Same as DEA)		
			<i>As specified in FIPS 46-2.</i>		
		SKJ	Skipjack		
C03203	1569	<b>Algorithm Mode of Operation</b>		O	ID 3/3
		Mode of Operation of the Encryption Algorithm			
		CBC	Cipher Block Chaining		
C03204	1570	<b>Filter ID Code</b>		X	ID 3/3
		Code specifying the type of filter used to convert data code values			
		ASB	ASCII-Baudot Filter		
		ASC	ASCII Filter		
		HDC	Hexadecimal Filter		
		UUE	Uuencoding		
		ZZZ	Mutually Defined		
			<i>Use to indicate Base 64.</i>		
C03205	799	<b>Version Identifier</b>		X	AN 1/30
		Revision level of a particular format, program, technique or algorithm			
C03206	1571	<b>Compression ID</b>		X	ID 3/3
		Type of Compression Used			
		913	X9E13 Compression as defined by X9.32		
		ZZZ	Mutually Defined		
			<i>Use to indicate that each block has been compressed by using a combination of the Lempel-Ziv LZ77 algorithm and Huffman coding, in accordance with the Internet Engineering Task Force (IETF) Request for Comments (RFC) 1951 format.</i>		
C03207	799	<b>Cite the version of the compression algorithm cited in S1S07 (C03206) above.</b>		X	AN 1/30
		Revision level of a particular format, program, technique or algorithm			
		<i>Cite the version of the compression algorithm cited in S2S07 (C03206) above.</i>			
S2S08	995	<b>Length of Data</b>		X	N 1/18
		Length of data is the number of character positions of the compressed or encrypted/filtered text; when data is plain text, this field shall be absent			
S2S09	996	<b>Initialization Vector</b>		X	AN 16/16
		The archival representation of a 64-bit value expressed in hexadecimal notation as 16 ASCII characters from the set of characters (0..9, A..F); the 64-bit value is used as a starting point for encryption of a data sequence to increase security by introducing cryptographic variance and to synchronize cryptographic equipment; a new Initialization Vector (IV) shall be used for each message; the IV shall not be intentionally reused; the 64-bit binary value, not its ASCII representation, is used for the cryptographic process; in the interchange process, the resultant encrypted and filtered 64-bit IV is sent; the hexadecimal notation is the representation for archiving purposes; the IV shall			



be a random or pseudo-random number; when encrypted, the IV must be decrypted using the Electronic Code Book (ECB) mode and the same key used to encrypt the message

Segment:	<b>S2A</b> Assurance Level 2
Usage:	Optional
Max Use:	1
Purpose:	To allow for multiple assurances at the ST/SE level
Syntax Notes:	<ol style="list-style-type: none"><li>1 If C02804 is present, then C02803 is required.</li><li>2 If C02806 is present, then C02805 is required.</li><li>3 If C02808 is present, then C02807 is required.</li><li>4 If C02810 is present, then C02809 is required.</li><li>5 If C02812 is present, then C02811 is required.</li><li>6 If C02814 is present, then C02813 is required.</li><li>7 If C02816 is present, then C02815 is required.</li><li>8 If C02818 is present, then C02817 is required.</li><li>9 If C02820 is present, then C02819 is required.</li></ol>
Semantic Notes:	
Comments:	<ol style="list-style-type: none"><li>1 X9 has a required minimum length of four characters for S2A04 (security originator). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>2 X9 has a required minimum length of four characters for S2A05 (security recipient). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.</li><li>3 The date/time stamp may determine which of several key values apply, depending on start and expiration dates of different key values that may share the same keyname.</li><li>4 Key distribution is performed by other means and thus only onetime keys are allowed in S2A09. The use of particular codes and corresponding values in S2A09 is dependent on the exigencies of the various cryptographic algorithms.</li></ol>
Notes:	<ol style="list-style-type: none"><li>1. Assurance (Digital Signature) segments (S2A/SVA) are not part of the control envelope structure. When used, insert the S2A/SVA segment pair(s) immediately preceding the SE segment of the transaction set for which assurance is being provided. See Section 10.5.3 of the Federal Implementation Guidelines.</li><li>2. The S2A segment represented here is only valid for versions 3060 and 3070.</li></ol>

## Data Element Summary

Ref.	Des.	Data Element	Name	Attributes
Must Use	S2A01	1432	Business Purpose of Assurance	M ID 3/3
			The stated business purpose for appending the assurance to an existing secured-entity (whether functional group or transaction set); the codes represent the intention of the business or application that has control over the assurance originator	
			ASG Authorization Signature Appropriate to this Document	
			CSG Authorization Co-signature Appropriate to this Document	
Must Use	S2A02	C034	Computation Methods	M
			Algorithms used to calculate an assurance	
Must Use	C03401	1574	Assurance Algorithm	M ID 3/3
			Code specifying the algorithm used to compute the assurance token	
			DSS Digital Signature Standard	
			As specified in FIPS 186.	
			RSA RSA	

<b>Must Use</b>	<b>C03402</b>	<b>1575</b>	<b>Hashing Algorithm</b>	<b>M</b>	<b>ID 3/3</b>
			Code specifying the algorithm used to compute the assurance digest		
			MD5 MD5		
			SHA Secure hash algorithm		
<b>Must Use</b>	<b>S2A03</b>	<b>1434</b>	<b>Domain of Computation of Assurance Digest</b>	<b>M</b>	<b>ID 1/2</b>
			The bounds of the text, whether contiguous or not, over which the computation of the Assurance Token is computed using the defined methodology of computation and any relevant Assurance Token parameters; the "body" is either a transaction set (beginning with the ST and including all segments up to the first S2A segment, but excluding any S2S segment) or functional group (beginning with the GS and including all transaction sets up to the first S1A segment, but excluding any S1S segment)		
			"This Assurance" is defined as from the "S" in S1A or S2A up to and including the data element separator preceeding the assurance digest		
			"Previous Assurance(s)" is defined as including the entire S1A or S2A segment and the entire SVA that follows the included S1A or S2A. Refer to 003060 Data Element Dictionary for acceptable code values.		
	<b>S2A04</b>	<b>1435</b>	<b>Assurance Originator</b>	<b>O</b>	<b>AN 1/64</b>
			Unique designation (identity) of the cryptographic process that performs the stated assurance on data to be interchanged		
			Note: X9 has a required minimum length of 4 characters for a security originator; no mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier		
	<b>S2A05</b>	<b>1436</b>	<b>Assurance Recipient</b>	<b>O</b>	<b>AN 1/64</b>
			Unique designation (identity) of the cryptographic process that performs validation of the stated assurance on received data. In the absence of an Assurance Recipient all potenial receivers will often be able to validate the assurance because the cryptographic technique is based on a "public" (as opposed to "secret") technology		
			Note: X9 has required minimum length of 4 characters for a security recipient; no mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier		
	<b>S2A06</b>	<b>1443</b>	<b>Assurance Reference Number</b>	<b>O</b>	<b>AN 1/35</b>
			Alphanumeric reference number issued by security assurance originator for the particular assurance in which it occurs; unique when used in combination with security originator data element		
	<b>S2A07</b>	<b>1437</b>	<b>Date/Time Reference</b>	<b>O</b>	<b>AN 17/25</b>
			Date/time stamp in format as follows:		
			YYYYMMDDHHNNSSTTTZZZ+XXXX, where YYYY = 4 digit year (with leading century), MM = month of year (01..12), DD = day of month (01..31), HH = hour of day in 24-hour format (00..23), NN = minutes of the hour (00..59), SS = second of hour (00..59), TTT = [optional] milli-seconds (000..999), ZZZ = [optional] three character, nominal time zone indicator (including daylight savings time indicator) and XXXXX = 3-5 digit (including leading + or - sign) offset of time to universal time, with three position format indicating hours-offset for whole hours, and five position format indicating hours and		

minutes offset where this is necessary. For example:

199306152213300CDT+0930 which represents 15 June 1993, 22:13 (10:13pm), Central Daylight Time (Nominal Value "CDT"), in a time zone that is offset + 9:30 from Universal Time (Australia)

	S2A08	1438	<b>Assurance Text</b>	O	AN 1/64
			Any text needed to convey the name of a signatory, registration number, certification number, or other assurance-originator defined or mutually-agreed business text related to the specific assurance; this text is not defined for X12 purposes and thus functions technically as "free form text" though it may have structure that is defined by the assurance originator, an industry group, a governmental agency, or bi-laterally between assurance originator and assurance recipient		
	S2A09	C028	<b>Assurance Token Parameters</b>	O	
			Parameters needed to calculate the Assurance Token		
Must Use	C02801	1439	<b>Assurance Token Parameter Code</b>	M	ID 2/2
			A code specifying the type of Assurance Token Parameter		
			CI Certification Authority ID		
			EK Key Value - One-Time Key		
			KN Key Name		
			NT Notarization		
			OD Key-Encrypting-Key for One-Time Key		
			UI User ID		
Must Use	C02802	1442	<b>Assurance Token Parameter Value</b>	M	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02803	1439	<b>Assurance Token Parameter Code</b>	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02804	1442	<b>Assurance Token Parameter Value</b>	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02805	1439	<b>Assurance Token Parameter Code</b>	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02806	1442	<b>Assurance Token Parameter Value</b>	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02807	1439	<b>Assurance Token Parameter Code</b>	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02808	1442	<b>Assurance Token Parameter Value</b>	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02809	1439	<b>Assurance Token Parameter Code</b>	X	ID 2/2



			A code specifying the type of Assurance Token Parameter		
Not Used	C02810	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02811	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02812	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02813	1439	Assurance Token Parameter Code	X	ID 2/2
Not Used	C02813	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02814	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02815	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02816	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02817	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
			Refer to 003060 Data Element Dictionary for acceptable code values.		
Not Used	C02818	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02819	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02820	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
	S2A10	1440	Assurance Digest	O	AN 1/512
			The result of the application of the hash defined in the methodology expressed in ASCII-hex notation		



Segment: **SVA** Security Value  
Usage: Optional  
Max Use: 1  
Purpose: To provide the encoded output of a cryptographic algorithm  
Syntax Notes:  
Semantic Notes:  
Comments:  
Notes:

*1. Assurance (Digital Signature) segments (S2A/SVA) are not part of the control envelope structure. When used, insert the S2A/SVA segment pair(s) immediately preceding the SE segment of the transaction set for which assurance is being provided. See Section 10.5.3 of the Federal Implementation Guidelines.*

*2. The SVA segment represented here is only valid for versions 3060 and 3070.*

## Data Element Summary

	<u>Ref.</u> <u>Des.</u>	<u>Data</u> <u>Element</u>	<u>Name</u>	<u>Attributes</u>
Must Use	SVA01	1570	Filter ID Code	M ID 3/3
Code specifying the type of filter used to convert data code values				
			ASB	ASCII-Baudot Filter
			ASC	ASCII Filter
			HDC	Hexadecimal Filter
			UUE	Uuencoding
			ZZZ	Mutually Defined
Use to indicate Base 64.				
Must Use	SVA02	799	Version Identifier	M AN 1/30
Revision level of a particular format, program, technique or algorithm				
Must Use	SVA03	C033	Security Value	M
Value of the Security Token				
Must Use	C03301	1572	Security Value Qualifier	M ID 3/3
Type of Security Value				
			ASV	Assurance Token
			CRT	Certificate
Only for use in the 3070 version of this segment.				
			PUB	Public Key
Only for use in the 3070 version of this segment.				
Must Use	C03302	1573	Encoded Security Value	M AN 1/10E16
Encoded representation of the Security Value specified by the Security Value Qualifier				

Segment: **S2E** Security Trailer Level 2  
 Usage: Optional  
 Max Use: 1  
 Purpose: To end a secured area and to provide the value of cryptographically computed authentication codes

Syntax Notes:

Semantic Notes:

Comments:

Notes:

*The S2E segment represented here is valid for versions 3040, 3050, 3060 and 3070.*

#### Data Element Summary

Ref.	Data		
<u>Des.</u>	<u>Element</u>	<u>Name</u>	<u>Attributes</u>
Must Use S2E01	997	Hash or Authentication Code	M AN 1/64
The message authentication code or hash/digest generated by the authentication process; when the Data Encryption Standard (DES) algorithm is used, the field consists of 4 hexadecimal coded characters (i.e., characters from the set 0..9, A..F), a separator character (space, "-", or other), and 4 hexadecimally coded characters; when non-DES hashes are used, the result of the hash is expressed as hexadecimally coded characters without spaces; when authentication or hash is not used, this field should be filled with a non-blank character other than the set (0..9, A..F) for the minimum length			
<i>Enter the character "Z".</i>			

**Segment:** **S1A** Assurance Level 1**Usage:** Optional**Max Use:** 1**Purpose:** To allow for multiple assurances at the GS/GE level

**Syntax Notes:**

- 1 If C02804 is present, then C02803 is required.
- 2 If C02806 is present, then C02805 is required.
- 3 If C02808 is present, then C02807 is required.
- 4 If C02810 is present, then C02809 is required.
- 5 If C02812 is present, then C02811 is required.
- 6 If C02814 is present, then C02813 is required.
- 7 If C02816 is present, then C02815 is required.
- 8 If C02818 is present, then C02817 is required.
- 9 If C02820 is present, then C02819 is required.

**Semantic Notes:****Comments:**

- 1 X9 has a required minimum length of four characters for S1A04 (security originator). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.
- 2 X9 has a required minimum length of four characters for S1A05 (security recipient). No mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier.
- 3 The date/time stamp may determine which of several key values apply, depending on start and expiration dates of different key values that may share the same keyname.
- 4 Key distribution is performed by other means and thus only onetime keys are allowed in S1A09.  
The use of particular codes and corresponding values in S1A09 is dependent on the exigencies of the various cryptographic algorithms.

**Notes:**

1. Assurance (Digital Signature) segments (S1A/SVA) are not part of the control envelope structure. When used, insert the S1A/SVA segment pair(s) immediately preceding the GE segment of the group for which assurance is being provided. See Section 10.5.3 of the Federal Implementation Guidelines.
2. The S1A segment represented here is only valid for versions 3060 and 3070..

**Data Element Summary**

Ref.		Data	
Des.		Element	Name Attributes
Must Use	S1A01	1432	<b>Business Purpose of Assurance</b> M ID 3/3
			The stated business purpose for appending the assurance to an existing secured-entity (whether functional group or transaction set); the codes represent the intention of the business or application that has control over the assurance originator
			ASG Authorization Signature Appropriate to this Document
			CSG Authorization Co-signature Appropriate to this Document
Must Use	S1A02	C034	<b>Computation Methods</b> M
			Algorithms used to calculate an assurance
Must Use	C03401	1574	<b>Assurance Algorithm</b> M ID 3/3
			Code specifying the algorithm used to compute the assurance token
			DSS Digital Signature Standard
			As specified in FIPS 186.
			RSA RSA

Must Use	C03402	1575	<b>Hashing Algorithm</b>	M	ID 3/3
			Code specifying the algorithm used to compute the assurance digest		
			MD5 MD5		
			SHA Secure hash algorithm		
Must Use	S1A03	1434	<b>Domain of Computation of Assurance Digest</b>	M	ID 1/2
			The bounds of the text, whether contiguous or not, over which the computation of the Assurance Token is computed using the defined methodology of computation and any relevant Assurance Token parameters; the "body" is either a transaction set (beginning with the ST and including all segments up to the first S2A segment, but excluding any S2S segment) or functional group (beginning with the GS and including all transaction sets up to the first S1A segment, but excluding any S1S segment		
			"This Assurance" is defined as from the "S" in S1A or S2A up to and including the data element separator preceeding the assurance digest		
			"Previous Assurance(s)" is defined as including the entire S1A or S2A segment and the entire SVA that follows the included S1A or S2A Refer to 003060 or 003070 Data Element Dictionary, as applicable, for acceptable code values.		
	S1A04	1435	<b>Assurance Originator</b>	O	AN 1/64
			Unique designation (identity) of the cryptographic process that performs the stated assurance on data to be interchanged		
			Note: X9 has a required minimum length of 4 characters for a security originator; no mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier		
	S1A05	1436	<b>Assurance Recipient</b>	O	AN 1/64
			Unique designation (identity) of the cryptographic process that performs validation of the stated assurance on received data. In the absence of an Assurance Recipient all potential receivers will often be able to validate the assurance because the cryptographic technique is based on a "public" (as opposed to "secret") technology		
			Note: X9 has required minimum length of 4 characters for a security recipient; no mechanism, or registration method, is provided by X9 or X12 to guarantee uniqueness of the identifier		
	S1A06	1443	<b>Assurance Reference Number</b>	O	AN 1/35
			Alphanumeric reference number issued by security assurance originator for the particular assurance in which it occurs; unique when used in combination with security originator data element		
	S1A07	1437	<b>Date/Time Reference</b>	O	AN 17/25
			Date/time stamp in format as follows:		
			YYYYMMDDHHNNSSTTTZZZ+XXXX, where YYYY = 4 digit year (with leading century), MM = month of year (01..12), DD = day of month (01..31), HH = hour of day in 24-hour format (00..23), NN = minutes of the hour (00-59), SS = second of hour (00..59), TTT = [optional] milli-seconds (000..999), ZZZ = [optional] three character, nominal time zone indicator (including daylight savings time indicator) and XXXXX = 3-5 digit (including leading + or - sign) offset of time to universal time, with three position format indicating		



hours-offset for whole hours, and five position format indicating hours and minutes offset where this is necessary. For example:

199306152213300CDT+0930 which represents 15 June 1993, 22:13 (10:13pm), Central Daylight Time (Nominal Value "CDT"), in a timezone that is offset + 9:30 from Universal Time (Australia)

	<b>S1A08</b>	<b>1438</b>	<b>Assurance Text</b>	<b>O</b>	<b>AN 1/64</b>
			Any text needed to convey the name of a signatory, registration number, certification number, or other assurance-originator defined or mutually-agreed business text related to the specific assurance; this text is not defined for X12 purposes and thus functions technically as "free form text" though it may have structure that is defined by the assurance originator, an industry group, a governmental agency, or bi-laterally between assurance originator and assurance recipient		
	<b>S1A09</b>	<b>C028</b>	<b>Assurance Token Parameters</b>	<b>O</b>	
			Parameters needed to calculate the Assurance Token		
<b>Must Use</b>	<b>C02801</b>	<b>1439</b>	<b>Assurance Token Parameter Code</b>	<b>M</b>	<b>ID 2/2</b>
			A code specifying the type of Assurance Token Parameter		
			CI Certification Authority ID		
			EK Key Value - One-Time Key		
			KN Key Name		
			NT Notarization		
			OD Key-Encrypting-Key for One-Time Key		
			UI User ID		
<b>Must Use</b>	<b>C02802</b>	<b>1442</b>	<b>Assurance Token Parameter Value</b>	<b>M</b>	<b>AN 1/64</b>
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
<b>Not Used</b>	<b>C02803</b>	<b>1439</b>	<b>Assurance Token Parameter Code</b>	<b>X</b>	<b>ID 2/2</b>
			A code specifying the type of Assurance Token Parameter		
<b>Not Used</b>	<b>C02804</b>	<b>1442</b>	<b>Assurance Token Parameter Value</b>	<b>O</b>	<b>AN 1/64</b>
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
<b>Not Used</b>	<b>C02805</b>	<b>1439</b>	<b>Assurance Token Parameter Code</b>	<b>X</b>	<b>ID 2/2</b>
			A code specifying the type of Assurance Token Parameter		
<b>Not Used</b>	<b>C02806</b>	<b>1442</b>	<b>Assurance Token Parameter Value</b>	<b>O</b>	<b>AN 1/64</b>
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
<b>Not Used</b>	<b>C02807</b>	<b>1439</b>	<b>Assurance Token Parameter Code</b>	<b>X</b>	<b>ID 2/2</b>
			A code specifying the type of Assurance Token Parameter		
<b>Not Used</b>	<b>C02808</b>	<b>1442</b>	<b>Assurance Token Parameter Value</b>	<b>O</b>	<b>AN 1/64</b>
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		



Not Used	C02809	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02810	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02811	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02812	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02813	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02814	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02815	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02816	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02817	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02818	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
Not Used	C02819	1439	Assurance Token Parameter Code	X	ID 2/2
			A code specifying the type of Assurance Token Parameter		
Not Used	C02820	1442	Assurance Token Parameter Value	O	AN 1/64
			A value of a parameter, usually specifying one or more options, required for the proper operation of the cryptographic algorithm used to compute the Assurance Token; depending on the algorithm used, one or more values may be required		
	S1A10	1440	Assurance Digest	O	AN 1/512
			The result of the application of the hash defined in the methodology expressed in ASCII-hex notation		

Segment: **SVA** Security Value  
Usage: Optional  
Max Use: 1  
Purpose: To provide the encoded output of a cryptographic algorithm  
Syntax Notes:  
Semantic Notes:  
Comments:  
Notes:

1. Assurance (Digital Signature) segments (S1A/SVA) are not part of the control envelope structure. When used, insert the S1A/SVA segment pair(s) immediately preceding the GE segment of the transaction set for which assurance is being provided. See Section 10.5.3 of the Federal Implementation Guidelines.
2. The SVA segment represented here is only valid for versions 3060 and 3070.

## Data Element Summary

	Ref. Des.	Data Element	Name	Attributes
Must Use	SVA01	1570	Filter ID Code	M ID 3/3
			Code specifying the type of filter used to convert data code values	
			ASB	ASCII-Baudot Filter
			ASC	ASCII Filter
			HDC	Hexadecimal Filter
			UUE	Uuencoding
			ZZZ	Mutually Defined
			Use to indicate Base 64.	
Must Use	SVA02	799	Version Identifier	M AN 1/30
			Revision level of a particular format, program, technique or algorithm	
Must Use	SVA03	C033	Security Value	M
			Value of the Security Token	
Must Use	C03301	1572	Security Value Qualifier	M ID 3/3
			Type of Security Value	
			ASV	Assurance Token
			CRT	Certificate
			Only for use in the 3070 version of this segment.	
			PUB	Public Key
			Only for use in the 3070 version of this segment.	
Must Use	C03302	1573	Encoded Security Value	M AN 1/10E16
			Encoded representation of the Security Value specified by the Security Value Qualifier	

Segment: **S1E** Security Trailer Level 1  
Usage: Optional  
Max Use: 1  
Purpose: To end a secured area and to provide the value of cryptographically computed authentication codes  
Syntax Notes:  
Semantic Notes:  
Comments:  
Notes: *The S1E segment represented here is valid for versions 3040, 3050, 3060 and 3070.*

Data Element Summary

Ref.	Data		
<u>Des.</u>	<u>Element</u>	<u>Name</u>	<u>Attributes</u>
Must Use S1E01	997	Hash or Authentication Code	M AN 1/64
The message authentication code or hash/digest generated by the authentication process; when the Data Encryption Standard (DES) algorithm is used, the field consists of 4 hexadecimal coded characters (i.e., characters from the set 0..9, A..F), a separator character (space, "-", or other), and 4 hexadecimally coded characters; when non-DES hashes are used, the result of the hash is expressed as hexadecimally coded characters without spaces; when authentication or hash is not used, this field should be filled with a non-blank character other than the set (0..9, A..F) for the minimum length			
<i>Enter the character "Z".</i>			

**Segment:** **GE** Functional Group Trailer

**Usage:** Mandatory

**Max Use:** 1

**Purpose:** To indicate the end of a functional group and to provide control information

**Syntax Notes:**

**Semantic Notes:** 1 The data interchange control number GE02 in this trailer must be identical to the same data element in the associated functional group header, GS06.

**Comments:** 1 The use of identical data interchange control numbers in the associated functional group header and trailer is designed to maximize functional group integrity. The control number is the same as that used in the corresponding header.

## Data Element Summary

	<u>Ref.</u> <u>Des.</u>	<u>Data</u> <u>Element</u>	<u>Name</u>	<u>Attributes</u>
Must Use	GE01	97	<b>Number of Transaction Sets Included</b> Total number of transaction sets included in the functional group or interchange (transmission) group terminated by the trailer containing this data element <i>1. Use to identify the number of ST segments (transactions) within a functional group.</i> <i>2. Transmit the required number of characters without leading or trailing blanks.</i>	M N0 1/6
Must Use	GE02	28	<b>Group Control Number</b> Assigned number originated and maintained by the sender <i>Cite the same group control number as was assigned by the originator in GS06.</i>	M N0 1/9

Segment: **IEA** Interchange Control Trailer  
 Usage: Mandatory  
 Max Use: 1  
 Purpose: To define the end of an interchange of zero or more functional groups and interchange-related control segments  
 Syntax Notes:  
 Semantic Notes:  
 Comments:

#### Data Element Summary

	Ref. Des.	Data Element	Name	Attributes
Must Use	IEA01	I16	Number of Included Functional Groups A count of the number of functional groups included in an interchange <i>1. Use to identify the number of GS segments (functional groups) within an interchange.</i> <i>2. Transmit the required number of characters without leading or trailing blanks.</i>	M N0 1/5
Must Use	IEA02	I12	Interchange Control Number A control number assigned by the interchange sender <i>Cite the same nine-digit interchange control number as was assigned by the originator in ISA13.</i>	M N0 9/9







# *NIST* Technical Publications

## *Periodical*

---

**Journal of Research of the National Institute of Standards and Technology**—Reports NIST research and development in those disciplines of the physical and engineering sciences in which the Institute is active. These include physics, chemistry, engineering, mathematics, and computer sciences. Papers cover a broad range of subjects, with major emphasis on measurement methodology and the basic technology underlying standardization. Also included from time to time are survey articles on topics closely related to the Institute's technical and scientific programs. Issued six times a year.

## *Nonperiodicals*

---

**Monographs**—Major contributions to the technical literature on various subjects related to the Institute's scientific and technical activities.

**Handbooks**—Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

**Special Publications**—Include proceedings of conferences sponsored by NIST, NIST annual reports, and other special publications appropriate to this grouping such as wall charts, pocket cards, and bibliographies.

**National Standard Reference Data Series**—Provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated. Developed under a worldwide program coordinated by NIST under the authority of the National Standard Data Act (Public Law 90-396). NOTE: The Journal of Physical and Chemical Reference Data (JPCRD) is published bimonthly for NIST by the American Chemical Society (ACS) and the American Institute of Physics (AIP). Subscriptions, reprints, and supplements are available from ACS, 1155 Sixteenth St., NW, Washington, DC 20056.

**Building Science Series**—Disseminates technical information developed at the Institute on building materials, components, systems, and whole structures. The series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

**Technical Notes**—Studies or reports which are complete in themselves but restrictive in their treatment of a subject. Analogous to monographs but not so comprehensive in scope or definitive in treatment of the subject area. Often serve as a vehicle for final reports of work performed at NIST under the sponsorship of other government agencies.

**Voluntary Product Standards**—Developed under procedures published by the Department of Commerce in Part 10, Title 15, of the Code of Federal Regulations. The standards establish nationally recognized requirements for products, and provide all concerned interests with a basis for common understanding of the characteristics of the products. NIST administers this program in support of the efforts of private-sector standardizing organizations.

*Order the following NIST publications—FIPS and NISTIRs—from the National Technical Information Service, Springfield, VA 22161.*

**Federal Information Processing Standards Publications (FIPS PUB)**—Publications in this series collectively constitute the Federal Information Processing Standards Register. The Register serves as the official source of information in the Federal Government regarding standards issued by NIST pursuant to the Federal Property and Administrative Services Act of 1949 as amended, Public Law 89-306 (79 Stat. 1127), and as implemented by Executive Order 11717 (38 FR 12315, dated May 11, 1973) and Part 6 of Title 15 CFR (Code of Federal Regulations).

**NIST Interagency Reports (NISTIR)**—A special series of interim or final reports on work performed by NIST for outside sponsors (both government and nongovernment). In general, initial distribution is handled by the sponsor; public distribution is by the National Technical Information Service, Springfield, VA 22161, in paper copy or microfiche form.

**U.S. Department of Commerce**  
National Institute of Standards  
and Technology  
Gaithersburg, MD 20899-0001

Official Business  
Penalty for Private Use \$300