

National Bureau of Standards
Disney, C.M., 1962
Oct 28 1962

NBS

Technical Note

18-14

QUARTERLY RADIO NOISE DATA MARCH, APRIL, MAY 1962 AND CORRIGENDUM FOR TECHNICAL NOTES 18-1 THROUGH 18-11

W. Q. CRICHLow, R. T. DISNEY,
AND M. A. JENKINS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, amended by Congress in Public Law 619, 1950. These include the development and maintenance of national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration service and various consultation and information services. Research projects are also performed for other government agencies when the work relates to and supplements the basic program of the Bureau or when the Bureau's unique competence is required. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Publications

The results of the Bureau's research are published either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three periodicals available from the Government Printing Office: The Journal of Research, published in four separate sections, presents complete scientific and technical papers; the Technical News Bulletin presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of non-periodical publications: Monographs, Applied Mathematics Series, Handbooks, Miscellaneous Publications, and Technical Notes.

A complete listing of the Bureau's publications can be found in National Bureau of Standards Circular 460, Publications of the National Bureau of Standards, 1901 to June 1947 (\$1.25), and the Supplement to National Bureau of Standards Circular 460, July 1947 to June 1957 (\$1.50), and Miscellaneous Publication 241, July 1957 to June 1960 (Includes Titles of Papers Published in Outside Journals 1950 to 1959) (\$2.25); available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

NATIONAL BUREAU OF STANDARDS

Technical Note

18-14

AUGUST 9, 1962

**QUARTERLY RADIO NOISE DATA
MARCH, APRIL, MAY 1962
AND
CORRIGENDUM FOR TECHNICAL NOTES
18-1 THROUGH 18-11**

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins
NBS Boulder Laboratories
Boulder, Colorado


NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest.



RADIO NOISE RECORDING STATION




ARN-2 ATMOSPHERIC RADIO NOISE RECORDER

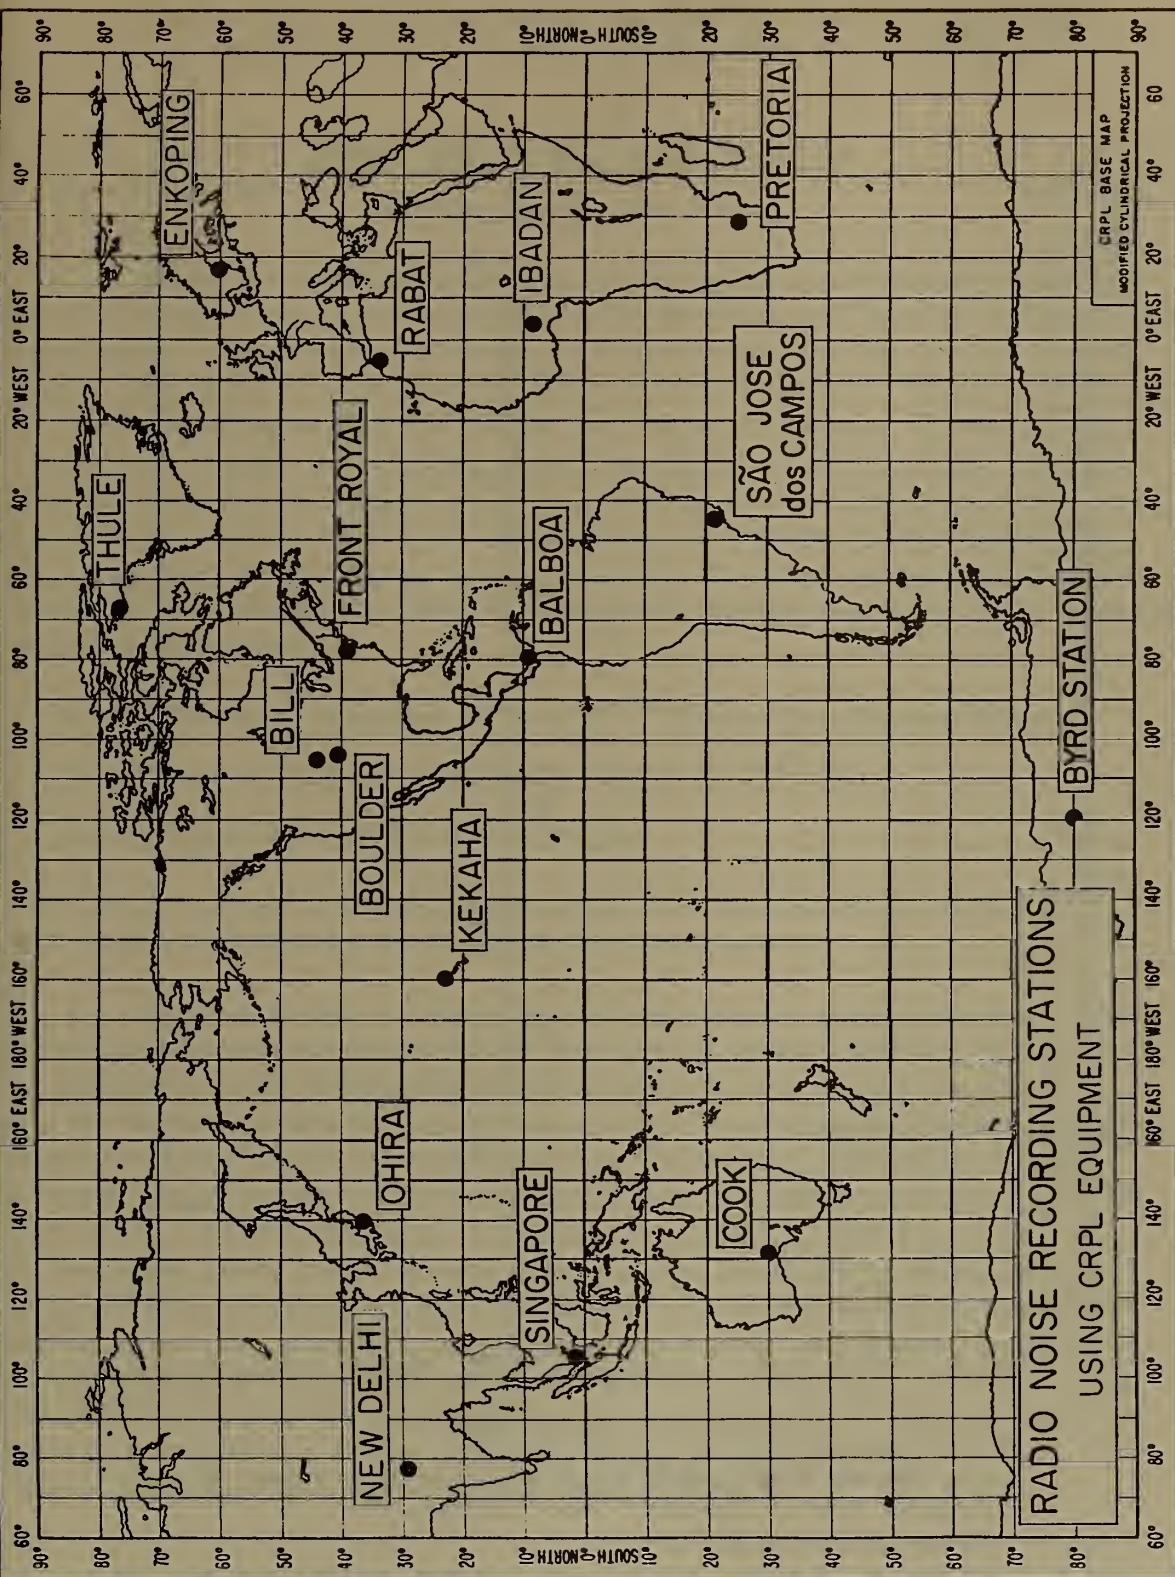

RADIO NOISE RECORDING STATIONS
USING CRPL EQUIPMENT

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE
TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

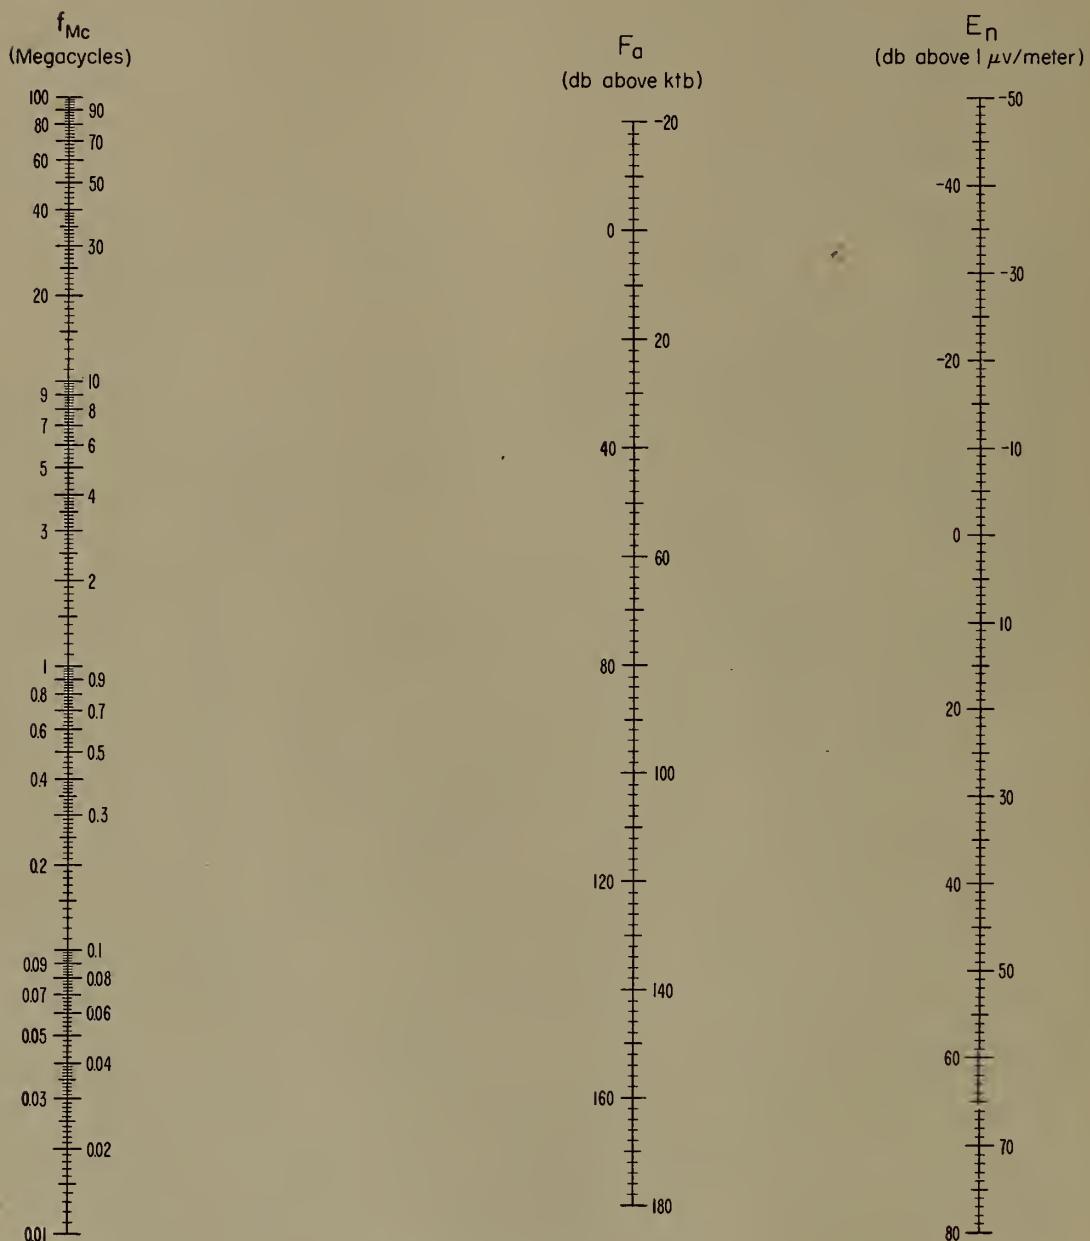

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above 1 μ v/meter for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Radio Noise Data for the Season

March, April, May 1962

Radio noise measurements are being made at sixteen stations in a world-wide network supervised by the National Bureau of Standards (see map). The results of these measurements for the period March, April, May 1962 are presented in the attached tables. These are based on three parameters of the noise: (1) the mean power, (2) the mean envelope voltage, and (3) the mean logarithm of the envelope voltage. The mean power averaged over a period of several minutes is the basic parameter and is expressed as an effective antenna noise figure, F_a . F_a is defined as the noise power available from an equivalent lossless antenna in db above ktb (the thermal noise power available from a passive resistance) where

$k = \text{Boltzman's constant } (1.38 \times 10^{-23} \text{ joules per degree Kelvin})$

$t = \text{Absolute room temperature (taken as } 288^{\circ} \text{ K)}$

$b = \text{Bandwidth in cycles per second.}$

The mean voltage and mean logarithm are expressed as deviations, V_d and L_d , respectively, in db below the mean power.

Measurements of these parameters were made with the National Bureau of Standards Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 21.75' vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour. The month-hour medians, F_{am} , V_{dm} , and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day, and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power, or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

Time-block median values of noise are tabulated on a seasonal basis, and are obtained by averaging all month-hour medians for the season within a particular four-hour period of the day. The time-block values conform to the seasonal-time-block values used in C.C.I.R. Report No. 65 (see attached references).

F_a in db is related to the rms field strength at the antenna by the following equation:

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

where

E_n = the equivalent vertically polarized ground wave rms noise field strength in db above 1 μ v/meter for a 1 kc bandwidth.
 f_{Mc} = the frequency in megacycles/second.

The nomogram given may be used for this conversion.

The values presented in the tables reflect the actual measured radio noise; in some instances the atmospheric noise level may be contaminated by man-made noise or station interference. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been, had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [10], contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution by the method in reference 10, and

can therefore be used to determine whether the measured value or the most probable value of L_d for any value of V_d should be used.

Station clocks are set to a local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5).

These preliminary data values are presented in order to expedite dissemination of the data. Additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications.

Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii

Signal Corps, U. S. Army - Balboa, C. Z.; Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enkoping

DSIR (Great Britain) and University College Department of
Physics (Nigeria) - Ibadan

Ministry of Communications, Wireless Planning and
Co-ordination Organisation - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) -
Pretoria

Institut Scientifique Chérifien (Morocco) - Rabat

Instituto Tecnologico de Aeronautica (Brazil) - São José dos
Campos

Department of Scientific and Industrial Research (Great Britain)
- Singapore, Malaya

The assistance of the station operators and other personnel of these agencies in obtaining the data contained in this report is gratefully acknowledged.

The following publications contain additional information on radio noise:

1. W. Q. Crichlow, D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
2. "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956 (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
3. A. D. Watt and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
4. W. Q. Crichlow, "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6, 778 (1957).
5. A. D. Watt and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
6. F. F. Fulton, Jr., "The Effect of Receiver Bandwidth on Amplitude Distribution of V. L. F. Atmospheric Noise," National Bureau of Standards, VLF Symposium Paper 37, Boulder, Colorado, 1957.
7. H. E. Dinger, "Report on URSI Commission IV - Radio Noise of Terrestrial Origin," Proc. IRE, 46, 7, 1366 (1958).
8. A. D. Watt, R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of Some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).
9. W. L. Taylor and A. G. Jean, "Very-Low-Frequency Radiation Spectra of Lightning Discharges," NBS J. of Research-D. Radio Propagation, 63D, 2, 199 (1959).
10. W. Q. Crichlow, C. J. Roubique, A. D. Spaulding, and W. M. Beery, "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," NBS J. Research-D. Radio Propagation, 64D, 1, 49 (1960).
11. Tatsuzo Obayashi, "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," NBS J. of Research-D. Radio Propagation, 64D, 1, 41 (1960).


Data included in this report and the standard time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	March April May 1962	75 W	+05
Bill	January February 1962	105 W	+07
Boulder	March April May 1962	105 W	+07
Cook	March April May 1962	135 E	-09
Enkoping	March April May 1962	15 E	-01
Front Royal	March April May 1962	75 W	+05
Kekaha	March April May 1962	150 W	+10
New Delhi	February 1962	75 E	-05
Ohira	March April May 1962	135 E	-09
Pretoria	March April May 1962	30 E	-02
Rabat	March April May 1962	GMT	0
Singapore	January 1962	105 E	-07
Thule	March April 1962	75 W	+05
Warrensburg	March April May 1961	90 W	+06
	July August 1961		
	Sept Oct Nov 1961		
	Dec Jan Feb 1961-62		
	March April 1962		

Previous data from the NBS World-Wide Network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957 - December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1959
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 September, October, November 1960
- 18-9 December, January, February 1960-61
- 18-10 March, April, May 1961
- 18-11 June, July, August 1961
- 18-12 September, October, November 1961
- 18-13 December, January, February 1961-62

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

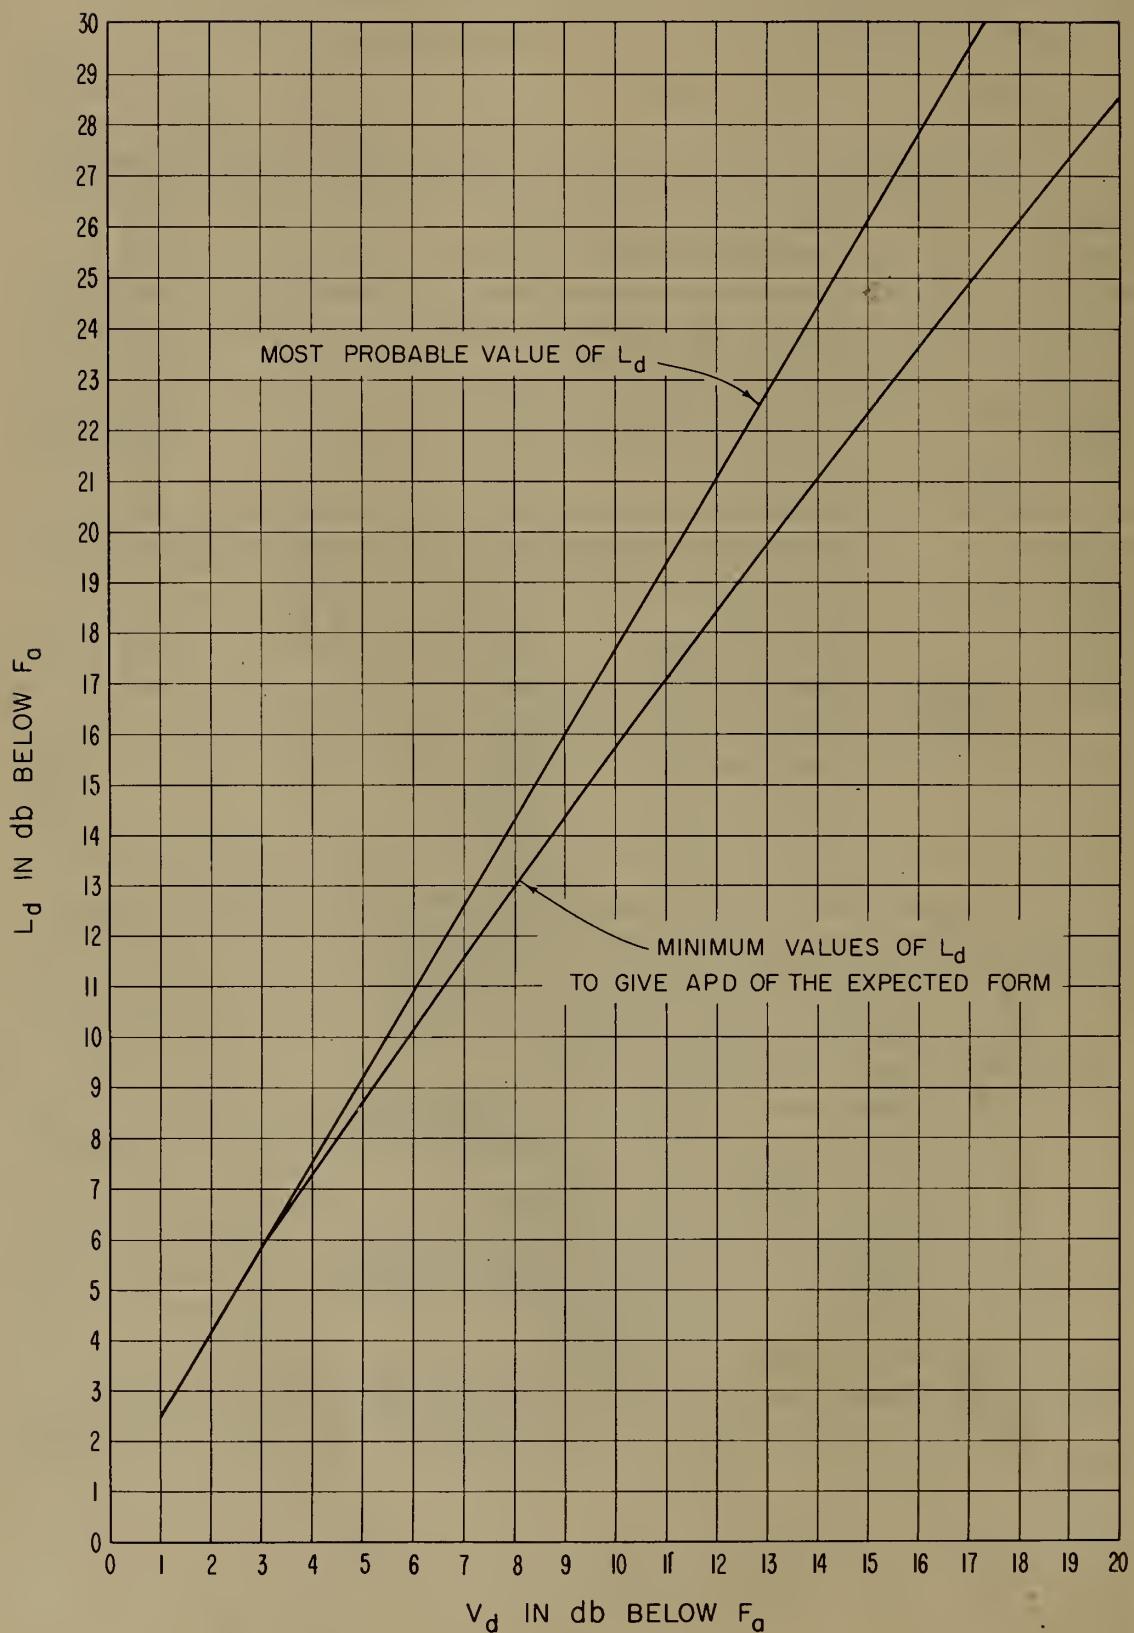

Frequency (Mc)

Frequency (Mc)																																											
ES		.013			.051			.160			.495			2.5			5			10			20																				
$\frac{5}{\text{Fam}}$	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}														
00	154	5	7	10.5	180	134	4	9	8.0	11.4	4	8	6.0	1.5	1.5	9.4	4	6	6.0	1.0	6.5	2	8	6.0	1.5	11	3.0	6.0	2.5	0	-2	1.5	3.0										
01	155	4	7	10.5	170	133	5	8	8.5	11.4	6	11	8.5	1.5	1.5	9.3	6	5	7.0	1.0	6.5	4	6	6.0	1.2	4.0	7.0	2.5	4	2	1.5	2.0											
02	155	6	8	9.0	16.0	133	7	9	8.0	11.4	6	12	7.5	1.5	1.5	9.3	6	7	5.5	1.5	6.5	6	7	6.5	1.5	3.0	9.0	2.5	0	0	1.5	2.5											
03	155	6	6	9.5	7.0	134	8	4	8.5	16.0	11.2	8	10	8.0	1.5	1.5	9.3	6	5	2.0	1.0	6.0	1.5	1.5	11.0	1.0	4.0	2	8	3.0	6.0	2.5	2	1	1.5	2.5							
04	155	6	6	9.0	6.5	134	6	9	8.5	15.0	11.2	6	8	8.0	1.5	1.5	9.2	7	6	9.0	1.5	6.5	5	10	5.0	1.0	5.5	7	4	3.0	6.0	2.5	1	1	1.0	2.0							
05	155	6	6	9.5	*6.0	134	6	12	9.0	12.0	10.8	8	8	9.0	1.5	1.5	9.0	7	11	2.5	1.5	6.5	6	9	6.5	1.5	1.5	11.0	1.0	3.0	2.0	4.0	2.5	2	2	1.5	2.0						
06	156	3	7	10.0	7.0	128	7	6	10.0	11.5	9.5	15	15	1.5	1.5	9.0	8.6	8	12	1.0	15.5	6.2	8	10	9.0	16.0	5.9	4	5	5.5	10.0	4.8	4	4	4	2	2						
07	153	5	5	5	*10.0	12.0	127	7	11	10.0	12.0	10.0	14	14	2.5	1.5	1.5	9.0	8.4	9	8	1.0	15.0	5.3	4	14	9.0	14.0	4.9	4	4	4	4	1.0	2.0								
08	155	5	7	12.0	15.0	16.6	8	14	12.0	18.5	10.4	10	24	1.5	1.5	14.0	22.5	8.4	9	8	1.0	15.0	10.5	4.3	8	9	3.3	6	6	7.5	13.0	4.0	4	4	4	2	2						
09	155	4	7	11.0	7.0	125	9	14	*13.0	19.0	9.4	16	10	12.5	2.5	1.5	14.0	22.5	8.2	10	7	8.0	10.5	4.0	3.9	7	9	5.0	9.0	3.8	2	3	4	4	2	2							
10	155	4	8	12.0	16.0	122	8	12	8.0	16.0	9.4	13	11	11.0	1.5	1.5	9.5	7.9	5	3	3.0	5.0	3.7	10	6	4.0	7.0	3.3	4	6	4.5	8.5	3.4	4	5	4	2	2					
11	155	6	6	14.0	7.0	126	4	10	9.0	17.5	9.6	10	10	9.5	2.0	1.5	12.0	21.0	7.8	6	2	3.6	8	6	5.5	11.5	3.1	3	3	5.5	8.5	3.4	4	5	4.5	8.0	2	2					
12	157	4	6	13.5	*7.0	122	4	7	11.0	10.0	9.9	6	18	*10.0	1.5	1.5	12.0	17.0	7.8	4	2	31	1.2	4	8.0	14.0	3.1	7	7	5.0	7.0	3.4	2	6	6.0	9.0	2.7	4	2	4.5	7.5		
13	159	2	6	11.5	16.5	130	4	6	10.5	11.5	9.7	9	9	9.5	1.5	1.5	15.0	8.0	10	4	4.0	1.5	1.5	3.3	3	5	4.0	16.0	3.1	4	4	5.5	6.0	2.7	2	4	3.0	5.5	2	4	5.0	8.0	
14	161	2	6	10.0	16.0	132	4	6	9.0	16.5	10.0	6	9.0	16.0	1.5	1.5	10.0	16.5	11	3	7.0	9.5	3.5	10	6	10.0	16.5	3.3	6	4	3.5	6.0	3.6	4	4	8.5	9.0	2	2	3.0	5.0		
15	161	3	5	10.5	16.0	132	6	8	8.5	15.0	10.4	8	9	10.5	1.5	1.5	8.2	16	4	4.0	4.5	3.7	10	6	10.0	15.0	3.7	7	4	8.5	14.0	4.1	3	5	2.0	7.0	2.9	6	2	4.0	5.0		
16	161	2	7	10.0	15.5	130	6	8	*11.0	16.0	10.4	10	8	8.5	1.5	1.5	18.0	8.4	12	7	5.0	7.0	3.7	13	6	5.5	9.0	4.3	8	10	6.0	10.0	4.4	3	2	5.0	8.0	3.1	2	4	3.5	5.5	
17	159	4	8	9.5	15.0	130	8	6	*11.0	16.5	10.2	11	8	8.0	1.5	1.5	8.4	13	6	5.5	7.0	4.7	7	4	6.0	10.0	5.1	4	14	6.0	10.0	4.8	6	1	3.0	5.0	3.1	2	3	5.0	8.0		
18	157	4	5	10.0	16.0	130	6	6	10.5	17.0	10.8	9	4	8.0	15.0	2.0	1.5	9.2	4	5	5.5	9.0	5.5	7	5	7.5	13.0	6.1	2	4	8.0	13.0	5.2	4	4	4.0	9.0	2.9	4	4	2	4.0	7.0
19	157	3	7	11.0	17.0	132	8	4	10.0	15.0	11.4	4	6	6.0	14.5	9.5	4	5	5.0	11.0	6.3	4	4	3.0	6.0	5.1	7	1	3.0	6.5	2.6	3	1	3.5	5.0	2	2	4	3.5	5.5			
20	155	4	8	11.0	17.5	134	4	6	8.5	14.0	11.4	4	6	6.5	12.5	9.5	4	7	5.0	8.0	6.5	4	8	5.0	10.5	6.5	4	4	4.0	7.0	2.5	2	2	3.0	4.0	2	2	3	4.0	6.0			
21	155	4	8	*120	17.0	134	6	6	9.0	15.0	11.2	4	6	7.5	15.0	9.4	2	7	5.0	8.5	6.5	2	8	6.0	11.0	6.7	4	4	4.0	7.0	2.5	2	2	3.5	5.0								
22	154	5	7	11.0	17.5	134	4	6	8.0	14.0	11.4	4	6	7.0	15.0	9.4	4	6	5.5	11.0	6.5	2	8	6.0	11.0	6.1	6	4	4.5	8.0	4.3	10	4.0	6.0	2.7	0	4	2.0	2.5				
23	153	4	8	11.5	134	4	8	9.5	15.5	11.4	4	8	9.5	15.5	9.4	2	8	6.0	15.0	9.4	4	6	8.0	15.5	9.4	10	5.5	10.0	6.1	5	0	4.4	8	1	1.5	2.5							

Epidemiologic evidence of effective control of hepatitis B

$r_{\text{om}} = \text{median value of effective antenna noise}$

D_U = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

X - median deviation of coverage variance in dB below mean power

V_{dm} = Maximum deviation of average voltage in ab below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0N Long. 79.5W Month April 1962

EST	Frequency (Mc)												.013			.051			.160			495			2.5															
	.013			.051			.160			495			F _{om}			D _u			D _f			V _{dm}			L _{dm}															
F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}											
00	1.59	4	4	1.0	1.75	1.39	4	6	9.0	1.50	1.17	5	4	5.0	2.0	9.6	6	4	5.0	2.0	6.7	2	6	6.0	1.0	6.1	2	6	4.0	8.0	5.1	6	10	2.0	3.0	24	2	2		
01	1.59	4	4	9.5	16.0	1.39	4	6	9.0	14.5	1.17	6	4	6.0	1.0	9.7	7	5	6.0	1.0	6.7	4	6	6.0	9.0	4.9	4	8	4.5	5.0	24	2	2							
02	1.59	5	2	9.0	13.5	1.39	6	4	9.5	15.0	1.17	6	3	7.0	1.20	9.7	6	4	6.0	1.0	6.7	6	4	7.0	1.20	5.9	4	4	5.0	9.5	9.3	12	6	4.0	5.5	24	0	2		
03	1.61	3	3	9.5	15.5	1.39	6	2	9.0	15.0	1.17	6	2	6.5	1.25	9.8	6	5	7.0	1.20	6.9	3	3	6.0	1.0	5.9	4	4	4.5	9.0	3.8	16	6	1.0	2.0	24	0	2		
04	1.61	5	4	10.0	16.0	1.39	6	4	9.0	15.0	1.17	6	4	7.5	1.20	9.6	7	4	6.5	1.25	6.9	4	4	7.5	1.25	5.7	2	4	5.0	8.0	3.8	13	5	1.0	2.0	24	0	2		
05	1.61	3	5	9.0	14.0	1.39	6	6	9.0	15.0	1.15	8	7	8.5	1.50	9.2	9	17	8.5	1.35	6.9	6	4	9.0	14.5	5.9	0	6	5.0	8.0	4.1	6	10	3.0	5.0	24	0	2		
06	1.61	2	4	9.5	15.5	1.33	9	6	10.0	1.0	2.0	2.0	2.0	1.0	2.0	2.0	1.0	2.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0		
07	1.59	2	4	* 9.0	14.0	1.33	8	10	9.5	17.0	1.11	10	16	* 9.5	17.5	8.6	18	10	6.0	1.35	4.9	8	10	7.5	1.30	4.9	4	8	11.0	14.5	4.1	2	4	4.5	7.0	2.6	2	4	3.0	3.0
08	1.59	4	4	* 11.5	16.5	1.31	10	1.2	*	1.20	1.80	1.10	1.3	19	* 10.0	1.60	8.6	8	* 8.0	* 1.55	4.3	12	11	9.0	14.0	4.1	6	5	7.0	11.0	3.9	4	8	2.5	3.5	2.6	2	2	1.5	3.0
09	1.59	4	6	12.5	18.0	1.31	8	9	* 11.0	10.9	1.2	18	* 12.0	1.90	8.6	16	9	* 6.0	* 6.0	3.9	14	8	3.0	4.0	3.7	8	6	8.5	12.0	3.5	6	8	5.5	7.5	2.4	4	4	2	3.0	4.5
10	1.59	4	6	11.0	17.0	1.31	8	10	13.0	1.90	1.07	1.0	1.9	* 12.5	* 9.5	8.8	9	12	* 2.5	* 3.0	3.5	16	6	5.0	8.0	3.3	6	4	5.0	9.0	3.3	6	6	4.0	6.0	2.6	2	2	2.0	3.0
11	1.59	2	6	12.0	17.0	12.9	8	6	13.0	1.80	1.07	1.0	16	* 14.0	3.00	8.4	11	8	* 4.0	* 4.5	3.3	14	6	9.5	14.0	3.2	7	3	6.0	7.0	3.3	4	6	7.0	10.0	2.6	2	4	3.5	5.0
12	1.59	2	6	12.0	17.0	12.9	8	6	10.0	1.00	1.05	1.4	14	* 11.0	1.70	8.4	19	8	* 3.0	* 4.0	3.3	13	6	4.0	6.0	3.1	6	2	4.5	5.0	3.5	4	6	6.5	11.0	2.6	6	2	2.5	3.5
13	1.59	4	4	10.5	16.5	1.33	6	8	9.5	13.0	1.07	1.0	11	11.0	1.65	8.6	10	6	* 5.0	* 6.0	3.5	15	7	3.0	4.5	3.3	14	4	4.0	5.5	3.7	2	8	5.0	7.0	2.6	4	2	3.0	4.5
14	1.61	4	4	* 10.5	* 16.0	1.35	8	10	11.0	15.5	1.09	1.2	14	* 11.0	1.70	8.6	11	6	9.0	12.5	3.7	22	6	9.0	15.0	3.5	16	6	11.5	10.5	3.9	4	8	3.5	5.5	2.6	4	3.0	4.5	
15	1.63	4	5	* 10.0	15.5	1.35	9	8	12.0	16.5	1.09	1.7	12	10.0	1.70	9.0	14	6	8.5	12.5	4.4	13	15	2.0	12.0	3.8	13	7	5.5	8.0	4.1	6	2	4.0	6.0	2.8	6	2	3.5	5.0
16	1.63	3	4	9.0	15.0	1.35	8	7	* 8.0	* 14.0	1.11	1.2	12	11.0	1.70	9.8	15	5	7.5	9.5	4.0	19	9	7.0	12.0	4.3	10	9	6.0	9.0	4.5	4	4	3.0	5.0	2.8	4	0	3.5	5.0
17	1.61	4	4	9.5	15.0	1.35	6	8	* 9.5	* 16.0	1.09	1.0	11	13.0	1.80	9.0	10	8	7.5	13.0	4.7	10	8	6.0	11.0	5.1	4	8	6.0	10.0	4.9	4	8	3.0	4.5	2.6	4	3.0	5.0	
18	1.59	4	4	9.5	15.0	1.35	7	6	10.0	16.0	1.11	1.0	7	9.0	15.0	9.4	7	8	7.0	11.0	5.7	6	10	6.5	11.0	5.7	3	7	4.5	6.0	5.0	3	7	4.0	6.0	2.8	6	2	3.5	5.5
19	1.59	4	5	10.0	15.0	1.37	5	7	10.5	15.0	1.17	4	5	9.0	14.0	9.7	6	5	8.0	13.0	6.3	4	6	6.0	11.0	6.0	5	5	4.5	3.5	5.1	2	4	3.5	4.5	2.5	3	3.0	4.5	
20	1.61	2	5	10.0	15.0	1.39	2	6	8.0	13.0	1.17	4	6	7.0	11.0	9.6	7	4	5.5	9.5	6.5	4	4	4.0	7.0	5.1	2	6	3.5	7.0	2.3	3	1	1.5	2.5	2	2	3.0	4.0	
21	1.59	5	3	* 8.0	* 13.0	1.37	4	4	8.5	13.0	1.17	4	4	7.0	12.0	9.6	8	4	5.0	9.5	6.5	4	4	6.0	8.0	5.1	4	6	4.0	6.0	2.2	2	0	2.0	2.5	2	0	2.0	2.5	
22	1.59	5	4	9.0	14.5	1.37	7	6	8.5	15.0	1.17	6	5	8.0	13.5	9.6	6	4	5.0	9.0	6.5	2	4	6.0	7.0	5.1	4	8	3.0	6.0	2.2	4	0	1.5	2.0	2	0	2.0	2.5	
23	1.57	8	2	11.0	17.0	1.38	5	5	7.0	12.5	9.6	9	3	4.5	9.0	6.5	4	6	6.0	9.5	5.1	4	6	1.0	1.0	6.1	4	6	6.0	9.5	5.1	4	6	2.0	2	2	3.0	4.0		

Form = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in dbD_f = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

Frequency (Mc)

Frequency (Mc)																																										
ES																																										
	.013			.051			.160			.495																																
	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u																														
00	16.0	2	4	*11.0	*18.0	14.1	7	6	9.0	15.0	12.2	8	6	9.0	16.0	10.2	8	8	9.5	18.0	16.9	3	6	4.0	7.0	6.1	2	4	3.0	5.5	5.3	2	4	2.0	4.0	2.0	2.0					
01	16.2	5	6	*11.5	*17.5	14.1	7	6	9.0	15.0	12.2	8	5	*8.0	*14.0	10.0	8	6	8.5	13.0	12.9	4	7	4.0	9.0	6.1	3	4	4.0	3.5	2.0	4	4	1.0	4.0	2.0	2.0					
02	16.1	6	3	*9.5	*15.0	14.1	6	6	*9.0	*14.0	12.2	5	7	*9.0	*14.0	12.0	5	7	*9.0	11.0	11.0	6	6	*5.0	*9.0	6.1	4	2	*4.0	7.5	5.3	4	6	2.0	4.0	2.0	2.0					
03	16.2	4	6	10.0	16.0	14.1	7	6	10.0	15.5	12.2	6	6	*8.5	*14.0	10.0	8	9	10.5	19.5	16.9	6	6	*5.0	*9.0	6.1	6	4	4.0	7.5	5.1	2	4	2.0	4.0	2.0	2.0					
04	16.2	5	6	9.0	*16.0	14.1	5	6	*11.0	*15.5	12.2	5	9	*7.0	*14.0	10.0	8	9	9.0	17.5	16.9	8	4	6.0	11.0	6.1	3	4	4.0	7.5	5.1	2	6	2.0	4.0	2.0	2.0					
05	16.2	5	6	*10.0	*17.0	14.1	6	8	*14.0	*18.0	12.0	8	12	*10.0	*17.5	10.2	6	2	10.0	19.0	11.1	6	4	*6.0	10.0	5.9	4	4	*4.0	7.5	4.7	2	4	1.5	4.0	2.0	2.0					
06	16.0	4	4	*11.0	*17.0	13.9	8	12	*14.0	*18.0	11.8	9	28	*14.0	*24.0	9.6	10	20	8.0	18.0	6.3	6	14	*4.0	*15.5	5.6	3	-	*4.0	8.0	4.5	4	4	3.0	5.0	2.0	2.0					
07	15.9	5	4	*11.0	*17.0	13.7	9	13	*14.0	*20.0	11.6	8	22	*12.0	*21.5	9.6	9	19	8.0	18.5	5.7	10	20	*9.5	*16.0	4.9	7	6	*7.0	11.0	4.1	2	4	3.0	5.0	2.0	2.0					
08	15.8	6	4	*12.0	*17.0	13.3	12	11	*14.0	*21.0	11.4	12	20	*12.0	*21.5	9.6	10	20	4.9	16	18	*14.0	*18.0	4.3	12	6	*2.5	5.5	3.7	4	4	1.5	2.5	2	4	1.5	2.5	2	2.0			
09	15.8	6	5	*15.5	*22.0	13.7	6	16	*14.0	*23.0	11.5	11.5	25	*14.5	*27.0	9.2	14	16	14.0	*24.0	4.5	16	16	*6.0	*8.5	4.2	13	11	*2.0	5.5	3.7	4	4	2.0	4.5	2	2.0	3.0	2.0			
10	15.6	8	4	*12.0	*17.0	13.1	14	10	*15.5	*21.0	10.5	12.3	19	*15.0	*27.0	9.0	16	14	12.5	*18.5	3.9	27	10	*5.0	*9.0	3.9	21	6	*3.0	4.0	3.5	7	2	2.0	3.0	2	2.0	3.0	2			
11	15.7	7	5	*14.0	*17.0	13.2	17	10	*14.0	*20.0	10.8	12.3	17	*14.0	*24.5	8.7	23	11	14.5	*24.0	3.7	31	8	*9.5	*14.5	3.9	25	8	*3.0	4.0	3.5	7	2	2.0	3.0	2	2.0	3.0	2			
12	15.8	7	4	*13.0	*18.0	13.5	13	12	*14.0	*20.0	11.3	11.8	18	*12.5	*20.0	9.0	22	14	11.0	*18.0	3.9	39	8	*3.5	*7.0	3.0	27	11	*2.0	5.5	3.7	4	8	3.0	5.5	26	6	4	2.0	3.0	2	
13	16.0	6	4	11.0	17.0	13.5	14	8	11.5	18.0	11.5	19	15	*17.0	*20.0	9.6	18	18	11.0	18.0	4.5	30	16	*8.0	*10.5	3.9	28	14	*2.0	5.5	3.7	4	8	3.0	5.0	28	16	2	2.5			
14	16.2	7	4	10.0	17.0	13.7	12	9	11.0	12.0	12.0	12.1	21	*12.0	*20.5	9.8	15	18	10.0	18.0	5.1	28	20	*3.5	*5.0	4.3	22	9	*5.0	*7.0	4.1	10	6	*5.0	8.5	30	8	2	2.5	4.0	2	
15	16.2	6	2	11.0	17.0	13.9	8	8	*8.5	*16.0	11.8	10	14	*13.0	*18.0	9.6	13	15	20	*13.5	5.4	19	17	*10.0	*14.5	1.2	8	*6.0	*8.5	4.5	4	4	4.0	6.0	30	6	2	*4.0	6.0	2		
16	16.4	2	4	*11.0	*18.0	14.1	6	10	*11.0	*18.0	11.8	7	8	*12.0	*19.0	9.6	13	12	10.5	*14.0	5.5	11	18	*9.0	*15.5	4.9	10	6	*5.0	*8.0	4.8	5	3	4.5	7.0	32	2	4	*3.5	*5.5	2	
17	16.4	3	3	*9.5	*15.0	13.7	8	7	*11.0	*18.0	11.2	14	10	*13.0	*20.0	9.3	11	13	12.0	*19.5	5.2	13	11	*7.5	*11.5	5.3	6	4	*5.5	*8.0	6.0	50	3	3	3.0	5.5	32	2	4	4.0	6.0	0
18	16.0	5	3	9.5	15.0	13.5	9	5	9.0	17.0	11.4	10	9	*11.0	*18.5	9.4	10	6	10.0	17.0	5.7	11	5	*6.5	*11.5	5.9	6	3	3.0	5.0	5.1	4	3	4.0	5.5	32	2	5	25	40	0	
19	16.0	5	4	10.0	16.0	13.7	8	7	10.0	15.5	11.6	10	6	*6.0	*16.0	9.5	9	7	9.0	13.5	6.6	7	8	*6.0	*7.5	6.1	4	4	*3.0	*6.0	5.2	3	5	2.5	5	4.0	3.0	4.0	2	2.0	3.0	0
20	16.2	2	5	9.0	15.0	13.9	6	6	*9.0	*14.0	12.0	7	6	*8.5	*14.0	14.0	9	7	8.5	*15.5	6.7	9	7	6.0	10.0	6.3	4	3	*4.0	*6.0	5.1	6	2	2.0	4.0	2	2.5	3.5	2	2.0	3.0	0
21	16.2	5	4	7.5	12.5	14.0	7	5	*7.5	*13.0	12.0	7	6	6.0	10.5	9.8	9	5	5.5	*13.5	6.7	7	5	5.0	9.0	6.3	4	2	4.0	6.0	4.0	3	4	2.0	4.0	2	2.0	3.0	0			
22	16.0	6	4	8.5	14.0	13.9	8	4	8.5	8.5	13.0	12.2	8	6	8.5	14.0	10.0	6	8	10.0	14.0	6.8	6	6	*5.0	*9.0	6.1	4	4	2.0	4.0	2	2.0	3.0	0							
23	16.0	7	4	11.0	17.0	14.1	6	8	8.0	8.0	13.5	12.2	7	6	8.5	12.5	10.0	8	7	6.5	12.5	6.9	4	7	*4.0	*7.5	6.3	0	5	*3.5	*4.0	2	2.0	3.0	0							

E_{eff} = median value of effective antenna noise in dB above kth

Fam - Legionnaire's Disease or Legionnaires Disease

D_u = ratio of upper decile to median in db

D_{fz} = ratio of median to lower decile in db

V_{dm} = median deviation of overge voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Hill, Wyoming — Lat. 43.2N Long. 105.2W Month January 1962

$F_{\text{eff}} = \text{median value of effective antenna noise in dB above } k \text{ dB}$

On a ratio of higher decline to median in 1980

De ratio of median to lower decile in dB

\bar{U}_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming — Lat. 43.2N Long. 105.2W Month February 1962

Hour	Frequency (Mc)												Frequency (Mc)																	
	0.13				0.51				160				495				2.5				5				10					
	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}					
00 148	7	5				121	10	12			97	10	13			83	11	13			57	12	8			59	6	3		
01 150	4	7				123	9	9			95	14	13			80	16	9			50	13	6			59	6	11		
02 150	3	4				123	9	7			95	13	10			79	17	8			50	13	8			61	4	13		
03 150	2	5				123	7	6			93	13	7			77	13	8			51	12	8			61	5	15		
04 148	3	3				123	6	5			93	12	10			79	10	18			52	9	9			61	4	11		
05 148	3	4				121	6	5			89	13	8			71	10	9			47	14	4			60	3	14		
06 148	2	4				119	3	8			83	9	7			63	10	10			47	14	4			41	4	14		
07 146	3	3				113	7	7			75	7	8			*55					50	7	2			46	4	14		
08 144	4	4				107	9	5			71	17	9			*55					36	3	2			43	6	14		
09 142	4	2				101	10	4			71	14	9			*52	9	3			36	2	2			37	5	12		
10 142	4	2				99	13	5			73	14	14			*53	6	4			36	4	2			35	4	12		
11 140	10	2				97	23	2			70	19	9			*53					36	2	1			33	4	9		
12 142	10	2				100					77	8	12			*58					36	2	0			34	4	9		
13 144	8	6				104	9	9			81	6	18			57	4	8			38	3	4			35	4	12		
14 144	9	5				107	15	14			81	11	19			57	8	6			38	2	2			36	6	12		
15 144	10	6				105	18	12			77	17	15			57	4	8			38	4	2			37	10	10		
16 144	5	7				109	13	13			79	16	17			59	11	8			38	5	3			47	4	18		
17 145	2	8				111	12	11			87	11	18			65	17	14			40	11	4			55	6	12		
18 146	3	7				121	4	17			93	8	8			69	17	14			48	10	10			59	4	6		
19 146	4	8				120	7	16			91	13	20			77	10	18			52	6	12			59	6	14		
20 148	4	9				123	4	14			97	8	19			77	13	11			52	8	10			61	2	15		
21 148	5	7				122	8	11			94	14	17			77	7	12			54	6	11			59	6	12		
22 148	7	7				123	9	11			93	14	10			83	12	16			50	12	6			59	8	20		
23 149	6	5				122	10	7			95	14	8			79	19	9			52	10	9			48	12	23		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltages in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Month March 1962

EST	.013		.051		.160		.400		.800		2.5		5		Frequency (Mc)										
	Fam	Du	D _L	Vdm	Ldm	Fam	Du	D _L	Vdm	Ldm	Fam	Du	D _L	Vdm	Ldm	Fam	Du	D _L	Vdm	Ldm					
00	1/52	8	2	11.0	18.0	1/22	9	3	9.0	16.0	1/03	10	12	7.5	14.0	59	14	4	5.0	8.5	58	8	4	6.0	10.0
01	1/52	6	2	12.0	18.0	1/24	11	8	10.5	17.0	1/01	14	9	8.0	15.0	59	13	5	5.0	9.0	58	8	2	7.5	12.5
02	1/52	5	3	11.5	18.0	1/24	7	8	10.0	17.0	1/01	14	8	7.5	13.0	61	10	7	4.5	10.5	58	5	4	6.0	10.0
03	1/52	5	3	11.0	17.5	1/24	7	8	8.5	16.5	9/7	16	8	8.0	16.5	59	10	4	6.0	9.5	58	6	4	5.0	9.0
04	1/50	7	3	12.5	19.0	1/22	4	5	10.0	16.5	9/5	14	10	8.5	16.0	59	6	8	4.5	7.5	58	6	6	5.5	9.0
05	1/50	5	4	12.5	19.0	1/16	9	4	10.5	17.0	8/5	19	6	8.5	13.0	53	9	4	5.5	7.5	52	8	3	5.5	8.0
06	1/48	6	3	12.5	19.0	1/16	10	6	10.5	18.5	7/7	15	6	9.0	13.5	49	5	4	3.5	5.5	50	5	6	5.0	9.0
07	1/48	6	6	11.5	17.0	1/08	14	6	11.0	17.5	7/3	22	4	7.0	7.5	47	6	4	4.0	5.5	42	4	2	4.0	6.0
08	1/48	5	6	12.5	17.5	1/04	18	8	11.0	18.0	7/3	22	6	4.0	7.5	45	8	2	3.0	5.0	40	4	4	3.5	5.0
09	1/48	6	6	12.0	17.0	1/04	15	12	12.0	19.0	7/5	17	6	7.0	11.5	47	5	5	4.0	7.0	38	6	2	3.0	4.5
10	1/48	7	4	10.5	15.0	1/05	14	11	11.0	17.5	7/9	10	11	4.5	10.0	48	17	5	4.0	5.0	40	10	4	3.5	5.0
11	1/49	7	5	11.0	17.0	1/07	12	11	12.0	18.0	7/9	14	10	6.0	9.0	53	12	8	3.5	4.5	41	9	5	*3.0	5.5
12	1/50	5	5	11.5	17.0	1/07	14	9	9.0	16.5	7/8	15	7	3.5	6.0	51	14	4	4.0	5.5	40	10	4	*3.0	5.0
13	1/48	6	3	10.0	16.0	1/08	11	10	11.0	18.0	8/0	23	9	3.0	6.0	51	14	5	3.0	5.0	40	10	4	4.0	6.0
14	1/50	4	6	10.0	15.5	1/08	13	11	9.5	16.0	7/7	25	6	4.5	7.5	52	13	7	3.5	5.5	40	10	4	*3.5	5.0
15	1/48	6	4	11.0	17.5	1/07	18	13	10.5	17.0	7/9	26	9	2.5	6.0	51	14	6	4.0	5.0	42	9	3	*3.5	5.5
16	1/46	8	3	11.5	17.0	1/09	19	13	11.0	17.0	7/7	26	8	3.5	6.0	51	13	6	4.0	6.0	44	10	4	*4.0	6.0
17	1/48	5	6	12.0	18.0	1/12	6	11	9.5	15.5	8/9	14	8	5.0	11.0	51	8	4	3.0	7.0	50	6	5	*5.0	9.0
18	1/50	5	6	11.0	17.0	1/18	11	9	9.0	16.5	9/7	14	12	7.5	13.5	57	10	5	4.5	7.0	56	7	5	6.0	10.0
19	1/52	4	8	12.0	19.0	1/22	9	8	8.5	16.5	10/2	10	17	7.5	14.0	59	12	7	5.0	7.0	58	5	6	5.0	9.5
20	1/52	4	6	12.0	18.0	1/22	9	7	10.0	17.5	10/0	15	10	10.0	17.5	59	14	6	6.0	9.0	58	5	6	6.5	10.0
21	1/52	6	6	13.0	19.0	1/22	10	6	8.5	16.0	10/1	10	12	9.0	14.0	59	14	6	5.5	8.0	58	5	4	*5.5	9.5
22	1/52	6	5	12.5	19.0	1/22	9	7	8.5	16.0	10/2	11	8	9.5	17.5	59	12	4	5.0	8.0	58	5	4	5.0	10.0
23	1/52	6	4	12.5	18.0	1/24	10	8	8.5	14.0	10/1	18	8	9.0	15.0	59	13	4	7.0	9.0	58	6	5	7.0	12.0

Fam = median value of effective antenna noise in db above kdb

D_U = ratio of upper decile to median in dbD_L = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Month April 1962

EST	Frequency (Mc)																										
	.013	.051	.160	.25	.5																						
±	F _{om}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{om}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}							
00	156	7	6	11.5	19.0	130	11	9.5	18.0	107	12	15	9.0	15.0			68	7	12	4.0	8.5	56	6	4	6.0	11.0	
01	156	7	6	11.5	17.5	131	8	11	10.0	18.0	106	12	14	9.0	15.0			66	9	11	6.0	11.0	55	8	3	5.0	9.5
02	156	6	6	11.5	18.0	131	8	10	10.0	17.0	110	8	16	8.5	16.0			64	11	8	4.5	7.0	54	8	3	4.0	9.0
03	156	7	6	12.0	18.0	131	8	10	10.0	17.5	110	7	16	9.0	15.5			65	10	9	6.0	9.0	56	5	2	5.0	9.0
04	155	6	5	10.5	17.0	127	10	8	11.0	17.5	102	11	16	9.0	18.0			65	8	11	6.5	13.5	56	6	6	5.0	8.5
05	154	6	3	12.0	17.5	126	8	11	9.0	16.0	90	18	18	7.0	12.5			55	10	5	* 4.0	7.5	50	8	4	6.0	9.5
06	153	5	5	10.5	16.0	121	10	12	9.0	17.0	86	17	19	5.5	11.0			49	7	4	* 3.0	6.0	42	7	2	3.5	6.5
07	154	4	8	11.5	17.0	118	15	16	11.0	17.5	86	17	19	5.5	9.5			47	3	4	3.0	4.5	38	6	5	3.0	5.0
08	152	6	4	11.5	17.5	114	15	12	12.0	18.0	84	19	16	5.0	9.0			45	2	2	2.0	3.0	38	5	4	3.0	4.5
09	151	7	4	12.0	18.0	117	12	10	11.5	18.5	96	14	16	6.0	11.0			47	8	4	* 2.0	3.5	38	4	4	2.5	4.5
10	152	7	4	11.5	16.5	119	10	12	11.0	18.5	90	15	19	2.5	12.0			47	8	4	2.5	4.5	38	7	4	2.5	4.5
11	152	8	3	11.5	16.5	119	14	10	10.0	17.0	88	22	15	7.5	12.5			47	8	3	2.0	3.5	40	6	6	3.0	4.5
12	154	7	4	12.0	17.5	121	14	12	10.0	17.0	92	19	20	6.0	14.0			47	16	3	2.0	3.5	40	8	5	2.5	5.0
13	156	8	6	11.0	17.0	125	10	11	10.0	17.5	90	22	16	5.5	15.0			47	16	2	2.0	3.5	41	7	6	3.5	6.0
14	156	10	6	11.5	17.0	125	10	11	10.0	17.0	91	21	16	6.0	8.5			49	13	5	* 2.5	4.5	42	5	7	* 2.0	4.5
15	156	8	6	11.5	17.0	127	9	9	9.0	16.0	92	21	17	6.0	14.5			49	12	4	2.0	4.0	44	4	8	4.0	7.0
16	155	9	5	11.0	16.0	125	11	12	10.0	16.5	94	18	20	6.0	12.0			49	19	3	2.5	5.0	44	8	6	3.0	6.0
17	154	10	4	10.5	16.5	129	5	16	8.0	14.5	100	16	21	6.0	11.5			51	17	4	3.0	5.0	48	8	4	5.0	8.5
18	152	11	4	12.0	18.0	130	8	15	10.0	15.0	104	14	22	7.5	14.0			59	7	7	6.5	11.5	46	8	6	4.5	9.0
19	153	9	6	11.0	17.5	131	12	10	8.5	15.0	111	7	13	6.0	12.0			66	9	9	5.5	11.0	58	6	5	* 3.5	10.0
20	154	11	4	11.0	16.5	131	12	8	9.0	14.5	110	10	15	7.5	13.5			67	8	11	* 6.0	11.0	58	8	6	5.0	9.0
21	154	12	4	12.0	17.5	130	13	5	10.5	17.5	108	13	10	7.0	14.0			66	11	10	5.5	9.5	52	10	4	5.0	9.0
22	154	12	5	12.0	17.0	131	8	11	9.0	18.0	106	10	7	9.0	15.0			65	10	9	5.0	10.0	52	10	5	* 4.5	8.0
23	158	6	9	11.5	16.5	132	7	12	10.0	16.0	111	9	17	8.0	13.5			66	9	11	* 5.0	8.5	56	10	4	5.0	10.5

F_{om} = median value of effective antenna noise in db above ktbD_U = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Month May 1962

Frequency (Mc)																									
0.13			0.51			160			2.5			5													
no	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}									
00	16.2	6	6	2.5	16.0	1.38	6	9	6.5	11.0	1.18	7	5	6.0	1.20	74	4	7	4.0	7.5	6.4	5	4.5	8.5	
01	16.0	8	4	10.0	17.0	1.36	9	6	7.0	12.5	1.17	6	6	5.5	10.0	72	6	8	5.5	8.5	6.2	6	5.5	9.5	
02	16.0	7	4	9.0	15.5	1.34	9	5	5.5	11.0	1.16	6	6	6.0	12.0	72	7	10	5.0	10.0	6.0	6	5	5.5	10.0
03	15.8	9	5	9.5	16.0	1.32	10	5	9.0	15.5	1.14	4	1.2	6.0	14.5	70	8	6	6.5	12.0	6.0	6	6	5.5	9.5
04	15.7	7	5	10.0	16.5	1.28	10	6	8.5	15.0	1.04	5	19	8.0	16.0	62	10	8	5.0	9.0	5.8	7	6	5.0	9.0
05	15.8	6	7	11.0	17.5	1.28	9	10	9.0	16.0	1.02	18	18	7.5	14.5	54	7	9	3.0	6.0	5.2	8	6	4.0	7.0
06	15.8	6	8	11.0	18.0	1.26	11	12	11.0	17.5	1.00	19	28	8.5	16.5	52	5	9	2.0	3.0	4.4	9	5	4.5	5.0
07	15.6	7	6	10.5	17.0	1.26	10	13	11.0	19.0	1.98	2.3	16	9.5	18.5	48	6	6	2.5	3.5	4.2	7	4	2.5	4.0
08	15.4	10	3	12.0	18.5	1.26	10	11	12.0	20.0	1.00	19	18	16.0	17.0	48	6	4	*2.0	*3.0	4.0	9	4	2.0	4.0
09	15.6	9	6	12.0	19.0	1.25	12	10	12.0	19.5	1.00	26	18	9.0	17.5	48	6	4	*1.0	*2.0	4.0	5	4	2.0	3.5
10	16.0	7	8	12.0	18.5	1.28	7	9	11.0	19.0	1.06	16	26	9.0	19.0	48	6	3	1.5	3.0	4.0	6	2	*2.0	4.0
11	16.0	5	8	12.0	18.0	1.30	13	10	10.0	17.5	1.06	18	22	8.5	16.5	48	6	2	2.0	3.0	4.0	10	2	2.0	4.0
12	16.2	10	8	12.0	17.0	1.32	16	9	9.0	14.5	1.06	20	9.0	15.0	48	19	2	1.5	3.5	4.2	20	2	*2.0	5.0	
13	16.4	10	7	10.0	16.0	1.34	16	8	7.5	14.0	1.10	22	16	8.0	16.5	56	25	10	*2.5	*3.5	4.4	23	4	*2.5	6.5
14	16.6	8	10	9.0	14.5	1.38	12	10	8.5	14.5	1.19	17	16	9.0	16.0	57	21	9	*3.0	7.0	4.6	16	4	4.5	5.5
15	16.6	6	8	10.0	16.0	1.40	8	12	7.5	15.0	1.20	14	14	7.5	13.0	54	25	6	*1.5	*3.5	5.2	12	8	*3.0	6.0
16	16.6	6	10	9.5	15.0	1.40	6	14	7.0	12.0	1.22	10	16	*9.0	*15.0	55	25	7	*2.0	*3.5	5.4	12	12	3.0	6.0
17	16.6	6	10	8.0	14.0	1.40	7	15	6.5	12.0	9	15	7.5	14.0	58	24	6	*2.0	*3.5	5.8	7	12	*4.0	7.5	
18	16.6	5	9	8.0	12.5	1.40	6	12	7.0	12.0	1.20	10	11	6.0	12.5	64	7	9	3.5	6.0	6.2	4	8	4.0	7.0
19	16.4	6	7	7.0	13.0	1.38	8	7	5.0	9.5	1.20	9	8	5.0	9.0	70	4	7	3.0	5.0	6.6	4	7	4.0	6.0
20	16.4	4	10	8.0	13.0	1.42	4	11	5.0	10.0	1.21	9	7	5.0	9.0	74	5	4	3.0	5.5	6.8	4	9	3.0	6.0
21	16.4	4	10	8.0	14.0	1.42	4	10	5.0	10.0	1.22	7	10	4.0	9.0	74	6	7	3.0	6.0	6.8	2	8	3.5	7.0
22	16.4	5	8	8.0	14.0	1.40	6	8	5.0	11.0	1.20	9	7	4.5	9.0	75	5	9	4.0	8.0	6.8	2	8	4.0	7.5
23	16.2	5	4	8.5	14.5	1.38	7	6	5.0	11.0	1.20	7	9	4.5	10.0	76	2	9	4.5	9.5	6.6	4	7	4.5	8.0

F_{om} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_z = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

Frequency (Mc)

Frequency (Mc)												20																													
.013			.051			.160			.545			2.5			5			10			20																				
F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}																	
00	156	4	2	8.5	12.0	13.0	5	10.0	15.0	10.7	7	8	10.5	17.5	8.9	9	10.0	17.5	6.0	10	6	8.0	15.0	5.5	6	4	6.5	11.0	4.4	2	4	4.0	7.0	2.1	2	1					
01	156	4	2	7.5	11.5	12.0	6	4	9.0	15.0	10.5	8	7	8.0	14.0	8.7	10	1.0	7.5	14.5	6.0	10	8	7.0	13.0	5.5	6	4	5.0	8.0	2.1	2	1								
02	156	4	1	7.0	12.5	13.0	4	5	9.0	13.5	10.5	8	6	8.0	14.0	8.7	9	9	9.0	17.0	6.0	11	7	8.0	13.0	5.5	8	6	6.0	12.0	3.5	2.1	2								
03	156	4	2	8.5	13.5	12.0	6	4	8.5	15.5	10.3	9	6	8.5	15.0	8.3	11	6	8.5	15.0	5.8	13	4	7.5	13.0	5.5	7	4	5.0	2.0	4.2	4	4	3.0	7.5	2.3	0	4			
04	156	4	2	8.0	15.0	12.0	9	4	10.0	15.0	10.1	1	5	9.0	17.0	8.5	10	8	7.5	15.0	5.6	14	4	7.5	12.5	5.3	10	4	4.0	5.0	4.0	2	0	2.5	3.5	2.1	2	1			
05	156	4	3	9.5	14.5	12.0	8	6	8.0	14.0	9.9	8	7	10.5	16.5	7.5	17	7	11.5	21.0	5.4	15	2	8.0	14.5	5.7	6	6	3.5	6.0	3.8	5	4	3.5	5.5	2.1	2	2			
06	156	4	2	9.0	14.5	12.2	5	8	9.0	15.0	8.5	1	7	10.0	17.5	4.1	24	* 8	10.0	17.5	5.4	12	6	7.5	11.5	5.3	9	4	4.0	5.0	4.2	2	2	2.5	3.5	2.1	2	1			
07	154	4	4	10.0	15.5	11.4	12	6	11.0	16.0	10.6	7.5	12	15.5	25.0	4.1	20	2	15.0	19.5	2.8	14	5	7.5	11.0	5.1	9	8	4.0	5.0	7.0	38	6	4	3.5	5.0	2.2	3	1	3.0	4.0
08	152	6	2	10.0	14.0	11.0	14	5	8.0	16.0	20.0	6	17.0	23.5	4.1	23	2	12.5	17.0	2.2	14	4	7.0	20	2.7	15	11	5.5	9.0	3.2	8	2	5.0	7.5	2.1	3	0	3.0	4.0		
09	152	7	4	12.0	19.0	11.0	14	8	12.5	20.5	7.9	24	18	15.0	46	4.1	22	2	17.0	25.5	2.0	8	2	3.5	4.0	23	14	8	7.0	30	6	4	3.0	5.0	2.1	3	0	3.0	4.0		
10	152	8	6	14.0	20.0	11.2	16	11	14.0	22.5	7.5	31	8	12.0	20.0	4.1	14	6	13.0	21.0	1.8	10	0	2.4	1.5	9	5.0	6.5	2.6	8	4	4.5	7.5	2.1	2	2	3.5	5.0			
11	150	10	4	12.5	18.5	11.4	13	6	14.0	19.5	7.7	30	8	9.0	14.0	4.1	19	6	16.0	20	2.0	12	2	7.5	12.0	1.9	14	6	9.0	11.0	2.4	7	6	1.5	3.5	2.1	2	2	2.5	4.5	
12	152	9	3	13.0	19.0	12.0	10	10	13.0	20.5	6.3	22	9	8.5	16.5	4.1	24	3	9.5	14.0	1.8	13	0	7.5	11.0	1.9	11	6	5.0	7.0	2.4	8	4	6.0	9.0	2.1	2	2	4.0	6.0	
13	154	8	4	11.5	20.0	12.2	10	6	10.5	17.0	8.9	22	12	14.0	23.0	4.1	37	6	6.0	17.5	20	20	2	3.5	5.0	21	18	6	7.5	10.5	3.0	10	1.0	7.0	2.0	2	4.0	6.0			
14	154	9	3	11.5	17.5	11.5	15	6	8.5	14.5	9.1	17	13	10.0	14.5	4.1	23	3	10.0	14.5	1.7	23	3	7.5	12.5	1.5	19	10	5.0	9.0	3.2	6	4	7.0	12.0	2.1	2	2	4.5	7.0	
15	156	8	6	10.0	16.0	12.4	16	8	11.5	17.0	9.5	26	2.3	10.5	17.0	4.1	49	37	9	8.0	14.0	4.8	6.5	11.0	30	* 3.0	6	6.0	13.0	3.6	4.5	7.0	2.5	4.0	6.0						
16	156	6	3	10.0	16.0	12.6	8	12	9.5	16.5	9.7	17	24	7.0	14.0	4.1	49	35	7	6.5	13.5	24	27	6	7.0	11.5	41	12	4	4	5.0	8.5	2.5	6	4	3.5	6.0				
17	156	6	3	8.5	16.0	12.6	5	8	8.5	15.5	9.9	12	19	7.0	16.0	5.9	22	11	7.0	15.5	38	16	14	7.0	20	4.7	9	10	7.0	20	4.4	6	4	4.5	8.0	2.5	3.5	6.0			
18	156	4	4	* 9.0	17.5	12.6	6	13	8.0	15.0	10.5	8	8	7.0	16.0	8.3	8	8.0	6.0	12.5	5.2	10	13	5.5	1.5	5.3	9	8	5.0	9.0	4.6	6	4	3.5	7.5	2.1	2	2			
19	156	6	4	10.0	16.0	12.8	9	7	9.0	16.5	10.9	6	8	8.5	17.5	9.1	7	8	6.5	14.0	6.0	12	5	6.5	11.5	5.7	8	8	6.0	20	4.6	4	4	5.0	8.0	2.1	3	1	3.0	4.0	
20	158	6	5	10.0	15.5	13.0	6	7	8.0	16.0	10.9	6	8	9.0	15.5	9.1	9	7	7.5	12.5	6.0	7	10	7.5	13.5	5.9	4	4	6.5	8.0	2.5	3.5	6.0	3	1	3.0	4.0				
21	156	5	3	10.0	14.5	13.0	7	6	9.0	15.5	10.7	7	5	8.5	16.0	9.1	8	4	7.5	13.5	6.2	9	7	7.5	13.5	5.7	6	4	6.0	10.5	4.4	4	2	4.0	7.0	2.1	2	2			
22	157	4	2	8.5	13.5	13.0	4	5	* 10.0	12.0	10.7	6	5	8.5	17.5	8.9	8	6	8.0	16.5	6.2	8	8	9.0	16.0	5.5	9	4	6.5	12.5	4.2	4	2	4.0	7.0	2.1	2	2			
23	156	4	2	8.5	12.5	13.0	3	5	* 10.0	14.0	10.7	5	4	* 10.0	16.0	10.7	6	5	8.5	16.0	8.9	9	8	9.0	16.0	6.2	8	8	7.5	14.0	5.5	7	4	7.0	11.5	4.4	2	4			

F_{ant} = median value of effective antenna noise in dB above kTB

DD: ratio of upper decile to median in db

D_U = Ratio of upper decile to medium in D_A = ratio of median to lower decile in D_B

D_F = ratio of median to lower decile in ab

一九四〇年

MONTH-HOUR VALUES OF RADIO NOISE

Station Coots, Australia — Lat. 30.6S Long. 130.4E Month April 19 62.

ES	Frequency (Mc)												.013			.051			.160			.545			2.5			5			10			20					
	Fm	Du	D _L	Vdm	Ldm	Fm	Du	D _L	Vdm	Ldm	Fm	Du	D _L	Vdm	Ldm	Fm	Du	D _L	Vdm	Ldm	Fm	Du	D _L	Vdm	Ldm	Fm	Du	D _L	Vdm	Ldm									
00	158	0	3	8.0	12.0	128	5	2	8.0	13.5	105	8	2	7.5	12.0	85	9	4	7.0	12.0	57	6	6	5.5	9.0	52	5	6	4.5	7.5	41	4	4	4.0	6.5	23	0	/	
01	158	2	2	8.0	12.0	129	4	3	9.0	13.5	105	6	2	8.0	13.0	84	9	3	7.5	13.5	54	10	6	5.5	9.0	52	6	8	5.5	9.5	41	4	4	4.0	6.5	23	0	2	
02	156	4	0	7.5	11.5	130	4	3	8.5	13.5	107	5	4	7.0	12.0	85	8	4	7.0	12.0	57	8	5	6.0	10.5	52	6	5	4.0	7.5	40	5	3	4.5	7.5	23	0	1	
03	154	4	0	8.0	12.0	128	6	2	9.5	14.0	107	4	4	7.0	12.0	84	9	5	7.0	12.0	55	10	6	6.0	10.0	54	6	6	5.5	9.5	41	8	6	4.5	6.5	23	0	1	
04	156	4	2	9.0	13.5	130	4	5	8.5	13.0	105	6	6	7.0	12.0	85	8	9	7.0	12.0	56	8	7	6.0	11.0	54	4	6	4.0	8.5	39	5	4	4.0	6.5	23	0	0	
05	156	4	2	9.0	13.5	128	6	4	8.0	13.5	103	7	5	8.0	13.5	81	7	6	7.5	12.5	55	8	6	5.5	9.5	54	4	8	5.5	9.5	35	8	4	4.0	5.5	23	0	0	
06	156	4	2	9.0	14.0	124	5	*	8.0	13.5	93	9	6	7.5	12.0	56	10	11	53	9	7	5.0	9.0	54	4	8	5.0	9.5	37	7	4	3.5	5.0	23	0	0			
07	154	4	2	9.5	14.0	118	5	3	7.5	12.0	71	11	8	7.5	11.0	41	10	2	5.5	11.0	37	4	8	6.5	11.0	44	4	5	7.5	8.0	37	6	4	3.0	4.0	23	2	0	
08	152	4	2	10.0	16.0	114	6	6	10.5	16.0	69	14	10	8.5	10.5	41	13	2	2.5	4.5	25	8	6	4.5	7.0	26	10	7	4.0	7.0	31	4	3	3.5	4.0	23	3	0	
09	152	2	3	11.5	17.5	110	9	4	13.0	18.0	69	15	6	11.0	10.0	41	11	2	3.5	4.5	21	13	2	4.0	6.0	20	11	6	4.0	6.0	30	26	6	3.5	4.0	23	2	2	
10	152	4	3	11.0	17.0	114	6	8	12.0	18.5	69	22	4	11.5	18.5	47	6	8	4.0	11.0	19	13	0	4.0	5.0	18	12	4	6.0	7.5	23	6	6	4.0	7.5	23	2	2	
11	152	2	4	13.0	18.5	114	9	6	13.0	22.0	73	10	8	10.0	13.5	51	2	1	19	12	0	3.5	5.0	18	10	4	5.0	7.5	19	10	6	4.0	7.5	21	4	2			
12	152	2	4	12.5	19.0	114	10	4	13.0	20.0	71	26	6	9.0	12.0	49	2	1	2.5	4.5	21	13	2	4.0	6.0	20	11	6	4.0	6.0	23	6	2	3.0	4.5	23	2	2	
13	153	3	4	12.0	18.5	116	8	5	11.5	18.0	75	14	10	9.0	13.5	49	4	6	8.0	11.0	19	2	0	3.0	5.0	18	7	5	3.5	5.0	23	12	8	5.0	7.0	23	3	2	
14	154	2	4	12.5	19.5	118	7	6	9.5	16.5	72	16	5	7.0	11.0	45	9	6	3.0	5.0	19	3	0	2.5	4.5	18	8	4	4.0	6.5	27	4	6	6.5	9.0	23	4	2	
15	154	3	2	9.5	15.0	116	9	4	7.5	13.5	72	19	7	8.5	14.0	41	11	2	4.0	6.0	45	20	10	4	6.0	8.5	33	8	6	4.0	6.0	23	6	0	4.0	6.0	23	2	0
16	152	2	2	9.5	15.5	118	7	4	8.0	14.0	74	15	11	9.0	13.5	43	10	4	4.0	6.5	24	13	5	6.0	8.5	26	15	6	8.0	11.0	34	6	7	4.0	6.5	25	4	2	
17	156	0	3	8.0	13.5	116	9	4	8.5	14.0	83	13	10	11.5	16.0	67	7	4	6.5	13.0	33	12	8	2.0	12.5	38	9	4	6.0	10.0	41	4	6	5.0	7.5	25	4	2	
18	155	1	3	8.0	12.0	119	7	7	9.0	15.0	93	12	12	9.0	16.5	77	9	5	5.5	10.5	47	8	8	9.0	14.5	42	13	4	6.5	*	39	8	2	3.5	6.0	23	4	2	
19	156	2	2	8.5	12.0	121	9	4	10.0	16.5	97	11	5	9.0	16.0	81	8	4	6.0	11.0	52	10	8	7.5	13.0	52	6	6	6.0	10.0	43	4	4	3.0	5.5	23	0	2	
20	152	3	2	8.5	12.0	126	5	3	9.0	14.5	101	8	3	8.0	14.0	84	9	3	7.0	12.5	55	10	6	7.0	11.5	52	7	6	5.5	10.0	42	4	4	5.0	7.5	22	1	1	
21	158	1	4	8.5	12.0	128	2	4	8.0	12.5	103	7	3	8.0	12.5	86	6	5	5.5	9.5	57	8	6	6.0	10.0	54	5	6	5.0	7.5	43	9	6	3.5	7.0	23	0	2	
22	158	1	4	7.5	11.0	128	4	2	7.0	11.5	105	6	6	7.0	11.5	83	8	4	6.0	10.0	57	9	7	6.0	9.0	52	6	6	4.0	7.5	23	0	2						
23	156	4	2	8.0	12.0	129	3	3	8.5	14.0	105	4	4	7.5	12.0	85	7	4	7.0	12.0	57	6	4	6.0	10.0	52	6	4	5.0	8.5	41	4	4	4.0	7.0	23	0	2	

Fm = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30° 6' S Long. 130° 4' E Month May 1962

$F_{\text{om}} = \text{median value of effective antenna noise in dB above kTB}$

Ω_u = ratio of upper decile to median in db
 Ω_l = ratio of median to lower decile in db

$\frac{P_{10} - P_5}{P_5}$ = ratio of median to lower decile in db
 σ_{dm} = median deviation of average voltage in db below mean power

Iconic War

MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5N Long. 17.3E Month March 1962

Month-Hour	Frequency (Mc)																																
	.013			.051			.160			.495			2.5			5			10			20											
	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm								
00	152	4	4	9.0	145	1/16	4	3	7.0	12.0	9.9	4	4	4.0	9.0	1/5	18	4	4.0	6.5	5.9	4	4.5	6.5	5.6	20	0	2					
01	152	2	3	6.0	16.0	1/16	5	2	2.5	12.5	10.3	8	6	3.5	8.0	1/5	22	4	4.0	7.5	5.7	6	4	5.6	6.0	20	0	2					
02	152	2	4	10.0	15.5	1/16	4	2	7.0	11.5	10.5	2	8	3.0	7.0	1/3	19	2	4.0	7.5	5.5	4	4	4.0	5.0	20	0	1					
03	152	3	4	11.0	16.5	1/16	2	4	7.0	12.0	10.5	2	8	4.0	8.0	1/1	21	9	4.0	7.5	5.5	2	4.5	7.5	5.5	20	0	2					
04	152	2	4	11.0	17.5	3	4	8.0	13.0	10.6	5	11	4.0	8.0	1/1	6.7	9	2	4.5	7.5	5.5	6	4	5.5	6.0	20	0	2					
05	152	2	5	11.5	18.0	1/12	5	6	10.0	16.5	10.3	10	1/8	3.0	7.0	1/3	6	4	3.0	5.0	5.3	4	5	5.0	8.0	20	0	2					
06	150	4	5	11.0	18.0	1/10	8	5	12.0	17.0	9.5	7	9	5.0	8.0	1/1	6.1	4	1.0	3.0	4.9	5	4.5	8.0	5.0	20	0	2					
07	146	4	4	12.0	19.0	1/10	2	8	6	9.0	13.5	9.5	5	6	5.0	10.0	1/0	6.3	9	6	2.5	4.0	12	9	5.5	11.0	20	0	2				
08	144	4	3	11.0	17.5	9.0	10	8	12.0	14.5	9.7	5	9	6.5	9.5	1/1	4.7	2	2.0	4.0	3.7	2	4	2.0	4.0	20	0	2					
09	144	4	4	11.5	17.5	9.6	17	5	8.0	11.0	9.5	8	6	5.5	8.0	1/1	3.5	3	5	2.5	4.0	1.0	6	4.0	8.0	20	0	2					
10	144	2	4	9.0	15.0	9.7	12	7	7.0	11.0	9.3	7	8	5.0	9.0	1/2	5.4	6.0	3.4	5	3.5	6.0	3.4	10	0	2							
11	146	2	4	9.5	15.0	9.8	8.5	12.0	9.2	4	7	2.5	5.0	1/3	3.0	5.0	1/0	3.5	4	4	3.5	5.0	3.4	6	4	4	10	0	2				
12	146	4	4	7.0	12.0	2.99	4.5	8.5	9.3	6	8	6.0	11.0	5.3	4	4	0.5	*2.0	3.5	1	3.0	5.5	3.4	11.0	15.0	40	22	2					
13	147	3	3	7.0	11.5	7.98	6.0	10.0	9.3	4	6	7.0	12.0	5.3	6	2	1.5	4.5	3.7	2	6	3.0	5.0	3.7	8	5.0	7.0	5.0	22	4			
14	148	0	2	6.0	10.0	9.8	6	6.5	9.0	9.1	9	8	9.0	13.0	5.5	11	3	3.0	5.0	3.7	4	4	2.0	4.0	6	10	30	48	6				
15	149	2	2	6.0	10.0	10.1	8	7	6.5	10.5	9.1	6	7	4.5	8.5	5.7	4	2	2.0	4.0	3.9	4	4	3.5	5.5	48	8	4					
16	148	2	4	6.0	10.0	10.8	2	10	11.0	16.0	9.3	6	8	5.0	9.0	6	6	1.5	3.5	3.9	5	3.0	6.0	4.5	5.0	20	5	0					
17	147	1	3	6.5	10.5	10.8	6	6	10.0	16.0	9.3	4	5	3.0	10.0	7	6	4	1.5	3.0	4.6	7	3	3.5	6.0	5.0	4	20	3				
18	148	2	4	5.0	9.5	11.2	4	4	6.0	10.5	9.6	5	7	4.5	8.5	7.1	10	4	2.0	4.0	5.3	4	4	4.0	6.5	5.6	20	2	2				
19	149	3	3	5.5	10.0	11.4	4	4	5.5	9.0	9.7	4	6	6.5	11.0	7.3	14	4	1.5	3.5	5.5	6	2	2.0	4.0	5.2	20	1	3				
20	150	2	4	6.0	11.0	11.4	3	4	5.0	9.5	9.7	9	4	6.0	10.0	7.3	10	2	2.0	4.0	5.0	7	8	2	3.5	6.5	5.6	20	1	2			
21	150	2	4	7.0	11.0	11.5	3	3	7.0	11.0	9.9	6	6	4.0	9.0	7.3	16	4	3.0	5.5	5.7	8	2	3.5	6.0	5.6	20	0	2				
22	152	2	4	7.0	12.0	11.6	4	3	6.0	10.5	9.9	11	6	3.5	7.0	7.6	21	6	3.5	6.5	6.0	7	4	1.5	4.0	3.8	9	5	30	50	20	0	2
23	152	2	4	9.0	14.5	11.7	4	3	7.0	12.0	10.0	7	7	4.5	9.0	7.5	18	4	3.0	5.5	5.9	4	6	5.0	6.5	5.6	20	0	2				

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_dm = median of average voltage in db below mean power

L_dm = median deviation at average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5N Long. 17.3E Month April 1962

Frequency (Mc)															
		.013			.051			.160			.495				
$\frac{F_{\text{om}}}{2}$	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	
00	152	2	9.0	150	117	10	4	7.5	12.0	95	11	8	3.0	7.0	80
01	151	3	10.0	155	117	7	4	7.5	12.0	103	4	8	7.5	12.0	85
02	151	3	10.0	16.0	115	8	4	8.5	13.5	101	6	12	6.0	12.0	85
03	150	2	8.2	10.0	16.5	115	6	5	7.0	12.0	103	7	5	5.0	10.5
04	150	2	4	10.5	16.0	109	8	2	10.0	16.0	99	12	16	4.5	8.0
05	149	2	2	11.0	17.0	107	6	6	10.0	16.0	85	8	8	4.5	6.0
06	149	6	4	11.0	17.0	101	12	6	10.5	15.5	89	4	6	4.5	8.5
07	149	3	11.0	17.0	99	25	8	11.5	15.5	89	8	4	4.5	9.0	5.5
08	149	5	2	11.0	16.5	123	10	8	11.0	15.0	91	7	9	3.5	8.0
09	146	4	4	11.0	16.0	*	*	13.5	18.5	87	10	8	3.0	6.0	*
10	148	5	4	10.5	15.5	*	*	13.5	20.0	89	6	9	5.5	6.0	*
11	149	4	6	9.0	15.0	108	17	5	13.0	19.0	87	3.5	6.0	5.5	3.5
12	150	4	6	8.0	13.5	109	17	6	13.0	19.0	88	10	3	5.0	9.0
13	150	6	4	7.5	13.0	112	16	7	12.5	18.0	89	13	6	7.0	12.0
14	152	4	4	8.0	12.0	113	13	10	11.5	16.5	89	15	6	5.5	9.0
15	152	6	4	7.5	12.0	113	13	9	14.5	19.0	87	12	4	6.0	13.0
16	150	6	2	6.5	11.0	111	14	5	13.0	19.0	89	12	6	5.0	9.5
17	150	4	2	7.0	12.0	113	10	7	13.5	19.0	91	8	10	5.0	8.5
18	148	4	2	7.5	11.5	111	11	2	11.0	15.5	91	10	4	4.5	8.5
19	150	2	2	6.5	11.5	115	10	4	9.0	14.5	95	6	4	2.5	4.5
20	150	4	2	7.0	12.0	117	8	4	8.0	13.0	97	8	6	5.0	9.0
21	150	4	2	8.0	12.0	119	8	5	7.0	12.0	103	6	12	4.0	9.0
22	150	4	2	8.5	13.5	119	9	5	7.0	12.0	99	9	7	6.0	10.0
23	152	2	4	9.0	15.0	119	7	5	8.0	13.5	103	6	8	5.0	10.0

F_{om} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

ccccc-ccc-cc

MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5N Long. 17.3E Month May 1962

Frequency (Mc)	FS												20																												
	0.13				0.51				1.60				4.95				2.5				5				10																
	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}													
00	152	6	2	9.5	15.5	12.2	9	6	10.0	16.0	10.6	8	4	6.0	1.2.0	7.3	1.3	6	5.0	9.0	6.4	7	5	5.5	+	0.8	4.0	7.5	4.9	6	3.0	5.5	20	0	2	1.5	3.5				
01	152	5	3	10.0	16.0	12.0	11	5	11.0	17.0	10.8	4	4	6.0	1.1.5	7.1	1.2	6	10.0	14.5	6.3	6	8	5.5	+	1.0	4.0	6.5	5.1	4	6	3.5	5.0	20	0	3	1.5	3.5			
02	152	3	2	9.0	15.0	11.6	10	4	10.5	17.5	10.6	4	7	4.0	1.0.0	6.7	6	9	4.5	8.0	6.1	8	4	5.0	+	1.0	4.0	12.0	5.5	5	3.0	5.0	20	0	2	1.5	3.5				
03	152	2	5	10.0	16.0	11.2	8	2	8.5	14.0	8.6	20	9	8	6	3.0	5.0	5.9	1.0	5	8.0	13.0	5.4	5	4	4.0	+	0.8	4.0	7.0	4.5	7	2.5	5.0	20	0	2	1.5	3.5		
04	150	2	5	10.5	17.0	11.0	6	4	13.5	19.0	8.0	6	6	5.5	8.5	5.9	9	6	6.5	13.0	4.6	1.0	2	4.5	+	1.0	4.5	7.0	4.7	6	8	5.0	20	0	2	1.5	3.5				
05	146	6	4	10.5	17.0	10.4	9	5	9.0	14.0	8.6	4	6	3.0	6.0	5.3	5	4	2.5	4.5	4.4	1.5	8.0	4.4	8	6	4.5	+	1.0	4.5	7.5	4.9	4	8	1.5	3.0	20	0	2	2.0	9.0
06	144	6	2	11.5	17.5	10.0	12	6	1.3.0	19.0	9.0	4	6	1.5	5.0	5.1	4	2	2.0	4.0	4.3	7.0	13.0	4.2	5	4	4.0	+	0.8	4.0	7.0	5	7	2.0	4.0	20	0	2	2.0	4.0	
07	146	4	4	11.0	17.5	10.2	8	8	12.5	18.0	8.6	6	4	5.1	2	2	3.0	5.5	3.7	4.0	8.5	3.6	6	2	3.0	+	0.8	4.5	4.3	6	4	4.0	6.5	20	0	2	2.0	4.0			
08	146	5	2	11.5	17.0	10.8	7	7	13.0	17.5	8.6	6	7	4.0	2.0	5.3	2	4	3.5	4.5	3.3	5	4	4.0	6.0	3.4	8	2	3.0	5.0	1.0	3	5.0	0.0	20	0	4	2.0	4.0		
09	148	6	2	11.5	16.5	10.8	10	6	11.5	16.0	8.6	6	0	3.0	7.0	5.3	2	4	3.5	5.5	3.2	6	2	4.5	7.5	3.4	7	5	5.0	2.0	39	7	4	3.5	6.0	20	5	2	2.5	4.5	
10	150	5	4	11.0	17.0	11.6	8	10	12.0	18.5	8.7	8	5	7.0	4.0	8.0	5.3	6	4	3.0	5.0	3.1	4	4	5.5	7.0	3.2	8	4	4.3	4.3	4.0	2.5	22	4	4	2.0	4.0			
11	153	7	5	11.0	17.0	11.8	8	6	12.0	19.0	9.2	7	9	1.2.0	1.7.5	5.5	11	4	6.0	9.0	3.1	4	2	6.0	8.5	3.6	6	6	6.0	8.0	4.5	6	4	4.5	8.5	22	5	4	1.5	4.5	
12	134	8	4	11.0	16.5	12.1	10	7	13.0	19.0	9.0	8	5	7.0	12.5	5.4	12	5	2.0	3.5	3.3	3	4	5.5	8.0	3.6	9	5	5.5	10.0	4.4	11.0	15.5	22	4	4	3.0	5.0			
13	152	6	4	11.0	16.0	12.3	10	5	13.5	20.0	9.1	10	10	9.5	14.0	5.6	11	6	4.5	7.5	3.3	3	5	3.6	9	10	4.0	7.0	4.7	2	4	5.0	8.5	22	4	4	2.5	5.0			
14	132	6	4	10.0	15.5	12.4	10	8	13.0	19.0	9.4	8	8	7.0	8.5	6.5	14	4	6.0	8.0	3.3	4	4	4.5	6.5	4.0	6	10	5.0	9.5	4.9	6	9	7.0	11.0	22	6	4	2.0	4.5	
15	152	6	6	11.0	16.5	12.4	8	10	13.0	19.0	9.4	8	10	10.0	11.0	5.7	14	6	5.5	8.0	3.5	4	2	4.0	7.0	4.4	5	12.0	5.1	6	6	4.5	9.0	24	4	6	3.0	5.5			
16	154	7	2	9.5	14.5	12.4	8	11	13.5	20.5	9.2	10	8	9.0	13.5	5.9	5	6	9.0	4.0	3.9	6	4	4.5	7.0	4.6	6	6	6.0	9.5	5.3	6	6	4.0	8.0	23	4	4	2.0	4.0	
17	153	7	3	10.5	15.5	12.2	10	8	12.5	19.5	9.2	8	8	10.0	15.0	6.1	6	6	4.0	7.0	4.3	7	8	4.0	8.0	5.0	8	6	4.0	9.0	5.1	6	6	4.5	9.0	23	4	4	2.0	4.5	
18	152	8	3	11.0	16.0	12.3	7	14	13.5	20.5	9.1	11	7	12.5	12.5	6.5	4	5	2.0	4.0	5.1	4	6	4.5	9.0	5.4	6	6	4.0	7.5	4.9	4	5	4.5	8.0	23	4	4	2.0	4.0	
19	152	5	4	10.0	15.0	11.8	8	10	14.0	21.0	9.4	5	12	9.0	14.0	6.7	4	3	3.0	5.5	5.3	6	4	4.5	7.5	5.6	6	6	3.5	7.0	4.9	5	4	4.0	8.0	23	4	4	2.0	4.0	
20	150	7	1	8.5	13.5	12.0	10	8	11.0	16.5	10.0	6	12	6.0	10.0	7.3	4	4	3.0	5.0	5.9	5	5.0	4.0	8.0	4.9	4	6	5.0	8.0	22	4	4	2.0	4.0						
21	152	5	2	9.0	14.0	12.4	8	8	9.5	15.0	10.6	4	10	7.0	10.0	7.5	9	5	4.5	7.0	6.3	6	4	5.5	9.5	6.0	6	5.0	8.0	9.0	22	8	8.5	14.0	20	5	2	2.0	3.5		
22	152	6	2	9.5	15.0	12.3	9	6	11.0	16.0	10.8	2	4	6.0	9.5	7.5	13	8	8.0	13.0	6.5	6	6.0	1.5	6.0	4	4.5	7.0	2.8	4	6.0	7.0	20	3	2	1.5	3.5				
23	152	4	2	10.0	16.0	12.3	9	7	10.5	17.0	10.6	8	4	7.5	11.5	7.3	16	8	8.0	12.0	5.8	6	4	5.5	8.0	5.3	14	7	20	5.0	20	2	3	1.5	3.0						

$\bar{r}_{\text{ant}} = \text{median value of effective antenna noise in db above kTB}$

R_{90-10} = ratio of upper decile to median in dB

De ratio of median to lower decile is ab

$\frac{U_{10}}{U_{50}}$ = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia lat. 38.8N Long. 78.2W Month March 1962

FS	Frequency (Mc)																								
	135				500				2.5				5				10				20				
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	
00	102	6	7		86	6	5		70	6	10		63	4	6		40	7	2		23	0	1		
01	102	7	7		86	7	6		68	7	8		63	3	7		39	8	1		23	0	1		
02	101	9	6		84	10	5		68	8	8		62	4	6		39	4	2		23	1	1		
03	100	12	6		82	12	6		68	8	8		62	5	6		39	4	2		23	1	0		
04	101	10	8		81	12	7		64	11	6		59	8	5		37	3	2		23	1	0		
05	94	17	4		75	18	6		62	14	6		57	8	3		37	2	2		23	1	0		
06	90	10	6		64	11	5		54	10	8		54	9	5		39	4	3		23	1	0		
07	86	10	4		58	7	2		44	8	4		47	10	4		41	6	3		23	1	0		
08	86	11	7		57	6	3		38	8	2		39	7	2		37	6	2		25	0	1		
09	85	12	4		59	6	4		36	5	3		36	5	4		36	5	2		25	0	1		
10	86	11	3		58	6	3		34	4	2		34	3	4		35	6	3		24	2	0		
11	85	11	2		59	6	4		34	3	4		32	5	2		34	6	2		24	2	1		
12	85	12	4		57	7	3		34	2	3		32	5	1		35	10	1		24	3	1		
13	85	13	4		58	10	3		34	3	2		33	9	2		37	8	2		25	2	1		
14	87	11	4		58	7	3		34	4	2		35	7	4		38	9	2		25	2	1		
15	86	11	5		58	7	3		35	6	1		37	10	3		41	6	2		25	2	1		
16	88	12	7		59	8	3		38	8	2		43	11	3		46	7	3		26	1	2		
17	88	13	5		60	10	3		45	10	3		53	7	4		49	8	3		26	2	2		
18	94	8	6		69	9	7		59	10	5		59	7	5		50	6	3		25	3	1		
19	97	11	5		76	11	8		63	11	5		61	8	4		49	4	5		24	2	1		
20	100	8	6		82	8	8		68	8	8		63	7	5		46	6	5		22	1	1		
21	101	7	8		86	7	8		69	8	7		63	7	4		45	5	5		22	1	1		
22	103	7	9		86	9	6		70	7	6		63	5	4		42	7	3		22	1	0		
23	103	8	7		86	10	6		70	7	8		64	4	6		41	7	3		23	0	1		

 F_{am} = median value of effective antenna noise in db above ktb D_u = ratio of upper decile to median in db D_{ℓ} = ratio of median to lower decile in db V_{dm} = median deviation of average voltage in db below mean power L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia At. 38.8N Long. 78.2W Month April 1962

Month-Hour (LS)	Frequency (Mc)											
	135				500				2.5			
	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u
00 11/2 9 14	87	9	11	68	9	12	69	8	14	63	8	10
01 10/8 8 10	87	9	12	69	8	14	63	8	11	39	7	3
02 10/8 7 11	86	10	13	69	8	14	63	8	10	38	6	2
03 10/8 7 11	85	10	14	68	9	13	60	9	7	37	4	2
04 10/5 10 9	85	8	16	66	10	11	59	9	8	37	3	3
05 10/1 10 12	73	17	12	62	12	11	58	9	7	36	4	1
06 8/9 12 7	60	11	6	48	8	9	51	8	7	38	8	2
07 8/9 13 6	58	9	3	42	10	3	44	8	6	40	6	4
08 8/8 13 6	57	7	3	32	6	2	38	7	4	37	7	3
09 8/9 11 6	57	6	2	30	4	2	34	9	4	35	7	3
10 9/0 17 7	58	7	3	30	6	2	32	12	2	34	8	3
11 8/7 21 3	57	11	3	30	6	2	32	10	2	34	6	3
12 8/8 27 5	59	19	2	30	11	2	32	12	4	32	8	3
13 8/9 26 6	60	22	2	30	14	2	32	16	3	33	7	4
14 9/1 27 7	60	22	3	31	14	3	34	16	4	34	8	4
15 9/3 26 9	61	19	4	31	10	3	36	16	6	37	9	5
16 9/4 24 10	62	19	5	37	14	3	42	18	4	41	9	4
17 9/4 21 10	62	18	4	42	16	5	49	14	7	44	9	4
18 9/5 18 8	62	18	5	52	14	8	58	10	7	46	11	4
19 10/5 8 12	70	18	8	62	14	10	63	11	9	47	9	4
20 11/1 8 10	79	12	10	69	8	12	66	7	10	46	7	5
21 11/4 6 12	84	9	11	69	10	12	65	8	9	43	9	4
22 11/4 7 13	86	7	9	69	10	12	65	7	9	41	9	4
23 11/2 10 15	87	8	10	67	12	9	62	11	7	39	7	3

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in ab

D_L = ratio of median to lower decile in ab

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. -38.8N Long. 78.2W Month May 19-62

Hour	Frequency (Mc)																								
	13.5			50.0			2.5			5			10			20									
	F _{om}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{om}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{om}	D _u	D ₄	V _{dm}	
00	120	3	11	93	7	9	77	5	8	70	4	7	47	5	7	23	2	0							
01	118	5	9	92	7	11	76	6	7	69	5	5	45	6	6	23	2	0							
02	116	7	8	90	8	10	74	8	8	67	5	7	43	6	4	23	1	1							
03	113	10	8	89	8	9	73	7	8	66	5	7	42	6	3	23	0	1							
04	113	10	10	85	10	12	69	7	7	63	6	6	39	8	4	23	0	1							
05	102	13	10	65	10	8	53	6	7	58	7	6	39	9	3	23	0	1							
06	102	11	14	62	10	7	44	7	5	52	7	5	41	9	3	23	0	1							
07	100	12	13	61	12	5	38	5	4	47	7	5	41	8	6	23	0	1							
08	98	16	12	60	14	3	30	8	2	39	8	5	38	8	5	23	2	0							
09	98	16	9	60	13	2	29	11	2	37	7	6	36	9	4	23	1	1							
10	98	16	9	61	13	4	29	10	2	36	5	6	35	9	4	23	2	1							
11	99	18	10	62	23	4	29	21	3	35	9	6	34	9	3	23	2	1							
12	99	23	11	64	33	6	29	31	2	36	18	5	37	9	5	23	3	2							
13	103	23	11	70	33	10	30	36	3	38	20	6	38	10	6	23	4	1							
14	109	21	13	72	33	10	34	35	3	41	21	7	43	9	9	24	6	2							
15	112	19	13	76	29	12	37	34	9	44	19	6	48	6	11	24	10	1							
16	112	19	12	73	33	10	37	34	8	51	16	7	49	7	6	25	10	2							
17	114	16	16	75	30	12	44	28	12	58	11	9	53	4	7	26	8	3							
18	113	>24	6	76	26	13	54	15	14	63	7	8	56	4	9	26	4	2							
19	114	>13	16	79	20	14	65	11	12	68	7	8	56	5	8	26	7	2							
20	117	>10	12	87	>15	11	76	9	10	72	5	8	57	5	10	25	10	2							
21	119	8	9	92	29	9	77	7	8	73	3	9	55	5	10	24	8	2							
22	119	6	7	93	8	8	78	5	8	71	5	8	53	5	11	23	7	0							
23	119	5	8	92	8	8	78	3	7	70	4	8	49	6	10	23	2	0							

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₄ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha(Kauai). T.H. Lat. 22.0 N Long. 159.7 W Month March 1962

From = median value of effective operating rates in the above 100

dm = Negation value of objective function raised to power of α

β_3 = ratio of upper decile to median $\ln \text{db}$

σ_2 = ratio of median to lower decile in db

THE JOURNAL OF CLIMATE

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha(Kauai), T. H. Lat. 22.0N Long. 159.7W Month April 1962

Hour	Frequency (Mc)												2.5			5			10			20						
	0.13			.051			.160			.495			2.5			5			10			20						
	Fam	Du	D _U	Vdm	L _{dm}	Fam	Du	D _U	Vdm	L _{dm}	Fam	Du	D _U	Vdm	L _{dm}	Fam	Du	D _U	Vdm	L _{dm}	Fam	Du	D _U	Vdm	L _{dm}			
00	154	4	3	100	140	130	5	7	115	195	184	10	6	111	186	83	11	8	9.5	19.0	5.7	11	5	9.0	5.0	24	2	
01	155	2	4	110	150	124	6	3	100	165	106	10	6	90	160	83	14	6	100	190	57	10	4	95	140	6.5	5	
02	155	4	4	9.5	15.5	131	6	5	10.5	16.5	106	9	6	95	16.0	87	7	10	105	180	57	11	4	8.5	14.0	6.5	24	
03	155	11	6	110	150	133	6	8	10.5	16.0	108	10	7	110	200	95	110	4	95	150	53	18	12	6	10.5	17.0	4.0	24
04	155	2	5	110	160	131	8	5	10.0	16.5	108	9	6	110	170	85	11	9	90	155	59	9	6	90	135	53	4	33
05	155	7	5	10.5	16.5	131	7	4	11.5	18.0	106	9	8	95	15.5	74	13	5	110	160	57	10	4	95	14.5	4.8	2	35
06	155	4	4	10.0	16.5	127	5	3	11.0	18.0	94	10	9	90	16.0	59	22	7	110	190	53	12	4	9.5	18.0	3.8	33	
07	155	2	4	10.0	16.5	114	9	2	11.5	17.5	77	27	6	90	14.5	57	29	4	40	6.0	4	.3	4	7.0	10.0	4.5	3	
08	151	6	3	11.5	18.0	111	18	6	12.0	18.0	82	26	10	80	14.5	53	33	8	60	8.0	35	11	5	50	70	3.1	13	
09	151	7	4	11.0	18.0	109	23	8	12.5	19.0	86	23	14	120	210	51	35	4	50	80	33	15	4	3.0	9.0	2.5	22	
10	149	10	2	11.0	17.0	110	19	9	13.5	20.5	77	30	5	110	190	55	33	4	60	105	33	18	4	3.5	9.5	2.0	20	
11	151	7	4	11.0	17.0	112	17	9	15.0	22.0	78	32	6	95	17.5	53	36	8	60	95	32	18	4	3.5	5.5	2.3	12	
12	149	8	2	12.0	19.0	113	18	8	13.0	21.5	81	27	9	80	14.5	53	36	8	50	85	31	21	2	3.0	5.5	1.8	11	
13	149	8	2	12.5	20.0	113	16	8	13.5	21.0	78	21	6	110	16.5	55	34	8	95	150	51	23	10	4	2.5	5.0	1.8	10
14	149	8	4	13.5	21.5	111	16	9	14.5	22.5	75	25	5	90	22.5	61	55	32	8	60	110	31	18	4	3.0	5.0	2.3	11
15	151	6	4	13.5	21.3	113	16	8	13.5	22.5	76	35	6	7.0	20.0	49	37	1	49	50	20	10	1	4.0	10.0	2.0	10	
16	147	11	2	15.0	23.0	109	22	8	14.0	21.0	84	25	14	110	16.5	49	37	4	70	13.5	31	17	4	4.0	5.5	3.0	20	
17	149	7	1	14.0	20.0	101	18	10	130	19.0	82	19	11	110	18.0	58	28	13	70	12.0	33	17	6	3.0	5.0	3.0	19	
18	149	6	4	13.5	21.0	116	23	7	12.0	18.0	86	25	5	80	16.6	61	29	8	70	16.5	35	20	4	2.5	4.5	1.1	18	
19	147	4	2	12.0	19.0	115	14	8	11.5	19.0	92	20	6	110	20.0	71	21	5	110	17.0	47	15	5	6.0	9.0	4.0	17	
20	149	8	2	110	175	123	11	10	130	21.0	84	10	14	125	21.5	78	17	9	115	22.0	51	14	8	70	12.5	7.0	24	
21	151	7	2	10.5	16.5	123	14	7	13.5	21.5	81	13	4	125	22.5	81	13	4	85	12.5	53	7	4	8.5	11.0	2.4	17	
22	153	6	4	11.0	15.0	125	12	4	13.0	21.0	84	12	7	120	22.0	83	16	6	90	15.0	51	9	4	6.0	9.5	4.4	17	
23	153	6	2	8.5	14.0	127	11	4	13.0	21.0	106	12	8	120	22.5	85	13	8	95	19.5	57	12	4	10.0	14.0	5.1	24	

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha(Kauai), T.H. Lat. 22.0N Long. 159.7W Month May 19 62

(FS)	Frequency (Mc)												.013			.051			.160			.495			2.5			5			10			20		
	Fam	D _u	D _r	Vdm	Ldm	Fam	D _u	D _r	Vdm	Ldm	Fam	D _u	D _r	Vdm	Ldm	Fam	D _u	D _r	Vdm	Ldm	Fam	D _u	D _r	Vdm	Ldm	Fam	D _u	D _r	Vdm	Ldm						
00 155 6 2 7.5 130 127 11 7 7.0 140 112 19 10 7.5 140 79 23 4 3.0 16.0 55 14 4 6.5 18.5 60 5 7 5.5 11.0 44 4 5 2.5 20 24 2 2 1.0 3.0	01 155 6 4 9.0 150 129 9 9 10.5 15.5 100 19 9 11.5 18.0 91 22 10 6.5 12.0 57 14 6 8.0 13.0 62 6 9 3.0 14.0 44 5 5 2.5 20 24 2 2 1.5 3.0	02 155 6 4 8.0 14.5 129 11 8 8.5 16.5 11.2 18 8 9.5 18.0 79 22 7 8.5 18.5 59 10 9 7.5 12.5 64 8 9 3.0 14.5 42 13 5 4.0 16.0 24 2 2 1.5 3.0	03 154 6 3 9.5 16.5 129 12 6 11.5 17.5 102 20 9 9.0 18.0 81 21 8 4.5 9.5 57 13 7 7.0 11.0 52 15 6 5.5 12.0 40 15 2 3.0 15.5 24 1 2 1.5 3.0	04 155 8 6 11.0 16.5 129 12 9 11.0 17.5 11.3 19 9 9.0 17.0 79 24 9 7.0 16.5 50 7 5 7.0 12.5 38 6 4 3.0 15.0 24 0 2 1.5 3.0	05 153 9 3 10.0 17.0 127 12 5 11.0 19.0 99 20 6 9.0 19.0 75 24 13 5.5 11.0 57 14 7 6.5 11.0 50 5 6 5.5 11.0 38 5 3 5.0 17.0 24 0 2 1.5 3.0	06 153 6 4 10.0 16.0 119 16 5 10.0 16.5 79 37 6 8.0 14.0 57 39 7 2.5 5.5 51 17 5 5.5 9.0 48 8 6 5.0 15.0 38 5 4 4.0 16.0 24 2 1 2.0 3.0	07 151 6 4 9.5 16.0 113 21 5 11.0 17.0 73 44 5 7.0 14.0 55 42 6 7.5 13.0 41 22 3 3.5 5.0 40 12 6 3.0 14.0 34 6 5 3.0 15.5 24 2 2 2.5 4.0	08 151 7 4 11.5 16.5 115 29 6 8.5 13.0 11.0 33 7 7.0 13.0 53 41 4 4.5 7.5 37 16 4 4.0 6.0 26 11 10 3.0 12.5 20 7 5 3.0 14.5 24 0 2 2.5 4.0	09 144 6 3 9.0 15.5 106 30 8 8.5 13.5 76 40 6 8.0 15.0 51 45 4 5.0 3.5 37 15 6 2.5 4.5 27 14 4 5.0 7.5 24 3 5 5.0 15.0 22 2 2 2.0 4.0	10 144 5 2 8.5 14.5 114 23 7 10.5 15.0 74 40 4 8.0 14.5 53 42 2 6.5 15.0 35 15 4 2.5 4.5 25 12 4 7.0 11.0 22 10 5 7.0 11.0 22 0 2 2.0 4.0	11 151 5 4 9.0 15.0 111 19 9 9.5 15.0 74 37 6 7.0 13.5 50 43 3 8.0 15.0 23 19 2 3.0 2.0 24 10 4 4.0 7.5 20 10 6 5.5 12.5 20 2 2 2.5 4.0	12 151 2 4 9.5 14.5 111 14 8 8.0 14.0 75 29 7 7.0 13.0 49 37 2 5.0 8.0 33 14 2 3.0 2.0 24 10 4 4.0 7.5 20 14 6 7.0 13.0 23 20 2 2 2.5 4.0	13 151 3 4 11.0 15.5 111 18 10 9.0 14.5 72 36 4 8.5 14.5 50 41 3 7.5 16.5 33 19 2 2.0 3.5 26 12 6 4.5 13.0 21 11 5 3.0 12.0 22 2 2 2.0 4.0	14 144 4 2 9.0 14.5 111 18 12 9.5 15.0 72 42 4 7.0 12.0 53 39 6 4.0 7.0 32 2 2.5 4.5 28 12 8 1.5 16.5 21 13 3 3.0 14.0 24 2 2 2.0 4.0	15 144 5 4 8.0 14.0 109 21 10 10.0 15.5 72 46 4 6.5 13.0 52 44 5 3.5 3.5 35 26 4 2.0 4.0 30 12 8 3.0 14.0 28 7 5 4.0 16.5 24 4 2 3.0 4.0	16 144 7 4 9.5 15.0 106 23 9 9.0 14.5 70 41 2 6.5 13.0 51 43 4 5.0 9.0 33 22 2 2.0 3.5 32 12 10 3.5 12.0 37 7 3 2.5 15 26 2 2 2.0 4.0	17 144 5 4 9.5 15.5 105 30 8 9.0 14.0 72 43 4 7.0 13.0 51 48 4 3.5 3.5 35 26 4 2.0 4.0 34 13 3 3.5 12.0 44 4 4 2.0 4.0 26 2 4 2.0 4.0	18 144 6 4 9.0 15.5 102 32 6 7.5 11.0 73 42 3 5.5 11.0 57 41 6 4.0 8.0 38 11 6 2.0 4.0 40 14 4 7.0 11.0 50 4 4 2.0 4.0 26 0 2 2.0 4.0	19 144 6 4 8.0 14.5 113 21 5 5.5 11.0 86 27 5 6.0 12.0 70 25 9 7.0 12.5 45 18 4 3.5 5.5 48 10 7 3.5 7.5 51 2 2.0 4.0 24 1 7 3.0 2.5 24 2 2 2.0 4.0	20 144 8 2 8.5 14.5 123 13 4 8.5 16.0 99 17 9 8.5 16.0 77 22 7 9.0 17.0 56 13 6 6.5 10.5 50 5 6 3.0 17.0 50 7 3 5.5 17.0 50 4 7 2.5 5.0 24 2 2 2.0 4.0	21 151 7 2 8.5 14.5 123 14 4 9.0 15.5 100 14 8 8.0 15.0 77 20 5 7.5 13.0 57 10 6 6.5 10.5 50 8 4 6.0 11.0 48 4 6 2.0 4.0 24 2 2 2.0 4.0	22 151 8 2 7.5 13.5 123 14 4 9.0 15.5 100 16 11 11.0 17.5 77 22 3 9.5 16.0 110 11 6 8.0 11.0 50 6 6 6.0 11.0 43 3 6 2.5 4.5 24 2 2 1.5 3.0	23 153 4 3 7.5 12.5 123 11 4 9.5 16.0 110 16 11 11.0 17.5 77 22 3 9.5 17.0 57 9 6 8.0 11.0 50 6 6 6.0 11.0 43 3 6 2.5 4.5 24 2 2 1.5 3.0													

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_r = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8N Long. 77.3E Month February 1962

EST	Frequency (Mc)												0.13			0.5			16.0			54.5			2.5			5			10			20		
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}											
00	1.57	3	2	10.0	14.0	1.33	1.2	2	13.0	17.5	1.10	1.7	4	15.5	17.5	9.0	1.2	10	17.0	21.0	6.7	8	8	6.0	4.0	10	4	3.5	6.0	2.5	3.5					
01	1.55	5	2	10.0	15.0	1.33	1.2	2	12.0	16.0	1.10	1.7	5	15.0	20.5	9.0	1.7	11	1.6	7	9	9.5	6.5	4.0	8	3	4.5	6.5	2.5	3.5						
02	1.55	6	1	9.5	13.5	1.33	1.0	3	11.0	12.0	1.12	1.4	6	8.8	17	8	6.5	10	6	10	1.0	5.9	8	4	6.0	9.5	4.2	4	5.5	5.0	2.5	3.5				
03	1.55	5	3	10.5	16.0	1.33	9	4	13.5	18.0	10.9	6	6	8.4	17	6	6.3	1.2	6	6.0	9.0	5.8	7	4	3.0	6.5	4.0	5	4.5	5.0	2.5	3.5				
04	1.55	4	2	11.0	16.0	1.31	1.0	4	10.5	16.5	1.06	1.6	3	14.0	18.5	8.0	1.9	6	10.5	14.0	6.1	1.3	4	6.0	9.0	5.6	4	4.0	5.5	2.5	3.5					
05	1.55	4	2	11.0	16.0	1.31	9	5	12.0	17.0	1.10	8	10	9.0	12.0	8.2	1.2	16	6.1	14	5	4.0	5.5	4	7	3.0	5.0	3.5	4.0	2.0	3.0					
06	1.55	2	4	11.0	15.5	1.29	7	7	12.0	16.0	9.1	2.3	6	12.0	17.5	7.5	1.6	7	5.7	1.3	2	5.4	4	6	4.0	3.0	4.0	4.5	2.5	3.5						
07	1.53	2	4	11.5	17.5	1.21	1.4	5	8.5	12.5	9.8	1.9	7	17.0	24.5	6.8	2.0	6	2.5	4.5	1.7	8	6	5.2	4	6	4.0	3.5	4.0	3.5	2.5	3.5				
08	1.51	2	4	10.0	15.5	1.13	1.6	5	13.0	18.0	9.2	2.0	1.3	6.6	1.9	4	2.5	5.0	5.0	1	7	5	3.0	5.0	4.4	2.0	3.0	4.0	2.5	5.0						
09	1.49	5	2	10.9	21	7	9.3	2.0	11	7.2	2.2	1.2	2.0	3.0	4.9	1.0	8	7.0	6.5	4.4	6	8	7	3.5	5.0	3.6	7	4	3.0	5.0	2.5	3.5				
10	1.51	3	4	13.0	18.0	1.13	2.1	9	9.4	2.0	1.2	6.8	2.2	4	2.5	4.5	6.8	6	5	2.5	4.5	3.8	4	4	4.5	5.0	3.5	4.0	3.5	6.5						
11	1.51	2	4	13.0	19.0	1.17	2.0	10	12.0	16.0	9.2	2.6	1.0	7.0	2.1	6	2.0	4.0	4.7	2	4	3.8	9	3	3.5	8.0	4.4	2.5	5.0							
12	1.51	6	4	12.5	18.0	1.25	1.2	14	12.0	16.0	9.8	2.2	18	17.0	23.0	7.0	3.1	7	4.7	8	4	3.0	5.0	3.8	11	2	2.0	4.0	4.2	9.5	7.5	8.0				
13	1.51	10	4	13.0	16.0	11.9	2.5	9	11.0	17.5	10.4	2.3	18	13.5	20.0	7.2	3.4	7	4.6	2.2	4	2.0	4.0	4.0	4.0	7	3.0	5.0	2.5	3.5	4.0					
14	1.53	9	6	13.5	18.0	12.6	1.9	17	13.5	18.0	9.8	2.7	1.5	11.0	18.0	7.3	3.1	7	3.0	8.0	4.7	2.1	4	2.0	4.0	3.9	17	6	3.5	5.0						
15	1.53	10	4	11.0	15.5	1.25	2.2	16	12.5	19.5	11.6	1.9	2.5	12.5	19.0	7.6	3.5	9	9.0	14.0	4.7	6.8	4	4.0	6.0	4.6	2.4	3.5	7.5	4.5	3.5	3.5				
16	1.55	8	4	11.0	15.0	1.29	1.9	2.3	9.0	16.0	10.5	2.7	2.2	13.0	20.0	7.3	3.6	7	3.0	4.5	4.9	2.6	1	2.0	4.0	4.5	3.0	5.0	4.0	5.0						
17	1.55	21	5	10.5	14.5	1.30	18	16	15.5	22.0	10.8	2.1	14	12.0	19.0	8.8	2.8	13	4.5	7.0	5.7	2.7	10	5.5	10.0	5.6	7	6.0	9.0	5.0	4.5	5.0				
18	1.53	8	4	13.2	14	1.34	1.4	2.0	11	14	9.0	14.0	9.2	1.6	14	11.0	17.0	6.5	1.9	17	7.0	10.5	6.1	8	11	9.5	7.5	4.8	7	5	4.0	7.5	4.5	4.0		
19	1.53	4	2	9.0	13.5	1.32	1.4	1.0	14.5	20.5	11.3	1.5	11	11.0	15.0	9.4	1.6	18	7.0	10.0	9.0	7	1.0	5.0	8.0	4.6	7	7	4	4.0	5.0	4.0	3.5	3.5		
20	1.57	4	4	9.0	13.5	1.35	1.0	1.2	13.0	19.0	11.6	1.2	18	12.0	18.0	9.5	1.1	1.7	6.5	9.5	6	8	1.0	7.0	1.0	5.0	8.5	4.6	5	4	3.0	4.0	3.0			
21	1.57	4	2	10.0	13.0	1.35	9	9	11.5	17.5	11.5	1.3	11	11.5	23.0	9.2	1.4	12	7.0	11.0	6.0	8	1.0	5.5	8.0	4.4	3	4	4.0	6.0	2.5	3.0				
22	1.57	4	4	9.0	13.0	1.35	1.0	6	10.0	15.0	11.5	1.2	8	15.0	22.0	9.1	1.9	13	11.0	16.0	6.7	1.0	6.5	5.8	4	5	5.0	8.0	2.5	3	3.5					
23	1.57	4	4	9.5	13.5	1.33	1.2	3	8.5	12.5	11.4	1.4	8	16.0	23.0	9.1	1.4	1.5	6.5	10	8	6.5	5.7	7	1.0	5.5	8.0	4.2	4	2.5	4.0	2.5	4.0			

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Obara, Japan Lat. 35.6N Long. 140.5E Month March 1962

Frequency (Mc)																																									
ES		013			051			160			495																														
Fam	Du	D _f	V _{dm}	L _{dm}	Fam	Du	D _f	V _{dm}	L _{dm}	Fam	Du	D _f	V _{dm}	L _{dm}																											
00	50	5	1.0	1.0	124	5	3	2.0	1.0	105	10	6	8.0	15.5	86	13	6	7.5	14.5	60	9	7	5.5	10.0	40	4	5	3.0	4.5	2	0	1.5	3.0								
01	50	6	6	5.5	126	4	4	9.0	14.0	105	10	6	7.5	15.0	84	12	5	8.5	14.5	60	12	8	8.0	12.5	59	7	4	5.5	10.0	40	6	5	2.5	3	1.5	2.5					
02	50	2	4	6.5	9.5	124	11	2	9.0	15.0	105	5	7	8.5	14.0	84	9	6	8.5	14.5	59	11	7	5.5	9.0	59	6	6	4.5	8.5	40	4	5	2.5	1	1.0	2.5				
03	50	4	6	9.0	124	6	2	6.0	10.0	104	9	7	8.5	11.5	82	11	6	8.0	13.0	59	9	9	8.0	11.5	59	6	6	6.0	9.0	26	1	2	1.0	2.0							
04	50	2	6	8.0	11.0	124	4	4	12.0	18.0	103	6	8	7.5	15.0	80	6	8	8.0	13.0	59	9	9	6.0	9.5	57	7	5	6.0	9.0	32	2	2.0	1.0	2.0						
05	51	5	5	8.0	12.0	122	6	4	8.5	13.5	95	8	6	2.5	17.5	72	11	9	7.5	12.0	60	11	8	6.0	11.0	67	8	6	3.0	3.5	25	1	1	1.0	2.5						
06	44	4	4	7.5	11.0	118	4	9	14.5	19.5	85	12	10	10.5	17.0	60	8	4	4.5	6.0	50	13	6	4.0	8.0	57	6	7	5.0	8.0	38	4	3	3.0	4.0						
07	146	4	2	9.0	14.0	112	8	8	6.5	10.5	77	16	10	11.0	19.0	62	10	4	4.2	4	8.0	10.5	45	8	6	4.4	10	33	8	7	3.0	4.0									
08	146	2	2	7.5	11.0	145	104	14	6	7.0	10.0	77	16	6	9.0	13.5	63	5	7	4.4	4	6	5.5	9.0	40	7	4	3.0	4.0												
09	146	4	4	7.5	15.0	106	11	8	6.0	9.0	73	40	6.5	6.0	42	2	4	9.0	11.0	37	6	2	8.0	10.0	38	4	3	3.0	4.0												
10	146	4	2	7.5	14.0	106	12	4	12.0	9.0	72	21	3	4.5	6.5	60	8	2	3.5	6.5	40	2	2	6.0	10.5	35	2	2	3.0	4.0											
11	144	4	2	6.0	12.5	107	9	5	11.0	16.0	75	18	8	3.0	20.0	57	9	3	4.0	2	8.0	10.0	37	4	2	8.0	10.0	30	8	4	4.0										
12	144	6	2	8.0	*	106	11	9	6	10.0	13.5	72	22	7	3.5	5.5	60	10	4	1.5	2.5	36	6	2	10.0	13.0	33	8	2	6.5	9.0	30	10	6	5.5	8.5	26	3	4	2.0	3.5
13	146	4	2	7.5	13.0	110	11	6	11.5	16.0	75	20	9	7	62	14	4	38	6	2	4.0	6.0	37	7	4	4.0	6.0	32	8	7	5.0	8.0	26	3	2	4.5	4.0				
14	146	6	2	9.5	14.0	109	11	7	8.0	12.0	74	24	7	3.0	5.0	60	18	4	40	4	2	9.0	11.5	37	7	2	8.0	10.0	33	7	5	4.0	6.5	26	5	3	2.0	3.5			
15	148	4	4	8.0	11.5	106	16	3	6.5	9.5	74	23	7	4.0	6.0	60	15	3	38	6	4	8.5	11.5	37	11	3	5.5	8.0	38	4	6	4.5	4.0	26	2	3	3.5	5.0			
16	148	4	3	8.0	11.0	106	14	4	6.0	10.0	81	13	12	3.5	6.0	62	21	6	2.5	4.0	44	4	3	12.5	15.5	43	9	3	6.0	9.0	40	4	5	4.0	6.0	27	3	3	2.5	4.0	
17	148	4	4	8.0	7.5	109	16	7	6.5	10.0	85	21	9	7.5	12.0	71	13	7	5.5	8.0	45	9	3	6.0	6.0	51	7	4	7.0	10.0	42	4	4	4.5	4.5	27	3	4	2.5	4.5	
18	148	6	4	7.0	10.5	114	12	4	7.0	11.5	93	15	4	11.0	19.0	76	10	4	6.5	10.5	52	12	6	13.0	18.0	57	4	5	5.0	9.5	42	6	4	4.0	7.0	26	4	4	3.0	4.5	
19	150	5	5	8.5	12.0	120	8	4	10.0	14.5	97	16	4	12.0	20.0	82	10	7	7.0	13.0	56	12	6	2	9.5	20.0	69	6	2	5.0	7.0	24	2	2	1.0	3.0					
20	150	6	5	8.0	11.0	122	8	2	8.0	12.5	99	14	5	6.5	11.5	82	17	8	6.0	10.5	58	12	7	8.5	13.5	71	5	6	6.5	11.0	48	4	7	4.0	6.5	24	2	2	1.0	2.5	
21	150	6	4	9.0	12.5	124	6	4	11.5	18.0	101	13	5	1.0	2.0	84	11	4	7.5	13.0	57	14	3	8.5	14.0	72	5	5	4.5	8.5	40	4	6	5.0	8.0	24	1	2	1.0	2.5	
22	150	3	6	8.5	12.5	124	10	6	10.5	17.0	102	13	7	7.0	16.0	86	11	6	7.0	10.5	64	7	10	8.0	20.0	63	16	10	4.5	8.5	38	7	4	5.5	8.0	24	3	2	1.0	2.0	
23	50	4	6	7.0	10.0	124	9	5	9.0	15.5	103	12	5	5	12.0	86	11	6	8.0	14.0	62	9	8	8.5	13.0	61	5	8	7.5	11.0	40	4	4	4.5	8.0	24	2	1	0.5	2.0	

F_{50} = median value of effective antenna distance in dB above k_0

Durchsetzung der Wettbewerbspolitik

D_u = ratio of upper decile to median in db

D_2 = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ohira, Japan Lat. 35.6N Long. 140.5E Month April 1962

FS	Frequency (Mc)												013			051			160			495			2,5			5			10			20									
	F _m			D _u			D _l			V _m			L _{dm}			F _m			D _u			D _l			V _m			L _{dm}															
	F _m	D _u	D _l	V _m	V _d	L _{dm}	F _m	D _u	D _l	V _m	V _d	L _{dm}	F _m	D _u	D _l	V _m	V _d	L _{dm}	F _m	D _u	D _l	V _m	V _d	L _{dm}	F _m	D _u	D _l	V _m	V _d	L _{dm}													
00	151	5	6	7.0	10.5	12.6	4	4	7.0	11.5	10.3	7	4	7.5	12.0	6.3	9	4	6.5	11.0	5.8	7	5	10	7.0	5.8	7	3	5.5	9.0	4.4	11	4	4.5	8.0	2.6	0	2	0.5	2.0			
01	153	3	7	6.0	11.0	12.4	6	2	8.5	13.5	10.4	5	4	7.0	11.5	8.2	8	4	4.5	8.5	5.7	9	5	5.0	8.0	6.7	6	4	7.0	4.0	6	2	4.0	7.0	2.6	0	2	1.0	2.0				
02	151	3	2	6.5	11.0	12.7	3	3	8.5	13.5	10.4	6	2	6.5	11.0	6.2	8	4	6.0	11.0	5.7	11	4	5.5	9.5	5.8	7	5	4.0	8.0	4.2	2	4.5	7.5	2.6	0	2	0.5	2.0				
03	151	2	5	6.0	10.0	12.7	3	3	9.0	15.0	10.4	6	5	6.5	11.0	8.0	11	4	5.5	10.0	5.5	14	3	4.0	7.0	5.6	6	3	4.0	7.0	3.8	4	3	4.0	6.0	2.5	1	1	0.5	2.0			
04	153	2	4	7.5	12.0	12.4	8	0	10.5	16.0	10.2	7	3	5.0	9.5	7.4	13	4	6.5	11.5	5.5	13	2	4.5	8.0	3.4	6	3	4.0	6.0	2.5	2	0	0.5	2.0								
05	151	2	6	7.0	11.0	12.2	2	4	7.5	12.5	9.1	13	5	6.0	10.0	5.9	13	3	3.5	6.0	5.3	12	6	5.0	8.0	5.8	6	2	3.0	7.0	4.0	4	4	5.0	10.0	2.6	0	2	0.5	2.0			
06	145	6	0	8.0	11.5	11.4	10	2	7.5	12.0	8.0	14	8	7.0	11.5	5.6	7	4	2.0	3.5	4.1	12	2	6.0	9.0	4.4	9	4	9.0	13.0	3.6	7	2	4.5	8.0	2.6	1	2	0.5	2.0			
07	147	4	2	8.0	11.5	10.7	22	7	9.0	11.5	7.8	12	9	6.0	12.0	5.6	7	2	4.0	6.0	3.9	4	3	6.0	8.5	3.7	10	5	4.0	6.5	3.2	6	2	5.0	7.0	2.6	2	2	1.0	3.0			
08	149	2	4	9.0	13.5	10.6	8	6	8.0	11.0	7.4	14	4	9.0	13.5	5.6	4	2	3.0	5.5	3.9	4	4	8.0	11.0	3.6	2	5	7.0	9.0	3.6	8	4	6.0	9.0	2.6	2	2	2.0	3.5			
09	149	2	4	10.0	14.0	11.0	7	7	7.5	12.5	7.5	12	7	3.0	4.5	5.8				3.0	4.5	5.8		3.9	4	9.0	12.5	3.4	4	2	6.5	11.5	2.7	2	5.5	12.6	3.0	5	5.0	2.0			
10	145	*	9.0	12.0	11.0	6	2	8.0	12.0	7.6	16	8	2.5	4.0	5.8	4	2	4.0	7.0	3.5		6.5	6.0	3.2	2	3	6.0	8.0	2.6	9	4	5.0	7.5	2.4	4	0	4.5	7.5	2.4	4	0	4.5	7.5
11	145	6	0	11.0	15.0	11.0	8	3	8.5	13.5	7.4	16	6	4.5	7.0	5.9	12	3	3	3.9	4	4	8.0	10.5	3.2	6	2	5.0	7.0	2.8	4	4	6	5.0	7.0	2.4	4	2	2.0	4.0			
12	147	4	2	9.0	12.5	11.0	10	3	7.5	13.0	7.6	14	10	2.5	4.0	5.6	12	2	2.5	4.5	3.5	6	2	9.0	11.5	3.2	4	4	6.0	8.0	2.6	6	4	3.0	5.5	2.4	4	4	2.0	4.0			
13	147	4	2	8.0	13.0	11.3	7	5	6.5	11.5	7.2	18	4	2.5	5.0	5.8	4	3	2.5	3.5	3.5	4	2	7.5	11.5	3.2	5	2	7.5	10.0	2.8	8	4	5.0	8.0	2.4	3	1	2.5	4.5			
14	149	4	4	8.5	14.0	11.4	8	8	7.0	12.0	7.6	20	8	3.5	5.0	5.8	4	2	3.7	4	2	7.5	10.0	3.4	4	4	7.0	10.0	3.0	6	2	4.0	7.0	2.6	2	2	2.0	4.0					
15	151	4	6	9.0	14.0	11.3	8	4	5.5	10.0	8.0	12	12	5.0	8.5	5.8	7	4	3.7	6	4	5.0	8.0	3.2	7	7	7.5	10.0	3.2	6	2	3.5	6.0	2.6	3	2	2.0	4.5					
16	151	6	6	6.0	11.0	11.0	8	4	4.5	8.0	7.6	16	4	3.0	5.0	5.8	13	2	9.0	15.0	3.9	4	2	8.0	11.0	3.8	8	6	5.0	8.0	2.7	3	1	2.5	4.5								
17	150	5	6	6.0	11.0	10.8	8	6	5.0	8.0	8.0	12	8	13.0	15.0	6.2	13	4	5.0	7.5	4.1	7	2	4.0	6.5	4.8	2	6	5.0	7.5	4.0	4	3	4.0	7.0	2.8	2	2	2.0	4.0			
18	151	2	6	5.5	9.5	11.2	10	4	6.5	10.5	9.0	12	4	16.0	23.0	7.4	8	7	7.5	13.0	4.8	5	6	6.0	10.0	6.4	6	5	3.0	5.5	4.2	6	2	5.5	9.0	2.8	2	2	1.5	3.0			
19	157	4	2	5.5	10.0	12.2	3	8	9.5	13.0	9.0	10	6	10.0	17.0	7.8	8	20	8.5	12.5	5	1	10	6	4.5	6.8	5	4	2.0	4.0	6.0	2.6	5	2	2.0	3.5							
20	153	4	4	6.0	11.0	12.4	4	3	8.5	13.5	10.0	10	8	7.0	12.0	8.0	8	7	5.5	10.0	5.3	12	4	6.0	10.0	7.0	8	4	4.5	8.5	4.4	9	4	1.5	3.0	4.0	2.0	4.0					
21	154	5	3	6.0	10.0	12.4	6	2	6.5	12.0	10.2	8	4	5.5	11.0	8.2	8	6	6.0	11.5	5.7	9	4	3.5	6.0	7.2	4	6	4.0	6.5	6.2	4	6	4.5	7.5	2.4	2	1.5	3.0				
22	153	2	6	6.0	10.5	12.4	6	0	5.0	9.0	10.3	7	5	6.5	12.0	8.2	11	4	6.0	14.0	5.7	9	4	4.0	6.5	6.2	4	6	4.5	7.5	7.0	4	2	0	1.0	3.0							
23	153	3	3	5.0	9.0	12.4	9	0	7.0	12.0	10.4	6	4	7.0	12.0	8.2	8	4	6.5	11.0	5.7	8	4	3.5	6.0	6.0	4	4	3.5	6.0	4.6	4	1.4	4.0	6.5	2.4	2	0	0.5	2.0			

F_m = median value of effective antenna noise in db above k_b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_m = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Obira, Japan — Lat. 35.6N Long. 140.5E Month May — 1962

FSJ	Frequency (Mc)												0.013			0.051			0.160			0.495			0.25			0.5			1.0			2.0						
	\bar{F}_{m}	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm									
00	1.50	4	2	8.0	13.0	1.23	5	1	8.0	14.0	1.03	6	6	9.0	15.0	8.0	6	9	7.5	13.0	6.0	5	5	4	7.5	5.5	10	4	5.5	4	2.6	0	2	1.5	3.0					
01	1.50	4	2	7.0	11.0	1.24	5	2	9.0	15.0	1.03	5	6	10.0	17.0	9	6	8.0	13.5	5.8	7	5	4	7.5	6.5	5	4	4	2	3.0	2.6	0	2	1.5	3.0					
02	1.50	6	2	8.0	12.5	1.24	6	2	8.5	14.5	1.03	7	4	7.0	13.0	7	7	6.5	12.0	5.8	7	6	3.0	6.0	4.3	7	3	3.0	2.6	0	2	1.5	3.0							
03	1.50	6	2	8.0	12.5	1.24	7	2	10.0	16.0	1.03	8	6	8.0	14.0	7	8	7.0	12.5	5.8	7	6	3.0	6.0	5.4	6	2	3.0	2.6	0	2	1.5	3.0							
04	1.50	4	2	7.5	12.0	1.24	6	4	11.0	17.5	1.01	9	11	10.0	18.0	6.7	12	11	5.0	9.0	5.4	8	4	5.0	8.0	5.4	6	3.5	7.0	3.8	5	3	3.0	2.6	0	2	1.5	3.0		
05	1.49	3	5	8.5	13.0	1.20	4	6	6.0	10.0	8.3	11	16	13.0	19.0	5.7	14	9	8.5	12.0	4.8	4	6	6.0	9.0	5.0	7	8	3.5	6.5	3.7	6	2	2.5	2	0	1.0	2.5		
06	1.48	4	6	8.5	13.0	1.14	6	6	9.5	15.0	8.1	13	13	5.9	10	5	1.0	2.5	4.1	6	3	7.0	10.5	4.0	7	5	4.0	7.0	3.5	4	4	4.5	2.4	4	4	0	1.0	3.0		
07	1.48	4	6	7.0	10.5	1.06	7	4	10.0	14.5	8.3	11	14	13.0	21.0	5.9	8	6	2.0	4.5	3.8	2	2	7.0	10.0	3.6	8	4	2.5	4.5	3.1	12	4	4.0	6.0	2.6	1	2	1.5	3.0
08	1.47	4	5	11.0	16.0	1.08	10	4	11.5	16.0	8.1	13	13	9.0	13.0	6.1	11	6	4.0	6.0	3.8	2	4	9.5	12.5	3.6	4	4	8.5	11.0	2.9	9	2	5.0	7.5	2.4	2	0	1.5	3.5
09	1.48	2	4	10.0	14.0	11	8	4	17.0	22.0	7.9	10	8	3.0	6.0	6.1	20	4	2.5	4.0	3.6	6	2	8.5	11.0	3.0	4	4	9.0	11.5	2.7	3	2	4.5	6.0	2.4	4	0	1.5	3.5
10	1.48	4	7.0	13.5	11.3	6	5	11.0	15.0	7.7	16	9	13.0	19.0	6.0	6	3	3.6	6.0	5.5	3.2	6	4	7.5	9.5	2.9	4	4	8.0	10.5	3.5	2.4	2	2	1.0	3.0				
11	1.48	5	5	11.0	15.0	11.6	6	6	10.0	14.0	8.1	17	12	15.0	26.0	5.9	8	4	3.6	4	4	8.0	11.0	3.4	2	4	8.0	11.0	2.9	8	4	5.5	9.0	2.4	2	0	2.5	4.5		
12	1.50	1	7	11.6	6	12.0	18.0	7.8	19	8	12.5	25.0	5.9	12	2	12.0	24.0	3.4	2	2	5.5	7.0	3	7.0	9.0	2.7	7	3	4.5	7.0	2.4	4	2	1.5	3.0					
13	1.48	4	4	8.5	12.5	11.8	4	6	9.5	14.5	8.4	10	12	13.5	18.5	6.1	9	4	5.5	8.0	3.6	2	2	6.5	8.0	3.4	5	4	8.0	11.0	2.9	10	4	2.5	5.0	2.4	4	0	2.5	4.0
14	1.50	4	4	14.0	19.0	11.0	8	8	10.0	16.0	8.3	10	12	6.0	10.0	5.9	16	2	1.5	3.5	3.6	8	3	6.0	9.0	3.4	7	4	7.5	10.0	3.3	7	6	4.5	7.0	2.6	3	2	2.5	4.0
15	1.52	4	7	11.5	17.5	11.8	11	6	7.0	12.0	8.5	20	11	6	15	4	18.0	30.0	3.4	6	2	7.0	9.5	3.6	10	5	7.0	9.5	3.7	3	6	6.0	9.5	2.8	3	2	2.5	4.0		
16	1.52	4	4	7.5	12.0	11.7	7	4	12.5	18.0	8.5	8	10	6.0	9.5	5.9	15	3	8.5	20.0	3.8	5	2	10.0	12.0	4	7.0	10.5	3.9	4	4	5.0	8.0	2.8	4	2	2.5	5.0		
17	1.52	4	4	9.0	15.0	11.2	15	5	11.5	16.5	8.5	17	15	10.5	19.5	6.1	19	4	13.0	19.0	4.0	9	2	6.5	10.0	4.4	15	4	6.0	10.0	4.2	7	4	4.5	7.0	2.8	3	2	2.5	4.5
18	1.50	6	2	8.0	14.0	11.2	14	5	13.0	20.0	8.5	23	10	8.5	17.5	6.5	20	5	4.0	6.0	4.4	18	4	8.5	12.5	3.8	16	2	7.0	11.0	4.5	4	5	5.0	8.0	2.8	2	1	2.5	5.0
19	1.50	6	2	7.5	13.0	12.0	10	7	10.0	15.0	9.5	16	6	9.0	15.0	7.1	17	5	2.0	15.0	50	19	5	10.0	15.0	6.4	8	4	5.0	8.0	4.5	11	4	4.0	7.5	2.8	2	1	2.0	4.0
20	1.52	2	4	7.5	12.5	12.4	6	5	10.0	16.0	10.1	11	7	9.0	16.0	7.5	14	6	2.0	12.0	5.4	16	5	6.0	9.0	6.8	7	6	14.0	4.5	19	4	4.0	8.0	2.8	3	3	1.5	3.5	
21	1.52	5	2	7.5	12.5	12.4	6	2	6.0	11.5	10.3	8	7	7.0	14.0	7.7	12	7	12.0	20.0	5.7	4	6	3.5	7.0	7.1	6	4	4.5	1.6	4	6.5	10.0	2.6	3	2	2.0	3.5		
22	1.54	5	3	8.0	13.5	12.4	5	2	10.0	15.0	10.3	7	5	5.0	8.5	7.9	9	7	6.0	10	6	4.0	7.0	2.0	6.2	12	4	6	4.0	8.0	2.8	3	2	2	1.5	3.0				
23	1.52	2	7	8.5	13.0	12.4	6	2	8.5	14.0	10.3	6	5	8.0	14.0	7.9	7	7.5	13.5	5.7	10	5	5.0	8.0	6.0	6	4	3.0	6.0	4.3	8	3	2.6	2	2	1.5	3.0			

Fam = median value of effective antenna noise in db above kitb

Du = ratio of upper decile to median in db

Dx = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8S Long. 28.3E Month March 1962

FS	Frequency (Mc)												0.13				0.51				1.60				4.95				2.5				5				10				20			
	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}	F _m	D _u	D ₂	V _{dm}	L _{dm}									
00	139	8	2			136	10	4			113	14	6			98	14	4			69	10	9			58	9	6			36	4	4			20	0	0						
01	139	8	2			136	12	4			113	13	8			98	14	6			68	12	9			58	6	6			36	4	4			20	0	0						
02	139	6	2			136	12	6			111	16	6			96	14	8			67	12	11			58	6	4			36	3	4			20	2	0						
03	139	6	2			136	12	6			111	15	6			96	12	6			67	11	7			56	8	2			32	6	4			20	3	0						
04	139	6	2			136	14	6			111	14	10			93	15	7			66	10	6			56	4	4			28	10	4			20	2	0						
05	139	6	2			134	12	6			103	16	6			83	15	7			66	9	11			54	6	4			29	4	5			20	0	0						
06	138	7	3			127	15	5			89	16	16			72	30	16			58	15	9			51	14	3			36	6	4			20	2	0						
07	135	8	2			122	18	4			83	30	12			93	9	33			40	13	10			36	20	6			32	13	4			20	2	0						
08	135	8	2			122					83					94	5	32			40	8	8			32	27	8			26	20	2			22	2	2						
09	135	6	2			124	10	10			89	19	18			88	14	29			42	16	8			38	12	13			26	13	6			20	2	0						
10	135	4	4			124	10	10			89	23	15			89	13	22			42	7	6			36	7	5			22	12	6			20	3	0						
11	137	4	4			127	15	7			93	16	16			83	15	23			40	7	6			31	11	6			22	12	6			20	3	0						
12	138	5	3			130	14	6			97	18	10			81	17	17			39	16	5			28	16	4			28	7	12			20	4	0						
13	141	4	2			134	11	4			107	17	17			93	11	27			40	16	6			34	12	10			30	8	11			22	4	2						
14	143	7	2			138	11	6			114	15	22			95	12	28			42	26	7			38	18	10			34	8	7			24	6	4						
15	145	4	4			140	11	8			117	12	19			96	13	27			46	26	8			44	18	11			38	7	7			24	4	3						
16	145	6	4			140	12	6			120	13	17			98	11	27			50	24	12			50	15	16			42	5	8			24	10	3						
17	145	6	4			141	9	9			117	14	12			95	15	27			58	21	18			57	10	11			44	5	6			26	7	5						
18	145	4	6			138	12	8			115	10	12			96	8	10			58	8	15			61	7	10			44	6	4			26	2	4						
19	143	6	4			138	10	6			105	12	8			100	12	8			74	9	10			63	5	8			42	6	2			24	2	2						
20	145	4	6			141	5	9			117	10	12			105	11	9			76	6	10			62	4	8			40	4	2			20	4	0						
21	143	6	4			142	6	10			119	8	14			104	10	10			76	6	12			59	7	6			38	4	2			20	2	0						
22	142	7	5			140	8	8			117	12	12			105	7	13			74	6	12			58	8	4			36	4	2			20	4	0						
23	141	9	2			138	12	6			117	14	10			102	10	8			73	7	11			58	8	4			36	4	4			20	0	0						

F_m = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD₂ = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8S Long. 28.3E Month April 1962

Frequency (Mc)												
0.5												
5	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	495	
00	141	10	2	129	16	4	109	18	6	96	16	8
01	141	8	4	129	14	6	109	16	6	94	16	6
02	141	8	4	129	12	6	111	10	10	92	16	6
03	141	6	4	127	14	2	109	12	10	92	14	8
04	141	4	8	129	12	6	108	11	9	92	14	8
05	141	6	4	127	12	6	103	18	8	86	16	6
06	139	6	0	123	12	8	89	24	14	66	28	10
07	137	8	2	119	16	8	81	32	16	76	14	20
08	137	8	2	119	*	*	93	*	*	76	*	*
09	140	6	5	119	15	11	83	28	14	68	24	8
10	138	7	5	119	10	10	87	22	16	64	22	6
11	139	8	6	121	12	8	91	21	16	63	28	5
12	141	8	6	127	10	10	97	18	17	66	28	8
13	143	4	4	129	11	8	99	23	18	70	32	12
14	145	4	6	129	13	10	103	21	21	72	32	14
15	145	6	4	131	12	10	102	21	21	70	34	14
16	145	6	4	132	13	11	103	24	26	76	10	20
17	145	6	4	131	13	10	101	24	26	82	24	22
18	143	6	4	129	16	10	108	17	17	91	13	11
19	144	7	3	131	14	8	108	16	7	94	15	8
20	145	6	6	130	13	5	109	20	8	95	15	7
21	143	4	6	129	16	4	109	16	8	96	15	6
22	143	6	4	129	16	4	107	20	2	96	16	6
23	143	6	6	129	11	4	109	20	4	96	16	8

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8S Long. 28.3E Month May 1962

HST	Frequency (Mc)																	
	0.13				0.51				1.60									
	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}			
00	139	6	5	128	6	4	104	10	6	90	12	6	62	11	4	53	10	5
01	139	4	5	128	8	6	102	10	4	90	8	4	62	9	4	53	8	4
02	139	4	5	126	11	2	102	10	4	90	10	6	62	7	5	53	8	5
03	139	4	4	126	12	2	102	12	6	90	8	6	61	10	4	53	6	4
04	139	5	4	128	8	6	102	10	8	90	6	6	60	8	3	53	5	4
05	139	2	4	126	10	4	100	12	10	84	10	6	60	7	4	53	4	6
06	137	6	2	124	6	6	86	8	10	62	14	6	58	9	7	51	10	5
07	134	8	3	116	14	6	68	11	4	66	24	8	42	5	2	41	13	4
08	135	5	5	112	18	4	72	23	4	64	4	5	42	4	5	37	17	4
09	135	8	6	112	16	6	74	18	6	64	2	4	46	2	5	41	14	10
10	135	7	6	113	15	6	74	19	4	62	4	2	48	2	8	43	4	11
11	135	8	8	114	14	7	76	13	6	62	3	3	48	2	9	43	5	5
12	135	5	7	116	12	8	74	15	4	62	3	2	48	3	6	43	4	4
13	137	6	8	118	10	6	73	17	3	62	4	4	48	3	5	41	4	2
14	139	4	10	118	10	3	74	18	4	62	4	4	49	4	6	43	4	7
15	140	3	8	120	9	4	76	20	6	62	5	4	48	4	4	43	6	5
16	141	2	9	120	9	4	74	18	4	62	6	4	48	4	4	44	9	4
17	141	2	7	119	9	3	82	18	10	70	18	8	50	6	4	47	7	6
18	139	4	4	123	7	7	94	14	12	83	11	7	54	12	4	49	13	5
19	141	3	5	126	9	7	102	12	10	90	7	6	60	11	4	52	7	7
20	141	3	4	127	8	5	104	7	9	92	7	4	62	11	4	52	9	10
21	141	4	3	128	7	4	102	11	5	90	10	3	63	10	5	53	8	7
22	139	6	4	128	8	4	104	8	6	90	12	4	64	11	3	51	11	4
23	139	6	4	128	7	4	102	12	2	90	11	6	62	11	2	52	7	6

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9N Long. 6.8W Month March 1962

(EST)	Frequency (Mc)												20														
	.013				.051				.160				.495				2.5				5				10		
F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}			
00 155° 5 4	130	7	-5		1/3	6	4			* 1/8					9/1	7			* 5/9					* 4/1			* 2.3
01 156°																											
02 155° 4 4	129	9	-5		1/6	4	8			* 1/6					8/8	10	4		* 5/7					* 4/3			* 2.3
03 155°																											
04 155° 4 4	128	10	4		1/4	4	6			* 1/4					8/4	14	6		* 5/9					* 4/4			* 2.3
05 156°																											
06 155° 4 6	126	12	8		1/2	12	10			* 1/2					7/1	27	15		* 5/6					* 3/8			* 2.3
07 153°																											
08 150° 3	122	8	12		1/6	8	4			* 1/6					6/7	12	9		* 5/6					* 4/2			* 2.3
09 153°																											
10 151° 7 4	116				* 1/6					* 1/6					6/7				* 4/2					* 3/9			* 3/4
11 153°																											
12 153° 4 4	118	10	9		1/3	5	12			* 1/3					6/7	9	4		* 3/9					* 3/8			* 3/3
13 155°																											
14 155° 2 5	122				* 1/6					* 1/6					7/0		3		* 4/0					* 3/2			* 3/2
15 155°																											
16 155° 3 4	119				* 1/9					* 1/5					6/8	30	8		* 3/2					* 3/2			* 3/2
17 155°																											
18 153° 4 2	116	11	6		1/6	10	7			* 1/6					6/4	23	8		* 3/7					* 3/1			* 3/1
19 154°																											
20 155° 2 6	126	4	6		1/10	6	4			* 1/10					8/0	6	4		* 5/7					* 4/6			* 4/6
21 156°																											
22 153° 8 4	128	10	4		1/2	4	6			* 1/2					9/0	8	6		* 5/6					* 4/4			* 3/1
23 157°																											

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9N Long. 6.8W Month April 1962

ES	Frequency (Mc)																											
	0.13			0.51			160			49.5			2.5			5			10			20						
	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}			
00 153	2	2	1	126	2	112	4	8	85	4	5	60	8	8	55	6	2	45	7	5	44	7	5	45	7	5	25	
01 153	3	2	1	127	1	3	112	4	4	85	4	6	58	5	5	55	5	3	44	7	5	45	7	5	45	7	5	23
02 153	2	2	0	125	4	0	112	4	6	83	4	6	59	3	7	55	4	4	45	5	5	45	5	5	45	5	5	23
03 153	4	2	1	125	6	1	112	6	10	81	8	2	58	6	5	55	5	5	45	5	11	45	5	11	45	5	11	23
04 153	2	4	3	125	3	3	110	7	9	79	9	6	56	6	10	53	3	3	39	3	3	45	3	3	45	3	3	23
05 153	2	3	0	125	2	8	98	9	5	65	0	6	54	6	2	57	7	9	36	12	5	43	2	4	43	2	4	23
06 151	4	2	1	115	5	6	94	8	6	59	6	6	49	7	7	47	7	7	37	7	7	37	7	7	47	7	7	23
07 149	4	2	1	109	*	100	6	12	57	3	6	44	6	10	35	7	9	37	6	10	37	6	10	37	6	10	23	
08 149	2	1	107	4	6	95	11	9	59	4	9	38	10	6	27	8	6	33	6	8	33	6	8	33	6	8	23	
09 149	2	2	109	*	113	98	4	7	59	11	3	36	11	4	36	11	4	36	11	4	36	11	4	36	11	4	36	
10 151	*	113	117	4	6	98	6	2	59	9	6	34	16	6	24	4	10	29	29	11	29	29	11	29	29	11	29	
11 151	2	2	117	4	6	98	6	2	59	9	6	34	16	6	24	4	10	29	29	11	29	29	11	29	29	11	29	
12 153	2	4	117	9	6	98	6	2	63	9	9	33	16	8	25	6	12	27	27	11	27	27	11	27	27	11	27	
13 153	4	2	118	12	3	99	7	7	63	6	6	34	12	7	26	5	3	32	19	19	32	19	19	32	19	19	25	
14 153	6	2	122	9	7	102	12	10	65	27	12	36	12	12	27	6	8	35	16	6	35	16	6	35	16	6	35	
15 153	6	4	122	13	9	102	12	14	71	22	18	36	16	11	29	10	10	37	18	4	37	18	4	37	18	4	37	
16 153	8	2	119	17	8	99	17	9	64	30	9	44	6	19	35	12	10	38	17	11	38	17	11	38	17	11	29	
17 153	6	2	119	17	9	98	20	8	63	29	6	46	8	12	39	16	10	45	23	7	29	16	8	29	16	8	29	
18 151	8	0	113	23	4	104	13	11	75	19	12	52	8	9	49	9	5	48	20	9	48	20	9	48	20	9	48	
19 151	6	2	127	11	6	110	6	8	82	13	5	58	10	8	52	10	4	47	20	6	47	20	6	47	20	6	47	
20 152	3	1	126	7	5	110	8	4	85	14	2	60	7	6	54	6	7	45	4	7	45	4	7	45	4	7	23	
21 153	2	4	125	4	4	110	8	6	87	12	4	62	8	6	53	8	2	43	4	8	43	4	8	43	4	8	23	
22 153	2	2	127	2	4	110	7	6	87	4	3	61	6	6	54	22	7	45	2	6	45	2	6	45	2	6	23	
23 153	2	2	127	2	4	110	4	4	87	4	4	60	6	8	55	5	5	45	3	7	45	3	7	45	3	7	23	

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco — Lat. 33.9N Long. 6.8W Month May 1962

Frequency (Mc)

ES	.013				.051				160				495				2.5				5				10				20					
	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm				
00 157 4	4					131 6 5					117 5 10					86 6 8					58 11 6					56 8 31				48 6 5				24 5 2
01 157 3	4					131 5 4					117 3 8					82 9 4					58 10 13					56 5 8				49 2 4				24 4 2
02 157 3	4					131 4 2					115 8 3					83 5 7					58 10 14					54 6 18				49 5 2				24 4 3
03 157 2	4					129 5 2					113 6 9					82 7 6					57 8 10					54 11 20				47 3 4				24 4 4
04 157 3	4					129 5 2					103 12 6					76 12 6					57 6 4					52 8 18				47 4 4				24 4 4
05 157 4	4					125 7 4					95 13 8					60 19 3					56 4 12					52 4 6				47 2 4				24 6 6
06 155 2	4					120 8 3					97 8 8					58 10 4					44 10 4					44 13 10				45 4 11				24 10 3
07 153 3	3					113 16 16					95 15 13					58 22 6					42 5 8					32 8 11				41 4 11				26 8 4
08 152 2	5					111 18 8					97 10 9					62 6 10					38 16 5					26 15 6				31 7 4				28 11 7
09 157 7	4					* 111					* 96					62 5 8					38 21 8					* 26				* 27				27 13 9
10 151 6	9					117 9 6					95 6 10					58 14 4					38 14 13					* 26				29				26 9 8
11 153 4	4					121 8 6					99 15 10					64 13 10					36 16 10					25 12 11				29 18 11				24 6 4
12 153 6	4					123 13 4					102 14 14					68 27 10					38 10 11					26 17 9				30 23 7				26 8 6
13 155 6	3					127 11 8					105 12 12					70 32 13					42 13 10					26 16 11				32 15 2				30 4 10
14 157 6	4					129 8 9					105 13 14					75 24 20					40 12 6					31 23 11				35 15 13				31 7 11
15 153 6	6					131 8 10					109 10 22					80 16 24					42 21 7					* 30				41 10 26				32 8 12
16 159 6	6					131 10 10					109 8 18					76 24 18					45 12 12					41 12 22				42 9 11				35 5 11
17 158 4	4					133 6 14					105 17 17					78 24 20					48 11 10					44 8 31				45 8 10				34 8 8
18 159 2	6					127 12 12					101 25 22					72 34 12					50 15 8					50 14 28				49 20 8				32 2 6
19 157 2	4					127 12 7					106 18 15					80 16 8					52 14 9					56 11 14				62 17 21				30 4 7
20 155 5	4					129 9 5					111 9 8					82 11 14					60 12 9					54 12 38				57 18 17				68 4 8
21 155 4	4					130 7 5					110 8 4					84 8 5					60 12 13					56 8 29				50 25 7				26 4 6
22 157 3	6					131 7 4					113 7 8					84 9 6					62 11 8					54 14 38				47 9 14				26 4 4
23 157 4	5					132 5 6					113 8 4					86 7 8					60 11 14					56 11 37				47 4 10				24 4 2

Fam = median value of effective antenna noise in db above kitb

Du = ratio of upper decile to median in db

Dx = ratio of median to lower decile in db

Vdm = median deviation at average voltage in db below mean power

Ldm = median deviation at average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore. Malaya Lat. 1° 3' N Long. 103° 8' E Month January 1962

F_{ave} = median value of effective antenna noise in dB shown in Fig.

D = ratio of number decide to median in dh

$D_u = \text{Ratio of upper decile to median in ab}$

D_{α} = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6N Long. 68.7W Month March 1962

Frequency (Mc)	155												160												165												170																																																						
	0.13				0.51				1.60				2.5				5				10				20				In				F _{am}				D _u				D _f				V _{dm}				L _{dm}				F _{am}				D _u				D _f				V _{dm}				L _{dm}				F _{am}				D _u				D _f				V _{dm}				L _{dm}		
In	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}																																														
00	165	4	4	5.5	8.5	11.8	4	2	6.0	9.0	8.6	8	2	5.5	9.0	5.0	4.2	6	6	2.4	9	4	2.8	2	0	0	165	4	2	5.0	8.5	11.8	4	2	5.5	8.0	8.6	7	2	4.5	8.5	4.8	4.2	6	6	2.4	10	4	2.8	2	0																																								
01	165	4	2	5.0	8.5	11.8	4	2	5.5	8.0	8.6	4	4	6.5	8.5	4.8	4.2	6	6	2.4	10	4	2.8	2	0	02	165	4	2	5.0	8.5	11.8	2	2	6.0	8.5	8.6	6	4	6.0	9.0	4.8	4.0	6	3	2.2	6	4	2.8	2	1																																								
03	165	2	4	5.0	8.5	11.8	2	2	5.5	8.0	8.5	6	3	5.5	8.0	4.8	4.1	7	5	2.0	4	2	2.8	2	0	04	165	2	3	4.5	8.5	11.8	2	2	5.5	8.5	8.4	6	2	4.5	7.5	4.8	3.8	6	2	2.0	7	2	2.8	2	0																																								
05	165	2	2	4.0	7.0	11.8	4	2	5.0	8.0	8.5	6	2	6.0	9.0	4.7	4.1	5	3	2.2	4	3	2.8	2	1	06	163	4	2	3.5	6.5	11.8	2	2	5.5	8.5	8.8	6	4	5.0	8.0	4.8	3.9	10	6	2.6	2	6	2.8	2	1																																								
07	163	4	2	4.0	7.5	11.8	2	2	6.0	9.0	8.5	4	4	5.0	8.0	4.8	4.0	6	5	2.5	4	3	2.8	3	1	08	165	2	4	4.5	7.0	11.8	2	2	6.0	9.0	8.8	6	0	9.0	5.1	3.7	9	6	2.2	6	2	2.8	4	2																																									
09	163	4	2	3.5	6.5	11.8	4	2	6.0	8.5	8.6	5.0	8.0	5.0	8.0	5.8	3.4	10	2.0	2.2	8	4	2.8	2	0	10	165	4	4	5.0	8.5	11.8	2	2	5.5	8.0	8.8	6.5	8.5	9.9	4.9	3.6	2	6	2.2	8	4	2.8	2	2																																									
11	163	4	2	4.0	8.0	11.8	0	2	5.5	9.0	8.8	10	6	6.0	7.0	4.9	3.4	4	4	2.0	2	2	2.8	3	1	12	163	4	3	4.0	7.5	11.8	2	2	5.0	8.0	8.6	4.0	7.0	4.8	3.6	4	5	2.0	7	4	2.8	2	1																																										
13	163	4	4	4.5	7.5	11.6	2	0	5.0	8.0	8.6	2	2	5.0	7.0	4.9	3.6	6	4	2.4	6	7	2.8	2	0	14	163	6	4	4.0	7.0	11.8	2	2	5.0	8.0	8.6	8	2	6.5	10.0	4.9	3.5	6	4	2.4	8	4	2.8	2	0																																								
15	163	4	2	3.5	7.0	11.8	0	2	4.0	7.0	8.6	7	2	7.5	11.0	4.8	3.6	6	4	2.4	4	4	2.8	2	0	16	163	4	4	4.0	7.0	11.8	2	2	4.5	7.5	8.4	5	2	6.0	9.0	4.8	3.8	9	6	2.6	4	6	2.8	2	2																																								
17	165	2	4	3.5	7.0	11.8	0	2	5.0	8.0	8.4	6	0	6.0	9.0	4.8	4.0	4	7	2.8	6	4	2.8	2	0	18	165	2	4	3.5	6.5	11.8	2	2	4.5	7.5	8.9	3	4	7.0	9.0	4.6	4.2	6	9	3.4	4	8	2.8	2	0																																								
19	167	2	4	4.0	7.0	11.8	2	2	5.0	8.0	8.7	3	3	6.0	8.0	5.0	4.2	4	7	3.2	6	8	2.8	2	0	20	167	4	4	4.0	7.0	11.8	2	0	5.5	8.5	8.6	7	2	5.5	8.0	5.0	4.4	9	7	3.1	9	7	2.8	2	0																																								
21	165	4	2	5.0	8.0	11.8	4	2	5.0	8.0	8.5	8	4	5.5	8.0	5.3	4.0	6	4	2.8	8	6	2.8	2	0	22	165	2	2	4.5	8.0	12.0	2	4	5.0	8.5	8.6	4	3	5.0	7.5	4.8	4.0	8	2	2.6	10	8	2.8	2	0																																								
23	165	4	4	5.5	8.5	11.8	4	2	5.0	8.0	8.6	2	2	6.0	8.0	5.0	4.4	6	4	2.3	13	3	2.8	2	0	41	6	3	4.6	8.6	11.8	4	2	5.5	8.0	8.6	2	2	6.0	8.0	4.6	4.1	6	3	2.8	2	0																																												

F_{mean} = median value of effective antenna noise in dB above kth

am - Region Vierge or Effective drilling noise

D_u = ratio of upper decile to median \ln db

CO_2 = ratio of median to lower decile in db

X₁, X₂, ..., X_n = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6N Long. -68.7W Month April 1962

FS	Frequency (Mc)											
	.013			.051			.160			.5		
	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u
00	166	6	6			119	3	2			41	36
01	166	6	4			119	4	2			33	36
02	166	4	6			119	5	2			47	42
03	166	2	6			118	6	1			46	40
04	166	2	4			117	6	0			37	42
05	164	4	4			117	4	0			45	40
06	164	4	6			117	5	0			45	46
07	164	2	4			117	4	0			35	34
08	164					117					33	36
09	164	2	4			119	5	3			-	33
10	164	3	4			117	5	0			31	34
11	164	4	4			117	4	0			33	32
12	164	4	2			117	6	0			37	30
13	164	4	2			117	5	2			39	34
14	164	6	2			117	4	0			39	32
15	164	4	2			117	4	0			37	32
16	165	5	5			117	5	0			37	34
17	164	6	4			117	5	0			39	34
18	164	6	2			117	6	0			35	36
19	166	4	4			117	5	0			31	36
20	166	4	6			119	4	2			31	42
21	166	4	4			117	6	0			33	38
22	166	6	6			117	6	0			39	40
23	166	4	4			119	4	2			33	38

F_m = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month March 1961

Month-Hour	Frequency (Mc)	0.51												4.95													
		F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	
00	1/38				9.0	13.5	*	1/6		7.0	13.0	*	1/0		5.5	10.5											
01	1/37				9.0	15.5	*	1/5		6.5	13.0	*	9.8		6.0	12.5											
02	1/38				8.5	16.0	*	1/3		8.0	15.0	*	9.7		4.0	8.0											
03	1/38				8.5	15.0	*	1/5		6.0	12.5	*	9.8		4.0	9.0											
04	1/37				7.5	14.5	*	1/4		5.0	8.0	*	9.7		3.5	8.0											
05	1/37				7.0	13.0	*	1/1		5.0	11.0	*	8.7		4.5	13.5											
06	1/34				7.0	15.5	*	1/05		5.0	8.5	*	7.3		5.0	7.0											
07	1/34				8.0	15.5	*	1/03		7.5	10.0	*	6.9		3.5	3.0											
08	1/32				12.5	19.5	*	1/01		7.0	12.5	*	7.1		2.5	5.5											
09	1/30				1.70	2.15	*	1/5		*	1.25	*	1.60	*	7.7	*	5.5	*	1.0								
10	1/28				8.5	15.0	*	1/03		8.0	16.5	*	5.5		4.5	6.5											
11	1/29				10.0	18.0	*	1/04		5.0	9.5	*	6.7		5.0	9.0											
12	1/28				9.5	18.0	*	1/04		10.0	17.0	*	7.7		4.5	6.0											
13	1/32	4	6	9.0	14.5	*	1/04		7.0	12.0	*	7.1		5.5	8.5												
14	1/30				7.0	12.0	*	1/03		6.0	9.5	*	7.3		4.5	10.5											
15	1/31				8.0	12.0	*	1/04		6.5	11.0	*	7.9		4.0	5.0											
16	1/32	8	6	8.0	15.0	*	1/04	6	15	6.5	12.5	*	6.8	25	8	5.0	10.0										
17	1/34	6	8	7.5	13.5	*	1/04		6.5	14.0	*	7.5	18	10	5.0	9.0											
18	1/35	5	9	2.0	13.0	1/2	6	7	5.5	11.0	*	8.7	6	5	11.0												
19	1/37				6.0	11.0	1/14	4	6	6.0	11.5	*	9.1	9	5.0	12.0											
20	1/38	4	4	6.5	11.5	*	1/15		6.0	13.0	*	9.6	6	7	12.0												
21	1/37	7	3	8.0	13.0	*	1/16	8	6	6.5	11.0	*	7.1	7.0	5.0	11.5											
22	1/37	9	6	7.5	11.5	*	1/16	8	6	6.5	11.0	*	7.1	4.0	8.5												
23	1/38				7.0	13.0	*	1/16	4	7	6.0	11.0	*	9.9	7	4	3.0	7.5									

F_{om} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to mean in dbD_z = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month April 19 61

Frequency (Mc)

Hour	F _{am}	D _u	D _L	V _{dm}	L _{dm}	0.51			1.60			4.95			Frequency (Mc)			
						F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	
00	135	14	10	10.0	18.0	1/2	1/2	1/2	9.0	15.0	10.0	21	1.3	7.0	13.0			
01	135	13	8	9.5	17.0	1/4	1/4	1/4	8.0	16.0	9.6	22	1.3	7.5	13.0			
02	135	13	9	11.5	19.5	1/2	2.0	1/4	7.5	14.0	9.6	25	1.2	7.0	14.0			
03	135	11	8	11.0	18.0	1/2	1/2	1/2	8.0	14.0	9.7	28	1.5	7.0	13.0			
04	133	10	7	10.0	16.5	1/0	1/9	1/2	8.0	14.5	9.2	20	1.6	7.5	13.5			
05	131	9	11	11.0	18.0	1/03	1/9	1/3	9.0	15.5	9.9	22	1.3	11.5	17.5			
06	123	21	8	10.5	17.0	9.5	30	1/7	8.0	12.0	6.6	41	7	4.0	6.5			
07	125	19	19	11.0	18.0	9.0	36	1/6	8.0	13.5	6.6	48	8	3.5	5.0			
08	121	19	16	11.5	18.5	9.4	33	2.2	7.0	13.0	6.9	46	11	2.5	5.0			
09	127	20	14	12.0	20.0	9.6	29	1/4	7.5	13.5	6.9	39	9	4.5	5.0			
10	121	23	10	11.0	18.5	9.0	33	1	6.5	12.0	6.9	29	9	2.5	4.5			
11	123	19	9	13.0	19.5	9.2	32	1/3	6.0	11.0	6.9	34	9	3.0	5.0			
12	123	17	10	11.0	17.0	9.2	36	1/7	7.0	11.0	6.9	40	10	3.5	6.0			
13	123	21	6	11.5	18.0	9.7	34	1/7	7.5	12.0	6.9	34	7	3.0	5.0			
14	124	19	9	10.5	17.0	9.6	27	9	7.0	11.5	6.9	39	9	3.0	5.5			
15	125	20	8	9.0	14.5	10.0	31	1/3	6.5	10.0	7.1	43	10	4.5	6.5			
16	123	26	10	11.0	17.5	10.4	29	1/9	7.0	13.0	7.0	50	7	4.0	6.0			
17	124	29	10	10.0	15.5	10.9	33	1/9	7.5	12.0	7.1	51	11	4.0	6.0			
18	121	22	10	11.0	17.5	10.4	29	1/2	8.5	13.0	7.8	46	11	5.0	9.0			
19	133	20	13	9.0	15.5	11.0	33	1/4	8.5	14.5	8.9	35	11	2.0	3.0			
20	135	19	8	9.5	14.0	11.0	19	9	8.5	15.0	9.3	33	9	6.5	12.0			
21	135	15	6	9.0	15.5	11.2	21	9	7.5	14.5	9.7	22	10	6.5	11.5			
22	135	16	9	9.0	16.0	11.4	19	1/0	7.5	14.5	9.8	19	14	6.5	13.5			
23	135	16	8	9.5	17.0	11.4	19	1/2	8.5	14.5	9.9	20	13	6.5	13.0			

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month May 1961

Frequency (Mc)											
051											
1st	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm	Fam
00	1/43	8	11	7.5	12.5	1/24	11	12	7.0	13.0	9.8
01	1/43	7	10	8.5	14.0	1/24	11	12	6.5	12.5	10.0
02	1/41	11	8	8.0	14.5	1/24	12	12	7.0	13.0	9.8
03	1/40	10	6	9.0	13.0	1/22	12	11	7.0	12.5	9.6
04	1/39	8	12	8.0	14.5	1/21	12	19	8.0	15.0	9.0
05	1/37	9	11	9.0	15.0	1/16	18	30	8.5	15.5	7.4
06	1/35	13	11	9.5	16.0	1/10	20.5	25	8.5	17.0	9.9
07	1/33	14	10	10.5	17.0	1/10	20	22	8.0	12.0	7.8
08	1/35	14	11	8.5	15.5	1/10	20	24	8.5	14.0	8.2
09	1/33	12	8	11.5	19.0	1/14	14	27	9.0	16.0	8.4
10	1/33	12	8	11.0	18.0	1/13	22	27	9.5	18.0	7.6
11	1/35	16	11	11.0	18.0	1/08	22	19	8.5	14.5	7.0
12	1/35	12	7	10.0	17.0	1/06	23	13	8.0	13.5	7.1
13	1/31	17	6	9.0	15.0	1/09	24	11	9.5	15.0	7.4
14	1/32	19	8	8.5	15.0	1/12	24	14	8.5	15.5	7.4
15	1/33	20	7	7.5	12.5	1/12	24	19	8.0	13.0	7.7
16	1/33	17	5	2.0	11.5	1/14	21	19	8.5	14.0	7.9
17	1/35	16	9	7.0	12.0	1/18	16	23	7.0	12.0	8.5
18	1/37	15	11	7.0	11.5	1/08	20	19	6.0	10.0	8.6
19	1/37	12	11	7.0	11.0	1/20	17	13	5.5	10.0	9.0
20	1/41	12	11	6.0	10.0	1/22	14	10.5	6.0	9.0	9.6
21	1/41	9	9	6.5	10.5	1/23	12	10	5.0	9.0	9.7
22	1/42	8	10	6.0	11.0	1/22	10	9	5.5	10.0	9.7
23	1/43	6	9	7.5	11.5	1/24	9	11	6.5	11.0	9.8

F_{dm} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_2 = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month July 1961

Month-Hour	F _{om}	D _u	D _z	V _{dm}	L _{dm}	.051						.160						495						F _{am}					
						F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}			
00	141	6.0	11.0	125	*	4.5	8.0	98	*	*	3.5	6.5	*	*	*	4.0	9.0	*	*	*	*	4.0	8.0	*	*	*	*	*	*
01	142	6.0	10.5	127	*	5.5	9.5	103	*	*	4.5	9.5	*	*	*	6.0	11.0	*	*	*	*	6.0	11.0	*	*	*	*	*	*
02	143	6.0	10.5	125	*	5.5	10.0	103	*	*	4.0	8.0	*	*	*	6.0	11.0	*	*	*	*	6.0	11.0	*	*	*	*	*	*
03	143	* 7.0	12.0	124	*	6.0	11.0	101	*	*	4.5	9.5	*	*	*	6.0	11.0	*	*	*	*	6.0	11.0	*	*	*	*	*	*
04	142	7.5	13.0	123	*	6.5	9.0	106	*	*	4.5	9.0	*	*	*	6.0	11.0	*	*	*	*	6.0	11.0	*	*	*	*	*	*
05	139	8.0	14.0	121	*	7.0	10.5	107	*	*	7.5	15.5	*	*	*	7.5	15.5	*	*	*	*	7.5	15.5	*	*	*	*	*	*
06	137	11.0	18.0	121	*	8.0	15.5	93	*	*	7.0	16.5	*	*	*	7.0	16.5	*	*	*	*	7.0	16.5	*	*	*	*	*	*
07	137	* 11.0	17.0	122	*	9.5	16.5	90	*	*	7.0	17.0	*	*	*	7.0	17.0	*	*	*	*	7.0	17.0	*	*	*	*	*	*
08	135	11.0	17.5	118	*	10.0	17.0	84	*	*	7.0	17.0	*	*	*	7.0	17.0	*	*	*	*	7.0	17.0	*	*	*	*	*	*
09	133	* 9.5	16.5	117	*	9.0	17.0	84	*	*	7.0	17.0	*	*	*	7.0	17.0	*	*	*	*	7.0	17.0	*	*	*	*	*	*
10	133	9.5	14.5	117	*	9.0	16.0	82	*	*	7.5	16.5	*	*	*	7.5	16.5	*	*	*	*	7.5	16.5	*	*	*	*	*	*
11	134	* 8.0	14.0	113	*	8.5	15.5	96	*	*	7.0	15.0	*	*	*	7.0	15.0	*	*	*	*	7.0	15.0	*	*	*	*	*	*
12	137	7.5	12.5	116	*	7.5	13.5	84	*	*	7.0	11.5	*	*	*	7.0	11.5	*	*	*	*	7.0	11.5	*	*	*	*	*	*
13	139	* 5.0	9.0	119	*	6.5	11.0	91	*	*	7.5	13.5	*	*	*	7.5	13.5	*	*	*	*	7.5	13.5	*	*	*	*	*	*
14	137	5.5	9.0	121	*	5.0	9.5	100	*	*	5.5	9.5	*	*	*	5.5	9.5	*	*	*	*	5.5	9.5	*	*	*	*	*	*
15	141	5.0	8.5	120	*	5.5	9.0	96	*	*	4.0	8.0	*	*	*	4.0	8.0	*	*	*	*	4.0	8.0	*	*	*	*	*	*
16	141	5.0	8.5	119	*	5.0	8.5	102	*	*	4.0	8.0	*	*	*	4.0	8.0	*	*	*	*	4.0	8.0	*	*	*	*	*	*
17	141	* 4.0	7.5	120	*	4.0	8.0	100	*	*	5.0	9.0	*	*	*	5.0	9.0	*	*	*	*	5.0	9.0	*	*	*	*	*	*
18	140	5.0	9.0	119	*	5.0	6.5	98	*	*	5.0	9.5	*	*	*	5.0	9.5	*	*	*	*	5.0	9.5	*	*	*	*	*	*
19	140	5.5	9.0	120	*	4.0	7.5	96	*	*	4.0	6.5	*	*	*	4.0	6.5	*	*	*	*	4.0	6.5	*	*	*	*	*	*
20	140	5.0	9.0	121	*	4.5	8.5	98	*	*	5.0	8.5	*	*	*	5.0	8.5	*	*	*	*	5.0	8.5	*	*	*	*	*	*
21	141	* 5.0	8.5	129	*	4.5	6.0	99	*	*	3.5	7.0	*	*	*	3.5	7.0	*	*	*	*	3.5	7.0	*	*	*	*	*	*
22	141	6.0	10.5	123	*	4.5	8.0	104	*	*	5.0	9.0	*	*	*	5.0	9.0	*	*	*	*	5.0	9.0	*	*	*	*	*	*
23	141	6.0	10.5	123	*	4.0	7.5	98	*	*	3.0	5.0	*	*	*	3.0	5.0	*	*	*	*	3.0	5.0	*	*	*	*	*	*

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month August 1961

Month-Hour	Frequency (Mc)																				
	.013	.051	.160	.495																	
F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}		
00	157	6	3		141	6	4			118	11	2				101	8	5			
01	158	5	4		141	9	4			119	11	3				101	10	3			
02	158	6	3		141	10	4			120	13	4				101	10	2			
03	158	5	4		141	8	4			120	11	4				102	10	4			
04	156	7	1		139	8	2			118	10	3				101	10	8			
05	156	4	2		137	10	4			116	14	11				91	18	18			
06	154	4	2		133	10	2			114	12	14				79	22	6			
07	154	3	3		133	7	4			110	14	13				83	18	10			
08	154	4	5		133	9	4			108	17	10				83	20	10			
09	154	2	8		131	8	4			102	22	6				73					
10	154	*			131	*				*	10					91					
11	155	*			133	*				*	10					79					
12	156	2	2		135	6	4			112	10	12				83	18	10			
13	158	4	2		137	4	2			115	9	9				83					
14	160	*			140	*				114	12	6				83	16	8			
15	162	3	5		139	6	4			118	6	8				91	14	7			
16	160	4	2		139	8	4			119	8	8				91	14	15			
17	160	4	3		139	8	5			119	8	9				93	14	15			
18	160	2	4		139	7	5			116	11	4				91	14	12			
19	158	2	2		141	4	6			119	9	7				93	8	8			
20	158	3	2		139	7	4			120	9	6				91	9	6			
21	158	4	4		139	10	4			120	9	4				99	8	6			
22	156	6	2		139	7	2			119	10	3				99	10	2			
23	152	8	2		139	10	2			118	12	2				99	15	2			

 F_{am} = median value of effective antenna noise in db above ktb D_u = ratio at upper decile to median in db D_l = ratio of median to lower decile in db V_{dm} = median of average voltage in db below mean power L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month September 1961

EST	Frequency (Mc)																								
	.013			.051			.495			4.00															
F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	
00 154 10 6					143 15 9					120 16 10					101 12 10										
01 154 6 4					142 14 8					122 16 14					100 13 9										
02 154 9 6					142 14 8					120 16 10					99 14 10										
03 154 10 7					142 10 8					121 13 9					97 14 6										
04 152 8 8					142 11 9					118 16 10					95 14 8										
05 152 10 7					138 12 10					114 20 12					82 29 9										
06 150 9 4					134 19 6					106 31 18					73 46 2										
07 150 14 8					132 26 8					108 34 20					80 42 9										
08 151 12 9					136 18 10					108 29 19					81 36 10										
09 150 16 10					134 22 8					116 24 28					79 44 8										
10 *156					*138					117 28 26					79 46 8										
11 153 20 9					136 21 8					108 26 19					73 36 2										
12 152 13 5					136 15 7					111 21 21					73 42 2										
13 156 10 8					139 19 10					116 23 24					89 26 18										
14 157 19 11					142 14 13					118 18 25					89 24 18										
15 158 8 10					142 14 13					122 15 23					91 25 20										
16 156 11 7					144 12 12					122 11 29					91 22 20										
17 156 9 6					144 13 12					120 16 27					91 26 20										
18 154 8 6					144 12 12					120 18 16					95 20 18										
19 154 12 7					144 14 16					123 13 15					97 14 12										
20 154 10 7					144 10 13					122 14 10					97 14 9										
21 155 7 5					144 12 8					120 17 8					97 16 8										
22 156 4 8					144 7 8					120 19 14					99 14 6										
23 154 10 6					142 13 11					121 17 16					99 14 6										

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month October 19 61

FS	Frequency (Mc)														
	0.13				0.51				160						
	Fam	Du	D _L	V _{dm}	L _{dm}	Fam	Du	D _L	V _{dm}	L _{dm}	Fam	Du	D _L	V _{dm}	L _{dm}
00	154	17	5			136	18	8			118	18	11		
01	155	14	6			134	14	6			117	21	9		
02	155	16	8			135	19	7			118	19	9		
03	155	9	8			136	12	8			114	16	6		
04	155	8	8			134	8	10			113	18	6		
05	153	10	7			132	14	10			110	21	14		
06	151	11	7			128	18	8			98	28	10		
07	151	10	8			124	18	9			94	26	13		
08	151	8	10			124	20	10			93	31	12		
09	151	9	10			122	26	9			*	96	31	7	
10	*	153				122					*	93			
11	*	153				122					*	90			
12	151	11	5			124	17	8			*	92			
13	152	9	6			124	20	10			90	36	10		
14	152	5	18			124					*	94			
15	153	6	6			124					*	96			
16	151	5	8			128	8	10			*	92			
17	153	12	5			127	18	8			*	111			
18	155	10	4			130	20	13			110	22	8		
19	155	13	7			132	10	11			111				
20	158	9	6			134	4	8			114				
21	155	6	5			134	15	8			116				
22	156	12	6			136	20	7			119	13	10		
23	155	22	12			134	25	9			117	23	5		

Fam = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month November 19 61

(LS)	Frequency (Mc)												
	0.13				0.5				160				
	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	
00 153 8 8		128	12	6		105	14	11			89	16	8
01 153 6 4		128	12	10		105	15	13			89	18	13
02 153 7 5		129	11	8		105	13	11			89	15	11
03 153 5 4		128	10	9		105	12	15			87	14	12
04 152 5 4		128	8	8		101	14	15			85	14	14
05 151 6 4		126	9	9		93	20	9			79	16	8
06 151 7 5		122	13	9		89	19	8			72	13	4
07 151 4 6		120	11	8		85	15	9			69	29	1
08 149 4 3		116	12	6		85	22	9			69	34	5
09 149 4 14		116	12	5		83	23	2			70	29	2
10 149 5 2		117	11	7		86	27	6			71	30	2
11 150 6 2		117	15	6		104	13	22			71	15	2
12 152 5 3		118	20	6		83	25	1			72	9	3
13 151 5 2		119	10	7		83	31	2			70	10	3
14 153 8 4		116	13	3		83	33	1			69	16	0
15 149 6 8		114	21	4		83	36	1			69	7	2
16 149 9 4		118	16	8		101	14	18			71	12	2
17 149 10 2		120	17	5		99	18	15			80	18	11
18 151 10 4		123	12	5		98	19	6			85	19	11
19 153 9 6		126	13	4		100	17	8			87	14	6
20 153 5 4		128	11	6		102	12	6			88	11	5
21 153 5 4		128	9	7		103	14	5			86	10	6
22 152 8 3		128	11	6		105	15	8			89	14	7
23 153 8 3		128	10	3		103	14	6			89	15	6

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD₄ = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month December 19 61

(LST)	Frequency (Mc)																			
	0.13			0.51			1.60			4.95										
Fam	Du	D _z	Vdm	Ldm	Fam	Du	D _z	Vdm	Ldm	Fam	Du	D _z	Vdm	Ldm	Fam	Du	D _z	Vdm	Ldm	
00	153	6	4		130	8	8			108	9	11			93	6	11			
01	157	4	6		130	8	8			108	12	9			91	11	9			
02	155	8	4		130	8	6			108	12	10			90	13	9			
03	155	8	4		130	8	6			104	12	6			87	12	7			
04	155	8	4		128	10	4			102	14	6			87	14	5			
05	155	8	4		127	9	7			103	13	15			85	14	17			
06	155	6	6		128	10	8			98	14	12			75	20	7			
07	155	6	6		122	12	4			88	20	2			71	10	3			
08	153	6	4		120	13	6			86	18	1			71	14	3			
09	151	6	5		120	9	7			87					71	7	3			
10	152	5	5		122					90					71					
11	149				122	8	10			87					71	6	3			
12	151	7	4		119	10	5			86	12	0			73	7	5			
13	152	5	5		119	7	4			86					71	8	3			
14	151	6	4		120	8	6			87					71	9	3			
15	151	4	4		119	8	6			86					71	10	3			
16	149	6	4		120	8	4			86					71	9	3			
17	149	6	4		120	10	4			94	11	8			75	17	5			
18	151	6	4		122	10	6			98	12	9			79	19	8			
19	153	6	6		125	5	9			100	10	13			81	14	10			
20	152	5	5		126	6	8			99					86	9	0			
21	153	2	6		126	8	6			104	9	13			86	9	7			
22	153	6	4		126	6	8			106	8	12			87	10	8			
23	153	8	4		126	8	4			108	8	9			89	12	7			

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month January 1962

FS	Frequency (Mc)												
	.013			.051			.160			.495			
	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	
00	151	7	4			127	15	11			102	12	5
01	152	6	3			124	17	7			104	11	7
02	152	6	3			127	14	10			100	14	5
03	153	5	3			129	13	11			101	10	7
04	152	5	5			126	15	8			100	9	6
05	152	4	5			123	17	8			97	16	5
06	152	5	4			123	18	5			96	12	6
07	152	5	4			122	17	4			88	16	0
08	152	2	4			117	24	4			88	15	0
09	148	4	4			*17					88		
00	*146					+15					*73		
1	146	6	4			*13					*78		
2	*146					115	22	2			*88		
3	148	6	4			*18	19	5			*91		
4	148	8	1			*17					*88		
5	*147					*17					*95		
6	148	8	6			*17					94	11	6
7	146	8	5			119	17	6			98	14	10
8	146	9	5			123	13	10			102	14	13
9	150	9	9			125	15	12			101	18	3
00	150	8	8			125	11	12			102	16	11
1	150	6	9			128	9	15			105	11	10
2	149	7	2			129	8	15			108	10	14
3	150	7	3			127	16	11			101	11	6

The median values of effect size estimates taken from the above literature

$R_{\text{om}} = \text{median value of effective antenna noise}$
 $D_U = \text{ratio of upper decile to median in db}$

VD_f = ratio of median to lower decile in db
 VV_f = median deviation of overone volume in db below mean power

V_{dm} = median deviation of overge voltage in db below mean power
 L_{dm} = median deviation of overge logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Month February 1962

Frequency (Mc)											
	0.13	0.51	1.60	4.95							
(LST) ± hr	F _{om} D _u D _f V _{dm} L _{dm}										
00 157 5 8	147 6 8	147 6 8	122 6 20	102 10 17							
01 157 5 7	147 8 6	122 6 20		100 10 16							
02 157 4 7	145 8 4	122 6 19		100 11 16							
03 157 3 8	146 7 5	120 8 17		100 9 17							
04 158 3 8	146 7 6	119 7 18		100 11 18							
05 157 4 7	147 5 8	122 9 23		100 9 19							
06 155 6 5	145 9 5	116 9 20		100 8 22							
07 155 5 5	145 7 7	122 2 29		97 11 19							
08 155 5 7	146 7 10	102 22 6		93 15 15							
09 155 6 6	145 6 9	118 4 24		99 9 21							
10 155 5 7	143 6 12	118 4 22		100 7 22							
11 153 8 8	142 7 10	114 9 22		103 4 26							
12 154 7 9	143 6 9	107 15 14		102 5 26							
13 153 8 7	143 7 11	118 5 25		102 4 26							
14 153 8 7	141 9 8	102 20 10		86 20 8							
15 154 9 11	142 8 10	118 4 26		100 6 24							
16 153 8 10	143 9 9	120 7 27		92 11 20							
17 153 6 11	143 8 9	120 5 24		98 9 20							
18 155 6 9	142 9 10	120 5 22		100 8 20							
19 157 4 10	143 10 10	120 6 22		102 6 22							
20 155 6 10	143 9 10	120 6 17		100 8 20							
21 153 6 6	143 8 8	120 6 21		102 6 19							
22 157 4 10	143 10 8	121 6 22		104 6 20							
23 154 7 7	143 10 4	122 5 18		100 10 16							

Form = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in dbD_f = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Wittenburg, Mo. Lat. 38° 7N Long. 93° 8W Month March 1962

HST	Frequency (Mc)																			
	0.3			0.51			160			495										
Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	
00 158	* 148	6 20			148	6 20				148	2 12									
01 158	* 148	6 20			148	6 20				148	4 16									
02 156	6 6	147			146	6 16				146	6 16									
03 156			146		146	6 18				146	4 24									
04 155			146		146	6 24				146	6 32									
05 156			146		146	6 32				146	6 34									
06 155			146	6 26	146	6 34				146	4 34									
07 152	8 8	146			146	6 34				146	2 36									
08 154	6 12	146			146	2 34				146	2 36									
09 156			145		145	6 18				145	4 34									
10 156			142		142	6 18				142	4 34									
11 156			142	10 22	142	10 28				142	4 34									
12 153	9 8	143	7 27		143	7 30				143	6 34									
13 152	8 6	142			142	6 10				142	6 10									
14 150			142		142	6 20				142	6 20									
15 150			142		142	6 18				142	6 20									
16 154	6 8	143			143	6 16				143	4 34									
17 154	6 10	145	5 27		145	4 24				145	4 34									
18 154	8 10	146	4 28		146	6 24				146	4 30									
19 158	2 14	145	7 23		145	6 25				145	4 25									
20 158	2 12	146	4 22		146	6 21				146	4 14									
21 156	4 10	145	5 21		145	4 9				145	3 20									
22 158	4 10	145	7 21		145	8 15				145	6 19									
23 158	4 10	146	4 22		146	6 25				146	6 19									

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in dbD_f = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38° 27' N Long. 93° 8' W Month April 1962

LST H	Frequency (Mc)																										
	.013	D _z	V _{dm}	L _{dm}	.051	D _z	V _{dm}	L _{dm}	.160	D _z	V _{dm}	L _{dm}	.495	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	
00 15 ⁴ 5	9				13 ⁷ 10	12			11 ⁴ 11	15 ⁷			9 ⁷ 7	13													
01 15 ⁵ 7	7				13 ⁷ 10	12			11 ³ 12	14			9 ⁷ 7	11													
02 15 ⁴ 8	6				13 ⁸ 7	13			11 ³ 12	14			9 ⁶ 10	16													
03 15 ⁴ 8	6				13 ⁷ 10	10			11 ³ 13	12			9 ⁴ 8	12													
04 15 ⁴ 8	6				13 ⁶ 11	11			11 ¹ 6	10			9 ² 12	10													
05 15 ⁴ 8	6				13 ⁵ 10	12			10 ⁵ 18	14			7 ⁷ 25	9													
06 15 ² 8	4				13 ³ 10	16			10 ¹ 24	16			7 ¹ 28	3													
07 15 ² 8	6				13 ² 11	19			9 ⁹ 26	14			7 ³ 27	5													
08 15 ² 10	4				13 ¹ 10	16			10 ¹ 24	16			7 ⁰ 28	2													
09 15 ² 10	6				13 ¹ 9	12			9 ⁵ 27	10			7 ⁰ 36	2													
10 15 ³ 9	7				12 ⁹ 14	10			9 ⁹ 25	14			7 ⁰ 34	2													
11 15 ² 8	5				12 ⁸ 17	12			9 ⁸ 26	13			7 ¹ 39	3													
12 15 ² 14	5				13 ¹ 19	11			10 ² 23	17			7 ⁴ 35	6													
13 15 ⁴ 11	4				13 ¹ 19	10			10 ⁵ 26	19			7 ² 36	4													
14 15 ⁴ 9	4				13 ¹ 16	10			10 ⁸ 21	23			7 ⁶ 30	8													
15 15 ⁴ 12	4				13 ¹ 17	11			10 ⁶ 22	21			7 ² 35	4													
16 15 ⁵ 11	7				13 ¹ 16	10			10 ¹ 26	16			7 ⁰ 35	2													
17 15 ² 14	4				13 ¹ 16	14			10 ⁵ 21	18			7 ⁰ 30	2													
18 15 ² 12	4				13 ¹ 16	12			10 ⁷ 17	15			6 ⁴ 15	16													
19 15 ² 10	4				13 ³ 12	7			11 ¹ 14	9			9 ² 11	14													
20 15 ⁴ 10	6				13 ³ 16	4			11 ³ 14	6			9 ⁶ 6	14													
21 15 ⁴ 11	6				13 ³ 15	6			11 ³ 14	10			9 ⁶ 8	10													
22 15 ⁴ 11	6				13 ⁴ 16	5			11 ⁵ 10	14			9 ⁸ 8	14													
23 15 ⁶ 7	6				13 ⁵ 7	3			11 ⁵ 12	16			9 ⁸ 8	12													

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_z = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0N Long. 79.5W Season Spring (Mar. - Apr. - May) 1962

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400				
Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	
0.013	1.58	4	3.5	10.0	16.5	1.59	4	5	10.0	16.0	1.57	5	6	12.5	17.0	1.60	4	5	11.0	17.0
0.051	1.38	6	6	9.0	15.0	1.35	7	8	10.5	16.5	1.30	9	11	12.5	19.0	1.33	8	8	10.0	16.5
0.160	1.18	6	6	7.5	14.0	1.12	9	15	10.5	18.0	1.05	14	17	12.5	21.5	1.08	12	14	11.0	17.5
0.495	9.7	7	6	7.5	13.0	9.2	9	13	8.5	15.5	8.6	12	10	8.0	11.5	8.7	14	9	7.0	11.0
0.95	6.7	4	6	6.0	11.0	6.3	7	9	7.5	13.0	4.0	15	9	7.0	10.5	4.0	18	10	6.5	11.0
1.0	4.0	4	5	5.0	6.5	5.6	4	5	5.5	9.5	3.6	9	6	5.5	8.0	3.6	13	6	5.0	7.0
2.0	2.5	2	2	1.5	2.5	2.5	2	2	1.5	2.5	2.6	4	3	2.5	3.5	2.8	6	2	3.5	6.0

Fam = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2N Long. 105.2W Season Winter (Dec. Jan. Feb.) 1961-62

TIME BLOCKS (LST)																						
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}		
* * *																						
* 0.3	149	4	5	9.0	13.0	147	3	4	7.0	12.0	141	6	2	7.0	11.0	140	5	4.0	8.0	141	4	
* 0.5	121	9	8	9.0	14.5	11.7	6	6	8.5	15.0	10.2	13	4	9.0	13.5	10.1	14	12	7.0	13.0	11.0	
* 1.0	93	12	11	8.5	15.0	8.3	10	8	8.5	12.0	7.0	16	10	6.0	9.0	7.4	10	16	3.0	5.0	8.2	
* 1.495	83	14	10	8.5	14.5	7.2	16	12	7.0	15.0	6.0	8	4	3.0	7.5	6.4	5	7	4.5	10.5	6.9	
2.0	50	12	8			46	9	6			39	3	2			34	3	2		43	8	7
2.5																				50	9	9
5																				53	6	14
10																				52	5	12
20																				45	10	17
																				41	15	23
																				35	18	3

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

RN-14

* - No December or January Data

* - No January or February Data for Voltage and Log

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Season Spring Mar. Apr. May) 19-62

TIME BLOCKS (LST)																									
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400										
Frequency (MHz)	F _{am}	D _u	D _p	V _{dm}	L _{dm}	F _{am}	D _u	D _p	V _{dm}	L _{dm}	F _{am}	D _u	D _p	V _{dm}	L _{dm}	F _{am}	D _u	D _p	V _{dm}	L _{dm}					
0.13	156	7	4	11.0	17.5	15.3	6	5	11.5	17.5	15.2	7	5	11.5	17.5	15.6	7	6	10.5	16.0	15.7	7	6	11.0	16.5
0.51	130	9	8	9.0	15.5	12.2	10	9	10.0	17.0	11.6	13	10	11.0	18.5	12.3	13	10	9.5	16.0	12.8	10	12	8.5	14.5
1.60	108	10	10	7.5	14.0	9.2	17	15	8.0	14.0	8.9	18	15	7.0	12.5	9.4	21	14	6.0	11.5	10.5	13	14	6.5	12.0
2.5	66	9	8	5.0	9.0	5.3	7	6	4.0	6.5	4.8	8	4	2.5	4.0	5.1	17	5	2.5	4.5	5.8	13	6	4.0	6.5
5	58	6	4	5.5	9.5	4.9	7	5	4.5	7.0	3.9	7	4	2.5	4.5	4.3	11	5	3.0	5.5	5.4	7	7	4.5	8.0

$F_{\text{am}} = \text{median value of effective antenna noise in } \text{db above ktb}$

Consequently, ratios of under deciles to median income are

THE JOURNAL OF CLIMATE

Df = ratio of median to lower decile in db

卷之三

$\Delta V_m = \text{median deviation of average voltage in } \mu\text{V}$

σ_m = median deviation of average lagarithm in db below mean power

מִשְׁנָה בְּבֵית הַמִּלְאָקָה

USCCOM - NBS - 84

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6S Long. 130.4E Season Fall (Mar.-Apr.-May) 1962

TIME BLOCKS (LST)																														
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400															
Frequency (Mc)	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{om}	D _u	D ₂	V _{dm}	L _{dm}	F _{om}	D _u	D ₂	V _{dm}	L _{dm}	F _{om}	D _u	D ₂	V _{dm}	L _{dm}										
0.13	1.56	3	2	8.0	12.0	1.55	4	2	9.0	14.0	1.51	5	4	1.15	1.75	1.53	4	4	12.0	17.0	1.55	3	3	8.5	14.0	1.56	3	3	8.0	12.5
0.51	1.30	5	4	9.0	14.0	1.26	6	5	9.0	14.0	1.13	10	7	1.25	1.90	1.19	9	6	11.0	18.0	1.23	8	7	9.5	16.0	1.30	4	4	8.5	14.5
1.60	1.06	7	5	8.0	13.0	9.2	9	7	9.5	16.0	7.2	20	9	1.10	16.5	7.9	16	9	10.0	16.5	9.4	12	11	9.5	17.0	1.06	6	6	8.0	13.5
5.45	85	9	6	7.5	13.0	6.5	12	8	8.5	13.5	4.6	13	6	9.0	13.0	4.9	17	6	5.5	9.0	7.1	12	7	6.5	12.0	87	7	6	6.5	12.0
2.5	5.7	10	7	6.5	11.5	4.8	10	6	6.5	11.0	2.1	12	2	5.0	7.0	2.0	12	1	5.0	8.5	4.3	13	8	7.5	13.0	5.8	8	7	6.5	11.5
5	5.2	6	6	5.5	9.5	5.1	6	7	5.0	8.0	2.2	13	6	6.0	8.5	2.2	12	5	6.0	10.0	4.4	11	7	6.5	11.0	5.4	6	6	6.0	10.5
10	4.1	5	5	4.0	7.0	3.8	6	6	3.5	6.0	2.7	7	4	5.0	7.0	2.9	8	5	5.0	7.5	4.1	6	5	4.0	7.0	4.2	6	5	4.0	7.0
20	2.2	1	1	2.5	4.0	2.3	1	1	2.5	4.0	2.2	3	2	3.0	4.5	2.3	3	2	4.0	6.0	2.3	4	2	3.0	4.0	2.2	2	1	2.5	4.0

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59° 5' N Long. 17° 3' E Season Spring (Mar. - Apr. - May) 1962

Frequency (Mc)	TIME BLOCKS (LST)																														
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000																		
0.13	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}																
0.25	1.52	3	10.0	15.5	1.48	4	4	11.0	17.5	1.47	4	4	10.5	1.51	5	4	8.5	13.0	1.50	4	3	8.0	13.5								
0.495	1.16	7	4	8.0	13.5	1.06	9	6	11.0	16.0	1.05	11	5	11.5	1.70	11	8	10.5	15.5	1.15	8	7	11.0	17.0	1.19	7	5	8.0	13.0		
0.95	1.02	7	7	4.5	9.5	9.2	7	8	4.0	8.0	9.0	6	7	5.0	8.5	9.1	9	7	7.0	12.0	9.3	7	7	6.0	10.5	1.01	7	7	5.5	9.5	
1.9	7.4	14	7	4.0	6.5	5.9	7	4	2.5	5.0	5.4	5	4	3.0	5.5	5.5	9	4	3.0	5.0	6.6	8	4	3.0	4.5	7.6	13	6	3.0	5.5	
3.9	5.9	7	5	6.0	10.5	4.7	8	5	5.5	10.0	3.3	5	4	4.0	6.5	3.5	4	5	4.0	6.0	4.8	7	4	3.5	7.0	6.1	1	5	4	5.0	9.0
7	5.5	6	4	4.0	7.0	4.6	6	3	4.0	6.5	3.5	7	5	6.5	9.0	3.6	8	7	6.5	10.0	5.1	7	4	4.0	7.0	5.8	6	4	3.5	6.5	
10	4.0	8	5	2.5	5.0	4.2	7	6	3.0	5.0	4.2	8	4	4.5	7.5	4.8	6	6	6.0	9.5	5.0	12	7	4.0	7.5	4.5	1.5	7	3.5	6.5	
20	2.0	0	2	1.5	3.0	2.0	2	2	1.5	3.5	2.0	3	3	2.0	3.5	2.2	4	3	2.5	4.5	2.1	4	3	2.0	4.0	1.9	2	2	1.5	3.5	

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm}

= median deviation of average logarithm in db below mean power

RN-14

USC-OMM-NBS-6

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Spring (Mar. Apr. May) 19-62

TIME BLOCKS (LST)																			
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400			
Frequency (MHz)	F _{am}	D _u	D _r	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	D _r	V _{dm}	L _{dm}	F _{am}	D _u	D _r	V _{dm}	L _{dm}
1.35	109	8	9	98	12	9	91	14	6	94	20	8	101	174	10	111	8	10	
2.00	87	8	9	69	11	7	59	10	3	63	20	5	69	18	8	87	8	9	
2.35	71	7	10	54	9	7	32	8	2	32	17	3	50	15	7	72	8	9	
5	64	6	7	54	8	6	35	7	4	36	14	4	56	11	6	66	6	7	
10	40	6	3	39	6	3	35	7	3	38	8	4	49	7	5	46	6	6	
20	23	1	1	23	0	1	24	1	1	24	4	1	25	4	2	23	3	1	

E_{eff} = median value of effective antenna noise in dB above kit

I am - median value of effective unit length in

D_u = ratio of upper decile to median in db

D_{ℓ} = ratio of median to lower decile in db

V_{dev} = median deviation of average voltage in dB below mean power

σ_{dm} - median deviation of average voltage in below medi power

ISSN 0022-216X

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha(Kauai), T. H. Lat. 22.0N Long. 159.7W Season Spring (Mar. - Apr. - May) 1962

Frequency (Mc)	TIME BLOCKS (LST)												TIME BLOCKS (LST)																	
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400									
F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}						
.013	1.54	6	1.00	1.00	1.54	6	4	1.00	1.65	1.50	8	3	1.00	1.70	1.50	8	4	1.20	1.85	1.49	8	4	1.20	1.95	1.51	8	3	1.00	1.60	
.051	1.30	9	6	1.00	1.00	1.26	11	4	1.00	1.85	1.11	2.2	10	1.20	1.80	1.14	18	10	1.30	2.00	1.09	23	8	1.00	1.70	1.24	14	6	1.20	1.95
.160	1.05	15	6	1.05	1.00	9.5	20	8	9.5	17.0	8.2	32	11	9.5	17.0	7.9	32	8	8.5	15.0	8.3	30	9	8.5	15.5	10.2	16	9	1.15	1.95
.495	8.4	17	8	9.0	17.5	7.1	24	10	7.5	13.5	5.6	37	8	5.5	12.0	5.6	36	10	6.0	9.0	6.2	32	11	6.5	10.5	8.1	19	8	10.0	17.5
.25	5.8	13	6	8.0	14.0	5.4	14	6	7.0	11.5	3.6	19	5	3.5	6.0	3.4	21	4	4.0	6.5	3.9	19	7	4.5	7.5	5.6	14	6	8.0	13.0
.5	6.1	9	6	6.5	11.5	4.9	8	6	6.5	10.5	2.9	15	6	6.0	10.0	2.6	15	6	6.5	10.0	3.9	13	8	7.0	12.5	5.2	8	5	6.5	11.0
1.0	4.2	9	5	3.5	5.5	3.6	6	4	3.5	5.5	2.5	13	5	5.5	8.5	2.3	15	6	7.0	10.5	4.6	5	7	3.0	5.5	4.7	5	6	3.0	5.0
2.0	2.4	1	1	1.5	3.0	2.4	1	1	2.0	3.5	2.2	2	2	2.5	4.5	2.2	4	2	3.5	5.0	2.5	2	3	3.0	4.5	2.4	2	1	2.0	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6N Long. 140.5E Season Spring (Mar. Apr. May) 1962

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000												
F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}						
0.13	1.50	4	7.0	11.0	1.49	4	4	8.0	12.0	1.47	4	3	10.5	14.0	1.48	4	4	9.5	14.0	1.50	5	4	7.0	11.5	
0.51	1.25	5	2	8.5	13.5	1.17	7	5	9.5	14.0	1.09	9	5	10.0	13.5	1.13	9	6	8.5	13.0	1.14	10	5	8.5	14.0
1.60	1.04	7	5	8.0	14.0	8.8	11	9	9.0	13.5	7.6	16	7	6.5	11.5	7.8	18	9	5.5	9.0	8.8	15	8	9.0	15.0
4.95	8.2	9	6	7.0	12.5	6.3	10	5	5.0	8.0	6.0	9	4	3.5	6.0	5.9	11	3	6.0	11.0	6.8	14	6	7.0	12.0
2.5	5.8	9	6	5.0	8.5	4.8	9	5	6.0	9.0	3.9	3	4	8.0	11.0	3.6	5	2	7.5	10.0	4.6	10	4	8.0	12.0
5	5.7	7	4	4.5	8.0	5.0	7	5	4.5	7.5	3.5	4	3	7.5	10.0	3.4	7	4	7.0	9.0	5.1	8	4	5.5	9.0
10	4.0	6	4	4.0	7.0	3.6	6	3	4.0	6.5	2.9	8	4	4.5	6.5	3.1	7	5	4.0	7.0	4.2	5	4	5.0	7.5
20	2.5	1	1	1.0	2.5	2.5	2	1	2.0	2.5	2.5	3	1	2.0	4.0	2.6	3	2	2.5	4.0	2.7	3	2	2.5	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8S Long. 28.3E Season Fall (Mar. Apr. May) 1962

TIME BLOCKS (LST)																					
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	
.03	140	6	3	138	6	3	136	7	5		141	5	5		143	5	5		142	6	4
.051	130	12	4	126	12	6	119	14	8		128	11	7		131	11	7		132	10	6
.160	108	13	6	94	17	10	84	20	12		94	18	14		103	16	13		110	13	8
.495	94	13	6	80	16	11	73	13	13		74	16	13		87	12	13		97	12	7
.25	64	10	7	56	10	7	43	6	8		44	14	6		56	12	10		68	9	8
5	56	8	5	50	9	6	39	12	9		40	11	8		54	10	9		56	8	6
10	33	7	5	31	7	4	26	12	6		30	10	8		48	5	6		36	7	4
20	20	1	0	20	1	0	20	2	0		21	4	1		22	4	1		20	2	0

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

RN-14

USC COMM 105-281.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9N Long. 6.8W Season Spring (Mar. Apr. May.) 1962

Frequency (Mc)	TIME BLOCKS (LST)														
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000		
.013	1.53	3	3	1.54	3	4	1.51	4	4	1.53	5	4	1.55	4	4
.051	1.36	5	3	1.23	8	6	1.14	8	7	1.22	10	7	1.23	13	8
.160	1.14	5	7	1.02	9	9	1.00	9	7	1.02	10	11	1.05	14	12
.495	.86	6	6	.69	13	6	.62	11	8	.68	20	12	.75	23	10
.2.5	.59	8	8	.53	6	7	.38	15	7	.38	11	8	.58	10	10
.5	.56	6	10	.49	7	9	.29	10	7	.29	12	8	.46	11	14
1.0	.46	5	6	.41	5	7	.32	14	8	.34	15	12	.49	16	12
2.0	.25	3	4	.25	6	4	.28	10	6	.28	9	6	.30	7	7

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Season Spring (Mar. Apr. May) 19⁶¹

TIME BLOCKS (LST)																						
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
Frequency (Mc)	F _{am}	D _U	D _Z	V _{dm}	L _{dm}	F _{am}	D _U	D _Z	V _{dm}	L _{dm}	F _{am}	D _U	D _Z	V _{dm}	L _{dm}	F _{am}	D _U	D _Z	V _{dm}	L _{dm}		
.051	13.8	11	6	9.0	15.5	1.33	13	11	9.0	16.0	1.29	17	11	11.5	18.5	1.29	17	9.0	15.0	1.32	16	9
.160	11.7	11.7	12.7	12.5	13.5	1.07	2.2	19	7.5	22.5	10.3	2.6	2.0	8.0	14.5	1.03	2.8	1.4	7.5	13.0	11.0	19
.495	9.8	19	13	6.0	11.5	7.9	3.0	15	5.5	9.5	7.3	3.2	1.3	4.5	8.0	7.2	3.8	11	4.5	8.0	3.0	12

$F_{\text{am}} = \text{median value of effective antenna noise in db above ktb}$

D_4 = ratio of upper decile to median in db

Ω_2 = ratio of median to lower decile in db

\tilde{v}/dm = median deviation of average voltage in db below mean power

18-50004

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Season Summer (***—July—Aug.) 1961

E_{eff} = median value of effective antenna noise in dB above

Digitized by srujanika@gmail.com

D_y = ratio of upper decile to median in db

卷之三

β_2 = ratio of median to lower decile in db

$V_{1-} =$ median deviation of average voltage in dB below mean power

WPW = Theoretical wave power mean value without wind power

L_{dm} = median deviation of average logarithm in db below mean power

מִשְׁנָה בְּבֵית הַרְבָּה וְבְבֵית הַדָּת

卷之三

** No June or July Data

১৮৪৩-১৪

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7N Long. 93.8W Season Fall (Sept. Oct. Nov.) 19 61

TIME BLOCKS (LST)																												
0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400								
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}			
0 13	154	10	6			152	8	6			151	9	9			153	9	7			153	10	6			154	10	6
0 51	135	13	8			130	14	8			125	17	8			127	16	8			132	14	10			135	12	8
1 60	114	16	11			102	22	12			98	25	16			98	26	12			110	16	16			114	16	9
4 95	94	16	13			80	23	9			73	32	5			74	21	7			86	20	13			94	16	11

F_{ant} = median value of effective antenna noise in dB above kth

- 3 -

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_1 = median deviation of average voltage in dh below mean power

V_{dm} = Measured deviation in dB below mean power

L_{dm} = median deviation of average logarithm in db below mean power

1500W, NRS, PI

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38° 28' N. Long. 93° 8' W. Season Winter (Dec.—Jan.—Feb.) 1961-62

TIME BLOCKS (LST)																							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
Frequency (Mc)	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}			
.013	155	6	5			154	5	5			151	4	4			151	7	7			153	6	6
.051	134	10	8			132	11	6			127	10	8			126	10	7			128	10	8
.160	110	10	11			104	11	12			96	12	12			96	11	15			104	10	15
.495	91	11	11			85	12	11			80	7	8			80	9	9			84	12	11
																					90	11	11

E_{qm} = median value of effective antenna noise in db above ktb

R_{90} = ratio of upper decile to median in $\delta\theta$

- 10 -
Digitized by srujanika@gmail.com

ρ = ratio of median to lower decile in db

σ_{dm} = median deviation of average voltage in db below mean power


medium deviation of successive observations is the mean power

$-dm$ = median deviation of average lagarithm in db below mean power

RN-14

Corrigendum for
Technical Notes 18-1 through 18-11

The following corrected values should be used in place of the originally published values in Technical Notes 18-1 through 18-11.



Corrections to seasonal time block values of radio noise published in NBS Technical Note No. 18-1

C -1

Station	Year	Season	Time	Freq. Mc/s	Published Should be	Fam Published Should be	V _d Published Should be	L _d Published Should be
Bill	1957	Summer	12-16	.113	125	123		
Boulder	1957	Fall	04-08	.115	116	107		
Boulder	1957	Fall	16-20	.246	95	98		
Front Royal	1957	Fall	20-24	.535	86	88		
Balboa	1957-58	Winter	08-12	10.0	41	21		
Bill	1957-58	Winter	16-20	5.0	40	42		
Front Royal	1957-58	Winter	08-12	5.0	36	34		
Pretoria	1957-58	Summer	12-16	.113	126	124		
Cook	1958	Spring	04-08	.545	59	61		
Cook	1958	Spring	20-24	5.0	58	59		
Enkoping	1958	Spring	16-20	5.0	43	41		
Ibadan	1958	Spring	04-08	.246	143	101		
Pretoria	1958	Spring	12-16	2.5	44	48		
Rabat	1958	Spring	16-20	.545	80	74		
Boulder	1958	Summer	08-12	.495	77	74		
Enkoping	1958	Summer	12-16	5.0	35	33		
Ibadan	1958	Summer	20-24	.246	106	109		
Ibadan	1958	Summer	08-12	2.5	41	43		
Ibadan	1958	Summer	16-20	20.0	19	29		
Kekaha	1958	Summer	04-08	.160	85	83		
Rabat	1958	Summer	20-24	.051	126	128		
Balboa	1958	Fall	08-12	5.0	39	34		
Balboa	1958	Fall	12-16	.051	136	139		
Boulder	1958	Fall	20-24	2.5	56	60		
Enkoping	1958	Fall	04-08	.051	114	113		
Enkoping	1958	Fall	08-12	2.5	40	42		
Enkoping	1958	Fall	16-20	.246	93	91		
Ibadan	1958	Fall	00-04	.113	112	122		
Ohira	1958	Fall	20-24	2.5	49	53		
Singapore	1958	Fall	08-12	2.5	48	42		
Balboa	1958-59	Winter	00-04	20.0	19	23		
Front Royal	1958-59	Winter	12-16	.135	96	92		
Kekaha	1958-59	Winter	08-12	.051	113	110		

18-1 (continued)

Station	Year	Season	Time	Freq. Mc/s	Published	Fam Should be	Published	Vd Should be	Published	Ld Should be
Ohira	1958-59	Winter	16-20	.160	98	90				
Rabat	1958-59	Winter	00-04	5.0	63	56				
Singapore	1958-59	Winter	08-12	.545	67	65				

TECHNICAL NOTE 18-2

Cook	1959	Spring	00-04	.545	69	83				
Ibadan	1959	Spring	12-16	5.0	45	43				
Singapore	1959	Spring	12-16	.160	118	116				

TECHNICAL NOTE 18-3

Bill	1959	Summer	20-24	20.0	35	28				
Front Royal	1959	Summer	16-20	.500	87	83				
Ohira	1959	Summer	00-04	.545	77	84				
Ohira	1959	Summer	08-12	5.0	27	30				
Ohira	1959	Summer	16-20	.545	67	74				
Rabat	1959	Summer	04-08	.545	76	74				
Rabat	1959	Summer	08-12	.545	76	74				
Rabat	1959	Summer	08-12	10.0	41	31				

TECHNICAL NOTE 18-4

Balboa	1959	Fall	00-04	5.0	70	60				
Balboa	1959	Fall	08-12	.246	92	100				
Balboa	1959	Fall	16-20	20.0	21	31				
Bill	1959	Fall	08-12	2.5	31	33				
Boulder	1959	Fall	12-16	2.5	62	46				
Boulder	1959	Fall	20-24	2.5	54	60				
Cook	1959	Spring	04-08	5.0	46	44				
Cook	1959	Spring	16-20	.545	76	68				
Enkoping	1959	Fall	00-04	.051	128	118				
Enkoping	1959	Fall	12-16	2.5	39	41				

18-4 (continued)

Station	Year	Season	Time	Freq. Mc/s	Published F _{am}	Should be V _d	Published L _d	Should be Published
Kekaha	1959	Fall	20-24	5.0	61	56		
Ohira	1959	Fall	16-20	10.0	58	48		
Pretoria	1959	Spring	16-20	10.0	49	46		
Rabat	1959	Fall	04-08	5.0	49	54		
Sao Jose	1959	Spring	00-04	10.0	4.3	4.6		
TECHNICAL NOTE 18-5								
Bill	1959-60	Winter	20-24	10.0	4.2	40		
Boulder	1959-60	Winter	12-16	.495	58	62		
Boulder	1959-60	Winter	16-20	.013	146	143		
Boulder	1959-60	Winter	16-20	.051	124	112		
Erikoping	1959-60	Winter	08-12	.051	92	99		
Erikoping	1959-60	Winter	08-12	5.0	54	32		
Erikoping	1959-60	Winter	20-24	2.5	36	48		
Erikoping	1959-60	Winter	12-16	.246	Blank	66		
Erikoping	1959-60	Winter	08-12	.246	Blank	66		
Erikoping	1959-60	Winter	12-16	.246	Blank	3.5		
Erikoping	1959-60	Winter	08-12	.246	Blank	3.5		
Erikoping	1959-60	Winter	12-16	.246	Blank	3.5		
Erikoping	1959-60	Winter	08-12	.246	Blank	3.5		
Erikoping	1959-60	Winter	12-16	.246	Blank	3.5		
Kekaha	1959-60	Winter	08-12	.246	Blank	6.0		
Kekaha	1959-60	Winter	16-20	.160	79	77		
Kekaha	1959-60	Winter	20-24	.495	70	76		
Ohira	1959-60	Winter	20-24	.160	102	100		
Pretoria	1959-60	Summer	04-08	2.5	55	52		
Pretoria	1959-60	Summer	16-20	.051	114	136		
Singapore	1959-60	Winter	04-08	5.0	53	51		

TECHNICAL NOTE 18-6

Station	Year	Season	Time	Freq. Mc/s		Published <u>V_d</u>		Should be <u>L_d</u>	
				Published	Fam	Published	<u>V_d</u>	Should be	<u>L_d</u>
Boulder	1960	Spring	08-12	.160	64	84			
Cook	1960	Fall	08-12	.160	72	75			
Enkoping	1960	Spring	08-12	.246	65			Blank	
Enkoping	1960	Spring	12-16	.246				Blank	65
Front Royal	1960	Spring	00-04	5.0	70	62			
Front Royal	1960	Spring	20-24	5.0	57	62			
Kekaha	1960	Spring	12-16	10.0	22	19			
Kekaha	1960	Spring	16-20	2.5	37	34			
Ohira	1960	Spring	08-12	.545	61	66			
Pretoria	1960	Fall	20-24	5.0	58	49			
Rabat	1960	Spring	16-20	2.5	42	48			
Rabat	1960	Spring	20-24	5.0	46	56			
Sao Jose	1960	Fall	04-08	.246	82	84			
Singapore	1960	Spring	08-12	.013	149	162			
Singapore	1960	Spring	16-20	.545	96	98			

TECHNICAL NOTE 18-7

Station	Year	Season	Time	Freq. Mc/s		Published <u>V_d</u>		Should be <u>L_d</u>	
				Published	Fam	Published	<u>V_d</u>	Should be	<u>L_d</u>
Bill	1960	Summer	16-20	10.0	41	46			
Boulder	1960	Summer	08-12	20.0	27	24			
Boulder	1960	Summer	12-16	.160	122	120			
Enkoping	1960	Summer	08-12	2.5	35	32			
Front Royal	1960	Summer	04-08	.135	112	106			
Front Royal	1960	Summer	04-08	2.5	62	52			
Sao Jose	1960	Winter	00-04	.113	113	110			

TECHNICAL NOTE 18-8

Station	Year	Season	Time	Freq. Mc/s	Published	Fam Should be	Published	Vd Should be	Ld Should be	Published	Should be
Cook	1960	Spring	08-12	2. 5				8. 0			3. 5
Cook	1960	Spring	12-16	.013							
Enkoping	1960	Fall	08-12	2. 5							
Kekaha	1960	Fall	12-16	.495							
New Delhi	1960	Summer	16-20	2. 5							
Singapore	1960	Fall	00-04	.545							
Singapore	1960	Fall	08-12	5. 0							

TECHNICAL NOTE 18-9

Balboa	1960-61	Winter	00-04	.051							
Balboa	1960-61	Winter	04-08	2. 5							
Cook	1960-61	Summer	16-20	10. 0							
Enkoping	1960-61	Winter	16-20	.013							
Ibadan	1959	Summer	16-20	.545							
Ibadan	1959	Summer	20-24	.113							
New Delhi	1960	Fall	12-16	.545							
Ohira	1960-61	Winter	04-08	2. 5							
Pretoria	1960	Spring	12-16	2. 5							
Pretoria	1960	Spring	16-20	10. 0							
Balboa	1960-61	Winter - Frequency .031	should be .013.								

TECHNICAL NOTE 18-10

Front Royal	1961	Spring	00-04	5. 0							
Front Royal	1961	Spring	04-08	.135							
Front Royal	1961	Spring	08-12	.500							
Front Royal	1961	Spring	20-24	5. 0							
Kekaha	1961	Spring	04-08	.160							
Pretoria	1960-61	Summer	04-08	.246							
Pretoria	1960-61	Summer	04-08	5. 0							
Pretoria	1960-61	Summer	16-20	10. 0							

18-10 (continued)

Station	Year	Season	Time	Freq. Mc/s	Published	F _{am}	Published	V _d	Should be	L _d	Published	Should be
Pretoria	1961	Fall	08-12	5.0		28		30				
Rabat	1961	Spring	00-04	.051		136		128				
Ohira	1961	Spring	- Frequency .495	should be .545.								

TECHNICAL NOTE 18-11

Boulder	1961	Summer	00-04	20.0		19		23				
Cook	1961	Winter	16-20	.013		14.3		15.1				
Front Royal	1961	Summer	12-16	5.0		43		40				
Ohira	1961	Summer	20-24	.545		75		87				
Pretoria	1961	Winter	08-12	20.0		28		22				
Sao Jose	1960-61	Summer	00-04	2.5		57		62				
Sao Jose	1960-61	Summer	00-04	5.0		70		60				
Sao Jose	1960-61	Summer	04-08	.545		72		78				
Sao Jose	1960-61	Summer	16-20	20.0		53		35				
Singapore	1961	Summer	12-16	5.0		79		39				

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 2.0N Long. 79.5W Month January 1958

EST	Frequency (Mc)											
	0.51			113			246			545		
	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u
00	*130	*1/4				*104					*60	
01	*130	*1/4				*106					*58	
02	*132	*1/6				*104					*54	
03	*128	*1/2				*100					*52	
04	*131	*1/6				*103					*59	
05	*130	*1/6				*99					*62	
06	*130	*1/3				*84					*52	
07	*122	*1/4				*92					*58	
08	*11	*1/1				*60					*61	
09	*120	*1/2				*60					*56	
10	*113	*1/2				*76					*54	
11	*120	*1/2				*73					*55	
12	*120	*1/2				*76					*56	
13	*123	*1/0				*78					*58	
14	*126	*1/0				*68					*66	
15	*128	*1/2				*66					*61	
16	*126	*1/2				*63					*62	
17	*118	*1/04				*72					*59	
18	*128	*3	9			*69					*58	
19	*124	*1/0				*96					*64	
20	*128	*2	8			*104	2	10			*67	
21	*128	*1/4				*52					*65	
22	*128	6	7			*104					*92	
23	*130					*1/4					*93	

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average lagarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18.

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month March 1960

Frequency (Mc)												.013			.051			.160			.25														
F _m	D _U	V _{dm}	F _m	D _U	V _{dm}	F _m	D _U	V _{dm}	F _m	D _U	V _{dm}	F _m	D _U	V _{dm}	F _m	D _U	V _{dm}	F _m	D _U	V _{dm}															
00	1/62	3	10.0	15.5	39	6	4	6.0	1.0	11.7	7	3	9.0	16.0	6.5	8	2.0	13.0	6	2	4.0	9.0	48	4	4	7.0	11.0	29	4	5	3.0	5.5			
01	1/62	3	5 [*]	9.0	14.0	1.39	6	4	11.0	7.0	11.8	10	4	8.0	13.5	6.7	4	6.5	13.0	6	2	6.0	10.5	48	2	3	5.0	10.0	26	4	1	2.0	3.5		
02	1/62	5 [*]	3	11.0	16.0	1.39	10	4	8.0	14.5	11.8	12	6	6.0	11.5	6.7	6	4	6.5	13.5	6	2	4.0	9.0	48	4	4	5.5	8.5	25	4	1	1.0	3.0	
03	1/63	6	4	9.5	15.0	1.41	6	8	11.0	17.5	11.8	10	6	6.5	12.0	6.9	5	6	12.0	6	4	4	5.5	10.0	44	6	5	6.0	9.0	25	2	2	1.0	2.5	
04	1/63	6	4	9.0	14.0	1.39	10	2	6.0	12.0	11.6	12	4	5.0	9.0	6.9	4	5	6.0	13.5	6	4	4	6.0	10.0	44	8	6	5.0	8.0	25	2	2	1.0	2.5
05	1/63	6	2	9.5	14.5	1.39	8	2	9.5	15.5	11.6	11.6	7.5	6.5	7.5	6.9	3	4	7.0	15.0	6	4	4	5.5	10.0	42	4	6	5.0	9.0	25	2	2	1.0	2.5
06	1/63	6	0	9.0	14.0	1.33	10	4	8.0	14.5	11.0	16	1.8	13.5	2.30	6.2	9	5	9.0	15.5	57	4	4	5.0	9.0	44	4	4	4.0	8.0	27	4	2	2.0	3.5
07	1/61			10.5	15.0	1.31			10.5	17.5	1.7	1.1		1.5	2.25	4.7	13	12	10	0.16.0	9.6	8	6	8.0	12.5	40	6	4	5.0	9.0	28	3	3	3.0	4.5
08	1/61	8	4	9.5	14.5	1.30			10.0	17.5	1.7	1.0		1.0	0.6	3.9	15	12	6.0	9.0	37	11	11	8.0	12.0	34	6	4	6.5	11.0	27	4	2	3.0	5.0
09	1/61			10.0	15.0	1.28			11.5	19.0	1.04	1.04		10.0	19.0	3.3	17	10	7.0	11.0	3.0	10	10	3.0	6	3.0	10	9.0	13.0	25	6	2	3.0	5.0	
10	1/61			9.5	15.5	1.31			10.0	17.5	1.7	1.02		10.0	17.5	3.1	16	6	5.0	8.0	2.6	10	4	6.0	9.0	26	9	8	8.5	13.0	27	4	4	4.0	7.0
11	1/60	7	3	11.0	16.0	1.31	10	8	10.0	18.0	10.3	13	11	11.0	19.5	2.9	17	4	4.5	10.0	2.4	8	4	7.0	10.0	24	7	8	8.0	12.0	25	4	3	3.0	5.0
12	1/62	5 [*]	3	9.0	15.0	1.33	8	6	10.0	18.0	10.4	12	14	8.0	15.0	2.7	10	4	3.5	5.0	2.2	8	2	2.5	4.0	24	8	8	6.0	9.0	27	4	4	3.5	6.0
13	1/63	6	2	9.0	15.0	1.37	6	8	8.0	13.5	10.6	2.2	12	8.0	14.0	2.9	18	4	5.0	8.0	2.4	1.2	4	7.0	10.0	27	9	7	6.0	10.0	27	4	2	4.0	6.5
14	1/65	6	4	8.0	13.0	1.27	9	6	8.0	14.0	10.7	2.3	7	8.0	13.0	3.1	26	6	4.5	11.0	2.7	1.6	5	5.5	8.0	32	8	8	5.5	9.0	29	4	2	3.0	5.0
15	1/65	6	2	7.5	12.0	1.37	8	4	7.5	12.0	10.7	21	7	10.0	16.5	3.0	27	5	6.5	10.0	3.3	13	7	5.5	9.5	35	6	5	6.5	11.0	31	3	3.5	5.5	
16	1/65	2	2	7.5	12.0	1.37	8	4	8.5	14.0	11.0	14	12	9.5	16.5	3.5	15	7	5.5	9.5	38	8	8	5.5	9.0	40	6	8	5.0	8.5	31	4	3	3.0	5.5
17	1/65	4	4	9.0	13.0	1.33	11	4	8.0	13.5	10.8	14	12	14.0	23.0	4.2	10	5	4.5	8.0	4.7	5	4	5.0	9.0	46	4	4	4.5	7.0	31	4	2	3.0	5.0
18	1/61	6	2	9.5	14.5	1.33	9	4	8.0	14.0	11.2	8	7	10.0	14.0	5.3	8	4	5.5	10.0	5.6	4	2	6.0	10.0	49	4	2	5.0	8.5	31	4	2	3.0	5.0
19	1/63	4	4	9.0	14.0	1.39	6	8	9.0	13.5	11.8	4	6	7.0	13.0	6.3	6	5	5.5	10.0	6	4	2	6.0	10.0	48	5	3	5.0	8.5	31	3	4	3.0	5.0
20	1/61	4	2	9.0	13.5	1.37	6	2	7.0	12.0	11.8	6	6	6.5	10.0	6.3	6	5	5.5	10.5	6	4	3	4.5	7.5	48	5	4	5.5	10.0	31	4	4	3.5	5.5
21	1/61	4	4	8.0	12.5	1.39	6	4	7.0	12.0	11.8	7	4	5.0	10.0	6.3	6	6	5.5	11.0	6	5	4	4.0	7.0	46	4	2	5.0	8.5	27	5	2	3.5	5.0
22	1/63	4	4	8.5	13.5	1.37	9	2	7.0	13.0	11.8	8	4	6.0	11.0	6.3	6	5	6.5	11.5	6	4	4	6.0	10.0	48	6	4	6.0	9.0	27	6	2	3.0	5.0
23	1/61	4	2	10.0	14.0	1.37	8	2	7.0	12.5	11.8	8	6	5.0	11.0	6.3	6	5	4	4.0	7.5	46	6	1	5.0	9.0	29	2	4	3.0	5.0				

F_m = median value of effective antenna noise in db above kib

D_U = ratio of upper decile to median in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-6.

MONTH-HOUR VALUES OF RADIO NOISE Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month April 19 60

HST	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
00	162	7	4	11.0	18.5	143	5	7	8.0	14.0	123	7	8	7.0	12.0	10	4	6	7.5	14.5	67	5	6	6.0	13.0	62	2	9	4.0	8.0	4.8	4	2	5.0	9.0	2.7	6	3	3.0	4.5	
01	163	7	6	10.5	18.0	143	9	6	9.5	16.5	123	11	7	7.0	14.0	9.8	6	16.5	17.5	67	8	6	5.0	10.5	62	4	8	4.5	8.0	2.5	8	2	2.0	4.0							
02	164	10	5	10.5	17.5	144	10	9	8.5	15.0	121	13	6	7.5	13.5	10	12	7	7.5	14.0	67	10	7	5.0	10.5	62	5	8	5.5	11.0	9.0	2.7	9	4	2.0	4.0					
03	164	9	5	11.5	18.5	144	9	7	11.0	19.0	123	12	7	9.0	17.5	10	10	7	8.0	16.5	67	9	7	6.0	14.0	62	5	6	5.5	11.0	9.0	2.7	9	2	2.0	3.5					
04	165	9	6	10.0	20.0	144	10	6	8.5	15.0	124	8	5	9.0	17.5	10.2	6	12	9.0	19.5	71	7	8	6.5	13.0	62	5	8	4.5	9.0	4.6	3	4	6.0	10.0	2.5	8	2	2.0	3.5	
05	165	9	6	12.0	19.0	144	9	7	11.0	20.5	123	9	14	10.0	19.0	10	10	8	14	11.5	22.5	71	7	8	6.0	13.0	62	4	9	6.0	11.0	4.4	4	3	5.0	9.0	2.5	6	2	2.0	3.0
06	164	9	5	11.0	18.0	140	11	10	11.0	20.0	121	9	19	13.5	26.0	10	10	7	21	13.5	26.5	63	9	15	18.5	17.0	56	7	10	6.0	11.0	4.4	4	4	5.0	9.0	2.7	2	4	2.0	4.0
07	163	9	4	11.0	18.0	138	12	8	10.5	20.0	121	8	18	14.0	23.5	102	6	20	16.0	24.5	53	11	13	11.5	19.0	4.8	11	13	8.0	15.5	4.1	6	5	6.0	10.5	2.5	4	2	3.0	5.0	
08	163	8	4	12.0	18.5	140	10	13	14.0	24.5	119	10	19	13.5	23.5	19	7	23	140	25.0	50	14	17	19.0	17.5	44	10	18	8.0	16.0	3.8	6	6	7.5	13.0	2.5	5	2	2.5	5.0	
09	163	8	4	12.0	20.0	138	8	10	11.5	20.0	23	10	17	11.0	19.5	18	6	26	11.0	23.0	51	8	26	8.0	16.5	3.8	8	12	9.0	15.5	3.4	6	6	8.0	13.0	2.3	4	2	3.5	6.0	
10	162	9	4	11.0	17.0	138	9	10	14.5	23.5	115	12	18	13.0	24.0	12	14	24	14.0	26.5	47	10	22	9.5	20.0	33	14	14	5.0	12.5	3.1	7	10	6.0	10.0	2.3	5	3	3.0	5.0	
11	163	6	6	11.0	17.0	136	10	6	12.0	19.0	115	12	16	13.0	24.0	92	17	23	11.0	21.5	39	20	14	4.5	5.0	30	18	10	5.0	8.0	3.0	8	10	6.0	12.0	2.3	8	2	3.5	6.0	
12	165	6	6	14.0	21.5	140	12	8	11.5	20.5	116	18	15	14.0	25.0	94	20	16	13.5	24.0	36	29	11	6.5	10.0	31	31	11	11.0	16.0	3.0	18	8	6.5	10.5	2.5	10	4	3.5	5.5	
13	165	9	4	10.0	17.5	140	14	6	11.5	19.0	119	16	15	13.0	24.5	94	25	17	11.0	21.5	41	24	15	7.0	11.0	34	18	18	8	7.0	12.0	2.7	13	4	3.0	5.5					
14	167	8	4	9.0	16.0	142	14	6	10.5	17.0	119	18	14	12.0	22.0	45	21	17	12.0	14.0	47	38	18	11	25	17	13.0	37	13	7	6.5	12.0	2.9	10	4	3.0	5.0				
15	167	9	4	9.5	17.0	142	14	6	9.5	16.0	119	18	13	11.0	19.0	40	16	18	12.0	18.0	43	30	16	10.0	14.0	36	33	8	6.0	10.0	4.0	13	6	5.5	10.0	2.9	6	2	2.5	5.0	
16	167	6	2	9.0	14.0	142	10	6	9.5	15.0	118	15	9	11.0	19.0	46	18	14	10.0	20.5	47	28	12	7.5	13.0	43	18	9	7.0	12.0	4.2	7	4	5.5	9.5	2.9	6	3	3.0	5.0	
17	165	10	2	9.5	15.0	141	13	7	9.5	17.5	117	16	8	10.5	18.0	46	15	15	14	16.5	49	22	14	15	15	5.0	9.0	44	7	2	3.5	7.0	2.9	7	2	3.5	6.0				
18	165	4	4	9.0	15.0	140	6	6	11.0	19.0	117	10	8	9.0	16.0	46	8	7.0	13.0	53	14	4	4.5	10.0	56	8	2	4.5	8.5	4.8	2	4	4.5	8.5	2.9	3	5	2.0	5.5		
19	164	6	4	9.0	16.0	140	9	4	8.5	14.5	121	8	7	7.5	13.5	48	8	8	7.5	13.0	63	8	4	6.5	14.0	60	6	4	4.0	7.0	4.8	2	5	4.5	8.0	2.9	3	6	3.0	5.5	
20	164	7	6	9.0	14.0	142	7	5	8.0	13.5	121	9	5	6.0	11.5	48	7	6	6.0	12.5	65	8	4	5.0	10.5	60	6	2	4.0	7.0	4.8	3	4	4.0	8.0	2.7	6	2	3.0	5.5	
21	163	7	4	9.0	15.5	142	7	4	6.5	11.5	121	7	4	6.5	11.0	100	8	6	6.0	12.5	67	7	4	5.0	11.5	62	4	5	4.0	8.0	5.0	0	4	3.5	8.0	2.7	5	4	3.0	5.5	
22	163	8	5	8.5	14.5	142	10	4	7.0	13.0	121	10	4	6.5	12.0	100	8	18	10	4	6.5	9.5	62	3	4	5.0	11.0	50	2	4	4.5	8.0	2.7	6	4	3.0	5.5				
23	163	7	6	9.0	16.0	142	8	7	8.0	13.5	123	8	7	6.0	11.0	100	6	6	7.0	13.5	67	5	5	5.0	11.0	62	3	8	5.0	10.0	48	4	4	4.0	7.0	5.5	2	4.0	4.0	5.5	

Fom = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dmm} = median deviation of average voltage in db below mean power

L_{dmm} = median deviation of average logarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-6.

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month May 1960

ES	Frequency (Mc)												.013			.051			.160			.495			2.5					
	.013			.051			.160			.495			F _{dm}			D _u			V _{dm}			L _{dm}			F _{dm}					
	F _{dm}	D _u	D _x	V _{dm}	L _{dm}	F _{dm}	D _u	D _x	V _{dm}	L _{dm}	F _{dm}	D _u	D _x	V _{dm}	L _{dm}	F _{dm}	D _u	D _x	V _{dm}	L _{dm}	F _{dm}	D _u	D _x	V _{dm}	L _{dm}					
00	168	6	4	16.0	19.0	148	8	4	10.0	12.0	129	4	6	6.0	14.0	103	8	4	6.5	14.0	72	4	4	6.0	11.0	63	2	2	9.0	8.0
01	169	5	3	16.0	18.0	148	6	2	8.5	15.0	129	6	6	7.0	13.5	123	8	4	6.5	14.5	72	5	3	5.5	9.5	63	4	2	7.5	5.5
02	170	6	4	17.0	19.0	148	8	2	9.0	17.0	129	5	6	5.0	8.5	104	9	5	7.0	14.0	72	4	5	6.0	11.5	64	3	3	9.0	9.0
03	170	6	4	17.0	18.0	150	6	6	9.5	17.5	127	8	4	6.5	14.0	130	6	6	6.5	14.5	72	2	6	5.5	10.5	65	1	3	9.5	9.5
04	170	6	4	17.0	19.5	149	7	5	9.0	14.5	127	8	4	7.0	13.0	122	10	5	9.5	17.5	72	4	4	5.5	10.0	63	4	2	9.0	9.0
05	168	8	2	18.0	18.0	146	10	2	8.0	16.0	123	10	4	11.0	21.0	99	10	6	15.0	16.0	72	4	4	6.0	11.0	63	2	4	9.5	9.5
06	168	6	4	17.5	18.5	144	10	4	19.0	24.0	123	8	6	17.0	29.0	99	10	9	16.0	29.5	64	6	6	9.5	17.5	57	6	4	9.5	9.5
07	168	4	6	18.0	18.0	144	8	8	17.0	26.0	123	11	8	9.9	12	15	17.0	26.5	58	12	10	11.5	18.0	51	6	6	9.5	17.5		
08	168	6	6	18.0	20.0	144	8	10	17.0	25.5	125	9	12	18.5	30.0	121	8	20	55	13	17	14.5	33.0	47	12	10	11.0	18.5	37	
09	167	5	7	18.0	20.0	144	8	10	13.0	22.0	121	12	10	19.0	28.0	99	10	10	21.0	24.0	53	14	11	13.0	20.0	43	16	14	13.0	20.0
10	166	8	6	18.0	20.0	142	10	8	15.0	24.0	120	14	12	19.0	32.0	97	12	20	20.0	32.0	44	13	10	14.5	38	19	11	10	10.0	20.0
11	166	8	5	18.5	21.5	142	15	9	13.0	24.5	125	12	19	18.5	30.0	121	8	20	55	13	17	14.5	33.0	47	12	10	11.0	18.5	37	
12	170	6	10	13.5	21.5	148	8	10	15.0	26.5	129	8	20	16.5	29.5	104	11	20	14.0	29.0	58	17	12	8.5	24.5	45	16	14	8.5	24.5
13	170	8	4	12.0	21.0	150	8	10	15.0	25.0	131	10	12	14.0	28.0	107	13	14	15.0	28.0	68	16	13	13.5	25.5	14	14	12	13.5	25.5
14	172	6	4	12.5	23.0	150	8	8	15.5	25.0	131	10	14	11.5	23.0	107	10	18	13.5	22.0	65	17	12	10.5	22.0	55	17	12	10.5	22.0
15	172	6	4	8.0	14.0	148	9	7	11.0	20.0	129	8	12	14.0	21.0	102	12	18	12.0	23.0	64	16	12	8.5	24.0	45	17	12	8.5	24.0
16	170	6	2	10.0	18.0	148	8	8	10.5	19.0	129	5	15	11.5	20.0	103	8	17	14.0	23.0	62	18	16	10.0	18.5	53	17	14	10.0	18.5
17	170	4	4	10.5	18.0	144	8	4	12.0	21.0	125	6	12	14.0	23.5	97	10	12	14.0	23.5	60	11	11	9.5	18.0	55	17	12	9.5	18.0
18	168	4	4	11.5	18.5	144	6	8	13.0	22.0	123	8	10	12.0	19.0	97	9	8	9.0	18.5	64	4	8	7.5	13.5	61	3	4	8.0	13.5
19	168	4	4	11.0	19.0	144	4	4	9.5	18.0	125	6	6	12.0	14.0	99	8	6	6.5	14.0	70	2	6	6.0	12.0	63	3	4	6.5	12.0
20	170	2	6	10.5	18.0	144	6	4	8.0	16.0	125	4	6	7.0	14.5	101	4	8	8.5	14.0	70	4	4	5.5	9.5	63	4	2	5.5	9.5
21	168	4	4	11.0	19.0	147	3	5	10.5	19.0	127	2	6	5.0	11.0	122	5	7	6.0	13.0	70	4	4	5.5	11.5	61	4	4	5.5	11.5
22	170	2	6	12.0	20.0	146	6	2	10.0	18.5	127	4	6	11.0	18.5	103	9	6	9.0	14.0	70	1	3	5.0	9.0	63	5	4	5.5	9.0
23	170	4	6	12.5	20.5	148	4	6	9.5	18.5	127	6	6	3.0	7.0	103	8	6	6.0	11.0	70	5	7	5.0	9.0	63	7	4	5.5	9.0

F_{dm} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_x = ratio of median to lower decile in db

V_{dm} = median deviation of overage voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-6.

MONTH-HOUR VALUES OF RADIO NOISE Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month June 19 60

EST	Frequency (Mc)																													
	.013			.051			.160			.495			2.5			5			10			20								
00	172	3	5	2.0	19.0	150	3	7	11.0	17.5	12.9	5	8	10.0	15.5	10.6	7	5	8.5	13.5	7.3	2	11	4.0	5.1	2	4.0	5.0		
01	172	4	6	12.5	19.5	150	5	6	11.0	17.0	12.9	7	7	9.0	14.0	10.6	8	6	7.5	14.5	7.3	1	5	5.0	9.0	6.0	2	4.0	5.0	
02	172	5	4	11.0	19.0	150	5	6	10.0	17.0	12.9	6	6	8.5	14.5	10.4	10	4	7.5	13.5	7.3	1	3	5.5	10.0	6.0	2	4.0	5.0	
03	172	4	3	12.0	20.0	150	5	5	12.0	17.0	12.9	8	7	9.0	16.0	11N	1	6	9.0	17.5	7.5	3	2	4.0	5.0	7.0	2	4.0	5.0	
04	172	6	4	13.0	20.0	150	8	7	11.5	17.5	12.9	8	7	9.5	16.5	10N	10	6	8.0	15.5	7.5	2	5	6.0	10.0	6.0	2	4.0	5.0	
05	172	6	4	14.0	22.0	150	6	9	14.0	18.0	10.0	16	15	*13.0	25.0	7.3	5	4	7.0	13.5	6.0	2	4	5.5	9.5	4.0	2	4.0	5.5	
06	170	6	4	13.5	22.0	148	8	10	16.0	21.0	12.7	8	14	14.0	24.5	10.0	13	12	14.5	26.0	6.5	7	9	*10.0	19.0	5.0	2	4.0	5.0	
07	170	6	4	15.0	22.5	146	9	7	16.0	24.0	12.7	6	11	13.0	24.0	10.0	10	16	13.5	25.5	6.1	8	10	11.0	19.5	5.0	1	4.0	5.0	
08	170	4	4	15.5	23.5	148	6	8	14.0	23.0	12.7	6	10	15.0	26.0	10.0	10	15	16.0	24.0	5.5	8	10	11.0	19.5	5.0	1	4.0	5.0	
09	170	4	4	15.0	23.5	147	6	7	15.0	24.0	12.7	6	8	*16.0	27.0	9.6	16	6	11.5	23.5	5.1	11	11	11.0	19.5	5.0	1	4.0	5.0	
10	170	4	4	15.0	23.0	146	11	8	16.0	25.0	12.7	6	16	14.5	26.5	9.4	18	14	14.0	26.5	4.7	16	16	16.5	3.7	1	4.0	5.0		
11	170	4	4	14.0	22.5	146	6	8	15.0	24.0	12.5	10	14	*15.0	26.0	9.7	17	18	*14.0	26.0	4.9	22	18	10.5	17.5	3.9	16	15	4.0	
12	170	6	2	14.0	21.0	145	12	5	14.0	21.5	12.7	12	11.5	23.0	9.9	19	15	13.0	23.0	5.1	27	19	13.5	23.5	4.4	24	19	11.5	18.5	3.7
13	172	8	4	13.0	19.5	148	10	10	13.0	21.0	12.5	14	8	15.0	24.0	10.3	17	19	*14.0	27.0	5.5	28	19	16.0	20.5	3.9	14	16	4.0	
14	172	10	4	11.0	17.5	148	14	8	10.5	17.0	12.7	12	12	15.0	23.5	10.2	20	16	*13.0	24.0	5.3	36	16	12.5	17.5	4.9	13	17	4.0	
15	174	4	4	10.5	16.5	148	12	7	12.0	17.5	12.6	16	12	14.0	23.5	10.1	18	20	15.5	24.0	6.1	26	18	*15.0	24.0	5.1	23	13	4.0	
16	172	6	2	10.0	15.0	148	10	8	12.5	18.5	12.7	10	10	14.0	24.0	10.0	14	20	*12.0	22.5	6.3	20	24	*13.0	21.5	5.6	15	11	4.0	
17	172	2	4	9.0	14.0	145	7	5	12.0	18.0	12.2	9	6	14.0	23.5	9.6	12	10	*15.0	25.0	5.9	13	8	11.0	18.0	5.6	17	11	4.0	
18	170	3	3	9.5	14.0	145	6	5	11.5	18.0	12.3	7	6	12.0	20.0	9.7	9	6	9.0	16.0	6.5	5	5	6.0	10.5	6.0	3	4.0	5.5	
19	170	2	4	11.0	16.0	144	6	4	11.5	18.0	12.3	4	4	8.5	14.0	9.8	6	4	7.0	11.5	7.1	4	4	7.0	11.0	6.0	2	4.0	5.5	
20	170	2	4	10.0	16.0	146	4	5	9.5	15.0	12.5	4	5	8.5	14.0	10.2	4	4	7.5	14.0	7.1	2	5	5.5	10.0	6.0	2	4.0	5.5	
21	170	3	4	10.5	19.0	146	6	6	9.5	14.5	12.5	4	6	7.0	12.0	10.3	5	5	7.5	13.0	7.1	3	5	5.5	9.5	6.0	2	4.0	5.5	
22	170	4	3	11.0	18.0	148	4	4	9.0	14.0	12.7	4	7	8.0	14.0	11.0	1	4	8.5	9.0	6.0	0	3	4.0	7.0	5.1	2	4.0	5.5	
23	170	5	3	11.5	18.0	148	7	3	11.0	16.5	12.7	8	5	9.0	15.0	11.4	8	3	7.0	13.5	7.2	3	4	4.0	6.0	5.1	2	4.0	5.5	

Fom = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_d = median of average voltage in db below mean power

L_d = median deviation of average logarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-7.

MONTH-HOUR VALUES OF RADIO NOISE

Station	Balboa, Canal Zone	Lat.	9.0 N	Long.	79.5 W	Month	July	19 60
---------	--------------------	------	-------	-------	--------	-------	------	-------

Median value of effective scattering noise in dB shows kib

Am - medium weight or effective uniting tissue

D_U = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power

* This sheet is a correction for corresponding sheet annealing in Tech Note 18-7

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month August 19 60

No	F _{0.13}	Frequency (Mc)																																												
		.013	.051	.160	.495	.2.5	5	10	20					F _{0.051}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.160}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.495}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.2.5}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.5}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.10}	D _U	D _Z	V _{dm}	L _{dm}	F _{0.20}	D _U	D _Z
00	171	8	5	9.5	6.0	15.0	8	4	10.0	16.0	12.9	7	7	8.0	12.5	10.2	13	3	7.5	13.5	6.8	6	3	6.0	10.0	6.2	4	2	5.0	8.0	3	5.0	8.0	30	4	6	3.5	5.0								
01	171	4	6	11.0	17.0	15.0	6	6	10.5	15.0	12.9	6	8	8.0	14.0	10.4	9	7	7.0	12.5	6.8	6	3	6.0	11.0	6.2	3	1	5.0	8.0	3	3.0	4.0	28	4	4	3.0	4.0								
02	171	6	5	12.0	17.5	15.0	7	7	9.5	15.5	12.9	9	9	9.0	14.5	10.4	11	8	8.0	14.5	7.0	6	4	6.0	11.0	6.4	2	3	5.0	9.0	48	2	2	5.0	9.0	28	4	4	3.0	4.0						
03	173	5	7	12.0	19.0	16.5	8	6	9.5	16.5	13.0	7	12	8.0	14.0	10.4	12	11	8.0	14.5	7.2	4	6	6.0	11.0	6.4	2	2	6.0	9.0	48	4	4	3.0	4.0	27	9	3	3.0	4.0						
04	173	6	7	13.0	19.0	15.0	8	10	10.5	17.0	13.9	8	11	10.0	17.0	10.2	14	9	9.0	17.0	7.1	5	6	5.5	10.5	6.4	2	4	5.5	9.0	47	4	4	3.5	4.5	26	8	2	1.5	2.5						
05	173	5	9	13.5	20.0	15.0	7	17	11.0	18.0	12.7	9	13	11.0	19.5	9.6	19	20	9.0	19.0	7.2	3	8	6.0	11.0	6.2	4	4	5.0	9.0	46	4	4	3.0	4.0	26	9	2	1.5	2.0						
06	170	7	8	13.0	26.0	14.8	9	16	14.5	21.5	12.9	6	20	12.5	23.0	9.8	14	20	12.0	21.0	6.4	6	12	8.5	15.5	5.8	3	6	6.0	11.0	44	4	4	4.0	5.0	27	9	3	3.0	4.0						
07	169	8	9	13.5	21.0	14.8	8	13	14.0	22.0	12.8	7	31	13.5	24.0	9.9	13	31	11.5	22.5	5.5	15	21	9.5	16.5	5.2	6	14	11.1	17.0	42	6	4	6.0	7.0	28	6	2	3.5	4.5						
08	169	8	8	14.0	21.5	14.7	8	12	14.0	23.0	12.5	12	28	12.5	22.5	9.8	14	24	11.0	20.0	4.7	19	19	8.5	14.0	4.6	12	2.0	11.0	19.0	36	10	6	7.5	12.0	37	5	3	4.0	6.0						
09	171	6	8	15.5	21.5	14.6	10	12	14.0	23.5	12.7	9	31	12.5	22.0	9.5	16	22	12.0	22.0	4.2	24	12	7.0	16.5	4.1	12	10	11.5	18.5	34	7	8	9.5	13.5	26	6	2	3.5	4.5						
10	169	8	6	14.0	21.0	14.4	10	11	14.0	22.5	12.6	9	31	14.5	25.5	9.4	17	24	12.0	23.5	4.0	26	15	8.0	16.0	3.6	13	12	12.5	22.0	36	14	6	10.0	15.5	26	10	2	4.0	6.0						
11	169	8	8	14.0	21.0	14.4	12	8	13.5	21.0	13.1	12	20	14.0	23.0	9.1	21	17	12.0	21.0	4.2	24	13	7.0	19.0	3.3	23	22	13	12.5	32	13	10	10.0	16.5	28	7	6	4.5	6.5						
12	169	5	3	13.0	20.0	14.4	10	10	12.0	20.0	12.0	12	17	14.0	23.0	9.0	28	17	14.0	23.0	9.0	39	29	13	11.5	26.0	3.2	32	32	12	10.5	20.5	34	19	8	11.0	18.5	28	12	4	4.5	6.5				
13	171	5	4	12.0	18.5	14.8	10	11	10.5	17.5	12.7	12	16	13.0	21.0	16	18	18	13.5	25.0	4.2	38	11	12.0	25.0	4.1	21	21	11.0	19.0	38	20	6	7.0	11.5	30	12	2	5.0	7.0						
14	171	6	2	8.5	13.0	15.0	11	6	9.0	14.5	12.6	12	17	13.0	21.5	11.4	21	13	12.0	21.0	4.2	28	22	11.0	20.0	5.1	51	11	10.0	18.5	39	14	4	7.0	11.5	32	10	4	4.0	6.0						
15	173	5	4	12.0	15.0	14.7	13	7	11.5	18.5	12.3	17	6	14.0	22.0	1.0	21	13	14.0	23.0	5.6	22	1.0	11.5	20.0	4.7	21	11	10.0	19.5	41	16	3	8.0	12.5	32	10	2	3.5	5.5						
16	173	4	2	9.5	13.0	14.6	10	6	12.5	18.0	12.3	14	12	14.5	21.5	9.6	18	9	12.0	22.5	5.6	22	1.5	11.5	19.0	5.1	14	11	10.5	18.5	44	6	2	5.0	8.0	34	4	3	4.0	6.0						
17	171	6	2	9.0	13.5	14.4	12	11	10.0	16.5	12.1	11	10	11.0	18.0	9.4	11	9	10.0	18.0	5.6	20	1.2	10.0	16.0	5.4	12	11	10.0	18.5	46	3	2	5.0	8.0	34	4	3	4.0	6.0						
18	169	5	4	9.0	14.0	14.6	7	5	10.0	16.0	12.3	9	10	11.0	18.0	9.4	11	9	10.0	18.0	5.6	20	1.2	10.0	16.0	5.4	12	11	10.0	18.5	46	3	2	5.0	8.0	34	4	3	4.0	6.0						
19	169	4	4	9.0	14.0	14.7	7	6	11.0	17.0	12.5	8	7	8.0	13.5	10.2	10	7	7.0	15.0	6.8	6	2	4.5	8.0	5.1	14	11	10.0	17.0	51	3	2	4.0	6.0	32	2	2	5.0	7.0						
20	171	4	4	10.0	15.0	14.8	6	6	10.0	15.5	12.7	8	8	8.0	13.0	10.4	10	6	7.0	11.5	7.0	4	3	5.0	9.0	5.1	14	11	10.0	17.0	51	3	2	4.0	6.0	31	6	4	3.0	5.0						
21	171	4	3	9.0	15.0	14.8	6	6	9.5	14.0	12.7	8	6	7.0	12.0	10.4	10	6	6.5	12.0	7.0	4	4	5.5	9.0	5.1	14	11	10.0	17.0	51	2	2	3.0	4.0	30	4	2	3.0	4.0						
22	171	4	4	9.0	14.5	14.8	7	6	9.0	13.0	12.7	6	6	8.0	13.0	10.5	8	5	7.0	12.0	7.0	3	4	5.0	9.0	5.1	14	11	10.0	17.0	51	2	2	3.0	4.0	29	6	2	3.0	4.0						
23	171	5	6	10.0	16.0	14.8	8	6	9.0	13.0	12.7	5	7	7.0	12.0	10.4	12	5	7.5	13.0	6.8	6	2	5.0	9.0	5.1	14	11	10.0	17.0	51	8.0	3	4	4.0	5.0	31	6	4	4.0	5.0					

F_{0.13} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_Z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-7.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Spring (Mar. Apr. May) 19 60

TIME BLOCKS (LST)														2000-2400																
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}										
0.13	165	6	4	10.5	17.0	165	7	4	10.5	17.0	163	7	5	11.5	18.0	167	7	4	10.5	17.0	166	5	3	9.5	15.5	165	5	5	10.0	16.0
0.51	144	7	5	9.0	16.0	141	10	5	10.0	18.0	137	10	9	13.0	21.5	142	10	7	11.0	19.0	140	8	6	10.0	17.0	142	7	4	8.0	14.5
1.60	123	9	6	7.0	13.0	120	10	10	11.0	20.0	114	12	15	13.0	24.0	118	15	13	11.5	21.0	119	10	9	10.0	18.0	122	7	5	6.0	11.5
2.95	102	10	6	7.0	14.0	100	8	13	13.0	24.0	98	12	23	14.0	25.0	100	16	16	14.5	22.0	98	10	11	10.0	18.0	101	6	6	6.0	13.0
2.5	69	6	6	6.0	12.0	64	7	8	8.0	15.0	43	16	15	9.0	15.5	45	23	15	6.5	11.0	55	12	8	6.5	12.5	66	6	4	5.5	10.5
5	62	4	5	5.0	9.0	57	5	6	6.5	11.0	36	13	11	8.0	14.0	38	20	11	8.5	13.5	53	8	5	5.5	10.0	62	4	4	4.5	8.0
10	48	4	4	5.0	8.5	44	4	4	5.0	9.0	33	8	7	7.0	16.0	36	12	7	7.0	16.0	47	4	4	4.5	8.0	49	4	3	4.5	8.0
20	27	6	3	3.0	5.0	26	4	3	2.5	4.0	25	6	4	3.5	6.0	29	8	3	4.5	7.0	30	4	3	3.0	5.5	29	5	4	3.5	5.5

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

** No data for March.
* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-6.

USCANN 105-81

RN-14

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Summer (June July Aug.) | 9 60

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400												
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
F _{dm}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}						
61.3	172	4	5	12.0	18.5	17.2	6	6	14.0	21.0	17.0	6	5	15.0	22.5	17.2	7	3	11.5	18.0	17.1	4	4	10.0	16.0
65.1	150	6	5	11.0	17.0	15.0	7	10	13.5	21.0	14.7	8	9	15.0	24.0	14.8	12	8	12.0	19.0	14.6	9	6	11.5	17.0
76.0	129	6	7	9.0	15.0	12.9	7	14	12.0	21.0	12.6	9	18	14.5	25.5	12.6	13	11	13.5	23.0	12.4	10	8	12.0	19.5
89.5	105	9	6	8.5	15.0	10.2	12	16	11.5	21.5	9.7	15	18	13.0	24.0	10.2	17	16	13.5	24.5	9.9	12	8	10.0	18.0
2.5	72	4	4	6.0	10.5	6.8	6	8	8.0	14.5	4.9	18	14	9.0	15.0	5.3	2.6	16	11.5	20.5	6.3	13	9	8.5	14.5
5	64	3	3	5.0	8.0	6.0	4	5	7.0	12.0	4.2	14	13	11.0	19.0	4.6	2.4	14	12.0	21.0	5.8	8	5	6.0	9.5
10	50	2	3	5.0	8.0	4.5	4	4	6.0	9.0	3.5	11	6	9.0	15.0	4.0	1.6	6	9.0	14.0	4.8	5	3	4.5	7.0
20	29	5	4	3.5	5.0	2.7	7	3	3.0	4.5	2.7	8	3	4.0	6.0	3.1	1.2	4	4.5	6.5	3.2	5	4	3.5	5.5

F_{dm} = median value of effective antennae noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db


V_{dm} = median deviation of overage voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

VFC/DMN NSG-Rh.

RN-14

* This sheet is a correction for corresponding sheet appearing in Tech. Note 18-7.



U. S. DEPARTMENT OF COMMERCE

W. L. Clegg, Secretary

NATIONAL BUREAU OF STANDARDS

A. V. Astin, Director



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its major laboratories in Washington, D.C., and Boulder, Colo., is suggested in the following listing of the divisions and sections engaged in technical work. Generally, each section carries out specialized research, development, and engineering in the field indicated by title. A brief description of the activities, and of the resultant publications, appears on the inside of the next page.

WASHINGTON, D. C.

Electricity. Resistance and Reactance. Electrochemistry. Electrical Instruments. Magnetic Measurements. Electricity, High Voltage.

Metrology. Photometry and Colorimetry. Refractometry. Photographic Research. Length. Engineering Metrology. Mass and Scale. Volumetry and Densimetry.

Heat. Temperature Physics. Heat Measurements. Cryogenic Physics. Equation of State. Statistical Physics.

Radiation Physics. X-ray. Radioactivity. Radiation Theory. High Energy Radiation. Radiological Equipment. Neutron Instrumentation. Neutron Physics.

Analytical and Inorganic Chemistry. Pure Substances. Spectrochemistry. Solution Chemistry. Standard Reference Materials. Applied Analytical Research. Crystal Chemistry.

Mechanics. Sound. Pressure and Vacuum. Fluid Mechanics. Engineering Mechanics. Rheology. Combustion Controls.

Polyers. Macromolecules: Synthesis and Structure. Polymer Chemistry. Polymer Physics. Polymer Characterization. Polymer Evaluation and Testing. Applied Polymer Standards and Research. Dental Research.

Metallurgy. Engineering Metallurgy. Microscopy and Diffraction. Metal Reactions. Metal Physics. Electrolysis. Metal Deposition.

Inorganic Solids. Engineering Ceramics. Glass. Solid State Chemistry. Crystal Growth. Physical Properties. Stallography.

Building Research. Structural Engineering. Fire Research. Mechanical Systems. Organic Building Materials. Fire and Safety Standards. Heat Transfer. Inorganic Building Materials. Metallic Building Materials.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics. Operations Research.

Data Processing Systems. Components and Techniques. Computer Technology. Measurements Automation. Engineering Applications. Systems Analysis.

Atomic Physics. Spectroscopy. Infrared Spectroscopy. Far Ultraviolet Physics. Solid State Physics. Electronics. Atomic Physics. Plasma Spectroscopy.

Instrumentation. Engineering Electronics. Electron Devices. Electronic Instrumentation. Mechanical Instruments. Basic Instrumentation.

Physical Chemistry. Thermochemistry. Surface Chemistry. Organic Chemistry. Molecular Spectroscopy. Elementary Processes. Mass Spectrometry. Photochemistry and Radiation Chemistry.

Office of Weights and Measures.

BOULDER, COLO.

Cryogenic Engineering Laboratory. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Cryogenic Technical Services.

CENTRAL RADIO PROPAGATION LABORATORY

Ionosphere Research and Propagation. Low Frequency and Very Low Frequency Research. Ionosphere Research. Prediction Services. Sun-Earth Relationships. Field Engineering. Radio Warning Services. Vertical Soundings Research.

Radio Propagation Engineering. Data Reduction Instrumentation. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Propagation-Terrain Effects. Radio-Meteorology. Lower Atmosphere Physics.

Radio Systems. Applied Electromagnetic Theory. High Frequency and Very High Frequency Research. Frequency Utilization. Modulation Research. Antenna Research. Radiodetermination.

Upper Atmosphere and Space Physics. Upper Atmosphere and Plasma Physics. High Latitude Ionosphere Physics. Ionosphere and Exosphere Scatter. Airglow and Aurora. Ionospheric Radio Astronomy.

RADIO STANDARDS LABORATORY

Radio Physics. Radio Broadcast Service. Radio and Microwave Materials. Atomic Frequency and Time-Interval Standards. Radio Plasma. Millimeter-Wave Research.

Circuit Standards. High Frequency Electrical Standards. High Frequency Calibration Services. High Frequency Reference Standards. Microwave Calibration Services. Microwave Circuit Standards. Low Frequency Calibration Services.

