

National Bureau of Standards
Library, N.W. Bldg
SEP 30 1964

Reference book not to be
taken from the library.



Technical Note

No. 18-19

**QUARTERLY RADIO NOISE DATA
JUNE, JULY, AUGUST, 1963**

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins



**U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

Institute for Basic Standards. Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.** Office of Standard Reference Data.

Institute for Materials Research. Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.** Office of Standard Reference Materials.

Central Radio Propagation Laboratory.** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

Institute for Applied Technology. Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

* NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado.

** Located at Boulder, Colorado.

NATIONAL BUREAU OF STANDARDS

Technical Note 18-19

Issued August 21, 1964


QUARTERLY RADIO NOISE DATA JUNE, JULY, AUGUST, 1963

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.


For sale by the Superintendent of Documents, U. S. Government Printing Office
Washington, D.C. 20402

Price: 50 cents

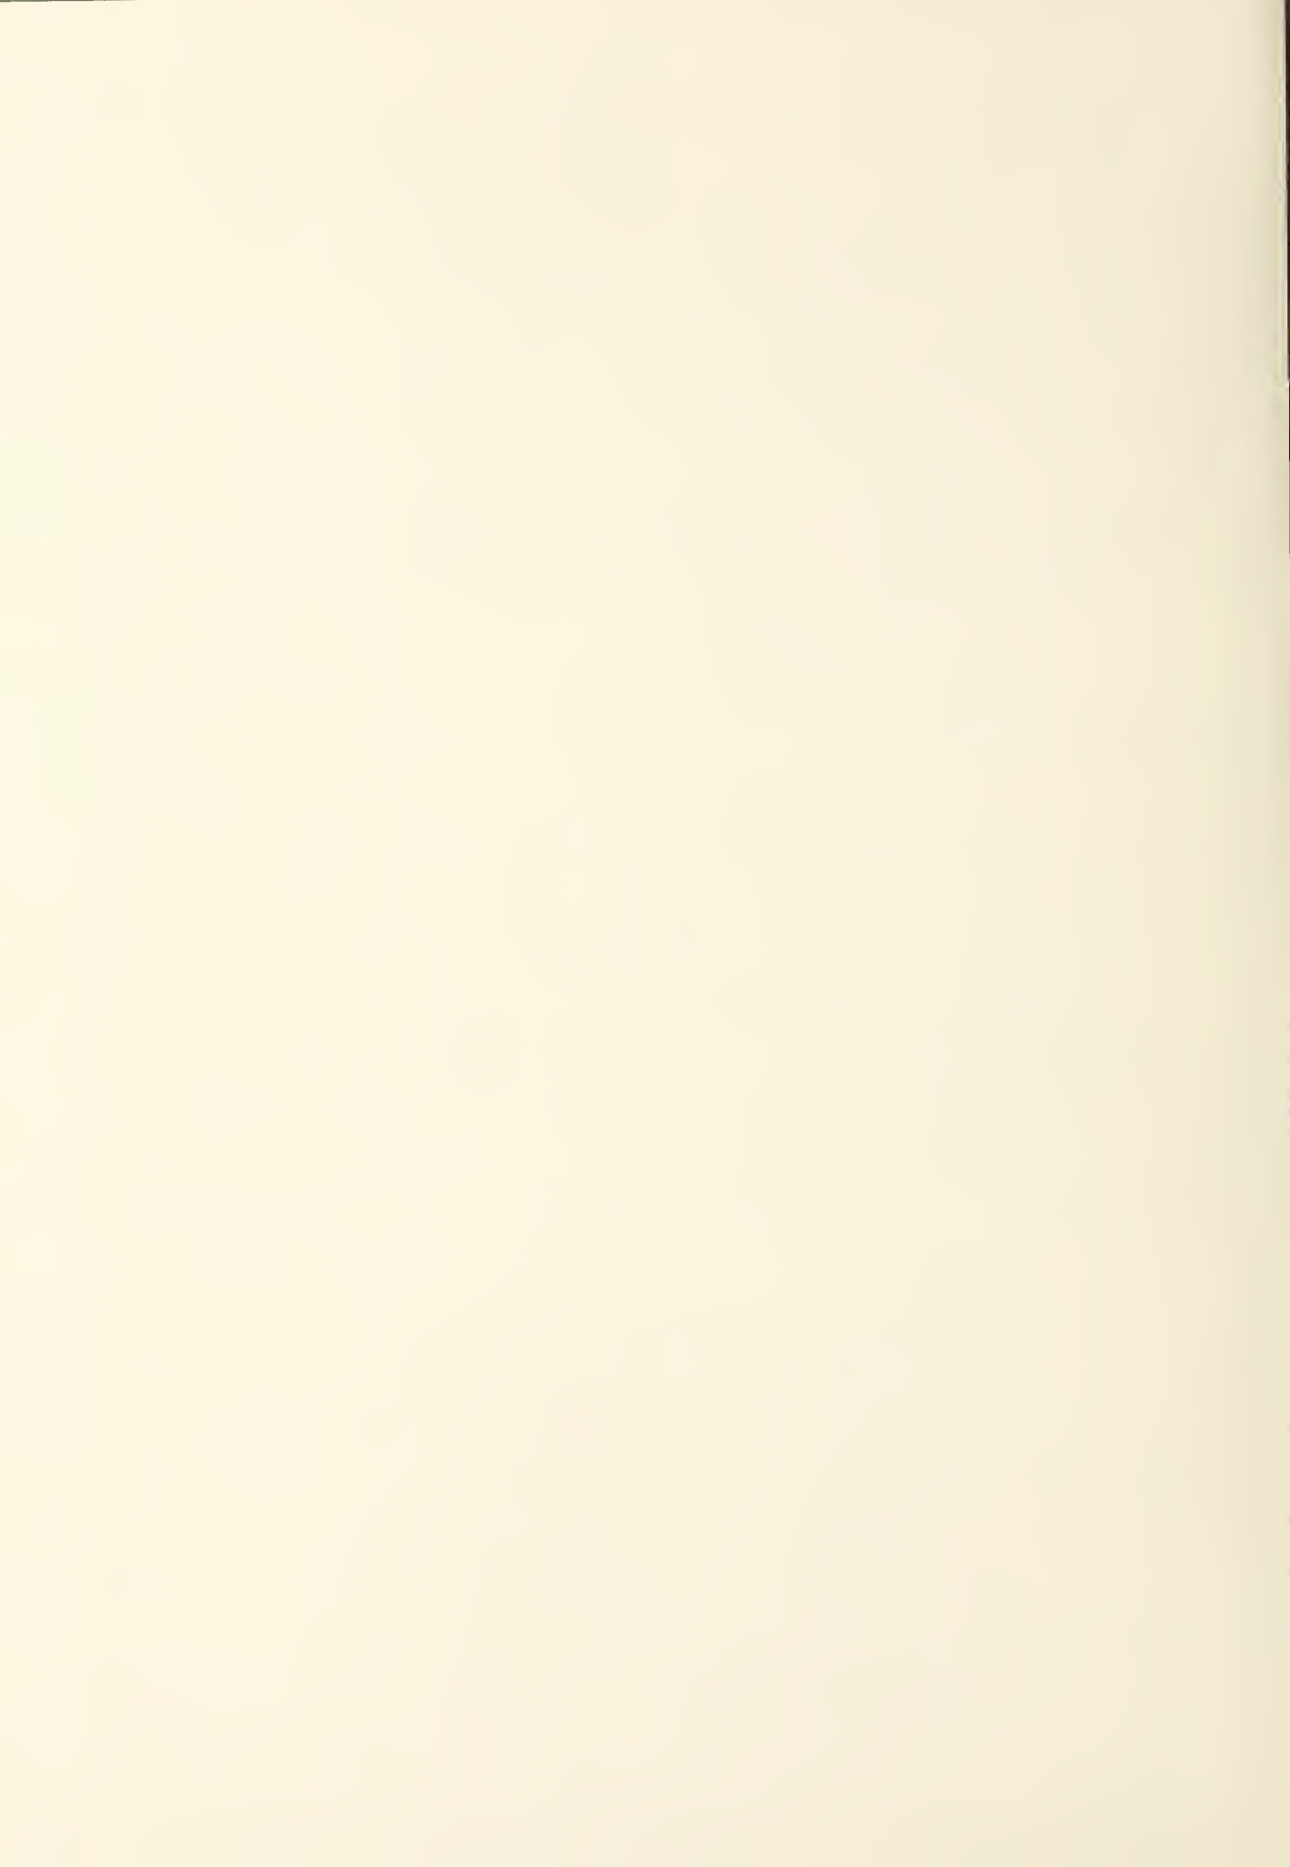




Radio Noise Recording Station

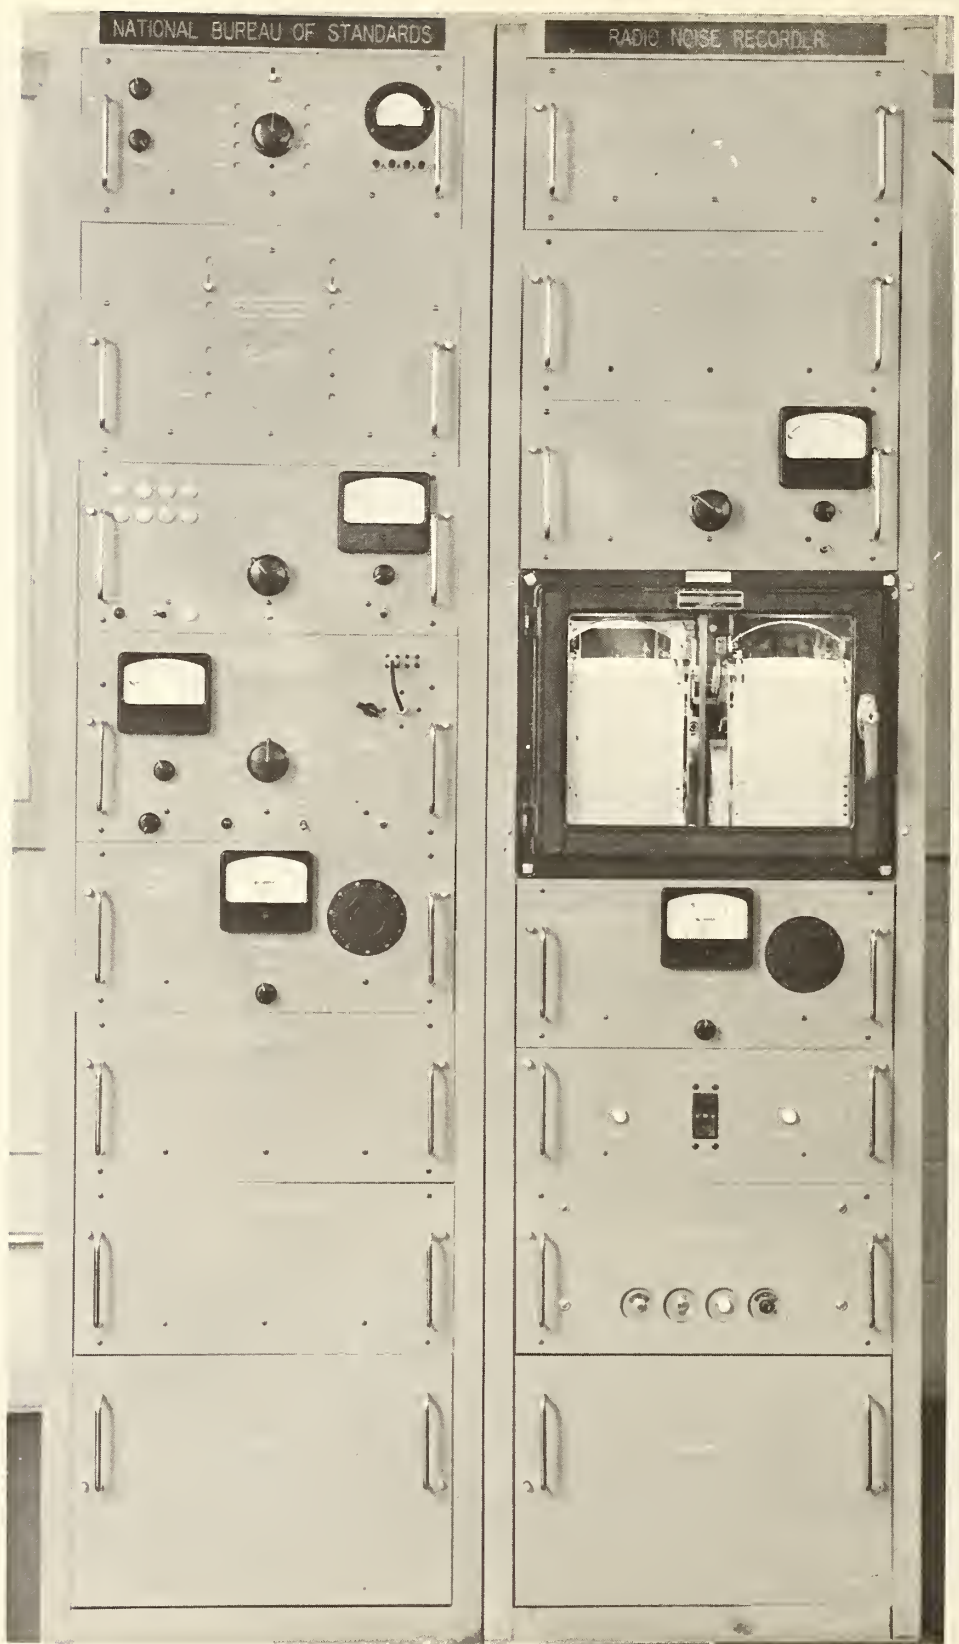


ARN-2 Atmospheric Radio Noise Recorder

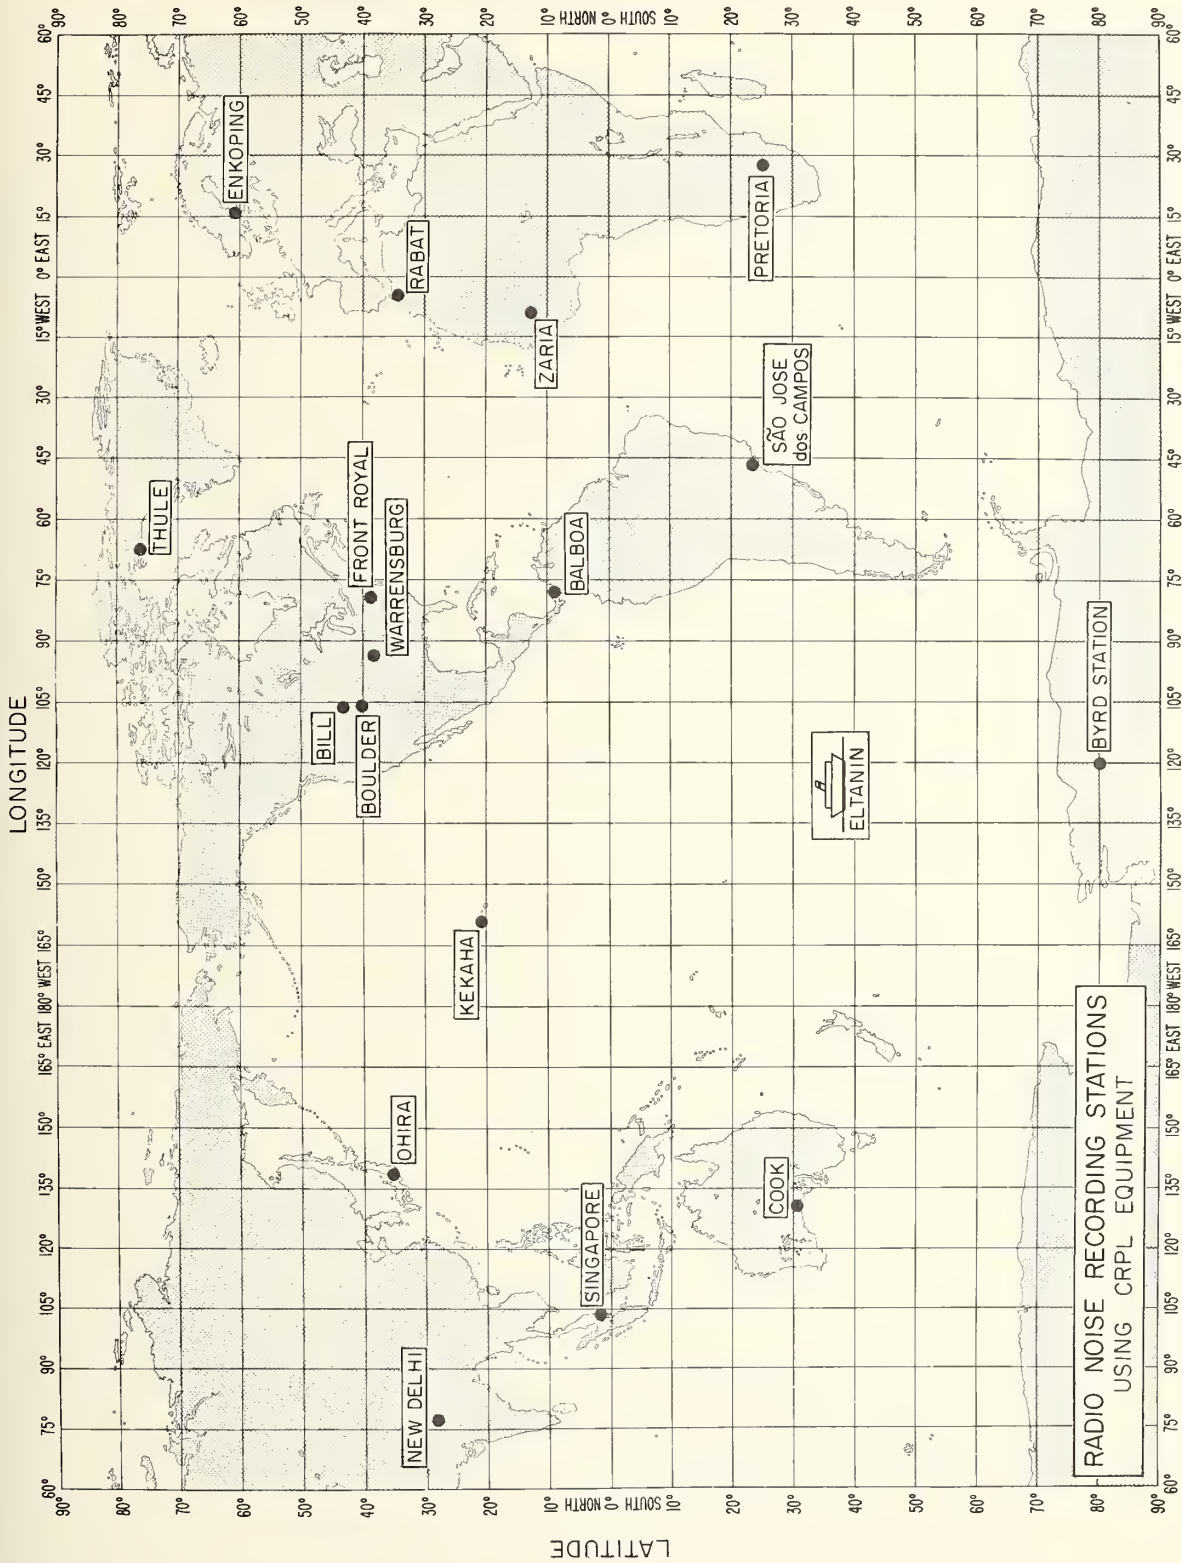

RADIO NOISE RECORDING STATIONS
USING CRPL EQUIPMENT

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

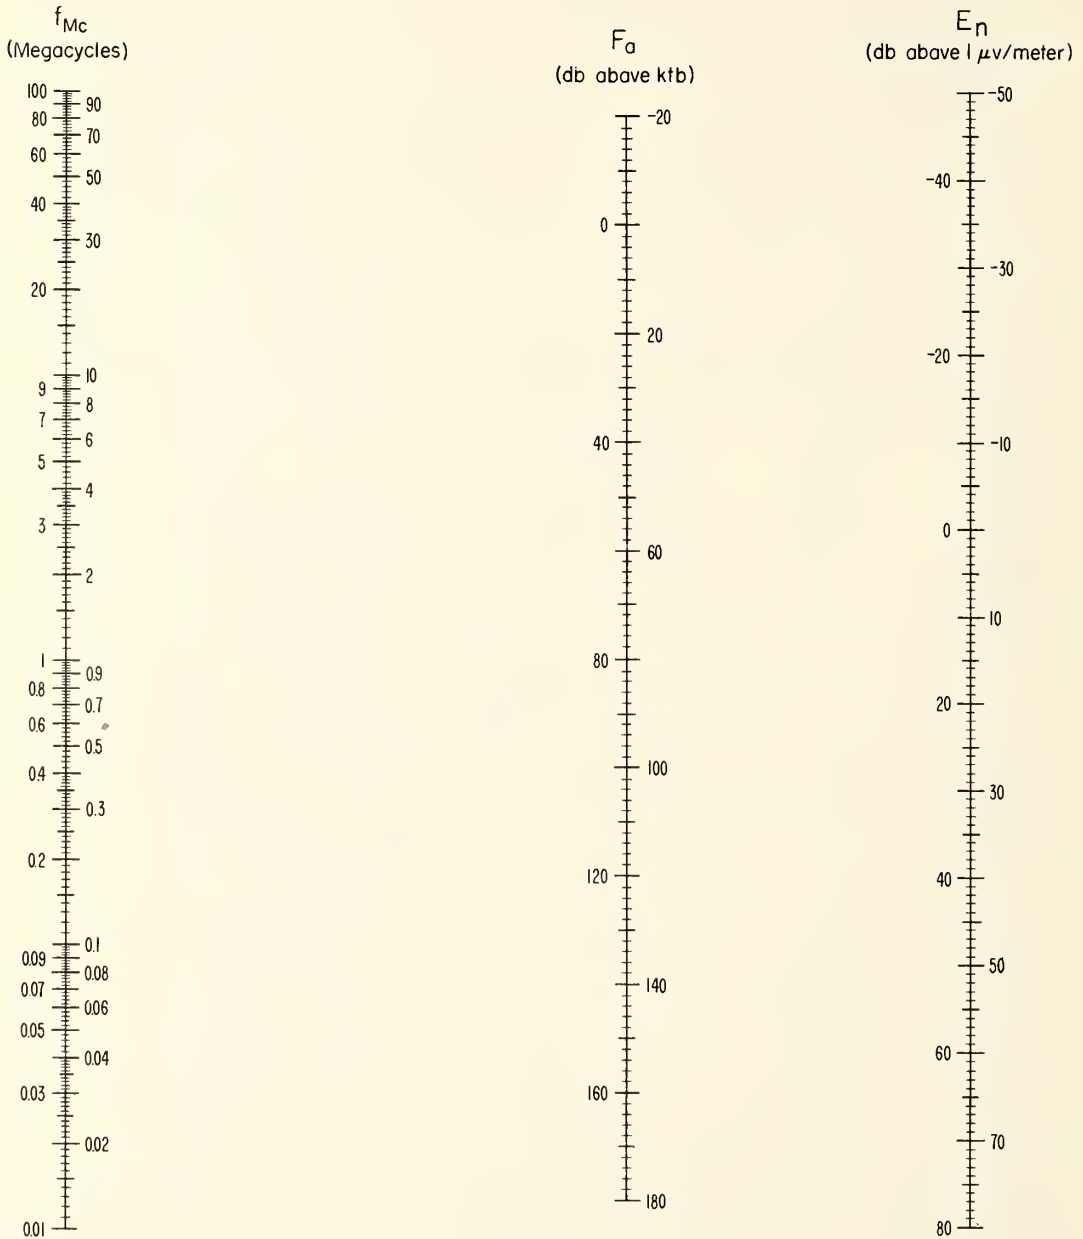

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above $1 \mu v/meter$ for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Quarterly Radio Noise Data
June, July, August, 1963

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

Radio noise measurements are being made at eighteen stations in a world-wide network operated in a co-operative program co-ordinated by the National Bureau of Standards. The locations of these stations are shown on the map. The results of these measurements for the months June, July, and August are given in this report. Where the results for these months are not presently available, the data will be published in subsequent reports, and the data for previous months, which are now available but have not been published previously, are included. The tabulated values are based on three basic parameters of the noise; these are the mean power, the mean envelope voltage and the mean logarithm of the envelope voltage.

The noise power received from sources external to the antenna averaged over a period of several minutes is the basic parameter and can be conveniently expressed in terms of an effective antenna noise factor, f_a , which is defined by:

$$f_a = p_n / kT_o b = T_a / T_o$$

where

p_n = noise power available from an equivalent loss-free antenna (watts)

k = Boltzman's constant = 1.38×10^{-23} joules per degree Kelvin

T_o = reference temperature, taken as 288° K

b = effective receiver noise bandwidth (c/s)

T_a = effective antenna temperature in the presence of external noise.

The antenna noise factors in this report are for a short vertical antenna over a perfectly conducting ground plane and are expressed in decibels, $F_a (= 10 \log_{10} f_a)$. This parameter is simply related to the rms noise field strength along the antenna by:

$$E_n = F_a - 95.5 + 10 \log_{10} b + 20 \log_{10} f_{\text{Mc/s}}$$

where:

E_n = rms noise field strength for bandwidth b in db above
1 $\mu\text{V/m}$

b = effective receiver noise bandwidth in c/s

$f_{\text{Mc/s}}$ = frequency in Mc/s.

The value of E_n for a 1 kc/s bandwidth can be found from the attached nomogram. It should be noted that E_n is the vertical component of the field at the antenna. It should also be noted that the rms envelope voltage is 3 db higher than the rms voltage.

The other two noise parameters tabulated are given relative to the mean power. Thus, the mean voltage and mean logarithm expressed as deviations, V_d and L_d , respectively, are in db below the mean power.

Measurements of the three parameters reported were made with the National Bureau of Standards' Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 6.6294 meter (21.75') vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour during which they were recorded. The month-hour medians, F_{am} , V_{dm} and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

In addition to these month-hour values, corresponding values are tabulated for the time blocks as defined by CCIR Report 322. All recorded values for the four hours of the day and the three-month period are used to determine the median and decile values. When no data were available for one or two months of the season, it is so indicated and should be noted when considering seasonal trends.

The values presented in the tables reflect the actual measured values of radio noise. The only editing for man-made noise or station contamination of the records has been done by the station operators, and no additional attempt has been made to identify these values by systematic statistical means. These preliminary data values are presented in order to expedite dissemination of the data, and additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [Crichlow et al., 1960b] contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution with a form factor described in the above reference and can, therefore, be used to determine whether the measured value or the most probable value of L_d for any value of V_d should be used.

Station clocks are set to local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5). The data from the Floating Antarctic Research Vessel, USNS Eltanin, are grouped so that a block 10° in latitude by 15° in longitude is treated as a separate station. The station clock in this case is

corrected to the LST at the center of the block. Because of this grouping, very few readings may be used to obtain the median values tabulated in some cases. If, during the month, fewer than ten readings are obtained for any one block, the decile values are not given. If data for less than three months are used in the time block summaries, this fact is noted on the summary sheet. Because of the small sample size, some caution should be exercised when using these values.

The assistance of the station operators and other personnel of the operating agencies in obtaining the data contained in this report is gratefully acknowledged. Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii;
Warrensburg, Missouri; USNS Eltanin

U.S. Army Strategic Communications Command - Balboa, C. Z.;
Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and Ahmadu Bello University, Electrical
Engineering Department, Zaria, Northern Nigeria

Ministry of Communications, Wireless Planning and Co-ordination
Organization - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) - Pretoria

Institut Scientifique Cherifien (Morocco) - Rabat

Comissão Nacional das Atividades Espaciais (Brazil) - São José
dos Campos

Department of Scientific and Industrial Research (Great Britain) -
Singapore

The following publications contain additional information on radio noise:

- Clarke, C., "Atmospheric Radio-Noise Studies Based on Amplitude-Probability Measurements at Slough, England, during the International Geophysical Year," Proc. Inst. Elec. Eng., Pt. B, 109, 47, 393 (September, 1962).
- Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney, "Amplitude-Probability Distributions for Atmospheric Radio Noise," NBS Monograph 23 (November, 1960b).
- Crichlow, W. Q., C. J. Roubique, A. D. Spaulding, and W. M. Beery (January-February, 1960) "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," J. Res. NBS 64D (Radio Propagation) No. 1, 49-56.
- Crichlow, W. Q., "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6, 778 (1957).
- Crichlow, W. Q., D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
- "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- "World Distribution and Characteristics of Atmospheric Radio Noise," C. C. I. R. Report No. 322, Xth Plenary Assembly, Geneva, 1963, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- Fulton, F. F. (Jr.) (May-June, 1961), "Effect of Receiver Bandwidth on the Amplitude Distribution of VLF Atmospheric Noise," J. Res. NBS 65D (Radio Propagation) No. 3, 299-304.
- Horner, F., "An Investigation of Atmospheric Radio Noise at Very Low Frequencies," Proc. Inst. Elec. Eng., Pt. B, 103, 743 (1956).

- Horner, F., "Radio Noise of Terrestrial Origin," Proc. of Commission IV on Radio Noise of Terrestrial Origin during the XIIIth General Assembly of URSI, " London, September, 1960.
- Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (November-December, 1962) "Conversion of the Amplitude-Probability Distribution Function for Atmospheric Radio Noise from One Bandwidth to Another," J. Res. NBS 66D (Radio Propagation) No. 6, 713-720.
- Obayashi, T. (January-February, 1960), "Measured Frequency Spectra of Very-Low-Frequency Atmospheric," J. Res. NBS 64D(Radio Propagation) No. 1, 41-48.
- Taylor, W. L. (September-October, 1963), "Radiation Field Characteristics of Lightning Discharges in the Band 1 kc/s to 100 kc/s," J. Res. NBS 67D (Radio Propagation) No. 5, 539-550.
- Taylor, W. L. and A. G. Jean (September-October, 1959), "Very-Low-Frequency Radiation Spectra of Lightning Discharges," J. Res. NBS 63D (Radio Propagation) No. 2, 199-204.
- URSI Special Report No. 7, "The Measurement of Characteristics of Terrestrial Radio Noise," Elsevier Publishing Co. (1962).
- Watt, A. D. and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
- Watt, A. D. (September-October, 1960), "ELF Electric Fields from Thunderstorms," J. Res. NBS 64D (Radio Propagation) No. 5, 425-433.
- Watt, A. D. and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
- Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).


Data included in this report and the standard time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	June, July, August 1963	75 W	+05
Bill	June, July, August 1963	105 W	+07
Boulder	June, July, August 1963	105 W	+07
Cook	June, July, August 1963	135 E	-09
USNS Eltanin	June, August 1963		
Enköping	June, July, August 1963	15 E	-01
Kekaha	June, July, August 1963	150 W	+10
New Delhi	June, July, August 1963	75 E	-05
Ohira	June, July, August 1963	135 E	-09
Pretoria	June, July, August 1963	30 E	-02
Rabat	August 1963	GMT	0
São Jose	August 1963	45 W	+03
Singapore	June, July, August 1963	105 E	-07
Warrensburg	June, July, August 1963	90 W	+06

Previous data from the World-Wide Network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957-December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1959
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 September, October, November 1960
- 18-9 December, January, February 1960-61
- 18-10 March, April, May 1961
- 18-11 June, July, August 1961
- 18-12 September, October, November 1961
- 18-13 December, January, February 1961-62
- 18-14 March, April, May 1962
- 18-15 June, July, August 1962
- 18-16 September, October, November 1962
- 18-17 December, January, February 1962-63
- 18-18 March, April, May 1963

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

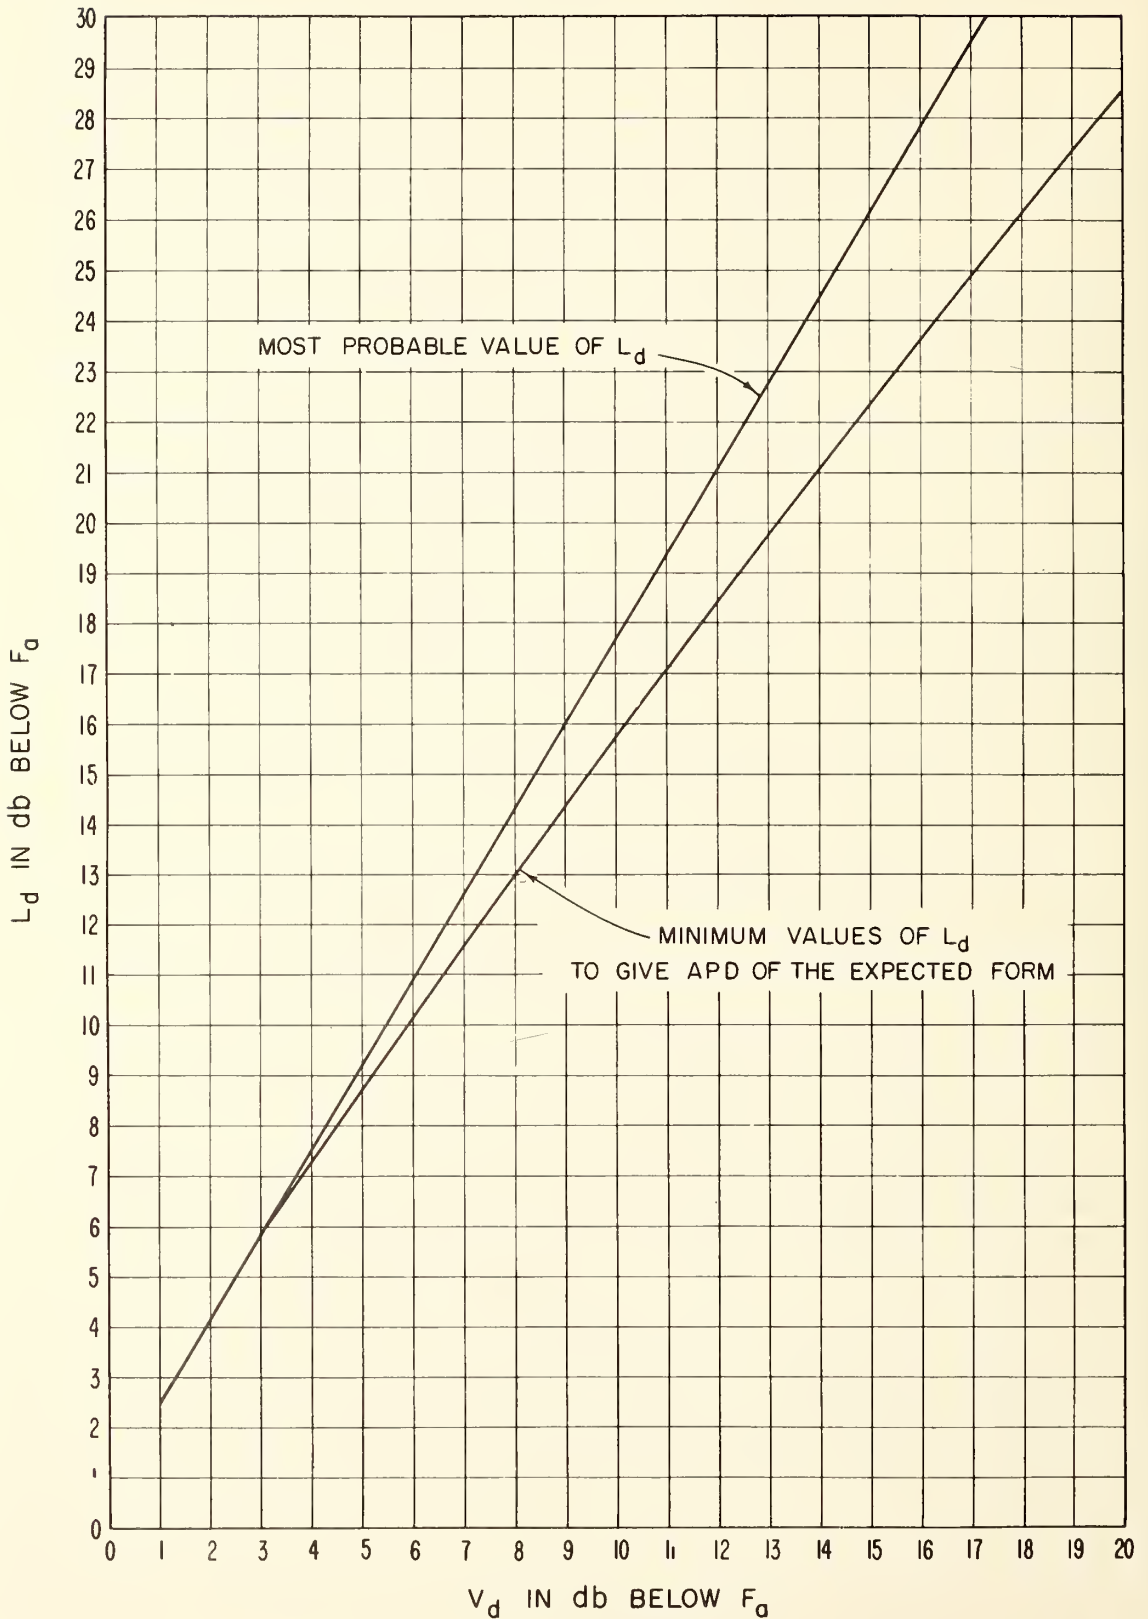

Hour (EST)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	F _{om} ⁺	D _u	V _{dm} ⁺	F _{am} ⁺	D _u	V _{dm} ⁺	F _{om} ⁺	D _u	V _{dm} ⁺	F _{am} ⁺	D _u	V _{dm} ⁺	F _{om} ⁺	D _u	V _{dm} ⁺	F _{am} ⁺	D _u	V _{dm} ⁺	F _{om} ⁺	D _u	V _{dm} ⁺	F _{am} ⁺	D _u	V _{dm} ⁺			
00	141			97			71			80	105	61	50	80	43								20				
01	141			99			72			50	90	59	45	80	40								6.0	75	20		
02	141			99			71			75	110	59	45	90	41								2.5	50	22		
03	145			99			74			55	95	59	40	75	40								75	100	22		
04	147			102			74			50	90	62	50	70	41								55	80	23		
05	145			97			75			55	100	61	55	85	41								45	60	23		
06	142			97			67			75	120	57	55	95	42								50	80	22		
07	143			97			67			70	150	57	70	105	41								50	80	23		
08	143			98			61			100	145	53	60	100	37								40	60	25		
09	143			92			51			65	115	51	90	130	35								60	75	24		
10	137			91			53					49	50	75	37								50	65	24		
11	135			90			49			85	135	49	9.5	140	36								20	30	25		
12	135			92			50			105	165	47	60	95	39								50	75	24		
13	143			105			61			70	115	49	80	110	42								40	70	32		
14	143			103			59			80	105	51			41								55	80	30		
15	144			98			61			100	160	53	105	175	44								50	70	32		
16	143			94			67			140	195	57			49								40	60	28		
17	139			92			60			80	120	59	55	95	47								30	50	28		
18	138			96			67			50	105	63	50	75	47								35	60	26		
19	139			98			73			50	85	63	55	75	46								50	75	24		
20	139			97			73			70	100	63	40	60	47								50	75	22		
21	139			99			72			60	80	63	45	65	46								35	65	23		
22	141			95			71			40	70	63	40	80	44								60	80	20		
23	140			97			71			50	85	61	50	80	45								55	90	22		

F_{om} = median value of effective omnidirectional noise in db above ktb
 D_u = ratio of upper decile to median in db
 V_{dm}⁺ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W

Month July 19 63

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}	F _{em}	D _l	V _{dm}	L _{dm}				
00	165	4	4	130	145	4	5	95	155	125	6	2	80	130	106	4	4	60	110	72	5	20	65	95	62	2	16	45	80	46	19	9	35	60	26	2	4	15	25	
01	167	2	4	135	165	147	4	100	150	127	4	6	85	130	104	8	2	60	105	72	4	22	50	100	63	4	7	50	90	47	20	7	25	50	26	4	3	15	25	
02	167	4	4	120	175	147	7	95	150	127	5	4	80	130	106	5	6	60	110	72	6	16	60	90	62	4	20	50	85	46	21	9	40	70	26	6	6	20	35	
03	167	4	4	110	180	148	6	100	160	127	6	6	80	135	106	5	7	70	120	74	4	11	55	100	62	6	18	55	90	46	22	12	50	65	26	8	3	20	40	
04	167	6	4	115	185	147	7	100	170	127	4	6	90	150	104	8	5	65	130	74	2	18	55	100	62	4	17	60	95	48	23	11	40	60	26	8	6	30	40	
05	167	6	6	120	180	147	6	110	175	129	3	9	95	170	104	8	14	90	165	72	6	16	65	110	62	5	9	60	100	48	22	12			26	7	4	75	25	
06	165	6	4	120	180	147	6	105	190	127	6	10	115	195	106	8	14	95	185	68	4	15	80	140	60	4	12	60	100	60	10	16	45	75	28	7	5	40	50	
07	165	7	4	140	195	147	4	120	190	127	5	11	110	180	104	10	14	115	195	65	5	12	95	140	56	8	8	80	130	54	8	14	20	50	28	2	4	40	50	
08	167	4	6	130	190	146	5	10	135	220	127	6	12	120	210	105	7	16	100	170	60	8	6	95	160	53	6	6	80	120	54	4	14	20	40	28	8	4	20	40
09	166	5	7	125	185	143	8	8	140	210	121	12	4	120	195	101	13	17	95	165	54	15	7	100	160	47	16	3	70	120	50	4	12	35	65	28	8	6	20	50
10	165	6	6	125	185	145	6	13	140	200	127	4	11	120	200	102	12	12	125	215	54	11	10	110	175	48	8	8	100	140	48	4	12	120	170	28	12	6	30	55
11	163	10	2	120	190	141	11	6	130	200	120	12	12	140	245	99	17	9	125	165	54	16	12	110	170	46	18	6	125	180	45	9	9	25	45	26	14	4	40	70
12	165	6	4	120	170	142	11	7	150	220	121	14	7	115	180	102	18	16	105	185	58	17	14	130	205	51	18	15	90	110	49	11	11	35	65	30	16	4	50	80
13	163	13	0	105	175	147	8	10	130	195	127	10	12	120	200	106	12	22	130	220	56	34	16	135	200	50	25	10	105	160	49	11	11	25	40	34	10	8	80	100
14	168	6	5	100	160	145	10	6	110	170	127	10	9	130	205	106	16	16	100	175	64	16	16	140	210	54	14	12	110	185	52	6	11	50	85	32	10	6	60	85
15	167	9	4	90	145	147	8	8	125	175	127	8	9	130	200	108	10	19	115	190	64	20	22	65	75	58	14	14	110	160	56	6	16	50	70	34	8	10	70	90
16	167	5	3	95	150	146	5	7	130	190	126	8	12	130	220	104	10	14	135	215	64	15	23	130	190	57	12	5	90	130	58	7	18	30	50	34	4	10	35	70
17	165	12	2	85	125	145	4	8	125	170	121	6	9	130	180	100	11	10	110	170	60	18	15	70	120	60	7	12	50	85	64	6	25	40	70	33	5	7	60	75
18	163	7	2	80	120	143	6	5	105	160	119	12	4	120	180	104	7	16	110	180	66	8	11	85	135	64	5	12	45	80	64	8	16	35	60	32	4	8	55	70
19	163	5	4	100	145	143	4	6	105	160	122	6	5	190	150	102	8	7	70	125	70	6	12	75	120	64	6	12	60	90	62	11	20	40	50	28	6	5	45	60
20	165	15	4	100	155	143	7	3	90	140	123	7	6	85	125	104	8	6	70	115	72	5	6	55	95	66	4	11	50	80	58	13	13	40	60	26	6	6	35	35
21	165	15	4	100	150	145	5	4	90	140	123	8	4	85	130	104	7	4	65	120	74	2	10	65	105	64	8	15	50	75	46	14	14	25	45	25	5	3	25	35
22	165	15	2	100	150	145	5	2	85	125	123	8	2	70	110	104	7	2	65	110	72	4	16	65	100	64	6	14	50	75	48	20	7	30	60	26	8	4	25	35
23	165	12	4	100	150	145	4	4	95	140	125	4	6	80	125	106	4	6	70	115	72	5	12	65	100	62	6	8	40	75	48	23	6	75	35	26	4	6	75	30

F_{em} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W

Month August 19 63

Hour (LST)	Frequency (Mc)																																						
	.013				.051				.160				.495				2.5				5				10				20										
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm				
00	176	11	11.5	16.0	14.6	7	3	11.0	16.5	127	5	4	9.0	13.0	104	10	4	7.5	12.0	72	4	3	5.5	9.0	68	6	6	5.5	7.5	48	21	11	3.0	5.0	26	2	2	3.0	6.0
01	173	12	11.5	16.0	14.6	8	3	9.0	14.0	129	5	6	9.5	14.0	106	10	8	7.5	11.0	74	6	6	5.0	9.0	69	6	1	3.0	8.5	48	23	8	5.0	7.0	28	6	4	2.0	3.5
02	173	14	10.5	17.5	14.8	4	4	10.0	15.0	127	7	2	9.0	14.5	106	8	6	8.0	12.5	76	4	4	6.0	10.0	70	3	5	5.0	8.5	46	22	8	4.5	7.0	26	4	2	3.0	5.5
03	179	8	10.5	17.0	14.8	6	4	10.5	16.0	129	6	4	10.0	14.5	106	7	6	8.0	14.0	78	2	6	6.0	10.0	69	4	4	5.0	8.5	46	28	6	5.0	8.0	26	4	2	4.0	5.5
04	181	6	11.5	18.5	14.8	4	4	11.0	16.5	127	6	3	10.5	15.0	106	6	7	7.5	14.0	79	3	5	7.5	12.0	69	4	4	5.5	9.0	46	21	7	7.0	9.5	26	4	2	2.0	3.5
05	181	6	12.0	18.0	14.8	4	4	11.0	16.0	127	6	6	10.0	16.0	104	8	9	9.0	15.5	78	4	7	6.0	12.5	67	6	4	5.0	9.0	46	28	9	5.5	8.0	26	6	2	3.0	4.5
06	185	2	17.0	20.0	14.6	5	8	13.5	17.5	127	3	11	13.0	19.0	102	10	15	9.5	16.0	74	4	13	8.0	12.0	67	6	5	6.0	10.0	65	10	24	3.5	7.0	28	2	4	7.5	2.5
07	183	4	14.0	18.0	14.6	5	9	13.5	19.0	127	3	13	12.5	19.0	102	9	15	12.5	18.5	68	6	17	9.5	16.0	65	6	14	7.0	12.5	54	13	14	8.0	11.5	28	4	2	2.5	3.5
08	181	6	14.0	18.0	14.6	5	11	14.5	20.0	125	8	15	14.5	21.0	98	14	14	12.5	18.5	62	6	10	10.5	17.0	61	6	6	8.0	12.0	54	10	14	5.0	7.0	28	6	4	4.0	5.5
09	181	6	14.0	18.0	14.4	6	10	17.5	22.0	125	8	14	13.5	15.5	96	16	18	9.0	14.5	60	8	15	8.0	14.5	56	9	5	9.0	13.0	50	9	13	8.0	12.0	28	8	4	5.0	7.0
10	181	6	16.0	21.0	14.4	6	10	13.5	21.0	123	8	16	17.5	22.0	98	16	21	10.0	17.0	56	10	14	10.0	16.0	57	8	10	8.0	13.0	48	14	12	9.0	13.0	28	6	2	4.5	6.5
11	181	6	15.0	20.0	14.1	8	8	20.0	20.0	123	8	22	13.5	20.0	96	16	21	11.0	17.0	56	13	16	7.0	18.5	53	14	10	10.0	14.5	47	11	12	11.5	16.0	28	6	3	5.0	6.0
12	179	8	14.0	18.0	14.2	10	8	16.0	19.5	121	16	16	16.5	20.0	102	18	26	13.0	19.0	53	23	14	11.0	17.0	55	17	8	10.5	14.5	51	11	15	6.0	10.0	30	13	4	7.0	16.0
13	178	7	13.0	18.5	14.6	11	11	15.0	18.5	127	10	21	14.5	20.0	107	13	23	13.0	22.0	56	30	12	7.5	20.0	57	23	11	11.0	15.5	54	10	14	9.0	13.5	34	14	4	6.0	8.0
14	179	8	10.0	20.5	14.8	12	10	14.5	20.0	129	10	16	14.0	20.5	108	12	19	13.0	19.5	64	25	20	8.5	22.5	65	16	16	9.0	14.0	58	8	12	6.0	8.0	36	9	4	8.0	11.0
15	183	4	16.0	19.0	14.4	8	6	12.0	14.0	125	11	12	12.5	19.0	107	9	11	11.0	16.5	69	15	25	10.0	18.0	59	18	9	9.0	16.0	58	8	12	7.0	10.0	36	8	4	7.5	10.0
16	183	3	15.0	16.0	14.4	8	9	11.0	15.0	123	13	13	13.0	17.0	101	14	17	10.0	15.0	68	13	22	12.5	18.0	63	11	9	6.5	10.0	58	10	12	5.0	8.0	34	6	2	5.5	8.0
17	183	4	16.0	18.5	14.2	8	5	11.0	15.5	121	13	11	13.0	18.5	94	17	10	8.5	13.5	64	12	14	7.0	14.0	65	4	8	7.0	10.5	60	13	11	6.0	8.5	34	4	4	6.0	8.0
18	183	2	16.0	20.0	14.2	6	4	10.5	15.5	119	12	8	10.5	15.0	98	13	6	7.5	10.5	66	8	8	7.5	11.5	69	4	4	6.0	8.0	52	20	4	6.0	9.5	34	2	4	5.0	7.5
19	183	3	18.0	11.0	14.2	6	4	10.5	15.5	123	6	6	8.0	14.0	104	9	8	6.5	12.0	70	6	6	7.0	11.0	71	3	4	5.0	8.0	54	19	6	6.0	8.5	30	4	6	4.5	6.0
20	182	5	17.0	19.0	14.4	5	4	9.5	13.5	123	5	2	8.0	12.0	104	5	6	7.0	10.0	72	6	4	6.5	10.0	71	4	5	5.0	8.0	52	17	7	4.5	7.5	26	2	2	3.0	4.0
21	173	12	8.0	11.5	14.6	4	4	9.0	14.0	123	6	4	8.0	11.0	104	5	6	7.0	11.0	72	4	4	7.0	10.0	72	3	7	5.0	7.5	48	27	7	4.0	6.0	26	2	2	2.0	3.5
22	177	10	12.0	13.0	14.6	3	4	11.5	15.5	127	6	6	9.0	13.0	104	8	5	6.5	10.5	72	4	5	6.0	9.0	69	4	3	5.0	8.0	46	19	7	5.5	8.5	26	2	2	2.5	4.0
23	171	16	4.0	10.5	14.6	5	4	11.0	15.0	127	5	6	8.0	13.0	104	10	4	7.0	11.5	72	4	5	5.0	8.0	69	8	4	4.5	6.5	46	18	6	4.5	5.5	26	6	2	2.5	4.0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2N Long. 105.2W

Month June

19 63

Hour (ST)	Frequency (Mc)																															
	.013			.051			.160			.495			2.5			5			10			20										
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	L _{dm}							
00	165	4	8.5	142	6	5.5	142	7	5	11.0	100	8	6	4.5	9.0	64	5	4	5.0	8.5	42	9	5	4.0	6.5	25	3	0	1.5	3.0		
01	163	6	9.0	142	4	6.0	142	5	7	6.0	100	4	8	5.0	10.0	75	4	7	5.0	8.0	40	9	5	4.0	7.0	25	2	0	1.0	2.5		
02	163	4	9.0	140	4	6.0	120	6	8	6.0	99	5	9	5.5	11.5	75	3	6	4.0	8.0	40	5	4	3.5	6.5	25	2	0	1.0	2.5		
03	163	2	9.5	139	3	6.0	105	7	9	8.0	85	11	11	7.5	15.5	75	2	7	5.0	9.5	39	8	3	4.0	7.0	25	0	0	1.0	2.5		
04	162	5	10.0	134	6	8.0	135	11	8	11.0	195	17	17	8.0	15.5	61	8	6	8.5	12.0	40	11	4	3.5	6.0	25	0	1	1.5	3.0		
05	161	4	10.0	132	8	7.5	130	10	12	10.5	195	71	19	15	7.0	15.5	49	9	10	7.5	11.0	53	5	10	6.0	10.5	40	9	2	3.5	6.0	
06	161	4	10.5	130	6	8.0	135	10	12	11.5	195	69	19	13	10.0	16.0	41	15	11	7.0	10.0	47	8	10	7.0	11.0	40	4	5	5.0	8.0	
07	161	4	10.0	130	8	8.5	140	10	13	12.0	205	71	15	13	9.0	14.5	33	17	6	5.0	8.0	43	6	6	8.0	12.0	36	6	2	4.5	7.5	
08	161	6	11.0	130	7	8.5	140	10	14	10.0	180	67	21	13	8.0	13.0	29	11	4	3.5	5.5	37	10	8	5.5	9.5	36	4	4	5.0	8.0	
09	163		11.0	134		9.5	150			12.5	220	72	20	14	9.5	19.0	31	9	6	5.0	8.0	40	5	13	8.5	11.0	36	4	6	4.5	7.5	
10	163	3	11.0	132	8	8.0	135	10	12	12.5	220	80	18	16	12.0	21.0	31	22	8	3.0	5.0	35	7	9	8.5	10.0	36	4	4	4.5	7.5	
11	165	4	10.0	136	10	10.0	150	11	12	16	225	84	24	16	11.5	21.0	33	30	8	3.5	6.0	39	12	8	6.0	12.0	36	4	4	4.0	7.5	
12	167	4	9.0	140	10	8.5	145	11	16	10.0	180	92	24	20	11.0	18.0	44	27	19	7.0	11.0	44	22	13	5.0	9.5	40	5	8	4.5	7.0	
13	167	8	9.0	150	14	7.5	140	14	18	9.0	160	100	21	28	8.0	15.0	51	28	26	6.0	10.5	46	22	14	5.5	8.5	42	10	6	4.5	7.5	
14	169	10	8.0	130	14	7.0	120	12	16	9.0	175	104	14	24	9.0	18.5	61	26	34	7.5	12.5	51	24	16	5.0	9.5	46	16	8	3.0	7.0	
15	169	6	7.0	125	10	7.0	130	12	14	7.0	150	107	17	25	7.5	16.0	65	17	34	8.0	13.0	53	22	13	5.5	10.0	46	14	6	3.5	7.5	
16	171	8	7.0	125	11	13	6.0	110	12	10	6.5	125	106	16	24	6.0	13.0	71	18	36	7.0	11.0	59	18	12	5.0	9.5	48	12	6	4.0	7.5
17	171	8	8.0	140	9	9	7.0	120	13	11	4.5	115	104	18	22	5.5	13.0	67	21	25	6.5	12.0	61	17	11	5.0	9.0	50	15	6	4.5	7.5
18	169	8	7.0	130	10	10	6.5	110	11	18	6.5	125	105	13	34	8.0	13.5	68	15	17	6.5	11.0	65	8	10	4.0	9.5	52	11	6	4.0	7.5
19	168	9	7.5	125	14	10	6.5	115	12	16	5.5	110	104	12	22	4.0	10.0	69	17	10	4.0	7.0	65	6	6	3.0	6.0	52	14	6	4.0	7.0
20	169	6	7.0	135	14	6	6.0	110	10	8	5.0	90	104	12	12	4.5	10.0	75	6	4	4.0	7.0	69	4	6	3.5	7.0	52	14	7	3.5	7.0
21	167	6	7.5	135	14	6	5.0	100	12	4	5.0	100	102	8	8	4.5	9.5	77	6	6	3.5	7.5	69	4	8	3.0	6.0	50	6	6	3.0	6.5
22	165	6	7.5	140	14	6	6.0	110	12	10	5.0	110	100	10	8	4.5	9.0	77	6	6	3.5	7.0	67	4	8	4.0	7.0	48	6	11	4.0	7.0
23	165	4	8.5	145	14	6	6.0	105	12	8	5.0	110	100	8	10	4.0	9.5	77	6	8	4.5	8.0	67	5	6	4.0	7.0	46	17	9	3.5	7.0

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	F _{om} *	D _z	V _{dm} *	
00	167	9.0	150	144	6.0	110	124	6.5	120	105	4.0	9.0	77	5.0	85	63	4.0	7.0	47	2.0	4.0	25	2.0	4.0	25
01	167	8.0	140	142	6.0	110	122	6.0	110	102	4.0	9.0	75	3.0	7.0	60	3.0	7.0	43	4.0	6.0	25	4.0	6.0	25
02	167	8.5	145	141	5.0	100	122	5.0	100	101	4.0	8.5	73	5.0	8.5	62	5.0	9.0	45	2.0	3.5	24	2.0	3.5	24
03	165	8.0	140	141	6.0	110	119	5.5	110	96	6.0	12.5	71	5.0	9.0	60	4.5	7.5	44	4.5	4.0	24	2.0	4.0	24
04	165	9.0	160	136	7.0	150	115	7.0	150	85	10.5	19.0	69	5.0	10.5	58	5.0	9.0	57	2.0	4.0	24	2.0	4.0	24
05	164	10.0	170	135	9.0	140	113	8.0	160	80	7.0	130	59	8.5	140	58	8.5	140	58	5.0	3.0	24	1.5	3.0	24
06	164	10.0	180	135	9.0	150	113	9.5	185	80	8.0	150	45	8.0	125	51	8.0	100	45	6.5	10.0	45	2.0	4.0	23
07	163	11.0	185	132	9.0	150	108	10.0	200	74	7.5	130	37	7.0	110	48	7.0	120	41	8.0	120	41	2.0	4.5	23
08	163	10.5	180	133	9.5	190	115	9.5	190	66	6.0	110	29	7.5	115	46	7.5	115	46	6.0	100	40	4.0	7.0	23
09	163	10.0	170	132	9.0	150	103	11.0	210	67	6.0	110	27	3.5	7.0	36	3.5	9.0	38	5.0	9.0	38	4.0	6.0	23
10	165	10.5	185	133	9.5	150	106	14.5	245	73	12.0	205	25	2.5	3.5	36	2.5	9.0	37	6.0	9.0	37	3.5	6.5	24
11	165	8.0	140	134	7.0	125	107	9.5	185	76	11.5	190	26	2.0	4.0	36	2.0	10.5	38	7.0	10.5	38	3.5	6.0	25
12	167	7.5	130	137	6.5	110	119	8.5	160	96	8.0	140	35	4.5	6.5	38	4.5	10.0	40	6.0	10.0	40	3.5	6.5	26
13	169	6.5	120	138	5.0	95	121	7.5	140	102	10.0	195	52	9.0	140	48	9.0	140	48	6.0	10.0	42	4.0	6.5	27
14	169	6.5	115	142	5.5	100	125	6.0	120	102	7.5	145	61	8.5	150	51	8.5	150	51	5.5	9.5	48	2.5	4.0	27
15	171	5.5	105	143	5.0	95	127	5.0	100	104	5.5	120	61	6.0	11.5	48	6.0	11.5	48	5.0	8.0	58	2.0	4.0	29
16	171	6.0	105	146	6.0	110	131	5.0	100	106	6.0	105	60	6.0	110	59	6.0	110	59	4.0	9.5	60	2.5	4.5	31
17	171	6.5	110	143	5.5	105	129	4.5	95	104	4.5	90	63	5.0	110	64	5.0	110	64	4.0	7.5	66	1.0	3.0	31
18	169	7.0	120	144	6.5	110	129	5.0	100	106	4.5	95	65	6.0	105	67	6.0	105	67	4.5	7.5	68	1.0	3.0	33
19	169	7.0	125	145	5.0	100	127	3.5	80	102	4.0	90	71	4.0	7.0	68	4.0	7.0	68	3.0	6.0	72	1.5	3.0	27
20	169	6.0	120	145	5.0	100	127	5.0	100	100	3.0	70	77	2.5	5.0	70	2.5	5.5	68	2.5	5.5	68	1.0	3.0	27
21	169	5.5	120	145	6.0	105	127	3.5	85	104	3.5	80	80	3.0	6.0	70	3.0	6.0	65	3.0	6.0	65	2.0	4.5	26
22	169	7.5	140	145	5.0	100	125	5.5	110	104	4.0	95	79	3.0	6.0	67	3.0	6.0	67	4.5	8.0	67	2.0	4.0	27
23	167	8.0	145	143	7.0	100	123	5.0	110	104	3.0	75	80	4.0	7.0	65	4.0	7.0	65	5.0	8.5	57	3.5	6.0	25

F_{om} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm}* = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2N Long. 105.2W

Month August

19 63

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm	Fam	Du	Df	Vdm
00	167	2	2	9.0	15.0	142	4	3	6.5	11.0	121	4	5	5.0	10.0	101	3	4	4.5	9.0	75	3	6	3.5	7.5	62	2	6	4.0	7.5	42	17	9	2.0	4.0	25	2	0	1.0	2.5
01	167	2	2	9.0	16.0	142	2	4	6.5	12.0	121	4	6	6.0	12.0	101	2	4	5.0	11.0	73	4	4	3.5	7.5	60	2	4	4.0	7.5	39	18	7	2.5	5.0	25	2	0	1.5	2.5
02	167	2	4	9.5	16.0	142	3	4	7.5	13.0	121	4	6	6.0	13.0	99	6	2	6.0	12.0	73	5	5	4.0	8.0	60	2	5	3.5	7.0	38	14	4	3.0	4.5	25	2	2	1.5	2.5
03	167	1	4	10.0	16.0	140	6	2	7.0	12.5	121	4	8	7.0	14.0	99	4	5	6.5	13.0	71	6	4	3.5	7.0	60	4	7	4.5	8.0	40	16	8	1.0	3.0	25	2	2	1.5	2.5
04	165	4	4	10.0	17.0	138	6	2	8.0	13.5	115	7	8	9.0	18.0	89	9	16	10.5	20.0	71	5	4	4.5	8.5	56	4	4	5.5	10.0	44	11	13	1.0	3.0	25	2	2	1.5	3.0
05	163	4	2	10.5	17.5	136	7	5	9.0	14.0	113	11	20	13.0	22.5	75	22	16	9.0	15.0	61	9	7	7.0	10.5	54	6	4	5.5	10.0	48	7	10	2.0	4.0	23	4	0	0.5	2.0
06	163	4	3	11.0	18.0	134	5	4	9.5	14.0	106	14	19	14.0	23.0	73	20	16	9.0	15.0	49	12	9	7.5	11.0	50	5	8	6.5	10.0	44	5	6	2.0	4.5	23	4	0	0.5	2.0
07	163	2	4	10.5	18.0	132	6	4	9.5	14.0	105	13	16	14.0	22.5	65	26	8	7.5	15.5	39	20	5	5.0	9.0	42	6	6	6.5	10.5	39	4	3	3.0	6.0	23	4	0	1.5	3.0
08	161	3	2	11.0	18.0	130	5	2	10.0	15.0	103	14	12	14.5	24.0	67	18	12	7.5	11.5	33	9	8	5.0	8.0	38	8	6	6.5	11.0	36	5	4	4.0	7.0	23	4	0	1.5	2.5
09	161	4	2	11.5	18.0	130	3	4	11.0	15.0	100	12	19	14.0	21.5	63	17	5	7.0	12.5	27	12	2	3.0	5.0	34	7	5	6.0	9.0	34	4	4	3.5	5.0	25	2	2	1.0	2.5
10	163	2	3	11.0	18.0	132	4	4	9.5	15.0	101	15	13	12.0	21.0	73	17	12	9.5	16.5	25	10	2	2.5	4.0	32	8	6	7.0	10.5	34	4	2	4.0	6.5	25	2	2	1.5	2.5
11	165	2	2	9.5	16.0	136	2	2	8.5	14.0	110	9	9	11.0	20.0	83	14	12	13.0	22.5	29	16	6	3.0	6.5	36	8	8	7.5	12.5	37	3	4	3.5	6.5	25	2	2	2.0	3.5
12	167	2	2	9.0	15.0	138	6	2	8.0	14.0	117	11	10	10.0	18.0	91	13	13	10.0	20.0	39	25	12	8.0	12.0	40	10	7	7.5	12.0	40	2	4	3.0	6.0	26	3	3	2.0	3.5
13	169	2	2	7.5	14.0	142	4	4	8.0	14.0	121	6	9	9.0	16.5	95	11	11	9.5	19.0	51	18	20	10.0	15.0	44	11	7	7.0	11.5	42	3	4	3.5	6.0	27	4	2	2.0	4.0
14	169	3	2	7.0	13.0	144	4	4	7.0	12.0	123	8	8	8.5	16.0	99	14	12	9.0	18.0	53	18	15	10.0	15.5	48	11	6	6.0	11.0	44	10	2	3.0	6.0	27	10	2	2.5	4.5
15	171	2	3	6.5	12.0	144	7	4	6.5	12.0	125	8	6	8.0	15.5	101	17	9	7.5	15.0	60	22	15	8.0	13.0	52	16	4	5.0	10.0	48	10	4	2.5	5.0	29	11	3	2.5	5.0
16	171	4	3	7.0	12.0	146	10	4	6.5	12.5	127	10	9	8.5	16.5	101	16	11	7.5	15.5	57	29	10	8.5	13.5	56	19	5	4.0	9.0	53	9	7	3.0	5.5	29	7	2	2.5	4.0
17	171	3	4	8.0	14.0	146	7	4	8.5	14.0	127	8	14	8.0	16.0	103	13	14	9.0	18.0	64	15	16	6.0	10.5	58	9	5	3.5	7.0	56	11	8	2.5	5.0	29	8	2	2.5	4.0
18	169	5	2	7.5	13.0	146	7	6	7.0	13.0	127	7	6	8.0	14.0	103	11	15	9.0	17.0	67	11	9	5.0	9.5	62	4	4	3.0	6.0	62	8	12	2.0	4.5	29	6	2	2.5	4.0
19	169	6	3	7.0	12.5	146	6	8	7.5	12.0	125	8	8	6.5	12.5	103	14	12	6.5	11.0	71	8	6	4.0	7.5	66	2	5	3.0	6.5	59	11	10	3.0	6.0	29	7	4	2.0	3.5
20	169	4	4	7.0	13.0	146	6	6	6.0	11.0	125	9	7	6.0	10.0	101	15	6	4.5	9.5	75	6	2	3.0	6.5	68	2	5	3.0	6.0	60	10	12	2.0	4.0	27	13	2	1.5	3.5
21	169	4	4	7.5	13.5	144	6	4	6.0	11.0	123	9	8	5.5	11.0	101	14	6	3.5	9.0	76	8	5	3.0	6.0	66	3	4	3.5	6.5	52	18	11	1.5	3.5	27	3	2	1.0	2.5
22	169	6	4	8.0	15.0	144	7	4	6.5	11.5	121	9	5	5.0	10.5	101	8	3	4.5	9.5	75	11	3	3.5	8.0	64	4	5	4.0	7.0	48	20	8	1.5	4.0	26	4	1	1.0	2.5
23	169	2	4	9.0	15.0	144	4	4	7.0	11.0	123	4	7	6.0	11.5	101	4	3	5.0	10.0	75	5	5	3.0	7.0	62	5	6	3.5	7.0	46	19	11	1.5	3.5	25	2	0	1.0	2.5

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Time (LST)	Frequency (Mc)																																					
	.013			.051			.160			.495			2.5			5			10			20																
	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm	Fom	Du	Vdm														
00	166	2	4	90	15.5	143	4	1	7.5	130	122	4	4	5.5	120	95	4	6	4.5	90	77	5	11	5.5	100	64	7	11	4.5	90	48	13	15	3.0	70	25	3	3
01	164	4	3	90	16.0	145	1	4	8.5	150	122	4	5	7.5	145	94	3	7	4.0	105	78	2	15	4.0	80	64	6	10	4.0	90	46	14	6	2.5	60	25	2	4
02	162	4	0	90	17.0	143	2	2	7.0	130	120	4	4	6.0	135	95	4	4	5.0	100	75	4	12	5.0	95	62	5	12	5.0	95	46	11	13	3.0	50	25	2	2
03	162	4	3	95	16.5	141	4	3	7.5	135	118	4	4	7.0	140	95	6	11	5.0	110	73	6	9	5.0	90	62	4	6	4.0	85	44	15	13	3.5	65	25	2	4
04	162	2	4	10.5	18.0	137	4	3	9.0	145	110	6	4	8.5	160	81	7	10	8.0	145	72	4	12	5.0	90	60	6	9	4.0	80	52	6	14	2.5	50	25	2	4
05	160	4	3	90	16.5	137	4	5	8.0	130	110	4	16	9.0	160	73	10	9	4.0	70	57	5	12	6.0	100	54	7	9	6.5	110	48	6	15	2.0	45	25	2	2
06	160	4	4	11.5	19.5	135	4	6	9.0	170	110	3	14	12.0	190	71	11	8	8.0	90	46	10	6	3.5	50	57	5	11	5.0	85	44	3	12	3.5	60	25	7	2
07	158	6	3	11.5	17.5	133	4	4	11.0	165	106	7	16	12.0	200	73	9	8	10.0	150	44	8	6	2.5	55	47	5	11	3.5	60	42	14	8	3.5	65	29	2	6
08	160	4	4	11.5	17.5	133	4	6	8.5	145	102	8	14	12.5	190	69	7	8	3.0	55	46	2	8	4.0	60	44	4	10	3.5	55	38	2	8	3.5	65	30	4	8
09	160	6	6	9.0	15.5	133	4	6	8.0	145	102	10	14	12.0	180	71	9	7	7.0	95	44	6	6	4.0	60	40	6	7	3.0	50	38	5	9	3.5	65	31	7	6
10	160	4	4	9.5	16.5	137	5	6	11.0	170	104	9	10	15.0	230	73	16	6	9.5	175	46	6	6	2.0	35	40	8	6	3.0	50	38	6	8	4.0	80	31	6	5
11	160	4	4	10.0	16.5	139	4	6	9.0	150	115	7	8	12.0	225	89	20	14	10.5	190	48	13	8	3.0	50	45	8	9	4.0	65	38	4	6	4.0	75	33	4	7
12	166	2	4	9.5	16.0	145	4	8	10.0	170	124	5	12	11.0	200	105	6	16	9.5	185	54	16	14	3.0	55	49	8	12	3.0	50	42	4	6	6.0	90	33	6	2
13	166	8	2	8.0	14.0	147	6	6	8.0	140	124	6	10	7.5	135	107	10	12	9.0	160	64	8	16	3.5	55	52	9	11	5.0	75	43	6	8	3.5	70	34	4	3
14	168	7	2	8.0	13.0	148	7	4	7.0	150	128	7	8	7.5	140	107	11	11	9.0	170	65			9.0	160	55			8.0	140	50	4	12	3.5	60	35	4	5
15	168	6	2	8.0	14.0	149	6	4	9.0	150	130	8	12	6.5	120	109	10	14	11.5	180	66	11	19	7.5	135	58	10	18	3.5	70	48	10	6	3.0	60	36	6	6
16	170	6	4	7.5	13.5	151	10	6	7.0	130	130	8	8	6.5	120	111	6	16	9.0	160	66	12	18	4.5	95	60	8	18	3.5	70	54	10	10	2.5	45	37	4	7
17	170	5	4	7.0	12.0	149	6	4	8.0	130	130	8	8	6.5	120	106	13	7	9.5	160	70	8	22	5.0	100	54	11	15	3.0	55	60	7	18	2.0	50	36	4	7
18	168	6	2	8.5	13.5	149	5	4	7.0	130	130	7	6	7.0	125	107	11	10	9.0	170	69	13	20	3.0	55	63	7	21	3.0	60	62	8	24	3.0	60	35	4	7
19	168	4	4	7.0	12.0	150	4	5	6.0	120	129	5	8	6.0	120	107	7	11	9.5	170	75	3	20	3.0	50	68	4	12			62	7	25	1.5	40	33	5	5
20	168	4	4	7.5	13.0	149	3	4	7.0	110	128	4	8	6.0	110	105	4	8	5.0	90	79	3	24	3.5	60	68	5	11	3.5	65	62	8	10	2.0	50	31	6	4
21	168	4	4	7.0	13.0	147	4	3	6.5	115	126	4	6	5.0	100	103	4	4	4.0	75	78	5	11	3.5	70	69	5	24	3.0	60	62	7	20	2.0	40	29	2	4
22	168	2	4	8.0	15.0	147	2	5	6.5	120	144	4	6	5.0	100	103	4	4	4.0	95	80	2	13	4.0	80	69	5	11	3.5	70	62	5	14	2.0	45	27	4	4
23	166	4	4	9.0	16.0	147	2	6	7.0	130	123	5	6	5.5	110	102	3	5	4.5	95	77	5	11	4.0	85	67	5	11	4.0	80	54	13	16	2.5	50	25	5	2

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_L = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm								
00	166	4	3	10.0	16.0	*	10.5	118	8	4	8.5	14.0	101	6	4	7.5	12.0	73	6	4	4.0	8.0	163	5	6	4.5	8.0	42	12	8	5.5	8.5	26	2	1.0	2.5				
01	166	2	4	10.5	12.5	*	6.0	118	6	4	8.0	14.0	101	4	3	7.0	12.0	73	6	4	5.0	10.0	62	4	6	4.0	8.0	42	10	8	3.5	6.0	26	2	1.5	2.5				
02	164	4	4	10.0	14.5	*	8.0	118	5	4	8.0	13.0	101	2	6	7.0	13.0	75	3	6	5.0	9.0	62	4	8	5.0	8.5	42	8	10	6.0	10.0	26	2	1.5	3.0				
03	164	4	4	10.0	16.0	*	10.5	116	5	2	7.0	12.5	99	5	6	7.5	14.0	73	5	6	5.0	10.0	60	6	4	5.0	9.0	40	16	6	4.0	7.0	25	2	3	2.0	3.0			
04	163	*	11.0	17.0	*	9.0	135	112	6	5	9.5	17.0	91	10	10	12.0	20.0	71	6	6	6.0	11.0	60	4	6	6.0	10.0	44	10	10	4.5	7.5	24	2	2.0	4.0				
05	162	6	4	11.0	17.5	*	10.0	15.0	11.0	*	11.0	18.5	73	16	10	7.5	10.0	65	4	10	8.0	14.0	55	6	4	6.0	10.0	46	6	8	4.5	8.0	24	2	3.5	7.0				
06	160	6	4	12.0	16.5	*	9.0	15.0	10.5	*	11.0	18.5	73	*	*	7.5	12.0	51	8	6	5.5	9.5	50	6	6	6.0	8.0	42	6	5	5.5	8.5	26	2	4	3.0	5.5			
07	160	6	6	11.0	16.0	*	7.5	14.0	10.0	*	11.0	15.5	68	15	9	4.5	7.0	49	3	9	4.0	6.0	44	7	5	7.5	11.0	40	2	4	5.0	8.0	26	2	2.0	3.5				
08	160	4	2	12.0	18.0	*	10.0	15.0	9.2	*	8.5	13.0	65	*	*	3.5	5.5	45	4	6	2.5	4.0	44	2	10	4.5	6.5	37	5	3	5.0	8.0	26	4	2.0	4.0				
09	158	*	7.5	17.0	*	8.5	12.5	88	*	10.0	17.0	63	*	7.0	9.5	45	4	6	2.5	4.0	*	4.0	40	4	11	3.0	5.0	36	2	7	4.0	6.0	28	4	4	4.0	6.0			
10	162	*	11.5	16.5	*	9.0	15.0	102	*	12.5	19.5	74	*	11.5	20.0	41	10	3	2.0	3.5	*	4.0	40	4	5	4.0	6.0	34	8	4	6.0	8.0	30	4	7	7.0	9.5			
11	164	*	11.5	16.0	*	11.5	16.5	112	*	14.0	21.0	91	8	16	12.0	19.5	51	14	6	7.5	3.5	44	8	6	7.0	6.0	36	10	4	5.0	8.0	24	6	3	3.0	6.0				
12	168	4	2	11.5	17.0	8	6	11.0	16.5	120	7	10	14.0	21.5	105	6	25	12.5	21.0	57	8	12	9.0	18.5	49	8	8	4.5	8.0	42	4	6	5.0	8.0	33	3	5	8.0	10.0	
13	170	4	4	9.0	14.5	*	11.0	17.0	127	7	18	13.0	20.0	111	9	23	12.5	21.0	67	14	18	10.0	18.5	56	14	10	8.5	10.0	45	14	9	5.0	9.0	34	8	6	7.0	11.5		
14	172	6	4	9.0	14.5	*	10.0	16.5	129	8	12	12.0	19.0	115	6	26	11.5	20.0	73	11	25	9.0	15.0	60	14	13	8.0	12.5	48	13	8	5.0	8.5	38	6	8	5.5	8.0		
15	174	4	4	9.5	15.0	153	6	10.5	16.0	131	9	14	10.5	17.5	111	13	15	12.0	21.0	75	14	18	8.0	14.0	67	13	15	7.0	11.0	51	11	9	4.0	7.0	35	11	5	5.0	8.5	
16	172	6	4	10.0	15.5	149	6	10.0	16.0	130	9	15	10.5	16.5	115	8	15	11.0	19.5	73	16	16	9.5	16.5	62	16	8	7.5	12.0	53	13	9	3.5	6.5	36	10	6	4.5	7.0	
17	172	2	3	10.0	15.0	149	6	10.5	17.0	130	9	11	10.0	16.5	110	11	7	12.0	20.5	71	20	12	6.5	12.5	62	14	4	4.5	7.5	56	8	8	4.5	7.0	32	11	4	4.5	9.0	
18	172	6	4	9.0	14.5	149	8	11.0	16.5	128	5	9	10.0	16.5	107	11	14	10.0	17.0	75	8	12	6.0	9.5	66	4	6	3.5	6.5	56	10	10	4.0	5.5	32	8	4	3.0	5.0	
19	170	2	5	10.0	15.0	147	7	11.0	15.0	124	9	8	9.0	15.0	109	12	10	6.5	13.0	74	9	5	4.0	7.0	68	4	6	4.0	6.5	52	14	4	2.5	5.0	32	6	6	3.5	5.0	
20	168	6	4	9.0	16.5	146	9	9.5	15.0	124	6	7	8.5	14.0	103	19	8	7.5	13.5	77	4	4	3.5	6.0	68	6	4	4.0	7.5	54	12	12	3.0	6.0	28	4	4	3.0	4.5	
21	168	4	5	10.0	15.0	144	7	7	9.0	14.5	22	8	7	8.0	14.5	103	7	5	6.0	11.5	77	4	6	4.0	7.5	68	2	6	3.5	7.5	50	12	10	3.5	6.0	26	5	2	7.0	2.5
22	168	3	6	9.5	17.0	143	6	9.0	15.5	120	8	6	7.5	13.0	105	2	6	6.5	11.5	75	7	4	4.0	8.5	66	4	6	4.5	8.0	48	12	14	3.5	6.5	26	2	2	1.5	3.0	
23	166	2	4	11.5	18.0	143	*	9.5	15.0	120	6	6	8.0	13.5	99	6	3	6.0	13.0	75	6	6	5.0	9.0	64	4	4	4.5	9.0	46	18	14	3.0	6.5	26	3	2	1.0	2.5	

Fom = median value of effective antenna noise in db above k1b
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6S Long. 130.4 E Month June 19 63

Time (LST)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}	F ₀₁	D ₁	V _{dm}																
00	157	2	4	6.5	11.0	127	4	5	8.0	14.0	105	4	5	7.0	12.0	84	8	4	5.5	9.0	57	6	3	4.0	8.5	37	5	4	3.0	6.5	24	0	2	3.5	5.5					
01	157	2	2	6.5	11.5	129	4	4	7.5	13.0	105	3	3	5.5	10.5	55	8	2	5.0	10.0	57	6	3	4.5	8.0	37	6	4	4.0	8.0	24	0	2	3.5	5.5					
02	157	2	2	7.0	12.0	127	3	4	7.0	12.0	104	4	4	6.5	12.0	84	7	5	6.0	10.0	57	5	1	5.0	9.0	37	6	4	4.0	6.5	24	0	0	3.5	5.5					
03	157	2	2	6.5	11.5	127	3	2	7.0	11.5	103	4	4	6.0	10.0	84	4	4	4.5	10.0	57	5	5	3.5	7.0	37	2	4	3.0	6.0	24	0	0	2.5	5.0					
04	156	3	1	7.0	13.0	128	3	3	7.0	13.0	103	4	3	6.0	12.0	84	3	4	6.0	12.0	57	5	4	4.0	7.5	37	4	4	3.5	7.0	24	0	0	2.5	5.0					
05	157	2	3	7.5	13.0	127	3	2	7.5	13.5	103	1	6	6.5	12.5	82	4	4	6.0	11.0	55	4	4	5.0	9.0	35	2	4	4.5	7.5	24	0	0							
06	156	2	3	7.5	14.0	127	3	4	7.5	13.5	99	4	4	7.0	13.5	73	9	7	7.5	15.0	53	5	4	5.0	9.0	48	3	3	4.5	8.0	35	2	4	3.0	6.5					
07	155	2	2	7.0	13.0	119	4	4	8.5	14.5	79	6	6	7.0	13.5	46	7	2	6.5	11.0	45	4	4	4.5	7.5	35	2	4	3.5	6.5	22	2	0	11.0	14.0					
08	153	1	2	7.5	13.5	110	9	1	10.5	17.0	63	12	6	11.5	18.5	47	1	3	6.0	8.0	26	5	3	4.0	7.0	32	5	7	5.0	8.0	31	4	2	4.0	7.0					
09	153	0	4	9.5	15.0	109	8	6	11.0	19.5	65	10	6	10.0	15.5	47			7.5	11.5	21	8	4	5.0	8.0	29	2	2	4.0	6.5	22	2	0	2.5	3.5					
10	153	2	4	11.0	18.0	109	5	5	12.0	19.0	65	16	6	7.5	11.5	47			7.0	10.0	21		17	10	3	4.5	7.0	25	4	0	3.5	6.0	22	2	0	3.0	4.0			
11	153	2	4	11.0	19.0	109	2	4	11.0	19.5	65	18	6	11.0	21.0	46			3.5	6.5	23		6.5	10.0	15	7	2	3.0	5.5	25	4	2	3.0	5.0						
12	152	3	3	11.0	18.5	109	4	4	11.0	19.0	65	18	6	9.5	13.0	48			4.5	7.5	23		5.0	9.0	17	7	4	4.0	6.0	25	6	2	3.5	5.5						
13	151	4	4	10.5	18.0	109	6	4	11.0	19.0	65	14	8	11.5	18.0	46			5.0	8.5	22		17	8	4	5.5	9.0	27	4	2	3.0	7.0	22	2	0	2.5	5.0			
14	151	5	2	11.0	18.5	109	11	4	10.0	17.0	61	21	6	4.0	6.5	44			14.5	23.0	27		19	11	6	5.0	8.5	27	4	2	3.0	6.0	22	2	0	2.0	9.5			
15	151	3	1	9.0	15.5	109	8	4	8.5	15.0	69	24	12	10.5	17.5	46	10	2	4.0	7.0	26		6.0	10.0	23	16	6	4.0	6.5	33	9	3	3.5	6.5	24	2	2	3.0	4.0	
16	153	2	2	8.0	14.0	109	9	5	9.0	14.0	73	20	10	10.5	18.5	62	4	11	5.5	9.5	30	10	9	5.0	10.0	33	8	8	4.0	8.0	37	6	2	3.0	6.0	22	2	0	2.5	5.0
17	153	2	4	7.5	13.5	109	12	4	11.0	18.0	87	12	8	13.0	22.0	80	4	10	6.5	13.5	40	12	7	5.5	10.0	41	6	6	5.0	9.0	37	7	3	3.0	6.0	22	2	0		
18	153	2	4	8.0	14.0	115	8	6	10.0	17.5	91	10	8	9.5	17.0	80	7	7	7.0	12.0	45	6	7	4.5	11.0	37	4	2	3.0	6.0	22	2	0	4.5	3.0					
19	153	4	2	7.5	13.5	121	8	10	7.0	16.0	97	10	8	9.0	18.0	82	8	4	4.5	10.0	52	9	6	6.0	11.5	50	8	8	5.5	11.0	37	4	2	3.5	7.0	24	0	2		
20	155	3	2	8.0	13.5	124	5	5	8.0	15.0	101	6	6	7.0	14.0	86	4	6	4.5	9.5	55	8	6	5.5	10.0	55	6	10	5.0	11.0	37	2	2	3.0	5.5	24	0	2	3.0	5.0
21	155	4	2	7.5	13.5	125	4	6	9.0	16.0	101	6	4	7.0	15.0	86	6	6	4.0	6.5	55	7	6	5.0	10.0	57	4	10	5.0	10.0	37	4	2	3.0	5.5	24	0	2		
22	155	4	2	7.5	13.0	126	6	5	7.5	14.0	103	7	4	7.0	13.0	85	7	5	6.0	10.0	57	8	4	5.0	9.5	51	6	5	5.5	10.0	37	4	3	3.0	5.0	24	0	2	3.5	5.5
23	155	4	2	7.0	12.0	127	4	6	7.5	13.5	103	7	4	6.5	12.0	84	6	4	5.0	10.0	56	7	4	5.0	10.0	49	9	2	5.0	9.5	37	4	3	3.0	5.5	24	0	2		

F₀₁ = median value of effective antenna noise in db above k1b
 Du = ratio of upper decile to median in db
 D₁ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month July 19 63

Hour (LST)	Frequency (Mc)																																					
	.013				.051				.160				.545				2.5				5				10				20									
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}		
00	155	2	2	80	120	127	2	2	9.0	14.0	102	4	2	7.5	130	83	6	2	6.5	115	57	5	4	6.0	100	51	4	2	5.0	80	36	5	3	3.0	45	22	2	0
01	155	2	0	80	120	127	2	2	8.0	130	102	4	2	7.5	130	85	3	4	7.0	120	57	6	4	5.0	80	55	5	2	5.0	75	39	4	5	4.0	65	24	0	2
02	157	0	2	80	120	127	3	2	7.5	125	104	3	4	7.5	125	83	6	3	7.0	120	57	6	4	5.0	90	51	4	3	6.0	100	36	8	2	4.5	75	24	0	2
03	155	3	0	70	115	127	4	2	8.0	120	102	5	2	7.5	120	83	5	4	6.5	110	55	7	2	4.0	70	51	3	4	5.5	85	36	9	4	3.5	65	24	0	2
04	155	3	1	80	115	127	4	2	8.0	115	102	5	4	6.5	110	83	6	4	6.0	90	55	6	4	5.0	85	49	6	4	4.5	80	34	5	4	4.0	65	22	2	0
05	155	2	2	80	125	127	4	2	7.5	120	100	6	4	7.0	115	81	4	4	6.5	110	53	5	4	5.0	90	49	4	4	4.5	85	32	4	2	5.0	60	22	0	0
06	155	2	2	80	120	125	4	5	8.5	130	100	3	9	8.0	140	71	9	13	10.5	155	51	7	5	4.0	95	45	4	3	3.5	60	32	4	2	3.5	40	22	0	0
07	155	2	3	80	120	119	3	4	8.0	145	76	12	7	8.0	115	41	12	0	11.0	145	47	5	10	4.0	70	45	3	6	4.0	75	34	3	2	3.0	55	22	0	0
08	153	1	4	80	130	111	9	4	9.0	140	58	18	2	6.5	120	41	11	0	3.0	40	23	10	4	7.0	90	31	6	9	8.0	105	32	5	2	4.0	60	22	1	2
09	151	2	2	90	135	109	6	4	11.0	150	63	11	7	7.0	90	41	17	0	4.5	60	19	13	0	10.0	70	19	12	4	5.0	70	28	5	9	3.0	50	22	2	2
10	151	4	4	110	165	108	3	3	13.0	190	63	7	5	8.0	105	41	21	0	8.0	110	20	11	1	7.0	130	17	8	4	4.5	55	26	4	2	4.0	55	22	0	2
11	151	4	2	120	175	109	8	4	13.5	200	64	18	6	10.0	135	41	21	0	10.0	150	19	6	0	7.0	100	17	16	4	5.0	65	28	2	4	4.5	55	22	2	2
12	151	2	4	130	180	109	7	4	15.5	225	64	12	5	6.5	85	41	22	0	5.5	70	19	6	0	8.0	100	15	14	2	6.5	85	26	5	2	4.0	55	22	0	2
13	151	3	2	130	190	109	8	4	12.0	190	62	14	4	12.0	160	41	20	0	6.0	75	19	9	0	4.5	70	17	13	4	5.0	60	32	0	4	3.0	45	22	8	2
14	151	4	2	125	180	109	8	1	12.5	190	66	22	7	10.0	130	41					19	8	0	6.5	80	19	11	4	5.5	75	32	5	3	4.5	60	22		
15	151	2	2	105	160	109	5	2	11.0	165	68	6	6	12.0	160	43	20	2	6.5	80	21	4	2	5.0	65	22	3	4	7.5	95	36	4	5	3.5	65	22	2	0
16	151	4	1	95	145	109	10	4	11.0	170	74	14	8	11.0	180	57	10	8	8.0	155	25	12	4	6.5	100	33	6	6	5.5	85	40	7	3	3.5	65	22	2	0
17	151	3	2	90	140	113	7	5	13.0	190	86	11	7	12.5	200	77	4	8	9.0	170	37	9	5	7.0	110	41	9	4	5.5	90	42	6	6	5.0	70	24	0	2
18	151	3	2	85	130	115	10	6	14.0	210	92	9	7	120	200	77	10	5	7.0	140	45	13	4	7.0	120	43	11	2	4.5	80	41	7	5	2.5	55	22	2	0
19	153	3	1	90	135	119	7	2	120	180	96	8	4	95	160	81	6	4	6.5	105	51	13	5	6.0	110	45	11	2	4.5	70	40	6	5	3.0	55	22	2	0
20	155	2	2	85	130	123	4	2	9.5	150	98	8	4	90	150	83	8	4	3.5	90	53	11	4	5.5	100	47	10	2	6.0	100	38	4	4	3.0	50	22	0	0
21	155	2	2	90	130	125	5	2	9.0	155	100	7	2	75	130	85	7	4	6.0	105	55	9	4	5.0	100	47	9	2	4.5	85	36	4	2	3.0	60	22	2	0
22	155	2	2	85	125	125	4	2	10.0	155	102	4	3	80	135	83	4	2	8.0	135	55	10	3	6.0	100	49	4	3	5.0	85	38	2	4	3.0	50	22	2	0
23	155	2	2	85	125	125	4	2	10.0	160	102	3	2	80	125	83	4	4	7.0	125	57	4	4	4.5	80	51	3	4	4.5	85	38	4	4	3.0	45	22	2	0

F_{am} = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month August 19 63

Time	Frequency (Mc)																										
	.013				.160				.545																		
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm							
00	155	2	2	7.5	12.5	12.5	6	6	5.0	10.5	5.3	6	6	5.5	10.5	3.7	8	4	3.5	6.0	2.3	0	2				
01	155	2	2	7.5	13.0	12.7	4	6	9.0	14.5	8.0	7.5	13.0	5.9	6	6	6.0	11.0	3.7	6	4	3.0	6.0	2			
02	155	4	2	7.5	13.0	12.7	6	6	10.0	15.0	10.2	10	6	8.0	14.0	8.0	7.5	13.5	5.7	8	4	3.5	6.0	2			
03	155	4	0	8.5	13.5	12.7	6	4	9.0	15.0	10.2	6	6	8.5	15.5	7.9	5.1	4	4	5.0	9.0	2.1	2	0			
04	155	2	2	8.0	13.5	12.7	6	2	8.5	14.5	10.0	8	6	8.5	15.0	8.0	5.1	6	4	5.0	9.0	2.1	2	0			
05	155	2	2	8.5	14.0	12.7	2	4	9.5	15.0	9.8	6	8	9.0	16.0	7.6	6.5	12.0	5.3	10	6	4.5	7.0	0			
06	155	2	4	9.0	14.5	12.3	6	2	9.0	15.0	9.0	10	4	10.0	16.0	6.4	12.0	19.0	4.9	10	4	5.0	9.0	0			
07	153	2	2	8.0	14.0	11.5	6	6	6.5	11.0	6.8	14	4	11.0	16.0	4.2	7.0	11.0	4.1	10	8	6.0	11.5	0			
08	151	2	2	9.0	15.0	11.1	6	6	11.5	18.5	6.4	18	8	8.0	10.5	4.2	2.1	1.6	2	6.5	8.5	2.7	8	0			
09	151	2	4	9.0	15.0	10.9	6	10	10.0	16.0	6.4	12	8	10.0	15.0	4.2	1.9	8	0	6.5	9.0	2.9	6	0			
10	151	2	2	10.0	16.5	10.9	8	10	14.0	21.5	6.4	12	6	10.5	16.5	4.2	6.0	8.0	1.9	4	0	5.0	7.0	0			
11	149	4	0	11.5	18.0	10.9	8	4	15.0	22.5	6.2	12	4	8.0	13.0	4.2	5.0	8.0	1.9	5	0	5.0	7.0	0			
12	151	4	2	12.5	20.0	11.1	16	6	14.0	21.5	6.4	24	6	12.0	20.5	4.2	5.0	7.5	1.9	6	0	8.5	11.5	0			
13	151	4	2	13.0	20.0	10.9	16	4	13.0	22.5	6.4	28	6	12.0	20.0	4.2	5.0	7.5	1.9	6	0	8.5	11.5	0			
14	151	4	2	10.0	17.0	11.1	10	4	11.0	18.0	7.0	10	6	10.5	16.0	4.2	1.9	8	0	4.0	6.5	2.9	10	0			
15	153			10.5	17.0	11.3	10	8	13.0	21.0	6.6	10	6	13.5	23.5	7.2	5.5	8.5	2.5	8.5	11.0	3.5		0			
16	153	2	4	8.5	14.0	11.1	12	8	11.0	17.5	7.8	2.0	2.0	13.5	21.5	5.4	6.0	13.0	2.9	16	10.0	7.0	12	0			
17	151	4	2	8.5	15.0	11.1	14	12	11.0	19.0	8.2	2.2	2.2	12.0	22.0	7.7	8.5	18.5	3.5	2.2	10.5	11.0	4.5	10	0		
18	151	6	2	10.0	16.0	11.5	14	8	13.0	21.5	9.4	1.2	1.2	13.0	23.0	7.4	6.0	12.5	4.5	1.8	8	6.0	11.5	4.5	12	0	
19	153	4	2	9.0	15.0	10.1	8	8	12.0	20.0	9.6	1.0	1.0	12.0	20.0	8.0	6.0	12.0	5.3	1.2	10.8	16.0	11.5	4.7	8	0	
20	155	4	3	9.0	15.0	12.3	8	2	11.0	18.0	10.0	10	10	10.0	17.0	8.0	5.0	10.5	5.3	1.4	8	5.5	10.5	4.1	12	0	
21	155	2	3	9.0	15.0	12.4	7	3	10.5	18.5	10.2	8	8	10.5	18.5	8.2	6.5	12.0	5.7	1.0	10	5.5	10.0	5.3	6	0	
22	155	2	3	10.0	15.5	12.5	6	6	10.0	17.0	10.0	12	1.2	1.2	10.0	19.0	8.2	8.5	17.0	5.7	1.0	8	6.5	12.5	3.9	10	0
23	155	2	2	8.0	13.5	12.5	6	4	10.5	18.5	10.2	10	1.0	1.0	9.5	17.5	8.0	6.0	11.5	5.9	1.0	8	6.0	12.0	5.3	6	0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 60-70S Long. 52.5-67.5 W

Month June 19 63

Hour (EST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}	F _{om} ⁺	D _u	L _{dm}
00	144			110			63						51			31						25		
01	145			108			63						45			33						41		
02	145			110			61						43			32						41		
03	147			108			59						41			28						25		
04	137			98			60						43			26						27		
05	137						58						45			22						27		
06	135			104			62						49			26						27		
07	135			102			48						53			26						27		
08	133						62						57			26						27		
09	133			102			62						31			30						27		
10	143			94			66						29			30						25		
11	141			98			66						23			30						25		
12	141			94			68						25			28						27		
13							68						28			28						27		
14							58																	
15	141						68						47			44						33		
16	145			112																				
17	146			106			70						49			34						27		
18	145			106			67						49			28						26		
19	145			106			71						53			33						26		
20	146						68						50			30						26		
21	145			106			74						51			31						26		
22	143			120			82						49			26						25		
23	142			122			72						49			27						27		

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of overage voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitain

Lat. 50-60S Long. 67.5-82.5 W Month June

19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}
00	142	9.5	140	113	5.5	10.5	74	5.5	9.5	59	56	33	30											
01	142	9.5	160	112	5.0	130	77	6.0	10.5	58	57	33	29											
02	142	10.5	160	112	6.0	12.5	84	6.5	9.5	59	56	32	30											
03	146	12.0	180	114	8.0	14.0	74	6.5	14.5	60	59	32	29											
04	146	13.0	185	115	7.0	11.0	74	8.0	10.0	60	61	32	29											
05	146	11.0	165	115	5.0	9.0	88	7.6		59	62	34	31											
06	146	12.0	175	115	11.0	15.5	84	10.0	15.0	64	60	33	31											
07	145	10.0	160	109	4.5	12.5	85	6.6		45	66	34	31											
08	145	12.5	180	109			81	13.5	18.5	66	49	34	32											
09	144	11.0	160	108			83			66	48	32	32											
10	145	9.0	140	107	9.5	13.0	73			60	49	31	27											
11	143	9.5	150	102			79			62	47	32	28											
12	145	9.5	150	104	6.0	140	79			64	51	48	33											
13	145	8.0	130	102			77			66	47	32	31											
14	141	6.0	100	104			67			68	45	38	31											
15	139	8.5	135	106			67			68	51	48	33											
16	143	6.0	110	105	5.0	120	72			68	55	41	28											
17	144	5.5	105	108	6.0	10.5	73	7.5	12.0	70	53	37	29											
18	144	7.0	110	106	6.0	10.5	76	5.0	10.0	68	53	34	29											
19	145			109	6.0	100	76	8.0	130	70	54	34	29											
20	147	6.5	110	113	5.5	90	77	4.5	8.5	72	55	33	31											
21	147	8.0	135	116	5.5	100	83	4.0	80	74	57	33	29											
22	147	8.0	115	115	7.5	110	86	5.5	100	74	57	33	30											
23	141	9.5	150	111	4.5	120	85	7.0	120	74	58	32	30											

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 F_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Fr (S)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺	F _{am} ⁺	D _ℓ	V _{dm} ⁺
00	143			111			74			58	5.0	9.0	55	5.0	6.0	28	2.5	3.5	27	2.5	3.5	27	2.0	2.0
01	142			113		7.0	70	8.5	140	57	5.0	6.5	53	4.5	5.5	29	3.0	5.0	27	2.5	3.5	26	2.5	3.0
02	141			109		7.0	72	8.0	150	54	4.5	6.0	50	4.0	7.5	27	2.5	3.5	26	2.5	3.5	26	2.5	3.0
03	142			109			70			58	4.5	8.0	54	4.5	9.5	28	2.5	3.0	27	2.5	3.0	27	1.5	2.0
04	143			110		8.5	72	8.5	150	60	4.5	4.5	58	4.5	8.0	22	2.0	2.0	27	2.0	2.0	27	2.0	2.0
05	141			110		13.0	70			58	5.0	8.0	57	5.0	8.0	26	2.0	2.0	27	2.0	2.0	27	4.0	4.0
06	141			108			70	5.5	12.5	58	5.0	6.5	53	6.5	9.0	32	3.0	3.0	27	3.0	3.0	27	3.0	5.0
07	141			108			56			54	11.0	16.0	55	8.5	9.5	32	3.0	3.5	27	3.0	3.5	27	3.0	3.0
08	141			106			58			42	6.0	7.5	61	6.0	6.5	36	2.0	3.5	27	2.0	3.5	27	2.5	3.0
09	141			104		16.5	71			38	5.0	9.5	37	5.0	6.5	30	4.0	4.0	26	4.0	4.0	26	1.5	3.0
10	141			98			70			30	3.0	4.0	29	4.0	5.0	26	2.5	3.0	25	2.5	3.0	25	2.5	3.0
11	141			96		11.5	69			29	3.5	4.5	29	3.5	6.5	26	3.5	5.0	27	3.5	5.0	27	3.0	3.0
12	140			96		13.0	73			30	3.0	5.5	29	3.0	7.5	26	3.0	4.5	27	3.0	4.5	27	3.0	3.0
13	143			100			79	4.0	8.0	39	4.0	5.0	35	4.0	6.0	31	4.0	5.0	27	4.0	5.0	27	3.0	3.0
14	141			95			69			34	5.0	6.0	38	2.5	4.5	35	2.5	6.0	27	3.0	6.0	27	2.0	2.5
15	138			104		8.5	70	9.0	140	62	4.5	5.5	49	5.0	7.5	46	5.0	7.5	46	5.0	7.5	46	2.0	3.0
16	139			100			77			56	5.5	7.5	49	4.0	4.5	50	4.0	4.5	50	4.0	4.5	50	2.0	3.0
17	139			109			86			57	6.5	8.0	47	6.5	8.0	30	6.5	8.0	30	6.5	8.0	30	2.0	3.0
18	140			111			83			52	5.5	10.0	51	5.5	10.0	33	5.5	10.0	33	5.5	10.0	33	1.5	1.5
19	143			105			77			52	5.0	6.0	50	4.0	6.5	29	4.0	6.5	29	4.0	6.5	29	2.0	3.0
20	143			110			83			54	3.5	5.5	51	3.0	5.0	28	3.0	5.0	28	3.0	5.0	28	3.0	3.5
21	143			108			83			60	5.0	7.0	51	4.0	6.0	34	4.0	6.0	34	4.0	6.0	34	4.0	5.5
22	144			109			83			60	6.0	7.0	53	6.0	7.0	28	6.0	7.0	28	6.0	7.0	28	2.5	3.0
23	143			110		8.5	86			60	6.0	8.0	55	6.0	8.0	26	6.0	8.0	26	6.0	8.0	26	2.5	3.0

F_{am} = median value of effective antenna noise in db above ktb
 D_ℓ = ratio of upper decile to median in db
 V_{dm}⁺ = ratio of median to lower decile in db
 V_{dm}⁻ = median deviation of average voltage in db below mean power
 L_{dm}⁻ = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltamin

Lat. 50-60S Long. 37.5-52.5 W

Month June 19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]	F _{om} [*]	D _g [*]	V _{dm} [*]
00	141	7.5/13.5	114	4.5/8.5	89	6.8	6.0/10.5	53	4.8	4.0/6.0	26	2.0/4.0	29	2.5/4.0										
01	140	7.0/13.0	115	6.5/9.5	89	6.7	3.0/8.0	51	3.5/6.5	26	2.0/4.0	33	2.5/4.0											
02	135	108	7.5/13.5	9.0	6.9	6.6	6.5/11.0	48	5.0/8.0	28	2.0/3.5	30	2.5/4.0											
03	140	110/14.0	111	9.5/14.5	89	6.6	6.5/11.0	48	4.6	2.0/4.0	28	4.0/8.0												
04	139	112	9.0/13.5	84	6.5	11.5/6.8	5.5	4.9	4.0/7.5	32	10.0/16.0	35												
05	139	116	11.0	8.0	8.1	6.0	6.0/12.5	51	4.9	4.5/9.0	27	3.0/5.0	30	3.0/5.5										
06	141	111	8.0/10.0	84	9.5	15.5/5.9	5.1	4.9	5.5/9.5	27	2.5/4.0	27	2.5/4.0											
07	143	10.0/15.0	110	9.5/14.5	76	5.3	2.5/4.5	4.9	6.0/11.0	42	2.6		2.9											
08	145	12.0/16.0	111	13.0/13.5	76	5.6	2.5/5.0	4.3	5.5/8.5	61	2.7	3.0/5.5	2.8	3.0/4.5										
09	143	11.0/15.5	109	12.0/18.5	74	5.5	2.0/4.5	3.9	4.0/6.5	57	2.6	3.5/6.0	2.9	3.0/4.5										
10	144	9.5/14.0	109	12.5/18.0	74	5.5	2.0/4.5	3.9	3.0/6.5	34	2.8	3.5/6.0	2.6											
11	144	11.0/14.0	112	12.0/18.0	76	5.3	2.5/5.0	3.4	4.0/7.0	21	3.5/5.5	2.7	3.0/5.0											
12	141	7.0/12.0	106	9.5/14.5	54	5.4	3.5/6.0	3.0	4.0/6.5	27	4.0/7.5	3.0	3.5/6.0	3.0/6.5										
13	143	11.0/15.0	106	13.0/18.5	74	5.4	4.5/8.0	2.9	4.5/8.0	29	4.0/7.5	2.8	3.0/5.5	1.5/3.0										
14	141	8.0/13.0	96	7.5/12.0	74	5.7	6.5/14.5	38	3.4	5.0/7.5	30	3.0/5.5	2.7	1.0/3.5										
15	141	9.0	96	6.5	6.5	5.8	4.0/6.0	3.9	4.0/6.5	38	4.0/7.5	3.8	2.7											
16	139	8.0/13.5	96	6.0/10.5	68	5.8	4.2	4.2	3.5/6.5	4.3	3.5/6.0	4.0	2.9	1.5/3.0										
17	141	7.5/11.5	97	4.0/8.0	69	6.8	4.5/9.0	4.6	3.5/7.0	4.2	4.1		2.7											
18	141	6.5/11.0	108	4.0/7.5	71	6.7	4.0/7.5	4.8	5.0/5.5	4.9	5.0/9.0	2.9	2.7											
19	137	10.5	105	5.0/9.0	75	6.5	4.5	5.2	4.5	4.5	3.1	1.5/3.0	2.7											
20	139	10.7	107	6.5/10.5	81	6.6	4.5/7.5	5.2	3.0/6.0	4.7	2.6		2.7											
21	144	8.0/13.0	111	6.5/11.0	77	6.3	4.5/8.5	4.8	3.0/5.5	4.8	2.6	1.0/2.5	2.9											
22	141	8.0/12.5	110	5.5/10.0	81	6.6	3.5/6.0	4.7	4.5/9.0	4.7	2.6	2.0/3.5	2.9	3.0/5.0										
23	142	8.5/12.5	112	6.0/10.0	84	7.1	5.3	5.3	3.5/6.5	4.6	2.7	2.0/4.5	2.8	3.5/6.0										

F_{om} = median value of effective antenna noise in db above k1b

D_g = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

F_{om} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	F _{om} *	D _l	V _{dm} *-L _{dm} *	
00	149		10.0 15.0	117		9.0 14.0	89		9.0 15.0	67		4.0 7.5	56		47		26		27		27		26		27
01	147		10.0 15.0	117		7.5 12.5	85		7.0 12.5	65		5.5 11.0	52		49		28		27		27		26		27
02	146		11.0 16.0	116			84			63		7.0 10.5	50		49		26		27		27		26		27
03	147		10.0 15.0	115		8.5 14.0	86		7.0 12.0	65		5.0 10.5	52		48		28		27		27		26		27
04	145		10.0 15.0	115		7.5 12.5	82			65		6.0 10.0	50		47		26		27		27		26		27
05	145		13.5 20.0	115		9.0 13.0	86		7.0 12.0	61		5.0 10.0	50		49		26		27		27		26		27
06	143		11.0 17.0	115		6.0 10.0	84			67			46		55		32		31		31		32		31
07	145		11.5 18.0	117		9.0 16.0	82			61			48		59		28		27		27		26		27
08	147			107		12.0 16.0	78			57			44		59		30		29		29		26		27
09	145		11.0 16.0	103		5.0 9.0	72			49			40		53		34		25		25		26		27
10	139		9.0 13.5	95		6.5 11.0	70		11.0 15.0	53			34		41		32		31		31		26		27
11	138		8.0 14.0	99		8.0 13.0	71			52		7.5 11.0	33		28		26		27		27		26		27
12	137		10.0 14.0	95			68			54		3.0 5.5	31		27		26		26		26		26		27
13	139		8.0 12.5	99		8.0 13.0	69		8.5 12.5	57		5.5 8.5	33		30		33		26		26		26		27
14	145		9.5 14.5	93		11.0 18.0	67			53		5.0 7.0	33		45		31		26		26		26		27
15	138		8.5 14.5	98			76		10.0 12.0	62		5.0 8.5	35		38		31		27		27		26		27
16	139			99		11.0 15.0	69			62		3.5 6.0	38		41		30		27		27		26		27
17	141		7.0 11.0	105		6.0 10.0	70		11.0 13.0	59			43		42		22		26		26		26		27
18	141		6.0 10.0	106		6.0 10.0	76		8.5 11.0	60			47		46		22		27		27		26		27
19	141			113		5.0 8.5	75		9.5 12.5				49		48		27		27		27		26		27
20	144		7.0 10.0	109		5.5 9.0	74			62		6.0 11.0	51		47		26		27		27		26		27
21	144		7.5 12.0	112			76			58		4.5 6.5	50		48		26		27		27		26		27
22	146		8.0 12.5	112		7.5 12.0	78			60		5.0 9.0	50		45		26		26		26		26		27
23	146		8.5 13.0	113		7.0 11.5	83		7.0 10.5	63		9.5 14.0	50		45		27		27		27		26		27

F_{om} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 40-50S Long. 67.5-82.5 W Month June

19 63

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	
00	147	8.5	13.5	120	5.5	9.0	103	82																	
01	147			122	6.0	9.5	99	82																	
02	145	10.5	13.5	120	7.0	12.0	101	84																	
03	147			122	7.0	12.0	101	84																	
04	147			122	9.5	14.5	101	80																	
05	149	13.0	19.0	122	12.0	16.0	95	77																	
06	153	12.5	19.0	118			88	70																	
07	147			117	9.0	18.0	88	72																	
08	146	10.5	17.0	113	7.0	16.5	90	73																	
09	147	9.0	14.0	110			80	70																	
10	144	10.0	16.0	106			91	72																	
11	149	10.0	16.5	108	8.0	13.0	89	70																	
12	147	8.0	12.5	106			75	72																	
13	147	8.0	13.0	106			87	68																	
14	151	6.5	11.0	98			91	76																	
15	150	8.0	13.0	108	4.0	12.0	81	78																	
16	145	7.0	11.0	100	7.0	12.0	87	77																	
17	147	9.0	14.0	108	9.0	17.0	89	80																	
18	149	9.0	14.0	116			93	78																	
19	149	7.0	15.0	118	8.0	12.5	91	80																	
20	149			118	7.5	11.5	95	80																	
21	147	7.0	12.0	118	2.5	5.5	97	82																	
22	147			120	5.0	9.0	101	80																	
23	145	8.5	13.0	122	5.0	9.0	103	82																	

F_m = median value of effective antenna noise in db above k1b

D_g = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

F_m = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	F _{om} *	D _l	V _{dm}	
00	155			125			106			83			55	10.0	49	45	8.0	37	35	55	55	30			
01	150			127			108			83			3.0	6.0	54	4.0	7.0	35		45	45	27			
02	152			129			108			82			3.0	6.0	53	3.0	5.0	36		4.0	6.0	29			2.0
03	152			127			106			82			4.0	7.0	51	3.5	6.0	35		2.5	4.0	27			1.0
04	153			130			104			80					53	3.5	7.0	34		3.0	4.0	27			1.5
05	153			123			101			76			4.0	7.0	54	4.0	7.0	34		2.0	3.5	27			1.5
06	154			124			89			66					55	4.0	9.0	34		2.5	4.0	29			2.5
07	149			108			71			67					53			34		5.0	7.5	29			2.0
08	143						71			73			8.0	11.0	47			36		2.5	4.0	31			2.5
09	145						71			70			3.0	5.0	35	6.0	9.0	38		2.5	4.0	33			2.5
10	144			98						65			3.0	5.0	39	4.0	7.0	36		4.0	7.0	29			2.5
11	145						87			65			3.5	5.5	37	3.5	6.5	36		4.5	7.0	27			2.0
12	143						73			70			2.5	4.0	37	2.5	6.5	34		2.5	6.0	39			4.5
13	148			113			79			68			3.0	6.0	41	4.0	6.0	36		3.0	5.0	37			3.0
14	143			98			78			70			4.0	8.0	43	3.0	6.0	40		3.0	5.0	35			5.5
15	145			104			73			76			5.0	7.0	49	3.0	5.5	40		2.0	4.5	33			3.0
16	145			104			70			68			3.0	5.0	43	2.5	4.0	40		2.0	5.0	30			1.5
17	141						67			72			3.5	6.0	47	3.5	10.0	37				28			2.0
18	147			120			92			78			2.5	5.0	57	3.5	6.5	37		3.5	6.0	30			3.0
19	148			119			100			83			2.5	5.0	52	3.0	4.5	37		4.0	6.0	28			2.0
20	147			124			103			82			3.5	5.0	53			38		4.0	7.0	27			6.0
21	150			121			102			85			3.5	6.0	53	3.0	4.0	41		2.0	3.5	31			2.5
22	147			125			104			83			3.5	6.0	54	3.0	5.0	40		4.0	7.0	29			4.0
23	148			126			107			84			4.0	8.0	57	3.5	6.0	34		2.5	4.5	27			2.5

F_{om} = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																													
	.013			.051			.160			.495			2.5			5			10			20								
	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}	F _{om} *	D _z	V _{dm}	L _{dm}		
00	140				89				70				58				51				25	4.5	36		20	3.5	36			
01	139				80				67				54				51				35	6.0	40		26					
02	131				80				70				51				40				25	5.0	38		26					
03	139				86				72				46				53				40	6.0	30		30					
04	140				89				78				52				53				45	7.5	35		30					
05	151				90				74				56				60				45	10.5	60		39					
06	148				85				71				53				51				30	5.5	35		31					
07	144				77				66				50				49				45	7.5	38		29					
08	144				72				60				47				47				50	8.0	47		38					
09	135				62				57				41				41				30	5.0	37		43					
10	131				96				56				47				36				20	3.5	36		32					
11	127				88				48				48				33				30	5.0	30		32					
12					72				58												30	5.0	27		30					
13	126				72				57				28				29				55	8.0	30		30					
14	124				66				56				32				28				60	9.0	48		40					
15	136				70				51				35				32				45	8.0	31		40					
16	137				70				63				41				43				60	9.5	36		36					
17	138				72				74				44				43				40	7.0	43		43					
18	138				75				77				49				43				60	9.0	35		35					
19	138				75				70				52				45				50	9.0	45		35					
20	140				79				70				54				47				55	9.0	47		42					
21	141				80				71				56				48				25	5.5	38		38					
22	141				81				73				59				51				20	4.5	36		30					
23	142				83				73				59				51				40	7.0	34		28					

F_{om} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																																	
	.013			.051			.160			.495			2.5			5			10			20												
	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm										
00	153	5	9	120	11	5	100	11	13	88	9	12	64	12	9	40	70	70	59	6	7	40	70	70	35	5	3	2.5	40	28	1	2	1.5	2.5
01	151	7	4	120	11	2	100	12	10	86	10	12	64	11	7	40	70	60	61	3	10	40	60	33	11	2	2.5	3.5	26	3	0	1.0	2.5	
02	151	6	9	121	10	8	98	13	11	83	12	9	63	11	10	40	75	85	57	8	9	35	85	35	12	3	2.0	3.5	27	2	1	1.0	2.5	
03	151	6	11	122	7	9	100	10	14	84	9	14	62	10	9	45	75	80	54	9	6	45	80	35	4	4	2.5	4.0	27	2	1	2.0	3.0	
04	151	6	11	123	8	9	100	9	16	82	8	15	63	11	14	50	85	85	57	7	7	45	90	37	10	6	3.0	4.5	28	5	2	1.0	2.5	
05	153	2	15	124	7	13	98	9	18	80	8	16	62	12	10	30	60	60	58	8	8	55	95	35	9	3	2.0	3.0	28	7	2	2.0	3.0	
06	153	3	20	118	8	18	82	21	11	62	24	4	61	13	15	40	70	70	57	6	9	40	70	42	8	11	2.0	3.0	26	2	1	1.5	3.0	
07	149	7	19	115	8	17	95	18	9	66	18	14	48	11	16	50	85	85	43	15	8	45	75	38	8	5	2.5	4.5	26	4	1	2.0	3.5	
08	149	3	16	110	8	11	79	5	10	58	10	7	39	14	9	45	80	80	38	19	10	50	80	39	8	8	3.5	6.0	26	7	1	2.0	3.0	
09	151	2	16	110	7	13	78			64	6	9	32	18	6	65	105	80	35	8	11	55	80	35	10	4	2.5	4.0	28	3	4	2.0	3.5	
10	151			106			79			68			*			40	65	33	*															
11	150	6	3	110	5	13	78	12	8	64	7	17	33	5	5	55	80	80	32	23	7	40	65	33	4	3	3.0	5.0	28	2	0	2.0	3.5	
12	152	5	5	111	4	10	76	10	7	60	14	12	32	6	4	55	80	80	39	6	5	55	85	33	2	8	3.0	5.0	28	2	0	1.5	3.0	
13	151	5	5	110	7	9	80	6	13	55	14	6	31	6	4	60	90	29	29	12	5	30	55	33	1	2	2.5	4.0	30	4	2	2.0	4.0	
14	149	7	3	108	9	6	80	10	10	58	27	10	30	10	2	55	80	31	31	6	6	40	60	35	3	3	3.0	5.0	30	5	0	2.0	4.0	
15	151	4	9	109	8	7	80	10	10	64	17	13	38	11	8	55	110	33	33	10	4	30	55	40	4	5	3.0	5.0	30	15	2	2.0	4.0	
16	151	4	9	108	9	15	78	15	9	68	8	15	41	8	5	30	60	45	45	16	8	30	55	43	7	10	3.5	6.0	28	4	0	2.5	3.5	
17	151	2	6	112	9	12	84	12	16	72	6	10	50	6	8	30	55	49	49	3	6	35	60	47	2	10	4.0	6.5	28	4	0	1.0	2.5	
18	153	2	6	116	8	7	90	13	17	78	6	6	58	9	4	40	70	53	53	6	6	40	70	41	6	4	4.5	5.0	28	2	0	2.0	3.0	
19	153	4	4	120	6	8	98	4	14	82	7	4	63	7	5	40	70	55	55	4	4	40	70	43	8	8	3.5	5.5	28	4	0	1.5	3.0	
20	153	4	3	120	6	6	98	6	12	84	6	6	65	8	5	50	85	57	57	6	6	35	65	39	12	4	2.5	4.0	28	3	0	2.0	3.0	
21	155	2	8	122	3	10	99	8	14	86	4	7	68	5	8	40	70	59	59	4	8	40	70	39	6	6	2.0	3.5	28	2	0	1.5	3.0	
22	153	4	5	120	9	6	100	7	13	88	6	12	66	8	8	50	85	55	55	8	4	40	70	37	10	4	2.0	4.0	28	2	2	1.5	3.0	
23	153	4	6	122	7	6	100	10	11	90	6	14	66	10	8	2.5	5.5	57	57	6	6	40	70	35	2	4	2.0	3.5	28	2	0	2.0	3.0	

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Dg = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 50-60S Long. 22.5-37.5W

Month August 1963

Hour (LST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *	F _m	D _u	V _{dm} *														
00	150	7	14	6.5	11.0	123	8	13	6.0	10.0	82	9	11	4.0	7.0	63	8	3	3.0	5.0	56	5	3	3.0	5.5	35	14	3	2.0	3.0	27	11	0	1.5	3.0						
01	154	4	22	7.5	12.5	124	8	10	5.0	8.5	86	7	8	3.0	5.0	65	8	6	3.0	6.0	57	8	4	3.5	5.5	35	11	4	1.5	3.0	29	9	2	1.0	2.5						
02	152	8	10	7.0	12.0	124	10	10	5.0	9.0	104	6	18	3.5	7.0	88	4	9	2.0	5.0	67	6	8	4.0	7.0	57	13	3	3.0	5.0	35	6	2	2.0	4.0	28	9	1	1.0	2.5	
03	148	10	7	7.5	12.0	122	10	7	5.0	9.0	96	12	8	3.0	5.0	85	8	9	3.0	5.0	69	6	12	3.0	5.0	57	6	6	3.0	5.5	35	13	4	1.5	2.5	27	12	0	1.0	2.5	
04	150	8	9	8.0	12.5	120	10	7	4.0	7.5	96	12	10	4.0	8.0	84	11	7	3.0	5.0	71	5	16	4.0	7.5	57	8	8	4.0	7.0	35	9	2	1.0	2.5	29	2	3	1.0	2.0	
05	152	6	8	7.5	12.5	122	10	10	4.5	8.5	94	12	10	4.0	8.0	82	9	6	4.0	7.0	65	9	11	5.0	8.5	57	6	7	5.0	8.5	37	13	6	3.5	5.5	29	4	1	2.0	4.0	
06	152	6	6	7.0	12.0	120	12	8	7.0	11.5	90	14	11	3.5	7.0	74	8	9	7	7	5.5	11.0	59	4	6	9.0	14.0	39	12	6	2.0	3.5	27	2	2	1.5	3.0				
07	148	9	4	8.0	13.5	118	2	11	6.0	10.0	84	7	20	6.0	10.5	66	9	11	3.5	7.0	59	7	13	49	12	3	5.0	8.5	45	8	6	3.0	6.0	27	2	1	1.0	2.0			
08	146	6	4	7.0	12.0	118	7	14	6.5	11.5	85	13	20	4.0	8.0	67	11	8	5.0	7.5	43	10	11	4.0	6.0	39	8	6	4.5	7.0	43	4	6	4.0	7.0	27	4	1	1.0	2.0	
09	148	6	6	7.0	11.5	111	6	16	7.0	11.0	83	14	19	14.0	23.0	70	7	6	7.0	11.0	39	9	8	6.0	8.0	34	12	6	5.5	8.0	40	8	7	3.0	6.0	27	2	0	1.5	3.0	
10	148	9	4	8.5	13.5	110			7.5	13.0	90			8.0	15.0	62	10	9	2.0	4.5	41	4	9	5.0	7.0	36			7.5	10.5	39			4.0	7.5	29	0	2	1.5	3.0	
11	151	3	12	7.5	12.0	108	11	15	10.0	15.0	86	4	17	4.5	8.5	72	4	15	2.5	5.0	39	2	7	7.0	10.5	31	7	3	9.5	14.0	34	5	3	2.0	4.0	23	1	3	4		
12	150	3	12	7.5	11.5	104	10	10	9.0	15.0	83	3	19	16.0	19.0	71	5	13	12.5	16.0	41	9	5	7.0	10.0	31	26	4	3.5	6.0	35	2	4	5.0	7.0	29	5	1	2.0	3.0	
13	148	4	17	8.0	12.5	105	7	11	8.0	13.0	77	9	14	5.5	10.0	74	2	20	5.0	11.0	38	3	8	7.0	9.0	33	9	5	4.0	7.5	34	4	3	3.0	4.5	29	9	0	2.0	3.5	
14	150	2	16	8.0	13.0	106	6	8	8.0	14.5	78	9	12	6.0	10.0	76	1	20	3.5	6.5	38	5	7	4.5	7.5	33	10	7	1.5	3.0	37	2	5	3.0	5.0	31	7	3	3.0	6.0	
15	148	4	12	8.0	12.5	105	6	9	7.5	13.0	72	15	10	6.0	10.0	71	6	18	4.5	9.0	37	6	4	2.0	4.0	34	3	6	3.0	5.5	37	4	2	2.0	3.0	30	7	2	1.5	3.5	
16	148	5	12	7.5	12.5	106	6	14	9.5	15.0	77	10	9	7.0	11.5	67	11	11	4.5	11.0	41	8	4	6.0	8.0	41	3	7	2.0	4.0	41	7	4	3.0	4.5	31	14	2			
17	148	5	8	6.0	10.0	107	7	8	9.0	16.0	76	10	11	7.0	12.5	72	6	12	3.0	7.0	47	8	5	3.0	5.5	51	6	6	3.0	6.0	45	12	5	3.0	5.0	29	17	1	4.5	6.0	
18	148	5	9	6.0	10.0	111	9	9	7.0	11.5	80	10	14	5.0	10.0	73	5	4	4.0	8.0	53	9	5	2.5	5.0	51	6	3	2.5	5.0	42	8	6	3.0	5.0	29	16	1	3.0	4.0	
19	146	9	6	6.0	10.0	116	6	11	6.5	11.5	87	9	13	5.5	10.5	74	19	1	5.0	10.5	59	4	4	4.5	8.5	53	8	2	3.0	6.0	43	11	9	1.5	3.0	29	16	1	4.0	5.0	
20	150	5	8	7.0	11.0	117	8	10	6.0	11.0	88	15	13	5.5	10.5	81	5	8	5.0	9.5	61	7	11	3.5	6.5	53	5	2	4.0	6.0	48	8	11	2.5	4.0	29	16	2	3.5	5.0	
21	151	6	9	6.0	11.0	119	7	10	7.0	12.5	88	19	9	5.0	11.0	82	8	7	3.5	7.0	63	8	2	4.0	7.0	56	5	5	3.0	6.0	42	11	8	3.0	5.0	29	19	2	3.0	4.5	
22	152	4	6	7.5	12.0	118	10	7	7.5	11.5	90	13	8	6.0	12.0	80	8	3	4.0	7.5	63	10	4	3.5	7.0	55	4	2	2.5	5.5	39	9	5	3.0	5.0	29	16	2	2.0	3.0	
23	151	5	12	8.0	12.0	121	8	7	5.5	9.5	92	11	12	4.0	8.0	82	7	8	5.0	9.0	63	7	3	3.0	5.5	55	4	4	3.5	5.5	37	16	4	2.0	4.0	29	15	2	1.5	3.0	

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]	F _{am} [#]	D _u	V _{dm} [#]
00	150	8.5	14.0	126	7.0	11.5	102	8.6	4.0	7.5	6.3	55	39						29					
01	150	9.0	15.0	126	11.0	17.0	102	8.6	3.0	6.5	6.3	55	53						31					
02	152	7.5	12.0	124	9.5	15.0	102	8.4	4.5	8.0	6.3	59	43						31					
03	152	8.5	14.0	128	8.0	12.5	102	8.4	5.0	9.0	6.1	57	53						29					
04	154	8.0	12.5	130	9.0	14.0	100	8.2	4.5	8.0	6.3	45	45						29					
05	154	8.0	13.0	130	8.0	12.5	98	7.6	5.5	10.0	6.1	59	41						29					
06	154	8.5	13.5	128	10.0	15.0	94	7.4	5.0	10.0	6.3	57	37						29					
07	154	9.0	15.0	124	10.5	16.5	86	6.0	4.5	9.5	6.1	57	41						31					
08	152	10.5	16.5	118	10.0	15.5	86	6.0	4.0	11.0	4.6	53	43						27					
09	148	10.5	16.0	116	11.0	18.0	72	6.7	3.0	6.5	3.4	39	34						29					
10	148			112	13.0	19.5	70	5.4	3.0	6.0	3.3	29	29						27					
11	148	12.0	18.0	104			70	5.7	10.0	11.5	5.7	33	29						29					
12	148	10.0	15.5	101			71	5.7	9.0	11.5	5.7	36	29						27					
13	148	9.0	14.5	102			71	6.6	5.0	6.5	6.6	32	30						28					
14	150	10.5	17.0	106			76	5.5				31	32						28					
15	150			106			72	5.6				33	33						31					
16	152	5.5	10.0	102			72	5.6				39	37						29					
17	152	5.5	9.5	102			72	6.0	9.5	11.0	6.0	41	41						31					
18	150	5.5	9.0	104			82	7.4	7.5	12.0	8.2	51	49						31					
19	148	6.0	11.0	108			86	7.4	4.5	9.5	5.3	49	53						29					
20	148	7.0	12.0	112			90	8.6	5.0	9.0	5.7	51	49						31					
21	152	7.0	11.0	118			94	8.2	4.5	7.5	6.1	53	53						29					
22	152	8.0	13.5	120			96	8.4	5.0	9.0	6.3	55	47						29					
23	150	8.0	13.5	122			96	8.4	5.0	10.0	6.3	55	39						29					

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of overage voltage in db below mean power
 L_{dm} = median deviation of overage logarithm in db below mean power

Time (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]	F _{om} [*]	D _ℓ	V _{dm} [*]
00	153	6.0	7.0	126	8.0	12.0	108	94	5.5	9.0	74	57	33			28			28			28		
01	157	8.5	13.0	126	6.5	11.0	106	93	9.5	16.0	76	59	33			28			28			28		
02	152	9.0	14.0	127	9.5	15.5	104	93	4.5	7.5	72	60	32			28			28			28		
03	152	7.0	13.0	123	9.0	13.0	97	88	7.0	9.0	88	60	31			27			27			27		
04	147	9.0	14.5	121	7.5	13.0	99	82	7.0	12.0	82	60	31			28			28			28		
05	152	8.5	13.5	124	7.0	11.5	99	84	5.0	9.5	71	60	32			28			28			28		
06	152	8.0	12.5	123	7.5	12.0	95	72	4.0	8.0	70	56	34			27			27			27		
07	147	8.5	14.0	114	8.0	13.5	79	61	5.0	8.5	60	54	36			27			27			27		
08	148	9.0	14.5	114	9.0	14.0	72	62	4.5	7.5	44	42	41			26			26			26		
09	139	9.0	13.5	107	14.0	19.0	78	56			34	36	37			26			26			26		
10	149	9.0	14.0	110			88	62	3.5	6.5	40	39	41			26			26			26		
11	151	9.0	14.0	112	12.0	16.0	74	62			38	35	35			28			28			28		
12	149	10.0	15.0	108	9.0	14.5	77	61			34	35	32			28			28			28		
13	149	9.0	14.0	110	10.5	14.5	75	56	2.0	5.0	36	31	32			28			28			28		
14	150	10.5	16.0	115	12.5	17.5	82	66	1.5	2.5	31	32	34			30			30			30		
15	148	8.5	13.5	107			86	72	4.5	6.5	33	31	31			29			29			29		
16	150	9.0	15.0	113	14.0	20.0	84	76	9.5	17.0	41	36	40			31			31			31		
17	149	10.0	14.5	113	8.0	13.0	82	72	7.0	13.5	47	48	43			29			29			29		
18	147	9.0	8.0	110	4.5	8.0	76	76	16.5	23.5	68	55	37			28			28			28		
19	149	7.0	11.0	114			83	79	5.0	8.0	74	60	37			28			28			28		
20	152	7.0	11.0	117	10.5	15.5	89	79			64	54	35			28			28			28		
21	152	7.5	7.5	119	8.0	13.0	89	82	8.0	13.5	67	59	33			28			28			28		
22	150	8.0	8.0	117	8.5	13.0	93	90	8.0	13.0	68	56	35			28			28			28		
23	147	8.5	8.5	120	7.5	12.0	93	83	9.0	15.5	70	57	33			28			28			28		

F_{om} = median value of effective antenna noise in db above k1b
 D_ℓ = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]	F _{am} [*]	D _f	V _{dm} [*]
00	155		6.0	11.0	124	96	6.0	10.0	80	57	5.5	9.5	68			33			28					
01	155		8.5	14.0	122	94	5.0	9.0	81	57	4.0	7.5	66			35			28					
02	155		8.0	14.0	122	94	5.5	9.5	84	59	3.5	7.0	65			34			28					
03	153		8.0	14.0	122	93	6.5	10.5	93	62	4.0	7.0	66			33			28					
04	155		9.0	14.0	123	97	8.0	12.0	97	58	4.0	8.0	66			38			27					
05	156		9.0	14.0	123	98	6.0	10.5	80	59	5.5	10.5	65			36			27					
06	156		9.0	15.5	125	97	5.0	9.0	81	60	5.0	10.5	66			42			27					
07	159		9.0	15.0	126	99	6.5	11.5	73	56	4.5	8.5	69			34			26					
08	156		9.5	15.5	114	84	10.0	16.0	60	55	6.0	12.0	62			43			26					
09	150		9.5	15.5	114	84	8.0	13.0	67	43	4.5	11.0	42			43			26					
10	149		9.5	15.0	114	86	8.0	13.5	62	40	5.5	9.0	32			41			28					
11	143		10.5	16.0	106	86	12.5	19.0	72	38	4.0	8.0	32			41			28					
12	153		12.0	17.0	113	85	9.0	14.5	64	34	3.5	7.0	30			36			28					
13	155		10.0	15.0	116	88	11.5	18.5	68	33	4.0	8.5	24			37			30					
14	154		8.5	13.0	117	84	9.0	14.0	84	31	3.0	7.0	27			37			30					
15	155		8.5	13.5	120	86	7.0	12.0	68	31	5.0	8.5	28			37			30					
16	153		9.0	14.5	116	88	10.0	15.0	86	31	5.5	10.5	28			39			30					
17	153		7.5	13.0	118	86	10.5	17.0	58	41	4.0	9.0	34			41			30					
18	151		7.0	11.0	112	80	8.5	14.0	80	47	4.5	9.0	46			43			28					
19	151		7.0	11.0	112	88	8.0	13.0	88	53	3.0	7.0	54			43			28					
20	153		7.5	12.0	122	88	8.0	13.5	88	60	3.5	7.0	62			41			28					
21	155		8.0	12.5	118	90	4.0	8.0	79	61	4.0	7.0	62			43			28					
22	155		8.0	13.0	122	88	4.5	8.0	82	60	4.0	8.0	66			41			28					
23	155		7.0	12.0	120	92	5.5	10.0	78	61	5.0	9.0	68			37			28					

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm}^{*} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E

Month June

19 63

Hour (LST)	Frequency (Mc)																																							
	.013			.051			.160			.495			2.5			5			10			20																		
	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}	F _m	D _f	V _{dm}													
00	154	6	4	80	135	125	3	5	11.0	16.0	102	4	4	5.5	10.5	78	7	3	7.0	9.5	64	8	4	5.5	11.5	57	5	2	5.0	9.0	44	4	8	3.5	7.5	19	2	2	2.0	3.0
01	154	4	2	7.5	130	123	6	6	6.5	11.5	104	2	6	6.5	11.5	75	8	8	7.0	12.0	62	4	6	6.5	11.0	55	4	2	5.0	9.5	40	6	4	4.0	7.0	19	1	2	1.5	3.0
02	154	2	2	8.0	135	119	4	4	8.5	13.0	94	10	6	3.0	9.5	62	9	9	2.5	6.0	58	5	3	6.0	11.0	53	4	2	5.5	8.5	38	8	4	4.5	7.5	19	1	3	2.0	3.0
03	153	1	3	8.5	140	117	8	4	11.0	15.5	81	7	7	6.0	9.5	53	8	4	1.5	4.0	52	6	6	7.0	13.0	50	3	3	5.5	9.5	30	9	4	4.0	7.0	19	1	3	1.5	3.0
04	152	4	2	8.5	145	117	8	4	14.0	20.5	78	15	6	3.0	6.0	53	20	2	2.5	5.0	40			6.0	13.0	45	6	4	6.0	10.0	38	9	4	4.5	7.0	19	2	2	1.0	3.0
05	152	2	2	10.5	16.5	117	11	6	13.0	21.0	78	14	6	4.5	6.5	51	19	2	3.0	5.0	36			6.0	12.0	39	12	4	6.5	11.0	38	11	6	4.0	6.5	19	2	3	1.5	3.0
06	150	4	2	11.5	18.0	117	12	12	14.0	21.5	80	20	8	5.0	8.0	51	18	2	3.0	5.0	36			6.0	11.0	37	6	8	3.0	6.0	36	8	4	4.5	7.0	19	2	4	1.5	3.0
07	150	6	2	11.0	17.0	117	12	8	16.0	22.0	79	14	6	4.0	8.0	52	14	1	3.0	5.0	36	12	8	5.0	10.0	33	12	6	4.5	7.0	36	18	6	5.0	7.0	19	2	2	2.0	3.5
08	152	2	4	10.5	17.0	117	8	6	14.5	21.5	80	9	7	4.0	7.0	52	10	1	2.5	4.0	32	16	2	5.0	9.5	31	8	6	4.0	6.5	34	12	2	4.0	6.5	19	4	2	1.0	3.0
09	152	8	4	11.5	17.5	119	8	3	14.5	21.0	83					53	8	2	4.0	6.0	36	14	4	4.0	7.0	33	7	6	6.0	9.0	38			5.0	8.5	19	2	2	1.5	3.0
10	154	6	2	12.5	18.5	123	6	2	13.5	21.5	87	10	8	5.5	8.5	57	14	5	4.0	8.0	36			3.5	7.5	31	7	2	7.0	10.0	42	4	8	5.0	9.0	21	2	4	2.0	3.5
11	158	3	6	12.0	18.0	127	8	4	12.5	19.5	92	8	6	15.0	23.0	59	24	8			36	26	6	9.0	14.5	35	16	5	7.0	14.5	40	9	4	6.0	10.0	20	11	2	2.0	4.0
12	160	4	5	10.5	17.0	129	4	5	10.5	18.0	96	14	14	9.0	15.0	67	27	18	12.5	24.0	43			10.0	17.5	41	17	10	7.0	11.5	42	9	6	5.5	9.0	21	5	2	2.0	4.0
13	160	5	4	9.5	15.0	129	5	4	11.0	16.5	98	16	11	11.0	18.5	69	27	18	10.5	21.5	42	26	9	6.0	9.5	43	11	10	7.0	11.0	42	6	4	5.0	9.0	19	9	2	2.0	4.0
14	160	4	1	9.0	15.0	129	10	4	10.0	16.0	96	18	10	10.0	19.0	61	34	8	13.0	24.0	38	32	6	15.0	23.0	43	10	8	8.0	13.5	44	4	4	4.0	8.0	21	6	4	2.0	3.5
15	160	4	2	9.0	14.0	129	8	4	9.0	16.0	94	22	6	12.0	19.0	59	38	6	4.0	6.5	42	23	8	8.0	12.0	43	13	4	8.0	14.0	45	3	5	4.0	7.0	19	9	3	1.5	3.5
16	160	4	4	9.0	15.0	127	10	4	9.5	16.0	92	12	8	7.5	12.0	61	24	6	4.0	7.0	40	28	7	7.5	14.0	45	6	6	6.5	11.5	48	10	4	5.0	8.5	21	4	2	2.0	3.5
17	160	2	4	9.0	14.0	128	5	5	9.5	16.0	94	7	12	8.5	14.0	57	18	6	8.5	13.5	44	8	8	5.5	10.0	47	6	4	6.0	11.0	50	9	6	4.0	7.5	22	5	2	2.5	4.0
18	158	4	3	9.0	14.5	127	4	5	11.0	17.5	88	10	8	7.0	11.0	59	10	6	7.0	13.0	48	10	10	4.0	8.5	50	6	5	6.0	11.0	48	4	4	3.5	7.0	23	4	4	2.0	4.0
19	156	4	2	9.0	14.5	125	5	5	11.0	17.0	87	7	7	6.5	11.0	57	14	2	4.0	6.0	50	8	8	5.5	9.5	53	4	4	4.5	8.0	50	8	4	4.0	7.0	23	4	4	1.5	4.0
20	155	5	3	8.0	12.5	123	4	5	10.5	16.0	90	6	2	6.0	10.5	65	4	6	0.5	1.5	54	5	7	3.5	6.5	57	2	4	3.0	6.5	49	18	3	4.5	8.0	23	4	4	1.5	3.5
21	156	4	4	8.0	12.5	121	6	2	10.0	15.0	96	8	2	6.0	11.0	75	12	4	4.5	7.0	60	8	4	3.0	7.0	61	1	4	4.0	7.5	52	18	8	4.5	8.0	21	4	4	1.5	3.0
22	154	6	2	8.0	13.0	127	4	6	10.0	15.0	101	5	3	5.0	9.0	79	4	10	5.5	9.5	62	9	3	4.0	8.0	61	2	4	4.0	7.5	48	22	6	7.0	10.0	19	2	2	1.5	3.0
23	155	5	3	9.0	14.0	125	6	4	11.0	16.0	104	4	8	6.0	10.0	77	12	7	5.5	8.0	65	10	4	5.0	9.5	59	3	3	5.0	8.0	46	16	8	4.0	6.5	19	2	2	1.5	3.0

F_m = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																								
	.013				.051				.160				.495																												
	F _{am}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}																	
00	154	5	3	9.0	14.5	127	6	4	11.0	18.0	104	10	7	6.5	12.0	81	10	8	7.0	11.0	66	6	6	4.0	8.5	58	4	4	5.0	10.5	58	9	2.0	1.5	3.5	19	1	2	1.0	3.0	
01	155	4	4	10.0	16.0	127	5	8	11.0	17.5	104	8	7	6.0	11.5	79	8	10	7.5	11.5	66	4	6	4.0	8.0	56	4	3	5.5	9.0	54	12	19	2.0	4.5	19	0	4	1.0	3.0	
02	155	4	4	9.0	15.0	124	8	5	10.0	16.0	100	9	4	7.0	12.0	70	13	10	6.5	11.0	62	6	6	3.5	7.0	55	4	4	4.5	7.5	52	14	18	1.5	4.0	17	2	2	1.0	3.0	
03	155	4	4	9.5	15.5	121	8	4	12.0	17.5	90	18	11	7.0	12.0	54	27	7	2.5	5.0	56	6	6	3.5	7.0	52	5	4	4.0	7.5	50	13	19	2.0	4.5	17	2	2	1.0	2.5	
04	153	4	4	10.5	17.5	120	11	5	14.0	20.0	82	25	9	6.0	10.0	53	32	4	4.0	7.0	44	10	6	6.5	12.5	46	6	2	4.5	7.5	46	14	12	2.0	5.0	17	2	2	1.0	2.5	
05	152	3	3	10.5	17.0	119	10	6	14.0	21.0	81	26	9	7.5	11.0	51	33	2	4.0	6.0	40	14	10	7.0	13.0	42	6	6	7.0	13.0	42	16	8	2.0	5.0	17	2	2	1.5	3.0	
06	151	8	2	11.0	17.5	119	10	8	13.0	21.0	79	21	7	5.5	9.0	51	28	2	4.0	6.0	36	16	9	6.5	13.0	38	10	6	6.0	9.0	47	9	13	2.0	5.0	17	3	2	1.5	3.0	
07	151	5	3	10.5	17.0	119	9	6	13.5	22.5	74	30	4	5.0	8.0	51	26	2	2.5	5.0	34	13	6	7.5	13.5	36	6	6	5.0	9.5	40	14	6	2.5	5.0	19	2	4	1.5	3.0	
08	153	5	4	11.0	17.5	119	6	6	11.5	18.0	80	26	9	7.5	11.0	53	14	4	4.0	6.5	30			5.0	7.5	34	12	4	7.0	15.5	40	8	8	2.5	5.0	17	6	2	1.5	3.5	
09	153	6	4	10.0	16.0	123	4	8	10.5	18.0	82	21	12	13.0	20.0	55	14	6	5.0	7.5	32			3.0	7.0	34	10	6	7.0	11.0	38	8	6	4.5	7.5	18	3	3	1.5	3.0	
10	155	4	4	10.5	17.0	125	6	6	9.0	16.5	86			9.0	15.0	55	10	6	7.0	9.5	38					34	12	6	7.0	12.5	40			5.0	8.0	18	5	4	2.0	4.0	
11	159	4	7	10.0	16.5	127	6	7	8.0	15.0	90	17	13	7.0	12.5	61	18	12	6.0	9.5	35					38	11	11	6.5	13.5	42	6	8	4.5	8.0	18	5	3	1.5	3.5	
12	159	8	4	7.5	14.0	129	6	6	7.0	13.0	92	12	8	9.5	15.5	62	19	12	5.0	9.0	42					45	9.0	36	13	7.0	13.0	41	7	6	4.0	7.5	17	10	2	2.0	3.5
13	159	8	1	8.5	15.0	129	4	4	9.0	15.0	95	12	12	11.5	18.0	65	22	14	10.5	17.0	36	20	6	5.0	8.5	37	12	8	5.5	11.0	42	4	7	3.5	7.5	18	6	3	1.5	3.5	
14	161	4	3	8.0	14.5	131	4	6	8.0	13.0	98	14	12	8.5	14.0	67	23	14	5.5	11.0	46			3.0	4.0	40	11	8	6.0	12.0	42	6	2	3.0	7.0	19	6	4	1.5	3.0	
15	160	7	1	7.5	14.0	131	8	5	7.0	13.0	100	14	12	7.5	15.0	67	30	16	6.0	12.5	44	14	10	6.5	10.0	42	10	8	4.5	8.0	44	4	4	3.5	7.5	19	6	4	1.0	3.0	
16	161	3	2	8.0	13.5	129	10	4	7.5	14.0	96	12	11	11.5	19.0	63	22	10	11.0	21.0	40	24	8	7.0	11.0	44	10	6	6.0	12.5	46	2	4	4.0	7.0	19	24	4	2.0	3.5	
17	159	4	0	7.5	14.0	129	3	6	7.0	13.0	96	19	10	10.0	17.0	61	28	10	6.0	13.0	44	12	9	5.5	10.5	46	8	4	6.5	12.5	46	8	3	3.5	7.0	21	5	5	2.0	3.5	
18	159	2	4	9.0	15.0	129	6	7	11.0	18.5	92	14	12	8.5	14.5	59	28	8	9.0	17.0	58	5	16	5.0	9.0	50	6	4	5.0	9.0	48	3	3	4.0	7.5	21	6	4	1.5	3.5	
19	159	1	6	9.5	15.5	127	6	5	10.0	17.0	90	13	7	7.0	11.0	57	22	4	6.0	9.5	48	12	4	3.5	8.5	52	6	4	4.0	8.0	49	3	3	3.5	7.0	21	3	4	2.0	4.0	
20	153	4	2	9.5	15.0	123	8	4	11.0	17.5	95	12	5	6.0	11.5	69	18	8	4.0	8.0	56	10	5	5.5	9.0	58	4	4	3.0	6.5	50	8	7	3.0	6.5	21	4	4	1.5	3.0	
21	155	4	2	9.0	14.0	125	6	4	8.0	13.5	100	12	4	6.0	11.5	79	11	6	6.0	11.0	62	6	5	4.0	8.0	60	4	3	4.0	8.0	50	24	4	1.5	4.0	19	2	3	1.5	3.0	
22	155	4	2	9.5	15.0	129	4	6	10.0	17.0	104	8	2	7.5	12.5	81	11	8	7.0	13.5	66	4	4	4.0	9.0	60	4	4	5.0	9.0	56	11	11	1.0	3.5	19	2	4	1.5	3.0	
23	155	4	2	7.0	16.0	129	4	3	10.0	16.0	106	6	4	5.5	9.5	79	10	6	7.0	12.0	66	4	4	4.5	10.0	60	2	5	5.0	9.5	62	2	2	1.5	4.5	17	4	2	1.5	3.0	

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E

Month August 19 63

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}				
00	155	4	2	8.5	14.0	129	4	8	10.0	17.0	111	4	8	7.0	12.5	85	6	6	4.5	9.0	55	6	4	3.5	6.5	40	20	7	2.0	4.0	18	5	1	1.0	2.5					
01	155	4	2	8.5	14.0	128	7	5	11.0	18.0	109	5	5	7.5	12.0	85	8	8	5.0	10.0	55	4	3	4.0	8.0	41	17	9	1.0	3.0	18	6	2	1.0	2.5					
02	155	4	4	9.0	15.0	129	4	6	10.0	17.5	107	6	6	6.5	13.0	81	9	6	6.5	10.5	53	6	3	5.0	8.5	40	13	10	2.0	3.5	18	7	2	1.5	3.0					
03	155	4	4	10.0	16.0	125	6	6	11.0	18.0	105	10	7	9.0	16.0	73	15	12	7.5	15.0	53	4	4	6.0	10.0	34	19	5	2.0	3.5	18	5	2	1.5	3.0					
04	155	3	4	9.5	15.5	123	10	6	10.5	17.0	93	17	6	7.0	14.5	59	32	10	7.0	12.0	55	10	6	6.0	11.0	37	15	5	2.0	4.0	16	8	0	1.0	2.5					
05	153	6	2	9.5	15.5	123	9	8	12.5	20.0	91	20	10	6.5	13.0	55	32	6	4.0	6.0	45	6	6	7.0	12.0	40	17	6	2.0	4.0	16	7	0	1.0	3.0					
06	153	2	4	10.5	17.0	121	7	10	12.0	19.5	89	19	9	11.0	19.5	53	29	4	2.0	4.5	41	10	6	6.0	10.0	44	8	12	5.0	8.5	16	6	0	0.5	2.0					
07	151	4	2	11.0	17.5	119	7	5	12.5	21.5	83	20	9	5.0	10.0	51	23	2	4.5	7.5	36	10	6	4.5	9.0	40	14	8	4.0	6.0	18	3	2	1.0	3.0					
08	151	6	2	10.5	16.5	119	6	6	11.0	20.0	88	12	15	7.0	11.0	53					37	8	10	4.5	7.5	35	8	6	5.5	3.0	18	5	2	1.5	3.0					
09	151	2	4	10.5	16.5	118			11.0	18.5	82			3.5	7.0	51					31			4.0	7.5	36			2.0	4.0	18	5	4	2.0	3.0					
10	151	4	4	10.5	17.0	118			12.0	20.0	87			4.0	7.5	51					31			4.0	7.5	36			4.0	6.0	18	4	2	2.0	4.0					
11	152	3	2	11.0	16.5	123	2	6	11.0	17.5	87			5.0	9.0	53	18	2	12.5	20.5	33			5.5	8.5	27	14	2	15.0	19.0	36	6	4	5.0	7.5	18	6	2	2.0	4.0
12	155	4	4	10.0	17.0	125	4	4	10.5	16.5	92	13	9	9.5	18.0	58					33	8	4	7.5	10.5	31	11	8	6.5	9.5	18	7	2	2.5	4.0					
13	155	4	2	9.0	15.0	125	3	2	11.5	18.0	93	14	16	10.0	16.0	69	14	17	7.0	13.0	35	12	4	3.5	6.0	36	9	9	4.0	14.0	38	4	6	5.0	9.0	18	6	2	2.0	3.5
14	155	6	2	8.5	14.0	127	7	6	10.5	17.0	97	12	15	8.5	13.5	67	18	16	3.0	5.5	38	15	6	5.0	8.0	40	13	11	7.0	13.0	42	5	6	5.0	9.0	18	9	2	2.0	3.5
15	157	4	4	8.5	14.0	127	4	4	10.5	17.0	97	14	15	10.0	18.0	65	18	14	4.5	7.0	44	7	9	8.0	12.5	40	9	7	5.5	10.5	42	4	4	5.0	7.0	18	4	3	1.5	3.0
16	158	3	5	9.0	14.0	129	6	8	10.0	17.0	101	9	16	8.0	12.0	69	14	16	4.5	7.0	44	7	9	8.0	12.5	40	9	7	5.5	10.5	42	4	4	4.0	7.0	18	8	2	1.0	3.0
17	159	2	8	8.5	14.0	129	4	8	11.0	17.0	101	8	20	7.0	11.0	73	12	18	6.0	12.0	43	15	4	5.0	9.0	45	6	6	4.0	7.5	20	6	3	7.5	3.0					
18	155	6	4	8.0	13.0	127	6	8	10.0	17.0	99	12	10	10.5	21.5	70	16	14	6.0	11.5	51	6	11	4.0	8.0	53	4	4	4.0	9.5	48	2	4	4.0	8.0	20	6	2	2.0	4.0
19	155	4	4	8.0	13.0	127	6	8	9.0	15.0	103	10	10	7.0	13.5	77	11	8	3.0	4.5	55	9	7	4.5	8.5	57	5	5	5.0	9.0	48	3	5	4.0	7.0	20	6	2	2.0	3.5
20	155	4	4	7.5	13.0	129	4	8	9.0	16.0	107	6	8	6.0	11.0	81	8	6	5.0	9.5	63	8	4	4.5	9.0	61	4	6	5.5	10.0	48	8	6	3.5	7.0	20	6	2	1.0	3.0
21	155	4	4	8.0	13.5	129	4	6	9.0	16.5	109	8	4	7.0	12.5	85	8	8	8.0	12.0	67	4	6	3.5	7.5	59	5	4	6.0	9.0	48	6	9	2.0	4.0	18	3	0	1.0	3.0
22	155	4	4	8.5	13.0	129	8	4	10.0	16.0	109	6	5	8.0	11.5	83	10	6	5.5	11.5	67	4	4	5.0	10.0	57	8	5	4.5	7.5	49	11	4	2.0	4.0	18	4	0	1.0	2.5
23	154	6	3	7.0	13.0	127	10	4	9.0	15.5	109	4	6	6.0	11.0	83	10	6	7.0	11.5	66	7	6	4.0	9.0	55	6	4	4.5	8.0	48	16	14	2.5	4.5	18	5	0	1.0	2.5

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8N Long. 78.2W

Month February 19 63

Hour (ST)	Frequency (Mc)																					
	.135			.500			2.5			5			10			20						
	F _{om}	D _l	V _{dm} L _{dm}	F _{om}	D _l	V _{dm} L _{dm}	F _{om}	D _l	V _{dm} L _{dm}	F _{om}	D _l	V _{dm} L _{dm}	F _{om}	D _l	V _{dm} L _{dm}	F _{om}	D _l	V _{dm} L _{dm}				
00	105	11	8	83	13	6	63	11	6	56	8	5	30	2	1	23	1	1				
01	102	13	5	82	15	6	62	11	5	56	9	6	30	2	1	24	0	1				
02	101	12	8	80	17	4	63	11	8	55	9	5	30	3	1	24	0	1				
03	99	15	8	80	17	5	61	15	6	53	12	3	30	2	1	24	0	1				
04	99	15	6	77	19	6	59	14	6	52	14	2	32	3	1	24	1	1				
05	97	17	6	73	20	7	59	14	8	53	13	5	32	3	1	24	1	1				
06	95	15	6	67	22	7	56	14	5	54	10	4	33	3	1	24	1	1				
07	91	11	5	58	10	4	47	10	3	52	10	4	35	6	2	24	1	1				
08	86	9	5	56	6	4	41	6	4	51	9	2	34	6	3	24	1	1				
09	88	7	7	56	4	5	38	3	4	38	6	2	33	3	3	24	1	1				
10	86	9	5	56	3	4	35	3	3	36	5	2	32	4	2	24	1	1				
11	85	11	3	56	2	4	34	1	4	33	5	4	31	4	2	24	1	1				
12	85	10	3	55	3	3	33	1	4	32	5	3	35	4	2	26	1	1				
13	85	10	3	55	3	3	33	3	2	33	5	4	35	4	2	26	1	1				
14	86	7	3	54	2	2	34	2	2	34	5	3	37	4	2	26	2	1				
15	85	10	2	55	3	3	37	1	5	37	5	3	39	7	2	24	0	1				
16	88	10	4	58	4	4	39	7	4	55	7	2	36	14	2	24	1	1				
17	92	7	6	60	8	6	49	5	5	54	4	3	37	17	3	23	2	1				
18	94	10	6	72	9	11	55	9	3	58	4	5	37	14	3	23	2	1				
19	97	13	7	68	10	10	60	8	4	58	5	5	35	10	3	23	1	1				
20	103	9	9	80	9	9	63	8	4	57	7	3	32	2	1	23	1	1				
21	105	5	6	79	13	6	63	9	5	57	7	4	31	2	1	23	0	1				
22	104	9	5	80	12	5	63	8	7	58	5	5	30	3	1	23	1	1				
23	106	8	7	80	14	4	62	11	5	57	7	4	30	2	1	23	1	1				

F_{om} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* ** This sheet is a correction for corresponding sheet appearing in Technical Note 18-17

Hour (ST)	Frequency (Mc)																						
	.013				.051				.160				.495										
	F _{am}	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _ℓ	V _{dm}	L _{dm}							
00	155	2	3	8.0	13.0	127	4	4	9.0	14.0	99	8	2	2	53	2	2	39	4	2	23	2	2
01	155	3	2	8.0	13.5	127	4	4	10.0	15.0	100	7	3	6	53	2	2	39	2	4	25	0	4
02	155	3	2	9.0	14.0	127	4	2	10.0	16.0	101	4	6	4	76	5	5	39	4	2	25	0	4
03	155	2	3	9.5	15.5	129	4	4	11.0	17.0	101	6	4	4	77	4	8	39	4	6	25	0	4
04	155	3	2	11.0	18.0	129	4	4	12.0	19.0	101	8	4	4	77	6	6	37	4	4	25	0	4
05	155	2	2	13.0	20.0	129	2	4	12.0	18.0	99	6	4	4	72	13	7	35	4	2	25	0	4
06	155	3	4	12.5	18.5	121	2	4	11.5	18.0	79	6	6	6	57	4	6	35	4	2	23	4	2
07	151	2	2	12.0	18.0	115	4	4	14.0	19.0	71	14	8	4	52	7	5	33	2	4	23	0	4
08	151	2	2	10.0	15.0	107	8	4	9.5	12.5	67	16	4	4	51	2	2	29	2	4	23	2	4
09	151	3	2	9.0	14.0	107	6	4	13.0	19.0	65	16	4	4	51	8	4	25	4	4	23	0	4
10	151	3	2	8.5	13.5	109	4	4	8.0	11.5	65	12	4	4	49	2	2	23	2	4	21	2	2
11	151	4	2	9.0	14.0	111	6	4	10.5	14.5	65	14	4	4	49	3	2	21	2	4	21	2	4
12	151	3	2	8.5	13.5	109	8	3	8.5	12.5	63	14	2	4	49	3	2	19	2	4	21	2	2
13	151	3	2	8.5	13.5	112	5	6	12.0	16.5	65	11	4	4	49	2	4	19	2	2	22	1	3
14	151	2	4	9.0	14.0	111	6	6	8.0	12.0	63	17	2	4	47	4	2	19	5	2	23	2	4
15	151	2	4	10.0	15.5	109	4	4	10.0	14.5	61	11	2	4	47	4	2	23	2	4	23	4	2
16	151	2	4	10.5	16.0	107	10	4	9.0	14.0	59	18	2	4	47	6	2	31	4	6	23	4	2
17	149	4	3	10.5	16.5	105	10	4	8.5	12.0	59	18	2	4	49	10	2	25	4	4	25	2	4
18	149	4	3	10.0	15.5	105	4	4	6.5	10.5	66	11	5	4	53	8	2	40	3	3	25	2	4
19	149	2	2	9.0	15.0	111	8	2	7.5	12.5	84	13	6	4	63	10	4	41	2	4	25	2	4
20	149	5	2	8.0	13.5	119	4	4	8.0	12.0	95	4	6	4	69	11	10	40	3	1	25	2	2
21	151	3	2	7.5	13.0	121	8	4	7.5	12.0	97	4	6	4	73	6	10	39	4	2	25	0	2
22	153	3	4	7.5	12.5	123	2	4	9.5	14.0	97	6	2	4	75	4	8	39	2	2	25	0	2
23	153	4	2	7.0	13.0	123	8	2	7.5	13.5	99	8	2	4	75	10	6	39	4	2	25	0	4

F_{am} = median value of effective antenna noise in db above ktb
 D_ℓ = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Month July 19 63

Hour (LST)	Frequency (Mc)																																						
	.013			.051			.160			.495			2.5			5			10			20																	
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}												
00	152	2	0	80	130	126	4	3	9.5	155	102	6	4		80	8	6	11.0	180	58	5	4	5.0	85	53	3	3	3.0	50	23	2	2	2.0	35					
01	154	2	2	90	140	126	5	2	9.0	140	103	4	3		82	6	10	10.5	175	58	7	4	5.0	85	53	5	3	4	3.0	50	23	2	2	1.5	35				
02	154	1	2	9.5	155	128	2	4	9.5	150	102	7	2		82	8	7	10.0	175	58	6	4	6.0	100	52	4	2	4	3.0	55	23	2	2	2.0	35				
03	153	3	2	10.0	160	128	2	4	11.0	170	104	7	5		80	9	8	10.0	170	58	6	6	6.0	100	50	6	2	4	3.0	50	23	2	2	2.0	35				
04	152	4	2	11.0	180	129	3	4	12.0	185	104	7	5		80	10	8	10.5	180	58	6	4	6.0	100	50	6	4	5.0	85	50	23	2	2	2.0	35				
05	154	2	3	12.0	185	128	5	2	12.0	190	102	9	3		78	9	8	12.0	190	58	6	5	6.5	105	50	3	5	5.5	80	33	4	3	3.5	50	23	2	2	2.0	35
06	152	4	2	12.0	185	122	4	3	12.5	190	84	12	8		58	11	4	4.0	55	56	5	5	6.5	95	47	3	3	6.5	95	35	3	6	3.5	50	23	2	2	2.5	40
07	150	2	4	11.0	180	116	5	4	12.5	200	66	30	4		52	16	4	4.0	70	43	6	3	3.5	55	38	5	6	4.5	70	33	3	5	4.0	60	23	2	2	2.0	35
08	148	5	0	10.0	160	108	8	5	13.0	160	64	33	2		52	21	4	5.0	75	38	9	6	3.0	50	30	8	6	4.0	70	29	6	4	3.5	55	22	3	3	2.0	35
09	148	6	0	10.0	150	108	14	5	10.5	155	66	33	2		52	22	4	3.0	60	34	12	4	3.0	50	26	10	6	3.0	50	27	5	5	2.5	45	21	4	2	2.0	40
10	150	4	2	9.5	150	111	10	4	11.5	16.5	66	32	4		50	23	2	6.0	85	34	9	4	3.0	50	24	11	6	4.0	60	25	6	4	2.5	40	21	2	2	2.5	40
11	150	4	2	9.0	140	114	4	6	10.0	145	66	33	4		50	20	4	5.0	75	33	11	5	3.0	55	22	9	4	3.0	50	23	6	4	2.5	45	21	2	2	2.0	40
12	150	4	2	8.0	130	112	9	3	9.0	140	66	29	4		50	22	4	3.0	60	32	12	4	2.0	40	20	12	3	2.5	50	21	6	4	2.5	45	21	4	2	1.5	30
13	150	4	0	8.0	130	112	9	3	10.0	145	64	30	2		50	15	3	7.0	100	30	12	2	3.0	55	20	12	5	2.5	45	19	8	2	3.0	55	22	1	1	2.0	40
14	150	4	2	9.0	140	110	6	2	10.0	135	64	26	2		50	20	4	4.0	70	30	9	2	3.0	50	20	11	4	3.0	50	21	8	4	2.5	45	23	2	4	2.5	45
15	150	2	2	9.0	145	110	8	4	11.0	160	62	23	2		48	14	2	4.5	65	30	12	4	3.5	55	22	12	6	3.0	50	22	4	2	3.5	60	23	2	2	2.0	40
16	148	2	0	10.0	155	108	8	4	12.0	175	60	30	2		48	14	4	3.0	60	32	12	5	3.0	50	24	9	4	2.0	40	31	4	5	3.0	55	24	3	3	2.5	45
17	148	2	2	10.0	155	104	12	4	10.0	150	60	33	2		50	16	4	3.5	55	36	11	9	3.0	50	28	8	4	3.0	55	35	4	4	3.5	6.5	25	2	2	3.0	45
18	148	4	2	10.5	155	104	7	2	6.0	100	72	24	4		58	11	7	4.0	65	40	7	8	3.5	55	42	2	4	2.5	50	41	2	4	3.5	6.5	25	2	2	2.5	40
19	148	2	2	9.0	140	112	4	3	7.0	120	92	6	6		70	10	6	7.0	110	48	5	7	4.5	80	49	3	3	3.5	60	41	2	3	4.0	70	25	3	2	2.0	45
20	150	0	2	7.5	125	120	2	4	7.5	130	98	2	2		74	8	4	8.5	130	54	6	5	5.5	80	52	2	4	3.5	60	40	3	2	4.0	70	23	2	0	1.5	30
21	150	2	2	7.5	125	122	4	4	8.5	130	99	6	4		77	13	9	8.0	135	58	2	6	5.5	85	52	4	4	3.5	60	39	4	2	3.5	60	23	4	0	1.5	35
22	152	2	2	8.0	125	123	5	3	10.0	150	100	3	4		76	8	5	9.0	140	58	4	5	5.0	85	54	4	4	3.0	60	39	2	3	3.0	60	23	2	0	1.5	35
23	152	2	2	7.5	125	124	4	2	9.5	150	100	7	3		78	9	6	7.5	130	58	5	4	5.5	90	54	4	5	3.5	55	37	4	2	3.0	55	23	2	0	1.5	30

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii

Lat. 22.0 N Long. 159.7 W

Month August 19 63

Hour (ST)	Frequency (Mc)																																			
	.013				.051				.160				.495				2.5				5				10				20							
	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}
00	153	4	0	80	130	126	5	2	85	135	102	5	4	82	9	6	90	175	57	9	2	65	100	57	6	4	36	6	4	35	50	23	2	0	25	40
01	155	2	4	80	140	130	2	6	90	140	102	6	2	84	8	6	105	190	59	8	4	55	95	56	4	2	36	2	4	30	50	23	2	0	20	35
02	155	2	2	95	155	130	2	4	100	155	102	6	3	82	10	8	110	200	59	7	4	70	105	54	5	2	36	2	4	35	60	23	2	0	10	25
03	155	2	4	110	175	130	4	4	110	170	104	6	6	84	6	7	140	220	59	6	4	80	120	54	2	4	34	4	4	35	50	23	0	0	10	25
04	153	2	0	115	180	128	6	2	120	190	104	6	4	84	5	10	100	180	59	4	4	70	105	52	4	2	34	6	4	30	45	23	0	2	15	35
05	153	2	2	130	195	128	6	2	125	195	102	6	4	78	10	6	110	180	57	8	2	70	120	52	4	4	30	4	2	25	40	23	0	2	15	30
06	153	2	2	125	195	124	2	2	130	200	92	4	8	58	12	2	50	70	57	10	2	80	110	50	6	2	33	5	4	30	50	23	2	20	35	
07	149	4	0	115	190	118	4	2	120	190	72	22	6	52	18	4	40	65	43	4	2	50	75	40	8	4	32	4	4	40	70	23	0	2	20	40
08	149	4	0	110	170	110	8	4	120	175	72	20	8	52	16	4	45	65	39	4	5	35	50	34	4	4	28	4	4	55	80	23	0	2	20	40
09	151	2	2	95	150	110	8	4	100	150	70	16	6	50	15	2	50	80	37	6	4	25	45	30	4	6	26	2	4	30	50	21	2	0	25	40
10	151	2	2	85	145	112	6	4	80	120	70	14	6	48	16	0	45	70	35	6	4	20	40	26	5	4	24	2	4	35	55	21	2	0	20	35
11	151	2	2	80	130	114	8	2	95	140	70	16	6	48	12	2	35	65	33	6	4	30	50	24	6	2	22	4	4	45	65	21	2	20	35	
12	152	1	1	80	135	114	3	4	85	130	68	21	4	50	11	4	35	60	33	5	4	20	40	24	7	4	20	4	4	30	50	21	2	20	35	
13	151	2	2	75	130	114	3	4	85	130	66	22	4	48	13	2	50	80	32	8	3	30	50	22	12	1	20	4	4	35	55	23	2	20	25	
14	151	2	2	75	135	112	2	4	80	125	64	20	4	48	7	4	30	50	31	10	2	25	40	22	11	2	22	3	4	20	40	23	2	20	35	
15	149	2	0	90	150	108	7	2	95	140	64	14	4	46	7	4	50	75	31	9	2	20	40	26	7	5	26	2	4	35	60	23	2	20	40	
16	149	2	2	100	150	108	6	4	100	150	62	14	4	46	11	4	40	70	35	10	6	20	40	28	9	4	32	2	3	35	60	23	4	20	40	
17	149	0	3	100	165	106	4	4	90	120	70	11	10	48	7	6	30	50	39	8	8	15	30	38	5	5	36	4	4	50	75	25	2	20	35	
18	148	1	3	95	155	106	7	2	75	125	78	5	10	58	4	10	35	60	41	7	7	30	50	46	2	3	39	3	3	45	75	25	2	20	40	
19	149	1	2	80	130	116	4	4	65	115	92	5	2	70	10	9	70	115	51	5	5	35	55	50	7	2	40	2	4	45	75	25	2	20	40	
20	151	1	2	65	110	120	5	2	70	120	96	5	4	76	10	7	60	100	55	9	5	60	85	54	5	4	38	4	5	40	70	24	1	20	35	
21	151	3	2	75	120	122	7	4	80	130	96	5	2	77	12	3	65	100	57	7	5	65	95	54	4	4	37	3	3	35	60	23	2	20	40	
22	152	3	1	20	115	124	4	5	85	135	98	6	3	82	7	8	110	155	57	7	3	65	90	54	7	4	36	4	3	35	60	25	0	2	20	35
23	153	2	2	70	115	126	2	5	90	140	100	5	4	83	8	7	80	140	57	4	4	55	80	56	4	3	36	3	4	40	60	24	1	20	35	

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power

F _m (LS)	Frequency (Mc)																																			
	.013				.051				.160				.495				2.5				5				10				20							
	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}	F _m	D _z	V _{dm}	L _{dm}
00	159	2	4	8.0	10.0	140	5	5	8.0	11.5	103	9	9	8.0	10.0	73	8	12	6.0	9.0	65	4	12	5.5	7.5	46	14	6	4.5	7.0	26	6	2	1.5	3.0	
01	159	4	3	8.5	10.5	140	4	6	5.0	11.5	123	7	9	7.0	10.0	105	5	14	7.5	11.0	73	8	8	5.5	8.5	48			5.0	7.0	26	4	2	2.0	3.0	
02	159	5	2	8.0	11.0	140	6	5	7.5	11.0	107	4	14	7.5	11.0	75	6	9	6.0	9.0	63	6	9	5.5	8.0	42	13	5	5.5	7.5	26	8	2	2.5	3.5	
03	159	4	2	9.5	12.0	140	7	5	9.0	11.0	122	7	8	8.0	11.5	105	8	12	8.5	11.5	75	5	12	5.5	9.0	40	16	4	4.0	6.0	24	8	0	2.0	3.0	
04	159	5	2	10.0	12.0	138	9	5	10.0	13.0	122	6	6	9.5	12.5	101																				
05	157	6	2	9.5	12.0	140	8	14	9.0	13.0	123	8	32	10.0	14.0	95	16	19	7.5	12.0	67	10	12	6.5	10.0	44	12	8	5.0	7.5	26	6	2	2.0	3.5	
06	157	7	6	10.0	12.0	138	7	12	10.5	16.0	122	5	30	9.5	15.5	101	8	22	8.0	13.0	61	15	14	8.0	13.0	42	9	6	5.5	7.0	26	10	2	3.0	4.5	
07	156	5	5	12.0	15.5	134	9	12	11.0	15.5	114	16	22	11.5	18.0	101																				
08	155	6	4	12.0	15.5	131	13	10	15.0	19.0	110			16.0	20.0	89																				
09	155			12.0	17.5	130	6	8	13.0	17.0	112			12.0	18.0	88																				
10	155	2	2	11.0	15.0	133			10.5	16.5	113			11.5	17.5	89																				
11	155	4	4	10.5	14.0	134			9.5	15.5	115			9.5	16.0	91																				
12	159	4	4	10.0	13.0	136	7	6	10.0	15.0	118	8	6	11.0	17.0	98	15	7	8.5	12.0	56	8	12	6	5.0	7.0	42	6	4	5.0	7.5	31	3	5	3.5	5.0
13	161	3	4	8.0	11.0	140	5	10	9.5	15.0	124	5	18	7.5	12.0	103	13	17	8.0	12.0	61	18	13	7.5	12.0	52	15	11	4.5	9.5	32			3.0	5.0	
14	163	2	4	8.0	11.0	142	9	6	8.0	12.0	124	8	13	8.5	12.0	106	9	9	10.0	14.5	64	12	10	8.0	12.0	55	12	4	6.5	10.0	48	9	2	4.0	5.5	
15	163			10.5	12.5	144			7.5	13.0	127			7.0	10.5	106	9	3	9.0	13.5	67	14	12	4.0	6.5	59	10	6	4.0	6.0	52			3.5	6.0	
16	163			8.5	12.5	142	6	7	9.0	12.5	122	12	8	8.0	13.0	105	4	6	9.0	14.5	66	15	5	6.0	8.5	61	8	6	5.0	7.5	50	6	2	4.0	5.0	
17	163			7.5	11.0	142			7.5	11.0	122	13	6	9.5	14.0	103	6	6	10.0	15.5	65	16	8	6.5	10.0	65	11	6	5.0	7.5	53	8	7	5.0	7.0	
18	161	2	4	8.0	11.0	138	6	6	8.5	12.5	121	5	9	8.0	11.0	101	6	6	8.0	11.5	69	11	10	5.5	8.5	65	5	5	6.5	10.0	52	2	4	4.5	6.5	
19	159	2	2	7.5	10.0	140	7	4	7.0	11.0	120	11	2	7.0	10.5	103	8	5	7.0	10.5	73	6	4	3.5	6.0	66	5	4	5.0	7.0	52	3	5	4.0	7.0	
20	159	4	4	7.0	10.5	140	6	4	8.0	11.5	120	8	4	7.0	10.0	103	8	5	7.5	11.0	77	2	6	4.5	7.5	67	4	4	4.5	7.5	48	6	2	3.5	5.5	
21	159	3	3	7.5	10.0	140	4	4	9.0	11.5	122	5	7	8.0	11.0	103	8	6	7.0	11.0	75	6	6	6.0	9.0	65	4	4	6.0	8.0	47	6	3	4.0	6.5	
22	159	2	2	7.0	10.0	138	6	4	8.0	11.5	121	7	5	7.5	11.0	103	6	7	7.0	10.5	73	8	4	6.5	9.0	63	6	4	5.5	8.5	46	5	3	5.0	6.5	
23	159	2	3	7.5	9.5	140	4	4	8.0	11.5	122	4	6	7.5	11.5	105	8	10	8.5	11.5	73	7	4	5.5	9.0	63	6	7	5.0	7.5	46	5	5	5.0	7.0	

F_m = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Month July 19 63

Hour (IST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}
00	159	2	4	7.0	11.0	136	6	4	7.5	12.0	121	8	10	101	9	10	71	9	8	4.5	7.0	61	8	4	5.0	6.0	45	8	4	4.5	7.0	25	8	2	
01	159	4	2	7.5	11.0	138	9	6	8.0	11.5	119	11	9	101	13	9	71	12	7	5.5	9.0	63	9	7	5.0	9.0	45	12	4	3.0	5.0	25	6	0	
02	159	2	4	8.5	10.5	139	3	7	6.0	9.0	119	6	8	103	6	12	73	9	10	5.0	8.5	59	8	4	4.5	8.0	51	4	11	5.5	4.5	25	3	2	
03	157	4	4	9.0	12.5	139	4	6	8.0	11.0	121	6	12	101	7	11	75	5	10	7.0	12.0	57	10	4	5.0	9.0	54	5	15	4.0	5.0	25	2	2	
04	157	4	4	8.5	12.5	135	7	7	9.5	14.0	117	9	11	98	13	17	73	8	11	7.0	12.0	58	6	6	3.5	7.0	55	6	18	3.0	5.0	25	2	2	
05	155	2	2	8.0	11.0	133	6	8	9.5	12.5	113	10	18	92	13	19	65	14	10	7.5	12.0	55	12	4	5.5	7.5	57	6	17	2.0	3.5	25	0	4	
06	153	4	4	9.0	11.5	130	10	11	10.5	15.5	113	10	26	90			61	12	15	9.0	12.5	53	12	3	7.5	10.0	53	5	14	4.0	5.0	25	1	2	
07	151	6	2	10.0	13.0	129	9	15	10.5	16.0	115			88			53	16	34	9.5	14.0	59	13	8	2.5	4.5	53	6	8	5.0	4.0	25	2	2	
08	153	4	5	10.0	13.0	128			10.5	15.0	103			71			51			5.5	8.0	49	4	12	10.0	12.0	31								
09	151	5	4	10.5	14.0	122					98			73			45	12	6	8.0	10.0	37			8.5	14.0	31	10	2	5.0	6.0	25			
10	153	4	2	10.0	15.0	126	14	8	13.0	20.0	110			83	22	18	48	13	7	4.5	6.0	39			6.0	6.5	31			4.0	4.0	27			
11	155	4	4	10.5	14.5	128	12	6			114	15	19	99	10	30	45	24	4	3.0	5.0	39	20	4	7.5	11.0	39	10	6	8.0	9.0	27	4	2	
12	159	6	3	10.0	13.0	132	12	6	12.0	13.0	119	13	20	101	9	27	49	21	6	8.0	10.0	43	18	8	8.0	11.0	38	11	5	6.5	10.0	27	4	2	
13	159	5	4	9.0	12.0	136	11	8	10.5	14.0	124	5	13	107	5	21	60	19	19	10.0	14.5	49	17	10	9.0	13.0	33	9	14	4.0	5.5	27	6	2	
14	159	6	4	10.0	13.5	140	8	10	9.0	13.0	125	9	10	101	11	12	63	18	21	7.0	11.5	51	17	12	8.0	11.0	45	9	10	4.0	4.0	29			
15	161	4	3	8.5	13.0	142	6	12	7.0	14.0	125	7	12	101	14	16	65			7.5	9.0	57	7	10	6.0	7.5	45	10	6	5.0	8.0	31	4	8	
16	161	6	4	9.0	12.5	140	10	9	10.0	15.0	123	8	10	99	17	18	67	14	18	10.0	13.0	51	9	10	5.0	8.0	47	6	7	4.0	6.0	31	6	4	
17	161	4	4	9.0	13.5	140	8	10	11.0	16.0	124	7	12	103	12	19	66	19	14	4.0	7.0	61	14	8	4.5	7.5	48	6	6	4.0	6.0	31	6	3	
18	161	2	6	10.5	13.5	140	6	12	12.0	17.0	124	5	6	96	9	11	71	11	12	5.0	7.5	65	5	7	5.5	8.5	49	4	4	3.0	5.0	29	5	1	
19	156	6	2	7.5	10.0	136	8	6	12.0	14.0	121	9	10	98	13	7	71	7	6	6.0	7.5	64	7	5	4.0	7.0	49	4	4	3.0	5.0	29	5	2	
20	157	5	3	6.5	9.5	138	6	8	10.0	11.5	123	6	10	101	6	12	73	9	8	5.5	9.5	63	6	6	3.5	6.5	47	10	0	3.5	5.0	27	4	2	
21	158	3	3	7.0	10.0	138	6	10	9.0	10.5	121	5	7	100	7	10	73	7	9	5.0	8.0	61	8	4	4.5	6.5	45	5	2	3.0	4.5	27	2	3	
22	159	2	3	7.0	10.5	138	5	7	7.5	11.0	121	5	4	99	8	10	71	9	8	4.0	7.0	61	8	5	4.0	6.5	45	8	3	2.0	4.0	27	2	4	
23	159	2	3	7.0	10.0	135	9	3	8.5	12.0	119	7	7	101	8	10	69	6	6	3.0	5.5	61	6	6	4.0	7.0	45	7	7	3.0	5.0	27	1	4	

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India

Lat. 28.8 N Long. 77.3 E

Month August 19 63

Hour (IST)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}			
00	156	5	2	80	11.0	*	134	9	9	118	12	8	97	10	7	66	11	5	56	15	7	43	6	7	27	0	2
01	158	4	4	90	12.5	*	132	12	6	116	13	6	101	6	11	69	8	8	58	12	6	44	9	8	25	4	2
02	156	6	4	95	13.0	*	132	10	6	118	10	10	101	10	10	67	12	12	58	10	9	51	6	16	25	3	0
03	158	6	6	10.0	13.0	*	132	12	7	118	10	10	99	11	8	68	11	11	60	11	10	51	6	17	25	3	2
04	158	6	8	10.0	13.5	*	134	10	8	120	10	10	102	8	11	69	11	11	56	10	6	47	16	16	25	4	2
05	157	7	5	11.0	14.5	*	133	9	11	118	8	14	91	18	14	69	10	10	54	14	6	51	12	14	25	4	2
06	154	6	6	12.5	17.0	*	130	14	17	114	14	10	94	16	19	61	10	10	52	12	9	47	12	10	25	4	2
07	153	7	5	11.0	15.0	*	130			*	116		* 91			54	14	9	49	5	17	41	8	6	25	2	0
08	154	4	6	12.0	15.5	*	125			*	112		* 83			49			42			35	14	7	25		
09	152	6	4	12.5	17.0	*	127			104	20	20	* 77			47			* 39			33	8	6	25		
10	150	7	4	11.0	15.5	*	130			113	11	21	* 75			51	17	10	41			35	6	6	27	2	2
11	154	8	4	10.5	15.5	*	125	8	5	110	14	13	* 94			51	19	11	39	5	11	37	8	8	27	4	2
12	156	6	4	13.5	18.0	*	131	13	6	114	15	12	93	20	16	55	18	12	44	12	13	40	6	6	29	2	2
13	156	7	2	11.0	15.0	*	132	14	8	118	10	14	99	11	11	58	16	15	42	20	10	41	8	6	29	8	2
14	160	4	4	10.0	15.0	*	136	14	8	118	14	8	95	20	17	59	16	11	48	18	10	43	7	4	31	4	4
15	160	6	4	10.5	14.0	*	136	10	10	118	12	8	99	13	12	55	12	7	51	13	9	44	6	5	30	6	4
16	160	6	4	8.5	12.5	*	138	11	11	118	13	12	97	16	16	55	17	6	55	9	9	45	10	4	31	5	4
17	160	6	4	9.5	13.0	*	135	10	9	120	8	10	97	15	14	59	16	6	56	11	4	47	4	4	29	4	2
18	158	6	4	9.5	13.0	*	136	12	8	116	12	8	95	16	8	63	12	4	60	6	5	48	5	5	31	2	5
19	156	6	4	9.5	12.0	*	132	13	7	116	13	4	98	12	6	69	8	8	60	8	4	49	5	4	31	4	4
20	156	6	4	9.0	12.5	*	133	10	8	118	6	4	99	7	8	70	7	7	60	10	8	45	10	4	29	6	6
21	158	4	4	7.5	11.0	*	133	10	8	118	11	7	97	16	6	67	12	6	58	12	5	45	6	4	27	4	2
22	156	6	2	8.0	10.5	*	136	7	8	116	10	4	97	14	6	67	9	6	62	7	10	45	8	5	27	3	3
23	156	5	2	8.0	11.5	*	132	16	6	116	11	6	95	16	4	69	8	6	56	9	4	45	5	6	27	8	2

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6N Long. 140.5E

Month June

1963

Hour (ST)	Frequency (Mc)																																							
	.013			.051			.160			.495			2.5			5			10			20																		
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}													
00	157	2	2	10.5	15.5	131	4	3	9.5	14.0	108	4	3	8.0	14.0	86	8	5	9.0	14.0	63	4	3	6.0	10.5	56	5	2	5.0	9.5	43	4	4	4.0	7.5	24	1	2	2.5	3.0
01	157	4	3	10.5	16.5	131	2	4	11.5	17.5	110	2	5	8.5	15.0	85	7	5	8.0	14.0	63	4	4	6.0	10.5	56	4	3	6.0	9.5	41	5	3	3.0	6.0	24	0	2	1.5	3.0
02	157	4	2	9.5	14.0	131	4	2	10.5	16.5	109	3	4	7.5	14.0	85	6	5	8.5	14.5	61	6	3	6.0	10.0	54	4	2	6.0	8.5	41	2	3	3.5	6.0	22	2	0	1.5	3.0
03	157	2	2	10.0	14.5	131	3	4	9.5	15.5	108	4	5	8.0	14.0	83	5	10	9.0	14.0	61	4	2	7.5	12.0	66	7	9	6.0	9.5	39	4	2	4.0	6.5	22	2	0	1.0	2.5
04	157	2	2	10.5	15.5	127	2	4	12.0	18.5	100	6	6	8.5	14.5	67	4	6	4.0	7.0	59	6	2	6.0	11.0	58	7	4	6.5	10.0	39	4	2	4.0	6.5	22	2	0	1.5	2.5
05	155	2	2	10.0	14.5	123	4	4	10.5	16.5	84	15	6	8.0	11.5	62	10	5	3.0	5.0	47	6	4	7.5	12.0	48	6	2	5.5	9.5	39	6	2	4.0	6.0	22	4	0	1.5	3.0
06	153	3	2	10.5	15.0	117	7	4	10.0	15.0	85	11	7	8.0	11.0	61	11	3	2.5	4.5	42	4	1	8.0	11.0	42	4	5	11.5	9.5	37	3	4	5.5	8.0	22	2	0	2.0	3.5
07	153	4	2	11.5	16.0	117	4	7	12.0	16.0	88	9	6	10.5	15.0	61	9	4			41	1	2	8.0	11.0	40	4	5	9.5	12.5	35	4	6	3.0	5.0	22	4	0	2.0	3.5
08	155	2	4	11.5	16.0	119	6	7	13.0	18.0	88	8	6	12.5	18.0	61	7	2	2.5	5.0	41	2	2	8.5	12.5	38	4	6	9.0	10.0	33	2	6	3.0	5.0	22	2	2	2.0	3.5
09	155	2	2	12.0	17.0	119	7	3	14.5	19.5	89	7	5	13.0	17.5	61					39	2	0	8.0	12.0	36	4	4	8.5	12.0	31					22	4	2	2.0	4.0
10	153			12.0	16.0	121			13.0	20.0	86	12	8	13.5	20.5	61	12	5	3.0	6.0	39			7.5	11.0	36	4	4	12.0	15.0	29	2	2	3.5	5.0	22	4	2	1.5	3.0
11	155	4	4	12.0	16.5	123	4	6	12.0	17.5	88	9	8	10.5	13.5	63	8	4	4.5	6.5	39	2	0	7.0	11.0	34	5	3			29	4	4	4.0	5.5	22	2	2	2.5	4.0
12	155	4	2	11.5	16.5	123	7	4	12.0	17.0	89	6	6	8.5	10.5	63	15	4	8.0	10.0	39	4	0	8.5	11.5	34	4	4	9.0	12.0	29	5	3	5.0	7.0	22	4	2	2.5	4.5
13	157	3	5	11.5	17.5	125	5	4	11.0	17.0	90	11	6	7.0	10.5	67	12	6	5.0	8.0	39	2	0	6.5	9.5	34	7	4	10.0	13.5	31	6	4	3.5	6.5	22	4	0	3.0	4.0
14	157	4	4	11.5	16.0	125	13	2	10.5	15.5	90	27	8	9.0	15.5	66	30	7	14.5	18.5	39	12	0	6.5	10.0	36	8	6	9.0	12.5	33	6	6	6.0	8.5	24	4	2	2.5	4.5
15	157	4	2	10.0	16.0	125	21	6	10.0	16.0	88	35	6	13.0	19.0	65	34	6	3.0	5.5	39	20	2	6.5	10.5	38	14	6	9.5	15.0	37	4	14	5.0	8.0	26	4	2	3.0	4.5
16	159	6	4	10.0	15.0	124	18	5	10.0	15.5	90	34	9	11.0	15.0	65	35	8	16.0	27.5	39	24	0	6.5	11.0	42	13	6	5.0	9.0	41	8	4	4.0	7.0	26	7	3	2.0	5.0
17	159	3	4	9.0	14.0	127	14	4	9.0	14.0	88	12	8	9.0	13.0	65	35	5	9.0	13.0	43	19	3	8.0	11.0	48	7	5	5.0	9.5	45	2	5	4.5	7.5	26	5	2	2.5	4.5
18	157	6	2	9.0	13.5	126	11	7	9.5	14.5	92	14	7	9.0	14.5	71	15	4	8.5	12.5	47	14	2	6.0	13.0	56	4	5	6.0	8.5	47	6	4	4.5	7.5	26	4	2	2.5	4.0
19	155	4	2	9.0	14.0	125	10	4	10.5	15.0	102	9	5	12.5	20.0	79	12	6	9.0	12.0	55	7	4	7.0	11.5	54	17	8	6.0	9.5	47	5	3	5.0	8.5	26	3	2	1.5	4.0
20	157	2	2	9.0	14.0	128	5	4	12.0	16.5	108	4	5	10.0	16.0	81	11	6	8.5	15.0	60	5	3	7.0	11.5	70	9	12	5.0	9.0	45	5	3	3.5	6.5	26	2	4	2.5	4.5
21	157	6	2	10.0	15.0	131	7	5	9.0	15.0	108	8	4	8.0	14.0	83	7	4	7.0	13.0	61	7	4	4.5	9.0	74	5	14	3.0	6.0	45	4	6	2.5	5.0	24	2	2	2.0	4.0
22	157	4	2	10.0	14.5	131	5	4	9.5	15.0	108	7	2	8.0	14.0	83	10	3	9.5	13.0	61	6	2	6.0	10.0	58	7	3	5.5	8.0	45	4	4	3.5	6.0	24	2	2	2.0	3.5
23	157	3	2	10.0	16.0	131	4	4	10.0	16.5	108	4	2	7.5	14.0	85	7	3	7.5	15.0	63	4	2	5.5	10.0	58	7	2	5.0	8.0	43	4	2	4.0	6.5	24	2	2	2.0	4.0

F_{am} = median value of effective antenna noise in db above k1b
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm}* = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm
00	152	6	10	9.5	150	*	7.5	14.0	89	8	7	11.5	19.0	65	8	4	5.0	9.5	61	3	3	6.0	10.0	43	5	4	4.5	6.5	23	4	0	2.5	4.0		
01	152	6	7	11.0	150	*	6	8.0	14.0	88	6	6	7.0	14.0	67	6	6	5.0	9.0	59	8	3	6.0	10.0	43	6	5	4.5	7.0	23	2	0	1.0	1.5	
02	152	3	6	11.5	16.0	*	6	8.5	15.0	109	11	6	8.0	15.5	65	7	3	8.0	12.5	59	4	4	6.5	10.5	41	5	4	4.0	6.5	23	2	1	1.5	3.0	
03	152	6	7	9.0	13.0	*	6	9.0	16.0	110	12	6	9.0	16.0	65	8	5	7.0	11.5	57	6	2	7.0	11.0	37	6	2	4.0	6.5	23	1	0	1.5	3.0	
04	150	6	8	9.5	13.0	*	6	11.0	17.5	104	15	7	8.0	14.5	61	10	4	8.0	14.0	57	3	4	6.0	9.5	38	6	3	3.5	6.5	23	1	2	2.0	3.5	
05	150	4	7	10.0	14.5	*	7	9.0	15.0	94	25	12	10.0	14.0	51	12	4	9.5	14.0	53	5	6	6.0	10.0	39	5	2	4.5	7.5	23	2	2	2.0	3.0	
06	150	2	6	9.0	13.0	*	10	14.0	20.0	90	19	8	14.0	21.0	64	21	8	5.0	9.0	47	10	4	7.5	7.0	39	6	4	6.0	11.5	23	4	2	2.0	3.5	
07	150	4	6	11.0	17.0	*	6	13.0	18.0	92	26	9	11.5	17.5	72	14	1	7.5	12.0	45	8	6	10.0	16.5	37	4	3	7.0	10.0	23	3	2	2.5	4.0	
08	150	4	8	11.0	16.0	*	6	14.5	22.0	92	25	13	11.5	15.0	62	4	6	9.5	13.5	43	6	9	8.5	12.0	35	5	6	7.0	10.0	23	4	2	4.0	5.0	
09	150	6	6	11.0	15.5	*	6	13.5	18.5	90	27	9	15.0	20.0	62	20	6	8.0	12.0	41	6	8	12.5	18.0	31	10	2	8.0	10.5	23	2	2	3.0	4.5	
10	149							13.5	19.0	90	12	8	17.5	22.5	64	21	16	7.0	10.5	40					29	8	2	3.0	5.5	23	3	2	3.5	5.5	
11	150	2	2	11.0	15.0	*	4	13.5	19.5	90	21	8	13.0	18.0	62	33	6	7.0	11.5	39	4	4	9.5	13.5	29	10	2	2.0	4.0	23	4	2	3.0	4.5	
12	150	9	2	11.5	15.0	*	4	10.5	17.0	94	26	10	8.5	10.5	63	32	6	8.5	12.0	39	6	8	10.0	9.0	31	7	4	4.5	5.5	23	5	2	2.0	4.0	
13	152	7	4	10.0	15.0	*	10	10.5	15.5	94	28	8	8.0	12.5	72	26	14	13.0	23.0	39	14	0	8.0	12.0	41	6	8	8.5	12.0	25	14	2	2.5	4.5	
14	152	8	4	9.0	14.0	*	5	9.5	14.5	102	22	17	6.0	8.5	70	24	12	13.5	23.5	43	16	6	8.5	15.0	43	8	10	9.5	15.0	39	4	8	3.5	6.0	
15	155	7	5	9.5	14.5	*	6	8.5	15.5	103	24	17	7.0	20.0	74	27	17	10.0	18.5	41	18	2	9.0	14.5	45	10	7	8.0	12.5	25	6	0	7.0	3.5	
16	154	10	3	8.5	14.0	*	4	10.0	17.0	99	30	14	11.0	21.0	73	39	14	13.0	23.5	44	22	5	9.0	14.0	50	9	12	8.0	13.0	43	7	2	2.0	4.5	
17	154	14	8	8.5	14.0	*	4	8.0	12.0	106	23	22	15.0	22.0	73	34	12	13.5	20.0	45	24	4	8.0	13.0	54	12	8	8.0	12.0	46	5	3	2.5	4.0	
18	154	12	10	8.0	13.0	*	4	13.5	20.0	102	27	15	13.5	25.0	84	25	18	9.5	20.5	53	19	8	8.0	14.0	57	19	6	8.0	12.5	47	5	2	2.0	4.5	
19	152	7	6	7.5	13.0	*	4	15.0	22.0	104	22	9	10.0	19.5	86	17	12	10.0	18.5	61	22	10	7.0	11.5	61	5	6	6.0	11.0	49	4	2	2.0	4.5	
20	154	5	8	8.0	15.0	*	6	14.0	21.0	108	15	7	10.0	16.0	84	13	14	13.0	23.0	63	10	5	6.0	10.0	61	5	4	5.5	9.0	47	2	4	3.0	5.5	
21	154	9	11	8.5	13.5	*	6	8.5	14.0	110	8	6	8.0	14.0	86	10	6	8.0	17.0	65	6	4	6.5	8.0	61	4	3	4.0	8.0	45	4	2	3.5	6.0	
22	152	8	9	9.0	15.5	*	6	8.0	14.0	112	8	8	7.0	13.0	88	8	7	8.0	14.5	65	7	4	5.0	3.5	61	3	4	5.0	9.0	45	5	4	4.0	6.5	
23	152	8	5	8.0	14.0	*	7	10.0	16.0	110	8	8	8.0	14.5	88	8	6	8.5	16.0	65	6	3	5.0	3.5	61	4	4	4.0	8.0	45	5	6	5.0	7.5	

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_g = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6 N Long. 140.5 E

Month August

19 63

Hour (ST)	Frequency (Mc)																																							
	.013				.160				.495				2.5				5				10				20															
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm										
00	154	6	12	11.0	17.0	131	6	10	11.0	18.0	116	4	6	7.0	14.0	95	6	8	8.5	16.0	65	6	8	7.0	12.5	57	5	4	5.0	9.0	42	4	5	3.0	5.5	24	2	0	1.0	3.0
01	156	6	17	11.0	16.5	133	8	12	9.5	18.5	93	10	8	11.5	18.5	93	10	6	8.0	15.5	65	10	4	5.5	11.5	55	10	4	5.5	9.5	40	7	5	3.0	5.5	24	1	1	1.0	2.5
02	158	4	6	11.0	17.0	131	10	12	10.5	15.0	115	7	9	10.0	16.5	97	8	8	10.0	18.0	63	10	4	5.0	8.5	40	6	5	2.0	4.5	24	2	2	0.5	2.0	24	2	2	1.0	2.5
03	156	6	15	11.0	17.5	137	6	16	11.0	18.5	116	8	6	8.5	16.5	95	8	10	8.5	16.0	65	6	8	9.5	14.0	55	16	4	6.0	11.5	38	5	4	3.0	5.5	24	2	2	1.0	2.5
04	157	5	16	11.5	18.0	135	8	12	11.0	17.0	114	6	10	9.5	17.0	91	6	8	8.5	16.0	65	8	8	8.0	14.0	55	8	4	5.0	8.5	38	6	6	2.5	4.5	24	0	2	1.0	2.0
05	154	6	15	10.0	17.0	127	10	8	12.5	21.5	103	17	13	9.5	18.0	73	23	12	17.0	22.5	57	5	6	6.0	13.0	53	6	2	5.5	9.0	40	5	3	2.5	4.5	24	2	2	1.0	2.5
06	154	7	8	14.0	13.0	127	10	6	15.0	23.5	100	14	16	15.5	25.0	76	17	17			49	9	5	7.5	11.5	49	8	6	9.0	16.5	42	4	4	3.0	5.5	24	2	0	2.0	2.5
07	154	7	14	12.5	17.5	123	12	12	15.0	24.0	100	12	14	18.5	26.0	75	14	16	17.0	21.5	45	12	4	10.0	14.5	45	6	6	10.5	16.0	40	2	3	3.0	6.0	26	2	2	1.5	3.0
08	154	5	14	13.5	19.0	121	18	6	16.0	25.5	96	16	14	19.0	27.5	70	19	9	16.0	25.0	45	8	4	9.5	13.0	41	7	6	9.0	14.0	36	6	2	3.0	5.0	24	4	2	1.5	3.0
09	154	6	13	14.0	19.5	123	6	10	15.0	22.0	98	12	15	16.5	25.5	65					43	4	4	7.0	11.0	39	8	6			35	5	7	6.5	10.5	24			2.0	4.5
10	154			14.0	20.0	122			13.5	21.5	100	18	23	15.0	24.5	69	18	10			41			8.0	12.0	33			7.0	10.5	32	10	4	3.5	7.0	24	4	2	2.5	4.5
11	154	5	6	14.0	20.0	125	4	8	15.0	24.5	96	17	10	16.5	22.0	69	21	10	12.0	22.0	41	11	2	9.0	14.0	35	13	4	10.5	14.0	32	8	4	3.0	5.0	24	3	2	1.5	3.5
12	154	6	12	14.0	20.0	125	7	5	14.0	21.0	97	10	10	13.0	17.5	73	22	14	10.0	20.0	41	11	3	9.0	13.0	37	8	6	7.5	11.0	32	6	4	3.5	6.0	24	2	2	2.0	4.5
13	156	4	8	13.5	18.5	128	9	7	12.0	18.5	100	21	12	13.0	21.0	75	25	15	12.0	19.0	41	16	4	8.0	12.0	37	10	4	8.0	11.0	34	6	4	6.0	7.5	26	2	2	2.0	4.0
14	156	6	10	11.5	18.0	129	8	6	11.5	17.5	100	28	12	12.0	20.5	76	33	17	7.0	16.0	41	11	2	10.5	14.5	37	13	6	7.0	10.5	38	8	4	3.0	5.0	26	7	2	7.5	3.5
15	158	4	16	10.5	17.0	129	8	8	8.5	14.0	98	24	10	12.5	19.0	75	28	16	14.0	17.0	41	11	2	10.0	13.5	41	13	6	10.0	16.0	41	4	5	2.0	4.5	28	3	4	2.0	4.0
16	160	7	10	9.5	14.5	127	10	7	8.5	14.0	102	22	20	13.5	18.5	74	27	13	13.0	24.0	44	6	3	8.0	18.5	47	8	10			44	6	2	7.0	3.5	28	2	2	2.0	4.0
17	158	3	14	8.5	13.5	125	12	5	7.5	12.5	96	26	10	8.5	13.0	75	23	12	11.0	20.0	47	4	6	8.5	12.5	49	8	4	6.0	10.0	46	4	2	2.0	5.0	28	3	2	2.0	3.5
18	156	6	8	8.5	14.0	127	14	6	12.5	20.5	105	21	7	11.5	20.0	83	22	6	8.5	18.0	53	12	4	7.5	11.0	53	6	2	5.0	8.5	48	6	3	1.5	4.0	28	4	2	2.0	3.5
19	156	6	14	11.0	17.0	129	14	8	11.0	18.5	114	15	8	8.5	16.0	91	14	6	8.5	16.0	61	9	4	6.0	11.0	57	8	4	9.0	8.0	52	5	6	7.5	3.5	28	2	2	7.0	3.0
20	158	3	17	11.0	16.0	131	8	10	9.5	15.0	114	9	6	8.0	15.0	93	8	6	8.0	13.5	65	4	8	5.0	8.5	59	4	4	5.0	9.5	48	8	4	2.0	4.5	26	5	2	2.0	3.5
21	158	4	16	11.5	17.0	133	6	12	8.0	13.5	112	10	4	6.0	12.0	93	8	6	6.5	15.5	65	2	6	5.0	8.0	59	3	5	4.5	8.5	46	2	4	2.5	5.0	26	2	2	1.0	3.0
22	158	4	14	10.5	16.5	135	6	10	8.0	13.5	114	10	6	8.0	15.0	95	11	6	9.5	14.5	63	10	4	6.0	10.0	59	4	6	5.0	9.0	46	8	4	2.5	5.0	26	0	2	7.0	2.5
23	158	4	16	10.5	17.0	133	4	10	10.0	17.5	114	13	4	8.0	15.5	95	8	8	8.0	14.0	67	8	10	5.0	9.0	57	6	6	4.0	8.0	44	4	2	2.0	5.0	24	2	0	0.5	2.0

Fom = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Df = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month June 19 63

Time	Frequency (Mc)																							
	.051			.160			.495			2.5			5			10			20					
	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}	F _{am}	D _f	V _{dm} L _{dm}			
00	158	3	4	128	6	9	107	11	8	96	10	5	71	6	20	58	5	10	37	7	5	25	2	4
01	158	4	4	128	9	10	109	10	8	96	8	5	69	9	12	57	6	11	35	4	5	25	2	3
02	158	3	4	128	8	8	107	11	7	96	9	6	65	9	16	57	5	13	34	4	5	25	2	2
03	158	2	4	130	7	10	109	6	10	98	7	8	69	8	16	55	7	9	35	4	4	25	2	3
04	158	3	5	130	8	10	107	10	9	96	8	9	71	6	12	53	12	6	33	3	4	25	4	2
05	158	3	5	128	12	11	107	9	11	94	10	10	68	11	6	57	10	12	33	2	4	25	4	2
06	157	4	4	126	12	8	95	14	11	70	19	8	65	14	3	57	12	10	35	4	5	25	5	2
07	156	4	5	124	10	18	91	16	14	64	13	2	57	15	8	55	8	8	37	10	4	25	4	2
08	155	5	5	123	10	11	85	20	6	65	7	3	*53			*54			40			24		
09	156	3	3	122	12	17	91	14	16	66	8	4	55	2	12	50	7	11	36	13	5	25	4	2
10	156	6	5	122	9	13	89	15	12	64	13	2	55	3	8	49	5	9	36	10	6	27	10	3
11	156	4	6	120	12	9	85	18	8	66	12	4	55	2	7	47	5	8	35	12	4	25	16	2
12	155	5	5	122	7	13	85	23	10	66	14	5	53	3	7	43	11	5	37	10	5	27	1	3
13	156	4	4	123	8	10	89	14	14	66	14	6	51	4	6	41	8	4	33	13	2	29	2	5
14	158	5	4	122	9	9	89	16	15	66	18	6	51	7	3	45	15	5	39	10	6	27	5	2
15	159	3	5	122	9	9	92	24	19	66	27	6	53	29	4	46	16	5	41	15	6	27	10	2
16	159	3	5	124	9	10	93	22	18	68	19	4	57	5	8	53	7	7	43	6	6	29	4	2
17	158	3	6	122	10	11	101	5	19	88	6	20	59	8	4	57	10	8	45	4	5	27	5	2
18	158	3	3	125	11	13	103	10	14	96	4	10	67	9	17	58	10	8	41	7	5	27	5	3
19	159	4	4	128	6	9	108	7	11	96	6	4	71	9	21	59	10	6	41	4	6	27	2	4
20	160	3	4	128	7	6	105	10	4	98	4	4	69	9	15	60	6	6	37	6	6	25	3	1
21	159	5	4	128	6	7	107	8	8	97	7	6	70	7	13	57	7	9	37	4	6	25	2	2
22	158	6	3	128	8	7	106	11	6	96	10	4	70	8	29	57	7	8	37	4	5	25	3	2
23	158	6	4	128	7	8	108	12	7	98	8	8	73	2	18	57	8	7	36	9	5	25	2	2

F_{am} = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

L_{dm} = median deviation of average logarithm in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Time (ST)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _z	V _{dm}	L _{dm}			
00	153	8	4		126	10	6		91	12	4		67	3	7		58	9	7		38	6	6		28	2	0
01	153	8	4		126	8	8		89	12	4		65	8	7		58	4	4		36	10	4		28	2	1
02	153	8	4		126	10	8		89	12	4		61	9	5		60	4	6		36	4	4		28	2	0
03	153	6	4		126	10	8		89	10	6		61	10	2		58	5	4		36	8	4		28	2	2
04	153	6	4		124	10	6		89	8	10		62	10	8		59	5	7		36	7	5		28	2	3
05	153	6	4		124	10	6		85	10	8		61	7	4		56	8	2		34	3	4		28	1	2
06	153	4	4		122	8	6		61	24	4		61	7	8		58	6	5		36	6	3		28	2	3
07	151	4	2		118	8	6		74	22	4		53	12	6		52	6	4		40	8	5		28	4	2
08	151	3	5		117	5	7		79				51	2	10		52				40				28		
09	149	7	4		114	13	10		78	21	9		52				50	4	6		38	10	6		28	2	0
10	149	4	4		116	7	10		78	12	8		51	4	4		48	2	6		34	10	4		28	3	1
11	149	8	6		112	13	6		76	25	6		49	5	2		44	7	5		32	12	4		28	2	0
12	149	4	4		115	10	7		78	18	8		49	4	4		42	11	4		35	10	5		28	2	1
13	151	6	6		116	13	10		78	21	9		49	4	2		45	7	7		40	8	7		28	8	0
14	153	4	6		116	12	8		76	27	6		48	5	3		43				38	11	2		28	4	0
15	153	6	6		118	11	10		76	26	6		50	5	4		46	7	6		40	10	4		30	3	2
16	153	4	4		116	14	7		77	27	7		49	6	8		47	9	5		42	11	3		30	8	2
17	152	6	4		116	15	8		90	18	19		50	9	5		52	15	4		44	10	4		30	5	2
18	153	6	4		120	12	10		98	12	16		57	17	4		52	13	5		46	4	6		30	3	2
19	155	6	4		124	10	8		100	12	10		61	18	2		58	10	8		42	7	2		30	2	2
20	155	6	4		122	12	6		102	12	6		63	14	4		58	9	4		40	6	5		30	0	3
21	155	6	4		124	10	8		104	12	6		65	12	4		60	8	6		40	8	8		30	0	2
22	153	6	2		124	10	8		106	10	6		67	10	8		60	11	5		40	6	6		30	0	2
23	153	6	4		125	9	7		106	8	6		67	12	6		59	9	5		41	10	7		30	0	2

F_{om} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Time (hr)	Frequency (Mc)																							
	0.13			.051			.160			.495			2.5			5			10			20		
	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}
00	154	4	2	122	8	4	104	8	4	88	8	4	60	10	3	53	8	4	39	9	4	21	2	2
01	154	2	2	124	6	4	104	6	4	88	8	4	64	8	6	53	6	6	35	17	3	23	0	2
02	154	2	2	122	10	2	104	8	8	88	10	6	62	11	8	53	8	4	35	19	4	21	2	2
03	154	2	4	122	12	4	102	10	6	86	12	4	60	13	4	55	6	7	35	17	6	21	0	2
04	154	4	2	122	10	4	100	12	6	86	10	6	62	12	4	53	10	6	33	2	4	20	1	2
05	154	4	2	122	10	4	98	10	6	84	10	6	60	10	8	53	6	4	33	4	4	19	2	2
06	154	2	2	118	6	4	83	15	9	58	8	2	50	5	5	51	12	6	37	6	2	21	0	6
07	152	2	2	114	6	6	70	28	4	58	4	2	50	3	5	47	3	7	37	7	2	21	2	5
08	150	4	3	114	6	10	77			60			49	3	7	39			39			21		
09	150	6	4	108	15	6	72	25	5	60	2	3	48	4	6	40	11	4	35	14	6	21	2	0
10	150	4	6	113	7	11	70	22	2	58	4	2	46	6	2	39	8	2	81	14	2	21	2	0
11	148	4	2	110	10	6	70	22	4	60	2	4	46	6	0	39	8	6	29	10	3	21	2	0
12	150	4	4	112	8	6	72	18	4	58	2	2	46	4	2	37	8	3	33	10	4	21	5	0
13	152	4	4	112	8	2	70	18	4	58	4	2	46	4	2	37	7	3	37	4	5	23	0	2
14	152	4	2	116	6	4	72	10	4	58	4	2	46	4	3	39	6	3	36	6	3	23	2	2
15	154	2	4	116	6	4	72	14	4	58	4	2	47	3	3	39	6	6	39	4	6	23	3	3
16	154	4	2	116	6	6	70	16	4	58	2	2	48	2	6	41	4	3	41	6	2	23	4	2
17	154	2	4	116	4	6	76	18	8	60	10	2	46	4	0	45	7	3	43	4	4	23	4	2
18	152	4	2	116	8	8	92	12	8	80	8	6	52	11	2	53	3	8	46	3	3	23	3	4
19	156	2	4	122	8	4	98	8	4	84	10	2	60	10	4	54	5	5	44	10	6	23	3	3
20	152	2	4	123	9	5	100	6	4	86	12	4	64	5	7	53	6	4	41	5	7	23	0	2
21	154	4	2	122	8	4	102	8	6	88	10	4	64	6	7	52	7	7	39	8	4	21	2	2
22	154	4	2	122	8	4	103	9	5	87	11	3	62	5	5	55	4	5	43	7	8	21	2	5
23	154	4	4	122	8	4	104	6	4	88	8	4	62	5	10	53	6	3	37	13	6	21	2	2

F_{om} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33,9 N Long. 6.8 W

Month August

1963

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}
00	157	4	9	130	5	8	107	9	6	86	11	10	62	5	9	55	8	10	32	14	4	41	3	8
01	157	2	8	130	6	4	107	8	7	84	15	4	61	6	6	54	6	14	31	9	4	42	2	7
02	157	3	8	130	6	8	107	11	8	82	15	6	60	5	5	53	6	7	31	7	6	42	2	8
03	155	4	5	130	6	8	107	10	11	82	12	10	61	5	7	53	3	11	30	9	7	42	2	9
04	157	1	9	128	8	6	103	14	8	76	14	10	61	4	9	51	4	18	30	12	8	42	2	9
05	157	1	9	126	8	4	89	20	8	60	21	4	57	5	6	51	8	14	29	12	4	42	2	5
06	157	1	9	122	9	4	79	28	6	56	14	0	51	7	4	45	10	8	33	9	6	42	2	6
07	157	3	9	118	13	4	74	29	1	56	20	2	51	5	4	39	13	8	30	11	6	41	3	6
08	153	3	7	*117			*79			*56			49	2	7	31	12	6	*27			*42		
09	*153			*116			*85			*62			*51			*29			*29			*41		
10	151	5	5	118	10	8	81	11	4	56	10	2	*49			*30			*24			*41		
11	152	4	6	120	5	6	87	8	6	59	12	5	*49			*27			*23			*41		
12	153	5	5	123	5	5	86	22	6	58	28	2	*49			*27			*24			*41		
13	156	2	5	122	8	2	89	19	7	58	31	3	49	2	4	39	9	6	25	4	2	*41		
14	157	3	6	126	8	4	94	16	13	59	31	3	49	2	2	37	6	6	*29			*41		
15	157	2	4	125	9	5	96	17	17	72	22	16	51	3	4	41	8	11	33	12	7	41	2	8
16	157	2	3	126	13	4	91	32	12	68	36	12	53	10	6	44	7	8	33	17	5	41	1	6
17	157	2	7	125	12	4	91	26	11	64	31	8	59	8	10	50	6	10	37	18	3	41	2	5
18	155	4	6	126	7	7	93	21	14	70	26	7	61	8	9	51	8	8	39	12	3	41	2	6
19	155	3	6	126	5	5	99	14	6	80	25	4	66	3	10	57	6	14	41	6	11	41	3	3
20	155	3	5	130	5	8	105	11	6	84	13	5	67	2	6	57	5	10	39	12	6	41	2	3
21	155	2	8	129	4	7	105	9	8	86	11	6	63	4	6	55	5	18	38	6	8	41	2	6
22	156	3	7	130	4	7	105	9	7	86	11	7	63	3	8	55	2	15	33	8	5	41	3	4
23	157	1	9	132	4	6	107	11	10	86	11	6	63	4	8	55	1	11	32	8	6	41	2	3

F_{om} = median value of effective antenna noise in db above k1b
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station São José, Brazil

Lat. 23.3 S Long. 45.8 W

Month August

19 63

F _o (MHz)	Frequency (Mc)																																		
	.051			.113			.246			.545			2.5			5			10			20													
	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *	F _{om}	D _f	V _{dm} *								
00	121	13	11	6.0	9.5	102	12	14	4.0	9.5	87	7	12	5.0	9.5	65	4	16	3.5	6.0	61	8	14	6.5	8.5	45	7	10	1.0	4.0	27	8	3	6.5	8.5
01	120	14	8	7.0	11.0	102	12	14	6.0	9.0	89	5	11	7.0	10.0	63	8	14	4.5	7.5	58	4	11	3.0	6.5	42	10	10	1.5	4.0	25	5	2	0.5	2.5
02	123	13	11	8.5	13.0	100	16	14	4.0	8.0	89	6	15	3.0	7.0	65	4	18	5.0	8.5	57	4	14	4.0	6.5	43	10	13	3.0	5.0	25	4	2	1.0	2.0
03	124	12	15	8.0	14.0	103	11	17	4.0	8.5	88	8	22	3.0	7.0	65	4	14	6.0	9.0	55	7	13	5.0	7.5	43	11	8	2.0	5.0	24	4	2	1.0	2.5
04	126	10	16	9.0	13.5	100	14	15	5.0	9.0	90	8	18	4.0	7.5	65	4	12	3.0	7.5	53	10	14	5.0	6.5	39	10	10	3.5	7.0	23	4	2	1.0	2.0
05	124	12	12	8.0	13.0	98	13	15	6.5	11.0	88	8	13	2.0	4.0	63	8	10	3.0	8.0	51	11	14	3.5	6.5	39	8	10			23	4	1	1.0	3.0
06	122	10	14	8.5	14.5	109	9	20	5.0	7.5	78	15	7			62	11	17	3.5	7.0	56	9	11	4.5	9.5	39	9	11	5.0	7.5	23	4	2		
07	114	12	13	6.5	8.0	99	8	14	4.0	5.0	82	10	13	5.0	8.0	87	15	9	2.5	4.5	46	11	12	6.5	8.0	56	9	9	5.0	10.0	41	9	10	5.5	10.5
08	111	12	13	1.0	2.0	101	9	16	1.0	3.0	84	8	12	4.5	7.5	87	17	10			41	9	8	4.5	7.0	50	6	10	7.5	11.0	37	16	6	4.5	9.5
09	116	6	16	2.5	3.0	103	10	19	2.0	3.0	82	10	6	5.0	7.5	91	13	6	3.0	4.0	41	9	12	5.0	8.5	47	8	8	4.0	8.0	39	10	14		
10	112	12	15	3.5	4.5	101	9	15	3.0	5.0	80	15	8	7.0	10.5	92	13	8	6.0	7.5	37	7	12	6.5	9.0	41	7	6	2.0	3.5	39	8	11		
11	108	14	12	1.0	2.5	97	13	14	4.5	5.0	80	11	7	4.0	7.0	90	11	6			34	8	6	6.0	6.0	39	6	8	3.5	6.0	42	7	10	7.5	12.0
12	116	8	16	5.0	6.0	97	13	11	5.5	6.5	78	11	4	3.0	5.0	90	12	10	3.0	4.0	33	8	8	4.0	6.0	37	10	5	3.5	6.5	41	6	9	7.0	12.0
13	115	9	18			100	8	14			78	12	6			92	10	11	2.0	2.5	33	11	5	3.5	5.5	38	9	8	2.5	6.0	41	6	10		
14	116	7	12	1.0	3.0	100	12	9	1.0	2.5	82	8	12	2.0	10.0	91	12	9	3.5	4.0	37	14	10	5.5	8.0	41	5	8			42	7	10	5.0	9.0
15	115	8	16	5.0	7.0	99	13	11	6.5	7.0	88	14	6	1.5	3.0	39	4	11	3.5	6.0	43	8	8	6.5	8.0	43	8	8	6.5	8.0	43			7.0	11.5
16	112	9	12			97	14	12	6.5	7.0	78	14	5	6.0	10.0	88	12	10	1.0	2.0	40	8	13	3.5	8.0	47	7	8	6.0	11.0	47	7	12	6.0	10.0
17	116	10	12			96	19	6	8.0	9.0	80	12	6	12.5	12.5	88			1.0	3.0	47	8	7	3.5	5.5	53	8	4	5.0	10.5	47	22	8	3.5	9.0
18	119	10	16			107	11	13	3.5	6.5	89	12	13	9.0	12.0	88	7	14			57			5.0	8.5	55	12	7	4.5	10.0	49	18	7	3.5	5.0
19	116	14	12	7.0	11.5	107	10	14	6.5	12.0	94	10	10	4.0	9.0	86	8	12			60	7	16	3.5	7.5	55	8	6	4.5	9.5	47	8	7	4.0	6.0
20	118	12	10	7.0	10.0	108	11	10	4.0	7.5	97	9	11	4.0	9.0	84	8	12	1.5	5.0	61	7	16	5.0	9.0	60	6	10	5.0	9.0	43	6	4	5.0	8.0
21	117	14	8	5.0	10.0	108	10	8			98	10	8	6.0	7.5	90	8	12	3.0	5.5	61	9	11	4.0	8.0	59	9	10	4.5	9.0	41	8	4	8.0	10.5
22	124	9	16	4.5	8.5	114	9	13	4.0	7.0	102	8	12	5.0	9.0	91	9	10	2.0	3.5	63	8	10	3.5	8.0	61	8	12	2.5	7.0	45	6	7	8.0	11.0
23	124	10	14	5.5	10.0	115	10	15	4.5	7.5	100	12	12	7.0	13.0	90	8	8			63	8	10	5.5	10.0	61	7	10	4.0	6.5	43	9	3	6.5	9.0

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm}* = ratio of median to lower decile in db
 F_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm
00	164	2	4	9.5	14.0	144	2	6	7.5	13.0	102	2	6	6.5	12.0	66	5	7	6.0	11.0	57	6	6	5.0	8.5	26	0	4	4.0	7.5	26	0	4	2.5	4.5
01	164	2	3	10.5	16.0	144	4	4	8.0	13.0	100	6	2	8.0	14.0	65	6	6	6.0	12.5	61	4	12	6.0	10.0	40	4	6	4.5	7.0	26	0	4	2.5	4.0
02	164	4	4	8.0	15.0	144	4	5	9.0	15.0	102	6	4	7.5	14.0	67	4	8	6.0	11.0	59	4	8	5.0	9.0	40	4	8	4.5	7.0	26	0	4	2.5	4.5
03	164	6	4	9.0	15.5	146	4	6	10.0	17.5	102	4	6	7.0	14.0	67	4	6	6.0	12.0	56	4	8	5.5	9.5	38	6	6	6.0	9.5	26	2	2	2.0	4.0
04	166	2	4	10.0	17.0	147	1	7	10.0	17.0	103	3	11	8.0	15.5	67	4	10	8.0	13.0	53	8	9	5.0	9.0	34	10	2	4.0	5.5	26	2	2	2.0	4.0
05	164	6	2	9.5	16.0	144	6	8	9.0	17.0	99	7	9	12.0	22.5	65	8	8	7.5	13.5	55	6	8	5.5	10.0	39	10	6	5.0	8.0	26	6	2	2.0	4.0
06	164	4	4	10.0	16.0	140	8	8	13.0	22.0	90	19	8	11.5	23.0	61	8	8	10.5	18.0	57	5	9	7.0	14.0	42	4	4	6.0	10.0	26	6	2	2.5	4.5
07	164	2	4	11.5	18.5	140	10	10	13.0	22.5	116	14	14	12.0	25.0	55	8	10	10.0	18.0	52	7	9	10.5	17.0	42	6	4	7.5	12.5	26	6	2	5.0	7.0
08	164	4	4	13.0	20.0	140	9	13	10.5	19.5	118	12	16	16.5	29.0	47	14	8	9.0	16.0	50	9	12	10.5	16.0	38	8	4	8.0	12.5	26	6	2	5.0	8.0
09	163	9	3	14.5	23.0	139	12	11	15.0	26.0	117	16	17	14.0	26.0	43	22	12	7.0	13.0	45	12	15	12.5	19.0	40	6	7	10.0	16.0	26	4	3	5.0	7.0
10	166	3	6	14.0	23.0	140	10	10	14.0	24.0	116	18	15	14.0	26.0	40	24	11	7.0	11.0	41	24	12	9.5	14.5	40	6	6	8.0	14.0	26	8	4	4.0	6.0
11	166	7	6	11.0	19.5	140	14	10	12.0	22.5	121	15	19	13.5	25.5	37	41	8	9.0	14.0	41	30	16	8.0	14.0	38	18	6	8.5	14.0	28	18	6	4.0	6.0
12	166	8	6	12.5	20.5	140	14	12	13.5	22.5	118	20	14	15.0	27.0	44	38	15	12.5	14.5	39	29	14	9.0	15.5	38	17	8	9.0	13.5	26	16	4	6.5	10.0
13	166	9	6	13.0	21.0	140	16	6	13.5	23.0	120	14	16	14.5	24.0	52	29	17	9.0	13.0	46	21	15	9.5	16.0	40	10	6	7.0	12.0	27	14	3	5.5	7.0
14	166	10	6	12.5	20.0	140	16	8	13.0	22.0	119	19	15	12.0	23.0	55	22	20	10.0	17.0	45	22	11	9.0	16.0	40	13	3	7.0	10.0	26	17	2	3.0	6.0
15	166	8	4	11.0	18.0	142	12	10	12.0	20.0	118	18	12	11.0	21.0	51	26	17	11.0	19.0	47	20	6	7.0	12.5	42	11	4	7.0	12.0	30	15	4	5.0	8.0
16	166	6	4	10.0	15.5	142	8	12	11.0	18.5	118	12	10	10.5	20.0	53	22	8	7.5	16.5	53	8	8	7.5	14.0	44	6	2	6.5	9.5	32	6	6	4.0	7.0
17	166	4	6	8.0	13.5	142	4	12	11.0	19.0	94	8	14	7.5	13.5	61	8	8	7.5	14.5	56	7	16	6.5	11.0	46	6	4	5.0	7.0	30	6	2	3.0	6.0
18	164	4	4	9.5	15.0	142	6	8	10.0	18.0	122	4	6	7.5	15.0	65	6	4	6.0	11.0	62	3	7	5.0	9.0	48	2	4	4.5	8.5	32	4	4	3.5	6.0
19	164	4	4	9.0	14.5	142	6	4	9.5	17.0	124	6	6	6.0	13.0	67	6	6	6.5	12.0	63	6	8	6.0	11.5	48	4	4	4.0	7.0	30	7	4	3.0	5.0
20	164	4	4	9.5	15.0	142	8	4	9.0	15.0	124	4	4	6.0	12.5	68	3	7	7.0	11.5	61	8	6	5.5	9.0	46	6	2	4.0	6.5	28	6	2	3.0	5.5
21	162	6	4	10.0	15.5	142	6	4	8.5	16.5	124	4	6	8.0	14.0	67	4	8	6.5	12.0	59	4	8	5.0	9.0	46	4	4	4.0	7.0	26	2	2	2.5	4.0
22	162	6	2	9.0	14.0	142	4	4	7.0	12.5	100	6	6	7.0	12.5	65	6	6	6.0	11.0	59	2	8	5.0	9.0	44	4	6	4.0	6.5	26	2	2	2.5	4.0
23	162	4	2	8.0	13.5	144	4	6	9.0	15.5	100	4	4	6.5	12.0	64	7	5	6.0	11.5	56	7	17	4.5	9.0	42	7	4	4.5	7.0	26	0	2	2.5	4.5

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia

Lat. 1.3 N

Long. 103.8 E

Month

July

19 63

Hour (SGT)	Frequency (Mc)																																							
	.013				.051				.160				.495																											
	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}																								
00	162	3	4	10.5	16.0	143	4	9.5	15.0	124	4	4	8.0	15.0	98	6	1	8.0	15.0	65	2	6	6.5	11.5	56	4	6	5.0	9.5	40	7	4	2.5	5.0	26	1	2	2.0	3.5	
01	162	5	4	10.0	15.0	143	4	10.0	16.0	125	5	5	9.0	15.5	100	5	4	9.0	17.5	63	4	4	5.0	10.0	54	5	5	4.0	7.0	38	7	4	3.0	4.5	26	0	2	2.0	3.5	
02	164	4	6	10.5	17.0	145	3	9.0	15.5	123	7	6	9.5	16.5	99	7	5	8.5	15.5	63	6	4	5.0	10.0	52	6	2	4.0	7.0	34	5	2	2.5	4.0	26	0	2	2.0	3.5	
03	164	4	8	10.5	17.0	144	3	7	10.0	16.5	124	6	13	9.0	16.0	98	6	7	8.5	16.0	63	4	5	5.0	9.0	52	5	5	4.0	7.0	34	7	4	3.0	4.5	24	2	0	1.5	3.0
04	164	2	6	11.0	17.5	145	2	8	11.0	17.5	124	4	8	9.5	17.0	98	5	8	9.5	19.5	63	6	5	6.0	11.0	47	10	15	5.0	9.0	32	8	2	2.5	4.0	24	2	0	2.0	3.5
05	164	3	6	10.5	17.0	143	3	7	10.5	17.0	123	5	10	10.0	16.0	95	9	7	12.0	24.5	65	3	9	6.5	12.5	48	9	6	7.0	12.0	34	6	2	3.5	5.0	24	2	0	2.0	3.5
06	162	4	4	10.5	16.0	141	4	10	12.5	20.0	120	5	13	14.0	24.0	90	8	12	14.0	26.0	61	6	11	9.0	13.5	56	4	6	6.5	11.5	44	7	7	3.0	3.5	24	3	0	2.0	3.0
07	164	2	8	12.0	19.0	139	7	14	14.5	25.0	118	11	16	16.0	27.0	89	14	12	12.0	24.0	53	9	14	7.5	14.5	54	4	10	7.0	13.5	44	6	8	4.0	7.0	24	4	1	1.5	3.5
08	162	4	6	13.0	22.5	140	12	12	17.0	27.0	119	7	18	13.5	24.0	88	15	14	8.0	15.5	46	15	9	9.0	15.5	48	8	17	7.5	15.0	41	6	8	6.0	10.5	24	2	2	2.0	3.5
09	162	4	7	15.0	24.0	137	7	9	14.0	23.5	114	12	12	13.5	25.0	86	16	14	10.0	21.0	39	18	8	7.0	14.0	42	5	10	9.5	16.0	38	7	5	7.0	11.5	22	4	0	2.0	4.0
10	164	2	8	13.0	22.0	135	8	10	16.0	27.0	108	16	14	14.5	25.5	83	15	19	14.0	24.5	37	18	8	8.0	10.5	38	10	9	10.0	16.0	40	4	12	6.0	9.5	24	2	2	2.5	4.0
11	162	4	7	13.0	21.0	135	8	8	13.0	23.0	110	16	17	17.0	24.0	86	17	15	17.0	28.0	35	13	7	7.0	11.0	38	8	10	7.5	14.0	38	9	10	7.5	11.0	24	14	2	2.5	4.5
12	162	6	5	12.0	20.0	135	12	7	13.5	22.5	110	20	15	15.5	25.5	88	22	16	12.0	23.5	35	27	8	10.0	16.0	38	13	12	10.0	17.0	38	9	9	8.5	14.0	26	7	4	3.0	4.5
13	162	7	4	12.0	19.0	137	13	7	12.0	20.0	114	18	12	11.0	19.0	92	19	17	15.0	25.5	41	28	12	8.0	11.5	40	17	9	8.5	14.5	40	8	10	7.0	10.0	26	10	2	4.0	7.0
14	166	7	7	13.0	19.5	139	14	10	11.0	18.5	122	12	20	9.0	20.0	100	12	15	12.0	23.0	48	26	17	5.5	11.0	46	16	13	8.5	15.0	44	5	9	5.5	9.0	26	10	2	2.5	4.0
15	166	7	6	11.0	17.5	141	12	11	11.0	18.0	119	14	14	12.5	21.5	96	17	14	12.5	23.5	55	18	19	6.5	11.5	48	11	9	5.0	9.0	46	6	6	6.0	8.0	28	8	4	1.5	3.0
16	166	5	6	10.0	17.0	141	10	11	10.5	18.5	118	16	13	12.0	20.0	96	15	15	11.5	23.5	55	14	12	5.5	10.5	52	10	10	6.5	10.5	46	7	4	5.0	9.0	28	12	2	3.0	5.0
17	164	5	4	10.5	17.0	139	11	6	12.5	20.0	118	10	8	13.0	22.0	94	14	10	9.0	17.0	61	8	10	5.5	10.0	56	6	6	6.0	11.0	48	8	4	4.0	6.5	30	2	4	2.5	4.0
18	162	6	4	10.0	15.5	141	10	9	12.0	16.0	120	10	4	9.5	17.0	100	13	6	7.0	13.5	67	6	8	6.0	10.0	58	6	5	5.0	9.0	48	6	4	4.5	7.0	28	12	2	3.0	4.5
19	161	7	3	11.5	16.5	141	7	6	9.5	18.0	124	5	6	8.5	15.0	102	8	4	9.5	18.0	69	5	5	5.5	10.0	60	3	7	6.0	9.5	46	6	2	4.0	7.0	26	10	0	2.0	3.0
20	160	6	3	9.0	16.0	142	5	6	11.0	18.0	124	6	5	8.0	15.5	100	8	4	6.5	13.5	67	4	4	6.0	11.0	58	4	4	5.0	9.0	46	6	2	4.0	6.0	26	8	0	2.0	3.0
21	160	5	4	10.0	15.0	142	6	6	10.0	17.0	124	5	6	10.5	19.0	100	6	4	8.0	16.0	65	5	4	6.0	10.5	56	4	4	6.0	10.5	44	3	2	3.0	5.5	26	4	2	2.5	3.5
22	162	6	5	10.5	15.5	141	6	5	11.5	19.0	124	5	4	9.5	17.0	100	7	2	8.5	16.5	67	3	7	5.0	10.0	56	4	12	5.0	8.5	42	4	2	3.5	6.0	26	3	2	1.5	3.0
23	160	7	2	10.0	15.0	143	4	6	10.5	17.0	124	4	6	9.0	16.0	102	3	6	8.5	16.5	65	5	4	5.0	9.0	56	3	11	4.5	8.5	42	4	4	3.5	5.5	26	0	2	1.5	3.0

F_{am} = median value of effective antenna noise in db above k1b
 D_g = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E

Month August 1963

Frequency (Mc)

Hour (LST)	.013						.051						.160						.495						2.5						5						10						20					
	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom	Fom	Du	Df	Vdm	Ldm	Fom
00	160	5	5	8.0	13.0	139	6	4	8.5	13.5	119	8	8	9.0	17.5	94	4	6	10.0	16.5	6.0	6	4	7.0	12.0	56	2	6	6.0	10.5	43	9	8	3.0	5.5	22	2	6	2.0	3.5								
01	159	6	2	8.0	13.0	140	7	5	8.0	13.5	119	8	8	8.5	17.0	96	2	6	10.0	19.0	6.4	4	10	8.0	14.0	54	6	6	4.5	8.0	39	6	6	3.0	5.0	24	2	4	2.0	3.5								
02	160	6	4	9.0	14.0	143	4	8	9.0	15.0	121	6	8	11.0	17.5	93	7	5	9.0	19.0	6.4	4	9	6.0	10.5	54	6	6	4.0	7.5	39	8	8	3.0	4.5	22	2	2	2.0	4.0								
03	163	4	5	9.5	15.0	141	6	6	10.0	16.0	119	6	6	13.0	21.0	94	4	7	8.5	18.5	6.4	8	10	6.0	11.0	54	4	15	6.0	10.0	33	9	4	5.0	8.0	22	2	0	1.0	2.5								
04	161	6	5	9.0	14.5	141	4	4	10.0	17.0	121	6	4	11.0	19.5	96	6	8	11.0	21.5	6.4	6	10	6.0	12.0	48	8	15	6.0	10.0	33	10	4	2.0	4.0	22	4	0	3.0	5.0								
05	162	4	5	9.5	15.0	140	3	7	11.0	18.0	119	6	10	14.5	23.5	92	7	9	12.5	24.5	6.2	8	8	7.0	15.0	50	4	16	5.5	9.5	31	6	0	3.0	5.0	22	2	0	1.5	3.0								
06	158	6	2	10.5	17.5	134	9	5	12.5	21.0	113	11	15	13.0	24.0	84	21	16	2.5	4.0	5.6	6	10	5.2	6	16	5.2	6	16	7.0	11.5	45	6	4	4.0	6.5	22	5	2	1.5	3.5							
07	158	4	2	11.0	17.0	130	15	5	14.0	23.0	111	17	25	16.0	23.0	78	25	10	15.0	29.0	4.8	13	10	5.2	8	48	8	8	8	8	43	4	6	3.0	5.5	22	4	2	2.5	4.0								
08	158	5	2	12.0	19.5	129	12	6	16.0	25.0	105	14	14	17.0	30.0	74	*	*	15.0	22.0	4.0	22	8	4.2	10	4.2	10	8	8.5	13.5	*	43	4	4	4.0	6.0	20	4	0	2.0	3.5							
09	160	4	6	12.5	20.5	129	*	*	13.5	21.0	106	*	*	13.0	25.0	81	*	*	9.0	15.5	3.2	26	4	6.0	8.5	3.7	*	12.0	17.0	4.1	4.0	6.0	20	4	4.0	6.0	20	4	1.0	2.5								
10	158	*	*	13.0	21.0	131	*	*	13.0	21.5	103	*	*	16.0	28.0	78	26	8	3.2	*	3.2	3.2	3.2	6.0	8.5	3.4	*	10.5	16.0	4.1	4	4	4.0	6.0	20	10	0	1.5	3.0									
11	160	6	6	13.0	19.0	130	17	7	12.0	21.0	99	30	20	12.5	21.0	78	30	6	*	*	3.1	30	7	3.5	7.5	3.4	21	10	10.0	14.0	4.1	6	4	4.5	7.0	20	11	4	2.0	3.5								
12	160	8	7	11.5	19.5	133	12	10	16.0	25.0	104	27	18	11.5	20.0	81	27	9	15.5	26.0	3.0	38	4	10.5	16.0	3.2	18	24	9.5	14.5	4.1	4	4	3.0	6.0	22	8	2	2.0	4.0								
13	160	4	4	10.0	16.0	135	13	6	13.0	20.5	105	24	11	15.5	28.0	88	21	16	15.0	30.0	3.6	32	4	9.0	13.0	3.7	21	9	10.5	15.5	4.3	2	6	4.0	6.5	24	8	4	5.0	7.5								
14	163	7	3	10.5	17.0	141	12	10	12.5	21.0	114	17	18	12.5	24.0	96	14	25	13.5	25.0	4.8	24	14	8.0	16.5	4.5	16	13	8	13	4.4	5	5	5	2.6	6	4	3.0	5.5									
15	164	4	4	11.5	18.0	139	8	8	12.0	22.0	116	9	16	11.0	21.0	94	8	20	12.5	23.0	5.3	15	18	8.5	16.5	4.6	8	8	2.0	6.0	4.3	6	2	2.0	6.0	24	2	0	3.0	5.0								
16	164	2	4	10.0	14.5	139	6	8	11.5	20.0	113	11	10	13.0	22.5	88	12	18	13.5	25.0	5.4	6	6	4.8	6	4.8	6	26	2.0	4.0	4.9	2	4	2.0	4.0	26	2	2	3.0	5.0								
17	162	6	4	10.0	15.5	137	6	6	12.5	20.0	112	7	7	9.0	17.0	90	8	9	8.0	16.0	5.6	8	12	9.0	16.0	5.1	5	26	6.0	10.5	5.0	5	1	2.5	5.0	26	2	2	3.0	5.0								
18	160	3	5	9.5	15.5	137	6	6	10.0	18.5	117	4	2	9.0	19.5	94	6	4	8.5	16.0	5.8	6	2	7.0	12.5	5.6	4	4	6.5	10.5	4.9	4	4	2.5	5.0	24	2	0	3.0	5.0								
19	160	4	4	10.5	16.5	138	5	5	11.0	17.5	111	4	8	9.0	17.5	96	4	6	9.0	18.0	6.2	4	6	6.0	11.5	5.6	4	4	6.0	10.0	4.9	5	2	3.5	6.0	24	4	2	2.0	4.0								
20	158	6	2	10.5	15.5	139	6	6	10.0	18.5	119	6	6	11.5	20.5	94	6	2	8.0	16.5	6.2	4	6	6.5	12.5	5.6	4	4	5.0	8.5	4.9	4	4	2.0	4.0	24	2	0	1.5	3.0								
21	158	4	4	8.0	13.0	139	6	6	11.0	18.5	121	5	6	10.0	17.0	98	2	8	8.0	16.0	6.0	8	6	7.5	13.0	5.4	6	8	4.0	10.0	4.7	8	4	3.0	5.5	24	2	2	2.0	3.5								
22	159	9	3	10.0	15.0	137	8	4	10.5	16.0	121	4	6	8.0	15.0	96	4	8	9.0	16.0	6.0	6	6	7.0	13.5	5.6	4	4	14	6.0	10.5	4.5	2	4	3.0	6.0	24	2	2	2.0	4.0							
23	160	6	5	8.0	13.0	139	6	6	9.0	15.0	121	5	8	8.5	15.0	94	6	6	8.0	15.0	6.0	4	6	5.0	9.0	5.4	6	6	2.5	5.0	4.3	6	4	4.5	6.5	22	2	2	2.0	4.0								

Fom = median value of effective omnidirectional noise in db above ktb

Du = ratio of upper decile to median in db

Df = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W

Month June 1963

Hour (LST)	Frequency (Mc)																					
	.013				.051				.160				.495									
	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}		
00	164	6	6		144	8	8		123	10	6		100	12	4							
01	162	6	4		144	6	8		123	8	10		100	10	4							
02	164	2	6		144	4	6		123	6	10		100	8	8							
03	162	4	6		142	6	5		121	10	8		100	12	12							
04	162	6	6		142	4	6		119	11	14		91	10	12							
05	160	4	6		140	6	10		117	11	8		86	24	13							
06	160	2	6		138	6	10		118	9	14		90	15	20							
07	160	4	5		136	8	9		117	8	14		94	12	22							
08	160	4	3		137	6	6		116	7	17		*90									
09	158				136	9	11		111	16	12		85	15	14							
10	160	4	9		135	7	7		111	17	15		83	21	12							
11	162	8	6		138	8	4		113	18	14		88	24	14							
12	162	8	4		140	10	6		115	21	14		90	26	14							
13	164	6	6		142	10	6		121	14	14		94	24	16							
14	166	6	6		144	12	8		125	12	12		101	17	17							
15	164	10	4		144	10	8		125	10	12		100	14	12							
16	164	8	4		144	10	6		125	12	10		98	18	16							
17	164	6	4		144	10	6		125	12	14		96	24	18							
18	164	6	6		144	10	6		123	12	8		98	16	18							
19	164	4	6		144	8	8		127	14	14		98	14	18							
20	164	4	6		146	6	10		127	6	16		100	12	12							
21	164	6	6		146	8	8		125	10	10		100	16	12							
22	164	6	6		144	10	6		125	12	10		100	14	10							
23	164	6	6		144	8	6		123	12	8		100	14	6							

F_{am} = median value of effective antenna noise in db above k1b
 D_z = ratio of upper decile to median in db
 D_z' = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)															
	.013				.051				.160				.495			
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}
00	162	8	2		144	6	4		123	10	4		104	8	6	
01	162	6	2		144	6	2		125	7	6		104	8	6	
02	162	4	2		144	4	2		125	5	6		104	4	6	
03	162	4	4		144	4	4		123	6	6		102	9	6	
04	162	4	4		142	8	4		123	6	9		96	8	9	
05	160	4	4		140	8	4		119	10	10		92	17	14	
06	160	4	4		140	8	6		119	11	8		90	16	12	
07	160	4	4		140	6	6		119	10	10		90	17	12	
08	158	5	3		140	6	8		117	9	12		86	12	7	
09	160				139	10	7		115	12	14		86	16	14	
10	158	6	5		136	10	4		111	16	8		83	22	11	
11	160	5	6		137	10	4		112	17	12		86	19	16	
12	162	4	6		140	9	5		115	14	9		90	18	19	
13	164	2	6		142	8	5		119	16	8		92	25	19	
14	165	3	5		144	9	6		123	13	13		96	18	20	
15	166	4	4		146	8	6		123	12	10		100	14	19	
16	166	4	4		144	9	4		123	12	7		97	16	15	
17	166	4	3		146	7	6		124	10	8		94	18	13	
18	166	3	4		144	7	4		123	10	8		94	16	13	
19	164	3	4		144	5	4		123	9	8		94	13	8	
20	164	2	4		146	5	6		123	10	6		100	12	6	
21	164	4	6		146	6	6		125	10	6		102	10	6	
22	162	8	2		146	6	6		123	12	4		104	9	6	
23	164	8	4		146	8	5		125	10	6		104	8	6	

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month August 19 63

Hour (ST)	Frequency (Mc)																								
	.013				.051				.160				.495												
	Fom*	Du	Df	Vdm	Ldm	Fom*	Du	Df	Vdm	Ldm	Fom*	Du	Df	Vdm	Ldm	Fom*	Du	Df	Vdm	Ldm	Fom*	Du	Df	Vdm	Ldm
00	146					125					105														
01	146					125					104														
02	146					124					103														
03	146					123					103														
04	145					123					102														
05	142					115					81														
06	139					114					81														
07	136					111					77														
08	134					107					74														
09	132					105					73														
10	132					105					73														
11	133					106					73														
12	136					109					89														
13	140					115					91														
14	140					117					88														
15	140					117					89														
16	142					119					85														
17	142					119					81														
18	140					115					83														
19	142					117					95														
20	142					119					99														
21	142					119					101														
22	142					121					103														
23	142					121					103														

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Summer (June July Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}					
* *	170	14	7	11.0	16.5	170	16	8	12.0	20.0	170	14	6	11.0	18.0	168	16	6	9.5	16.0	168	16	6	11.0	16.0
* *	147	6	4	10.0	15.5	147	4	6	12.0	17.5	143	8	8	15.0	21.0	143	8	6	11.5	16.5	145	5	4	9.5	14.0
* *	127	6	6	9.0	13.5	127	6	10	11.0	17.5	124	9	12	13.5	20.5	121	10	8	12.5	17.0	123	8	4	8.0	12.0
**	106	6	6	7.0	12.0	102	8	13	9.5	16.5	98	14	14	11.0	17.5	100	12	12	9.5	15.0	104	6	6	7.0	11.0
25	72	6	6	6.0	9.5	72	8	12	7.0	12.5	56	12	12	10.0	16.5	66	10	14	9.0	13.5	72	4	6	6.0	9.0
5	63	8	6	5.0	8.5	63	8	12	6.0	10.0	53	10	12	8.5	13.0	63	8	10	6.0	9.0	67	6	10	4.5	7.5
10	46	22	8	4.5	6.5	48	22	10	5.0	7.5	46	12	10	6.0	8.5	54	16	10	4.5	7.0	48	20	8	4.0	6.5
20	26	4	4	2.0	3.5	26	6	4	3.0	4.5	28	8	6	4.0	6.5	32	4	8	5.0	7.0	26	4	6	2.5	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No June data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Season Summer (June July Aug) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400				
	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}
.013	165	4	4	9.0	15.0	163	4	4	10.5	17.5	169	4	4	7.5	13.0	169	6	4	7.0	12.5	169	4	6	7.5	13.5
.051	142	4	5	6.0	11.0	134	6	6	8.5	13.5	142	8	6	7.0	12.0	146	10	8	6.5	11.5	144	7	4	6.0	10.5
.160	121	5	8	6.0	12.0	109	12	16	11.0	17.5	123	10	13	8.0	15.5	127	10	10	6.0	12.0	125	8	8	5.0	10.0
.495	100	4	10	5.0	11.0	76	18	18	8.5	15.5	76	20	18	9.5	16.5	104	16	18	6.0	12.5	102	10	6	4.0	9.0
2.5	75	4	6	4.0	8.0	53	16	20	6.5	10.5	30	15	7	3.5	6.0	69	14	18	5.5	10.0	77	6	6	3.5	7.0
5	61	6	4	4.5	8.0	51	8	10	6.0	10.0	37	10	8	6.5	10.5	63	10	10	4.0	7.5	67	4	6	3.5	7.0
10	40	14	6	3.0	5.0	42	10	6	2.5	5.0	36	4	4	4.0	7.0	54	16	8	3.0	5.5	50	20	10	2.5	5.0
20	25	2	2	1.5	2.5	25	2	2	1.5	3.0	25	2	2	2.0	3.5	27	10	2	2.5	4.5	29	10	4	1.5	3.0

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Summer (June July Aug.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																							
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400			
	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}
.013	163	4	9.5	16.0	161	4	11.0	17.0	169	6	8.5	14.5	169	4	8.5	14.0	167	4	8.5	14.5	167	4	8.5	14.5
.051	143	2	8.0	13.5	133	6	9.5	15.5	135	6	12	9.5	145	10	9.0	15.0	145	6	8.0	13.5	145	6	8	13.0
.160	120	4	7.0	13.5	108	6	17	10.5	106	12	18	12.0	124	12	16	10.0	122	8	8.0	14.0	122	8	8	11.0
.495	99	6	8	12.0	73	14	10	8.5	75	22	12	8.5	107	12	24	10.5	107	10	16	9.0	107	2	8	10.0
2.5	74	8	6.0	11.0	54	18	10	6.5	46	10	6	3.5	64	18	16	8.0	70	12	15	5.5	78	6	8	9.0
5	62	6	5.0	9.5	52	10	10	6.5	42	9	8	4.0	54	18	13	6.5	64	8	12	4.5	68	6	8	8.0
10	43	16	4.5	8.0	43	10	8	5.5	37	6	6	4.5	47	14	10	6.0	55	12	8	3.5	53	12	3.0	6.5
20	26	2	3.5	7.0	26	2	4	3.0	30	6	6	5.0	34	8	6	7.5	32	8	4	4.5	28	4	4	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_l = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

L_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.05 Long. 120.0W Season Spring (Sept. Oct. Nov.) 1962

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400						0400-0800						0800-1200						1200-1600						1600-2000						2000-2400											
	F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}							
	.051	109	6	6				108	7	5				108	6	6				108	6	6				108	6	7				109	6	7				109	7	6		
.113	90	7	6				92	6	6				91	6	6				91	6	6				91	6	6				92	7	6				91	6	7			
.246	67	3	3				67	7	4				67	5	3				66	5	3				68	3	2				66	3	3									
.545	53	8	3				53	10	3				52	11	3				52	6	3				52	7	2				51	8	3									
2.5	19	12	2				20	6	5				20	9	3				19	4	2				20	8	3				20	6	3									
5	22	13	9				18	12	4				16	6	4				21	6	7				25	10	9				27	10	12									
10	23	6	10				18	8	7				20	5	8				22	4	4				26	6	7				25	5	9									
20	23	2	2				22	2	3				22	2	2				23	2	1				24	2	2				23	1	3									

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No November data for D_u and D_l - correction for corresponding sheet appearing in Technical Note 18-17

This sheet is a correction for corresponding sheet appearing in Tech Note 18-16 for F_{am} - 20 Mc

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Winter (June July Aug) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.013	155	2	75 120	155	2	80 130	151	2	80 160	151	4	115 180	153	2	85 140	155	2	85 35
.051	127	4	85 135	125	4	80 135	109	6	120 185	109	10	120 190	115	10	110 180	125	6	95 60
.160	103	5	75 130	98	6	80 135	64	12	90 140	64	22	105 160	90	12	115 195	102	6	85 150
*.545	84	6	65 110	78	8	75 120	44	8	70 100	42	12	60 95	78	8	65 130	84	6	60 110
.25	57	6	50 95	53	6	50 95	21	8	65 90	19	8	60 85	43	14	65 115	57	8	55 100
.5	51	6	50 90	49	4	45 80	21	12	55 85	19	14	6 55 85	43	10	50 95	51	8	55 100
.10	37	6	35 65	33	6	35 60	29	6	40 60	29	10	4 35 60	39	10	40 60	37	6	40 55
.20	24	0	30 55	22	2	75 90	22	2	30 45	22	2	0 35 50	24	0	30 50	24	0	30 50

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* Only 13 1/2 days data for .545 for August.

545 was changed to .495 the 14th of August.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 52.5-67.5 W Season Winter (June ****) 1963

Frequency (Mc)	TIME BLOCKS (LST)																										
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400											
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}							
.013	141	14	6			137					141					145	8	6			146	6	13				
.051	109	15	16			98					94					112	10	22			119						
.160	90	19	22			71					79					89					89	20	17				
.495	70	17	18			64					68					68					80	7	24				
2.5	63	12	20	3.5	4.0	31			30	4.0	29			20	3.5	50	14	2	3.5	5.5	58	10	9	4.0	5.5		
5	44					30			5.0	8.5	36			60	8.5	49					35	5.5	49		30	4.0	
10	32	5	3	2.0	2.0	27			20	3.5	36			20	3.5	37					25	30	27	8	3	20	30
20	25	31	0			27					30			3.5	5.0	27					15	30	25	2	0	2.5	3.5

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

*** No July or August data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 67.5-82.5 W Season Winter (June ****) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}										
.013	142	5	3	10.5	16.0	145	0	2	10.5	16.0	143	3	5	8.0	13.0	144	3	3	6.0	11.0	147	2	8	8.0	13.0					
.057	112	6	2	6.0	11.0	114	4	7	7.0	12.0	107	7	5	9.5	13.0	104	11	9	6.0	14.0	108	8	6	6.0	11.0	114	4	4	6.0	9.5
.160	88	11	7	6.5	12.0	86	5	11	9.0	14.5	76	15	9	13.5	18.5	69	27	4	10.0	13.0	73	20	4	7.0	11.5	84	9	7	5.5	9.5
.495	76	10	4	5.5	11.0	73	8	11	2.5	7.5	63	13	3	3.0	7.0	67	9	4	3.0	7.5	68	12	4	3.5	7.5	72	10	4	4.0	8.5
.25	58	8	0			56	12	12			40	4	8			42	13	4			52	6	2			60	4	2		
.5	57	4	4			63	4	6			49	2	2			50	6	5			55	2	4			57	2	2		
1.0	32	2	0			34	2	2			32	4	2			37	11	5			38	6	6			32	2	2		
2.0	31	10	2			31	4	2			31	4	4			31	10	4			29	12	2			30	3	3		

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No July or August data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 52.5-67.5 W Season Winter (June *** Aug.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
	Fam	D _u	V _d m	Fam	D _u	V _d m	Fam	D _u	V _d m	Fam	D _u	V _d m	Fam	D _u	V _d m	Fam	D _u	V _d m			
** .013	141	5	10	142	10	8	140	4	12	138	4	12	141	7	11				142	10	10
** .051	113	9	5	110	12	4	99	12	6	98	6	10	104	6	7				108	6	4
** .160	86	9	7	85	10	11	71	4	6	71	11	6	78	14	12				83	6	5
** .495	72	3	7	70	8	14	56	6	4	58	5	7	67	8	8				70	4	2
2.5	54	10	9	56	16	8	37	13	9	33	7	7	50	10	9				58	4	8
5	51	12	14	55	6	18	35	24	8	33	22	18	47	7	20				51	6	15
10	28	15	4	26	12	2	27	9	6	30	22	11	28	20	4				28	8	3
20	27	0	15	27	4	15	27	14	10	27	2	15	23	4	11				25	8	11

F_m = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

** * No July data

** No July or August data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 37.5-52.5 W Season Winter (June *** Aug.) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}												
** . 013	152	6	16	85	135	152	4	18	10.0	15.0	150	6	8	11.0	15.0	152	4	15	7.5	12.0	154	4	14	8.0	12.5					
** . 051	120	10	10	7.0	11.5	118	12	14	9.0	14.5	110	4	14	12.5	17.0	110	6	10	10.0	15.0	112	10	14	5.0	9.0	120	8	11	6.0	10.5
** . 160	97	13	14	4.0	9.0	86	20	14	7.5	13.0	77	11	7	11.5	15.0	77	11	7	9.5	14.5	83	17	14	9.0	12.0	98	8	20		
** . 495	81	13	13	5.0	10.0	72	14	14	6.0	12.5	58	12	4	2.5	5.0	57	15	9	5.0	10.0	74	10	12	4.0	8.0	84	8	14	4.5	7.5
2.5	62	10	10	4.0	7.0	57	15	11	5.0	8.5	34	10	8	4.5	8.0	32	10	4	5.0	8.0	52	14	12	3.5	6.5	65	8	12	4.0	7.0
5	57	6	10	4.0	6.5	53	10	12	4.5	8.0	37	14	12	5.0	8.0	31	8	6	4.0	7.0	49	8	8	4.0	7.0	55	8	7	4.0	7.0
10	33	10	7	2.0	4.0	37	8	9	3.5	6.5	35	8	8	3.5	5.5	33	8	4	3.0	5.0	43	6	10	2.5	5.0	35	10	9	2.0	3.5
20	28	2	2	2.0	4.0	28	4	2	2.0	3.5	28	4	2	2.5	4.0	30	2	3	2.0	4.0	28	4	1	2.0	3.0	28	2	1	2.0	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_ℓ = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

*** No July data

**

No July or August data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 22.5-37.5 W Season Winter (June ****) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}										
.013	147	2	3	10.0	15.0	145	2	13	11.5	17.5	141	6	12	9.5	14.5	143	2	13	9.0	14.0	140	5	4	6.5	10.5	146	1	5	8.0	12.0
.051	117	0	6	8.5	13.5	115	1	11	8.0	13.0	101	9	6	8.0	12.0	98	2	10	9.5	15.5	109	4	18	7.0	11.0	112	4	3	6.5	11.0
.160	85	16	3	7.5	13.0	83	6	9	7.0	12.0	72	10	4	11.0	15.0	68	1	4	9.0	12.0	69	12	5	9.5	12.0	77	13	8	7.0	10.5
.495	65	8	3	5.5	10.0	62	7	6	5.5	10.0	53	7	4	7.5	11.0	57	7	4	4.5	7.5	59			3.5	6.0	59	9	2	6.0	10.0
2.5	52	5	9			49	2	4			40	8	10			33	8	5			46	6	14			51	4	6		
5	49	2	3			51	9	4			51	8	24			31	14	4			45	7	9			46	5	3		
10	26	3	0			28	7	2			27	8	3			31	3	6			28	2	4			26	0	0		
20	27	7	0			27	5	0			27	5	0			27	0	2			27	0	0			27	2	2		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* ** No July or August data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 40-50 S Long. 67.5-82.5 W Season Winter (June *** Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}												
.013	150	8	4	9.0	13.5	153	5	7	10.0	15.5	149	3	5	10.5	16.0	150	2	2	8.5	14.0	15.0	2	4	7.0	11.5	150	2	4	7.5	12.5
.051	122	6	4	7.5	12.5	126	4	8	9.5	15.0	112	6	6	10.0	16.5	106	3	8	7.5	13.0	10.8	10	11	7.5	12.5	120	6	4	6.0	10.0
.160	102	18	5	6.0	10.5	96	23	10	7.5	14.0	82	11	12	8.5	13.0	75	18	5	6.5	13.0	85	12	13	7.0	11.5	95	8	4	4.5	9.0
.445	84	15	4	4.5	8.5	78	20	14	5.0	10.0	67	5	11	4.0	8.5	68	9	14	4.5	10.0	78	2	18	5.0	10.5	82	2	4	5.0	9.0
2.5	64	14	4	5.0	8.5	62	15	10	4.5	8.0	37	9	7			32	10	2			53	11	13	4.0	7.0	62	2	4	3.5	6.0
5	55	10	2	3.5	6.0	59	8	4	5.0	10.0	45	8	16			35	13	9	3.5	6.5	49	6	14	3.0	5.5	35	2	4	2.5	5.0
10	40	17	6	3.0	6.0	37	11	3	2.5	4.5	32	11	3			32	2	3			40	13	6	1.5	3.0	43	12	11	2.5	4.5
20	29	5	2	1.5	2.5	30	2	3	2.0	3.5	31	3	4			31	6	4	2.5	4.0	31	8	2	2.0	3.5	29	10	8	1.5	2.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* ** No July data

* ** No July or August data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 40-50 S Long. 175-52.5 W Season Winter (**** Aug) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
0.13	152	5	75 120	149	6	85 135	146	10	9 140	149	8	95 145	149	5	4 120	157	8	80 90
0.51	126	4	80 130	121	11	75 125	110	10	6 115 165	111	11	17 105 155	111	9	9 135	118	12	85 135
1.60	104	4	50 85	94	10	60 105	76	16	10	78	6	14 20 30	80	14	14 95 150	89	15	80 130
4.95	92	4	65 110	74	18	16 45 90	62	10	9 40 70	61	13	10 30 60	73	5	9 95 170	85	9	15 90 145
2.5	72	4		69	3	13	40	5	7	34	10	8	53	13	20	68	8	10
5	59	4		60	3	9	41	9	12	31	10	2	48	7	14	55	8	6
10	33	2		33	6	2	41	3	9	34	11	7	39	6	4	33	8	0
20	28	0		28	2	2	26	2	0	28	4	0	28	6	0	28	0	2

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No June or July data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 40-50 S Long. 22.5-37.5 W Season Winter (*** *** ***) Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																							
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400			
	F _{am}	D _u	D _l	V _{dm} L _{dm}	F _{am}	D _u	D _l	V _{dm} L _{dm}	F _{am}	D _u	D _l	V _{dm} L _{dm}	F _{am}	D _u	D _l	V _{dm} L _{dm}	F _{am}	D _u	D _l	V _{dm} L _{dm}	F _{am}	D _u	D _l	V _{dm} L _{dm}
.013	153	8	4	7.5 13.0	156	3	7	9.0 14.5	151	6	20	10.0 15.5	154	3	7	10.0 14.5	152	5	5	7.5 12.5	153	7	4	7.5 12.5
.051	124	12	12	6.0 10.0	126	8	8	8.0 12.5	114	10	17	10.0 16.5	116	8	11	9.5 15.0	116	8	18	9.5 15.5	120	10	11	7.0 11.0
.160	96	20	10	5.0 9.0	98	10	14	6.0 10.5	86	4	18	9.5 15.0	85	5	23	9.0 15.0	86	6	19	9.0 15.0	89	18	11	4.0 5.0
.495	82	18	6	4.0 8.0	78	14	8	5.0 9.5	66	7	13	5.0 10.0	68	6	11	4.0 8.0	62	12	12	4.0 9.0	78	20	13	4.0 8.0
2.15	68	6	10		68	6	14		44	22	16		28	2	4		43	13	15		62	15	2	
5	57	12	4		58	11	9		45	5	10		33	6	2		45	9	17		61	3	9	
10	33	8	1		45	0	16		41	6	9		37	4	8		42	13	7		41	8	7	
20	28	0	0		26	4	0		26	3	0		30	2	2		28	4	0		28	0	0	

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No June or July data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 30-40 S Long. 67.5-82.5W Season Winter (June ***) 1963 ***

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.013	153	2 5		153			145	3 3		153	7 2		147	5 2		147	5 2	
.051	128	4 6		120	8 12		98			104			119	4 4		124	4 4	
.160	107	2 3		100	4 30		74			73	8 0		87	15 20		104	4 3	
.495	83	3 4		75	7 11		66	13 2		70	6 4		78			83	5 3	
.25	64	0 4	40 70	58	3 3	40 70	50	13 20	45 65	51	13 19	35 60	62	3 16	30 50	66	2 2	35 60
.5	53	1 8	40 65	53	3 0	40 75	38	11 11	45 75	44	5 13	30 60	47	9 4	30 60	53	5 0	30 50
10	36	2 3	30 50	34	5 2	30 50	36	3 9	30 50	39	3 11	25 50	37	10 6	30 55	38	5 4	30 55
20	27	4 0	15 25	27	7 0	20 35	29	12 4	25 40	38	2 8	40 70	29	1 2	20 35	28	3 1	40 65

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

-x No July or August data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Season Summer (June July Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _m	D _ℓ	V _{dm} L _{dm}	F _m	D _ℓ	V _{dm} L _{dm}	F _m	D _ℓ	V _{dm} L _{dm}	F _m	D _ℓ	V _{dm} L _{dm}	F _m	D _ℓ	V _{dm} L _{dm}	F _m	D _ℓ	V _{dm} L _{dm}
0.13	153	6	9.0 14.5	153	2	4 10.5 16.5	153	6	4 11.0 17.0	159	4	9.0 15.0	159	4	6 8.5 14.0	155	4	4 8.5 13.5
0.51	125	8	10.5 16.5	119	10	6 13.0 20.5	121	8	6 11.5 19.0	129	4	6 9.5 16.0	127	6	6 9.5 16.0	127	6	6 10.0 16.0
1.60	104	8	6.5 12.0	92	22	10 6.0 10.5	84	7	10 8.0 13.0	96	14	13 10.0 17.0	94	12	12 8.5 14.5	104	8	10 6.0 11.0
4.95	75	12	6.0 10.5	53	26	4 3.5 6.0	53	18	2 5.5 8.5	65	24	14 7.0 13.0	61	22	8 7.0 12.0	79	10	10 5.5 9.5
2.5	64	6	5.5 10.5	40	16	10 6.5 12.0	34	14	4 5.0 8.5	40	19	8 7.0 11.0	48	12	12 5.0 11.5	66	6	10 4.5 8.5
5	45	4	5.0 8.5	39	12	6 6.0 10.0	33	10	6 9.0 13.0	41	8	12 7.0 12.0	49	8	8 5.5 10.5	59	4	4 4.5 8.0
10	41	21	2.5 5.0	38	18	6 3.5 6.0	38	8	6 4.0 7.0	42	6	6 4.5 8.0	48	4	4 4.0 7.5	50	14	10 3.0 6.0
20	18	2	1.5 3.0	18	3	2 1.0 3.0	18	6	2 1.5 3.5	18	8	2 2.0 3.5	20	6	2 2.0 3.5	20	4	2 1.5 3.0

F_m = median value of effective antenna noise in db above ktb

D_ℓ = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Winter (Dec Jan Feb) 19 62-63

Frequency (Mc)	TIME BLOCKS (LST)																						
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.135	103	10	7			95	17	2			86	9	4			93	11	6			103	9	7
.500	81	13	6			69	16	10			56	7	4			68	14	9			80	10	6
2.5	49	9	7			53	12	7			34	7	5			50	11	13			59	7	7
5	54	7	5			52	8	5			36	7	6			34	4	6			50	8	7
10	31	2	2			35	3	3			33	3	2			36	6	3			31	3	1
20	23	1	1			24	1	1			25	3	2			26	2	1			23	1	1

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* ** This sheet is a correction for corresponding sheet appearing in Technical Note 18-17

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Season Summer (June July Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}
.013	155	2	9.0	153	4	12.0	151	4	9.5	149	2	8.5	151	4	10.0	151	4	7.5
.051	126	6	10.0	126	4	12.5	110	8	10.5	108	8	9.5	108	8	8.5	122	6	8.5
.160	101	8		97	10	28	67	20	4	65	22	4	71	24	12	97	6	4
.495	80	10	10.5	70	16	18	50	14	4.5	50	10	4.0	54	18	4.5	76	10	8.0
**	58	6	6.0	54	8	12	34	8	3.0	30	8	2.5	40	10	3.0	56	6	6.0
**	53	4	3.0	49	4	12	25	10	4.0	21	10	2.5	39	12	2.5	53	4	3.5
**	37	4	3.0	33	6	4	25	6	3.5	21	6	3.0	37	6	4.0	39	2	3.5
**	23	2	2.0	23	2	2.0	21	2	2.0	23	2	2.0	25	2	2.5	25	0	2.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

** No June data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Summer (June July Aug.) 1963

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}
.013	157	4	8.5	155	6	10.0	153	4	11.0	159	6	10.0	159	6	8.5	157	4	7.5
***			11.5			13.5												10.5
.051	138	6	7.5	134	10	12.0	130	10	12.0	138	8	9.5	140	8	9.5	138	6	8.5
***			11.0			14.5												11.5
.160	119	10	7.5	117	12	15.0	112	13	19.0	121	10	8.5	121	9	8.0	119	8	7.5
***			11.0			15.0												11.0
.495	101	10	8.0	95	14	8.0	89	16	20.0	101	14	9.0	100	11	8.5	101	8	7.5
***			11.0			12.0												11.0
2.5	71	8	6.0	65	12	7.5	51	14	10.0	59	16	7.0	67	12	6.0	71	8	5.0
***			9.0			11.5												8.0
5	61	8	5.0	55	10	6.0	42	15	7.5	51	14	6.5	61	8	5.0	61	8	4.5
***			8.0			8.5												7.0
10	46	12	4.5	46	14	4.5	36	8	5.5	44	8	4.5	48	6	4.0	46	6	3.5
***			6.0			6.0												5.5
20	25	6	2.0	25	6	2.5	27	4	2.5	31	6	3.5	31	6	3.0	27	6	2.5
***			3.0			4.0												4.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* ** No July or August data for log and voltage

* ** No August data for log and voltage

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140. SE Season Summer (June July Aug) 1963

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}										
.013	154	6	8	10.5	15.5	152	6	8	11.0	15.5	152	8	6	12.5	16.0	156	4	10	11.0	16.5	156	6	8	9.0	14.0	156	4	11	9.5	15.5
.051	131	6	8	10.0	16.5	123	10	8	11.5	17.0	121	8	6	13.5	19.5	125	12	4	11.0	17.0	125	16	6	10.0	16.0	131	6	8	10.5	16.0
.160	110	10	6	8.5	15.0	96	20	14	11.0	17.0	90	20	8	14.5	20.5	94	28	10	10.0	15.5	100	26	16	11.0	18.0	110	8	6	8.0	14.5
.495	89	10	8	9.0	15.5	67	22	10	8.5	12.0	65	20	8	9.0	14.0	67	34	8	10.0	16.0	79	24	16	11.0	19.0	89	10	8	8.5	15.5
2.5	65	6	6	6.5	11.0	49	14	8	8.0	13.0	41	4	2	8.0	12.0	41	16	2	8.5	12.5	51	18	10	7.5	12.5	63	8	4	5.5	8.5
5	59	6	6	6.0	9.5	49	10	8	7.5	11.0	39	6	6	9.5	13.0	39	10	8	9.0	12.5	53	12	10	6.5	10.0	61	10	6	4.5	8.5
10	41	4	6	3.5	6.0	39	4	5	4.0	7.0	31	8	4	4.5	6.5	35	6	6	4.0	6.5	47	6	6	2.5	5.5	45	4	4	3.0	6.0
20	23	2	0	1.5	3.0	23	2	0	2.0	5.0	23	4	2	2.5	4.0	25	4	2	2.0	4.0	27	4	2	2.0	4.0	25	2	2	2.0	3.5

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Winter (June July Aug) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400						0400-0800						0800-1200						1200-1600						1600-2000						2000-2400					
	F _{am}		D _u	D _l	V _{d_m}	L _{d_m}	F _{am}		D _u	D _l	V _{d_m}	L _{d_m}	F _{am}		D _u	D _l	V _{d_m}	L _{d_m}	F _{am}		D _u	D _l	V _{d_m}	L _{d_m}	F _{am}		D _u	D _l	V _{d_m}	L _{d_m}						
	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}						
.013	156	4	4			154	4	4			154	6	6			156	4	6			156	4	6			156	6	4								
.051	125	10	6			123	10	10			117	12	8			121	12	12			125	8	8			125	8	8								
.160	105	10	6			97	14	24			79	22	10			95	14	24			105	10	6			105	10	6								
.495	92	10	8			78	19	20			60	10	4			80	16	22			92	10	8			92	10	8								
2.5	64	11	8			60	13	10			50	7	5			56	15	10			66	11	8			66	11	8								
5	61	8	11			59	8	8			51	8	10			57	12	8			61	8	6			61	8	6								
10	35	8	4			35	6	4			35	12	6			43	6	4			39	8	8			39	8	8								
20	24	6	2			24	5	4			24	14	2			27	5	3			24	6	2			24	6	2								

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{d_m} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Summer (*** August **) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.013	156	4	8	155	3	7	153	3	7	155	4	9	155	4	5	155	3	7			
.057	130	6	8	122	14	6	118	8	6	124	7	6	126	8	6	130	4	8			
.160	107	10	10	85	25	10	83	12	4	91	19	10	95	20	15	105	11	9			
.495	84	12	12	64	20	8	59	10	5	60	31	4	76	20	20	86	12	6			
2.5	59	8	6	55	8	6	49	2	8	49	6	3	55	12	6	63	5	8			
5	54	5	9	47	9	14	30	9	6	30	13	4	51	8	10	55	4	18			
10	31	8	6	31	8	6	26	14	6	27	13	4	37	14	7	36	9	7			
20	42	2	7	42	2	7	41	2	10	41	1	9	41	2	6	41	3	3			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

** * No June or July data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Saõ José, Brazil Lat. 23.3 S Long. 48.5 W Season Winter (*** *** *** Aug.) 19.63

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400					0400-0800					0800-1200					1200-1600					1600-2000					2000-2400									
	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m					
.051	122	4	13	7.5	12.0	122	12	17	8.0	12.0	112	10	16	2.0	3.0	116	8	18	3.5	5.5	116	12	12	7.0	11.5	120	12	12	5.5	9.5	120	12	12	5.5	9.5
.113	115	13	13	4.5	8.5	109	14	18	4.5	7.0	101	10	16	2.5	4.0	99	12	11	4.5	5.5	105	12	14	6.0	8.5	111	12	10	4.0	7.5	111	12	10	4.0	7.5
.246	102	12	14	4.5	9.0	90	18	16	5.5	9.5	82	10	10	5.0	8.0	82	8	10	4.5	7.0	88	12	14	8.0	11.0	100	10	13	5.5	9.5	100	10	13	5.5	9.5
.545	90	12	8	4.5	8.5	87	10	11	3.0	5.5	92	6	12	4.5	6.0	88	8	14	2.5	3.5	86	10	12	1.0	2.5	90	14	8	2.0	4.5	90	14	8	2.0	4.5
2.5	65	4	16	5.0	8.0	61	8	16	4.0	7.5	39	10	10	5.5	7.5	36	7	11	4.0	6.5	51	14	14	4.0	7.5	63	8	12	4.5	9.0	63	8	12	4.5	9.0
5	57	6	13	4.5	7.0	55	8	10	4.5	8.0	43	10	8	4.0	7.0	41	6	8	4.0	9.0	53	8	10	5.0	10.0	61	8	10	4.0	8.0	61	8	10	4.0	8.0
10	43	10	11	2.0	4.5	39	10	10	4.5	8.5	41	8	12	6.0	10.5	43	4	10	5.5	11.0	47	11	9	5.0	7.5	43	8	5	7.0	9.5	43	8	5	7.0	9.5
20	25	7	2	2.0	4.0	23	4	1	1.5	2.5	26	9	4	5.5	8.0	30	8	5	5.0	7.5	29	4	4	2.5	4.0	33	4	8	4.5	7.5	33	4	8	4.5	7.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

*** No June or July data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Season Summer (June July Aug.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																															
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400											
	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}				
.013	162	6	3	9.5	164	4	6	10.5	162	6	6	13.0	164	8	6	11.5	164	4	6	10.0	162	4	6	9.5	162	4	6	9.5	162	4	6	9.5
.051	143	4	6	9.0	141	6	10	12.0	137	10	12	14.0	137	16	8	13.0	141	8	8	11.0	141	6	6	10.0	141	6	6	10.0	141	6	6	10.0
.160	124	6	6	9.5	122	8	16	12.5	110	20	14	14.5	116	18	10	12.5	120	8	10	10.0	124	4	8	9.0	124	4	8	9.0	124	4	8	9.0
.495	98	8	6	8.5	92	12	14	11.0	84	14	14	12.5	94	20	12	13.0	98	8	12	8.5	100	6	6	7.5	100	6	6	7.5	100	6	6	7.5
2.5	65	4	6	6.0	61	10	12	7.5	39	22	10	7.5	47	28	12	9.0	63	8	12	6.5	65	6	6	6.0	65	6	6	6.0	65	6	6	6.0
5	54	8	6	5.0	52	8	8	6.5	40	14	10	10.0	44	18	8	8.5	56	8	8	6.0	56	6	6	6.0	56	6	6	6.0	56	6	6	6.0
10	38	8	6	3.5	38	8	6	4.0	40	8	8	7.0	42	8	4	6.0	48	6	4	4.0	44	8	4	3.5	44	8	4	3.5	44	8	4	3.5
20	26	0	4	2.0	24	4	2	2.5	24	8	4	3.0	26	12	2	3.5	28	8	2	3.0	26	2	2	2.0	26	2	2	2.0	26	2	2	2.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Season Summer (June July Aug) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400										
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}						
.013	162	6	4			160	4	4			164	6	4			164	6	2			164	6	6			
.051	145	6	6			141	8	7			143	10	6			145	10	6			147	6	6			
.160	124	10	6			120	10	14			122	14	13			124	12	8			125	11	7			
.495	102	10	8			92	14	16			94	20	18			96	18	16			101	13	7			

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power





