



Technical Note

No. 18-20

**QUARTERLY RADIO NOISE DATA
SEPTEMBER, OCTOBER, NOVEMBER 1963**

W. Q. CRICHLAW, R. T. DISNEY, AND M. A. JENKINS



**U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS**

THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

Institute for Basic Standards. Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.** Office of Standard Reference Data.

Institute for Materials Research. Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.** Office of Standard Reference Materials.

Central Radio Propagation Laboratory.** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

Institute for Applied Technology. Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

* NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado.

** Located at Boulder, Colorado.

NATIONAL BUREAU OF STANDARDS

Technical Note 18-20

Issued October 23, 1964

QUARTERLY RADIO NOISE DATA SEPTEMBER, OCTOBER, NOVEMBER 1963


W. Q. Crichlaw, R. T. Disney, and M. A. Jenkins
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.






Radio Noise Recording Station

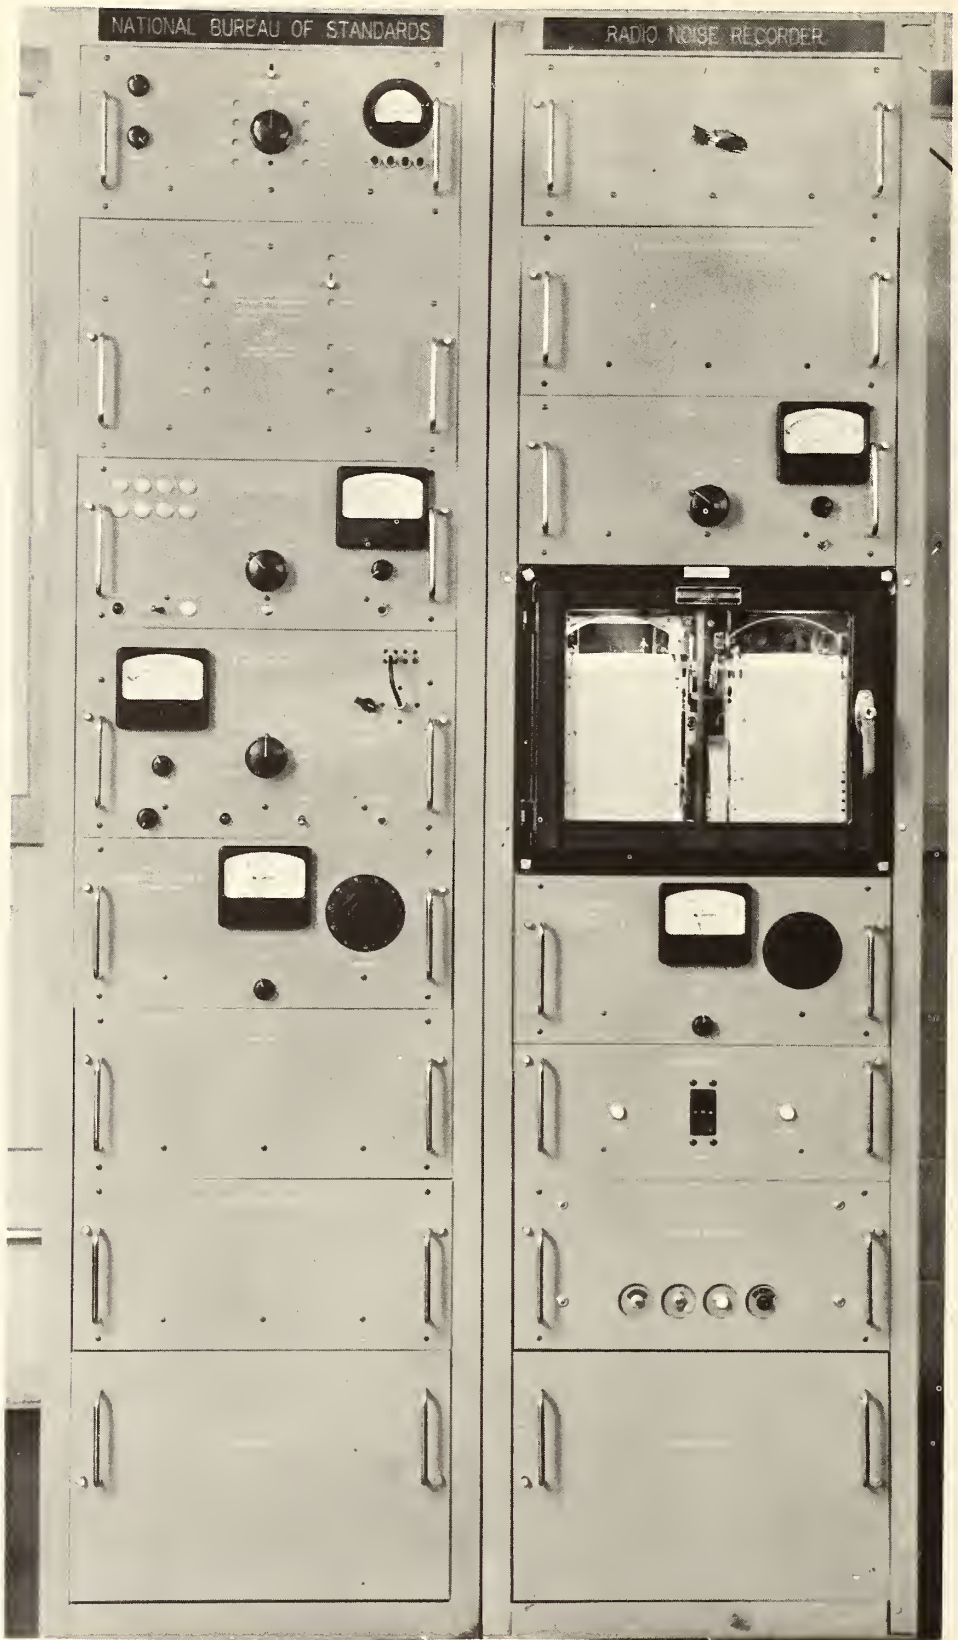

ARN-2 Atmospheric Radio Noise Recorder

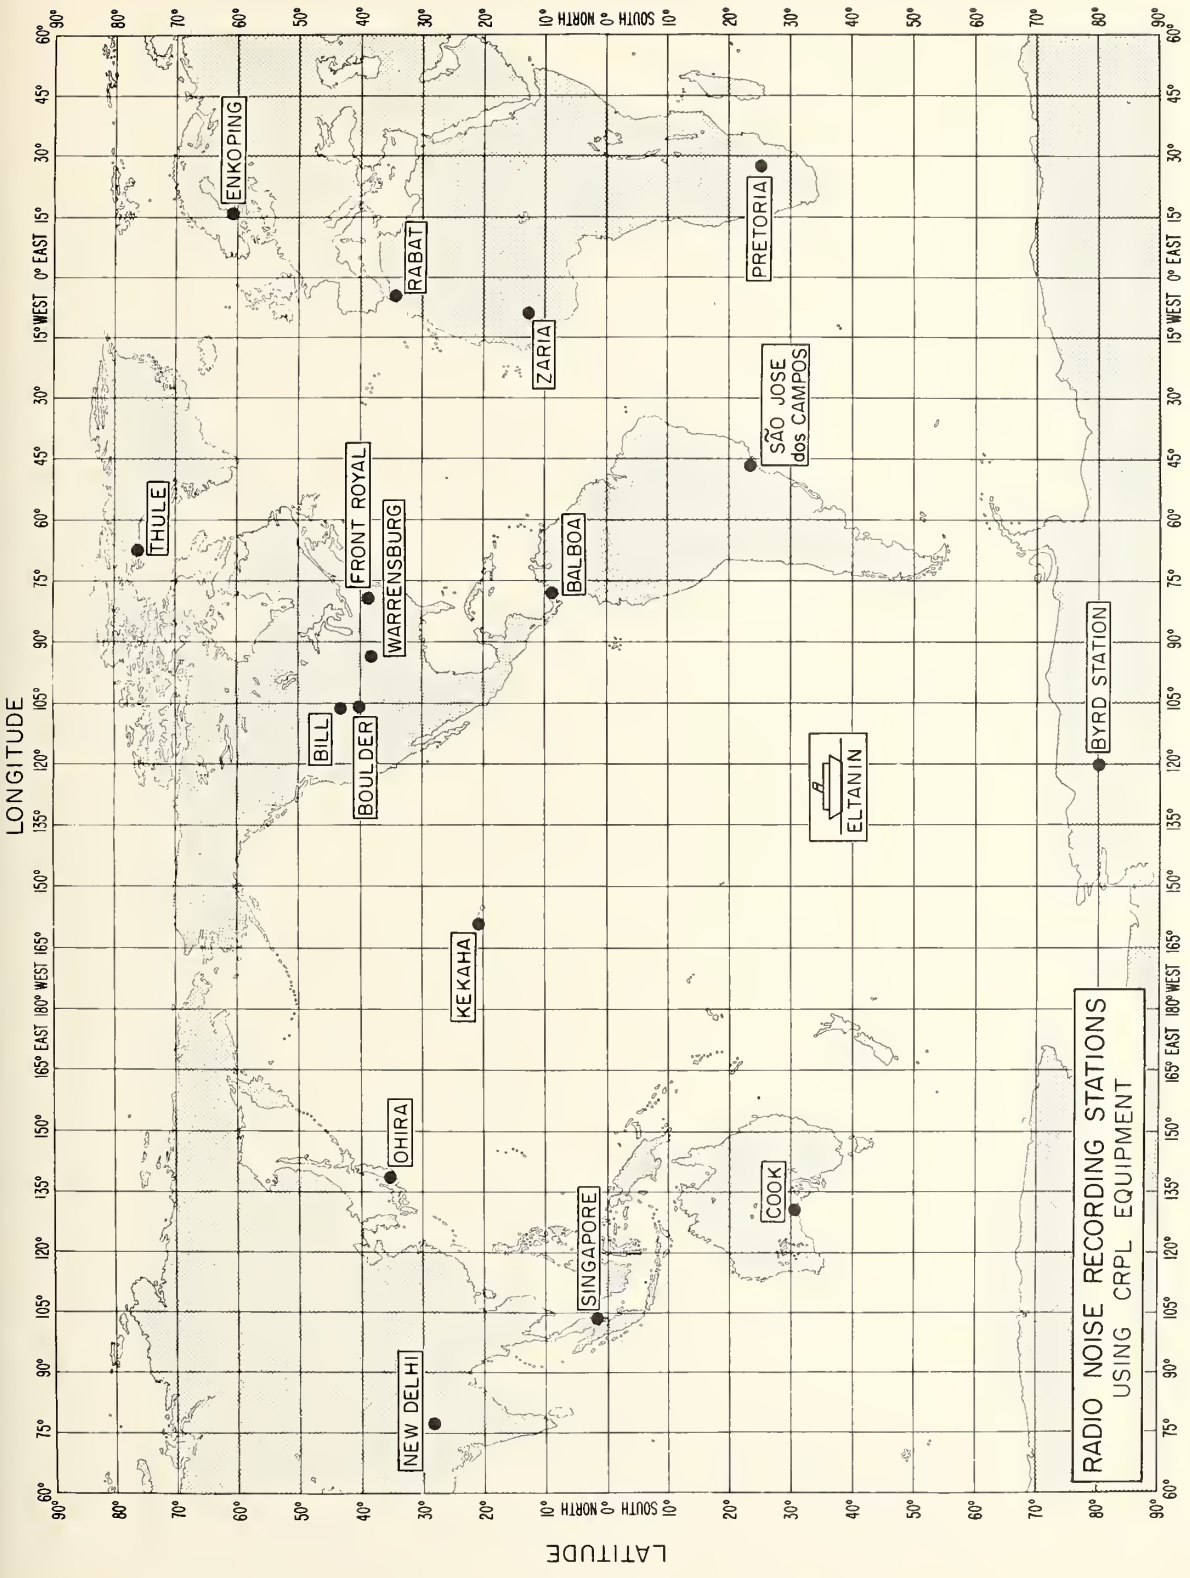


RADIO NOISE RECORDING STATIONS
USING CRPL EQUIPMENT

LATITUDE

LONGITUDE

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

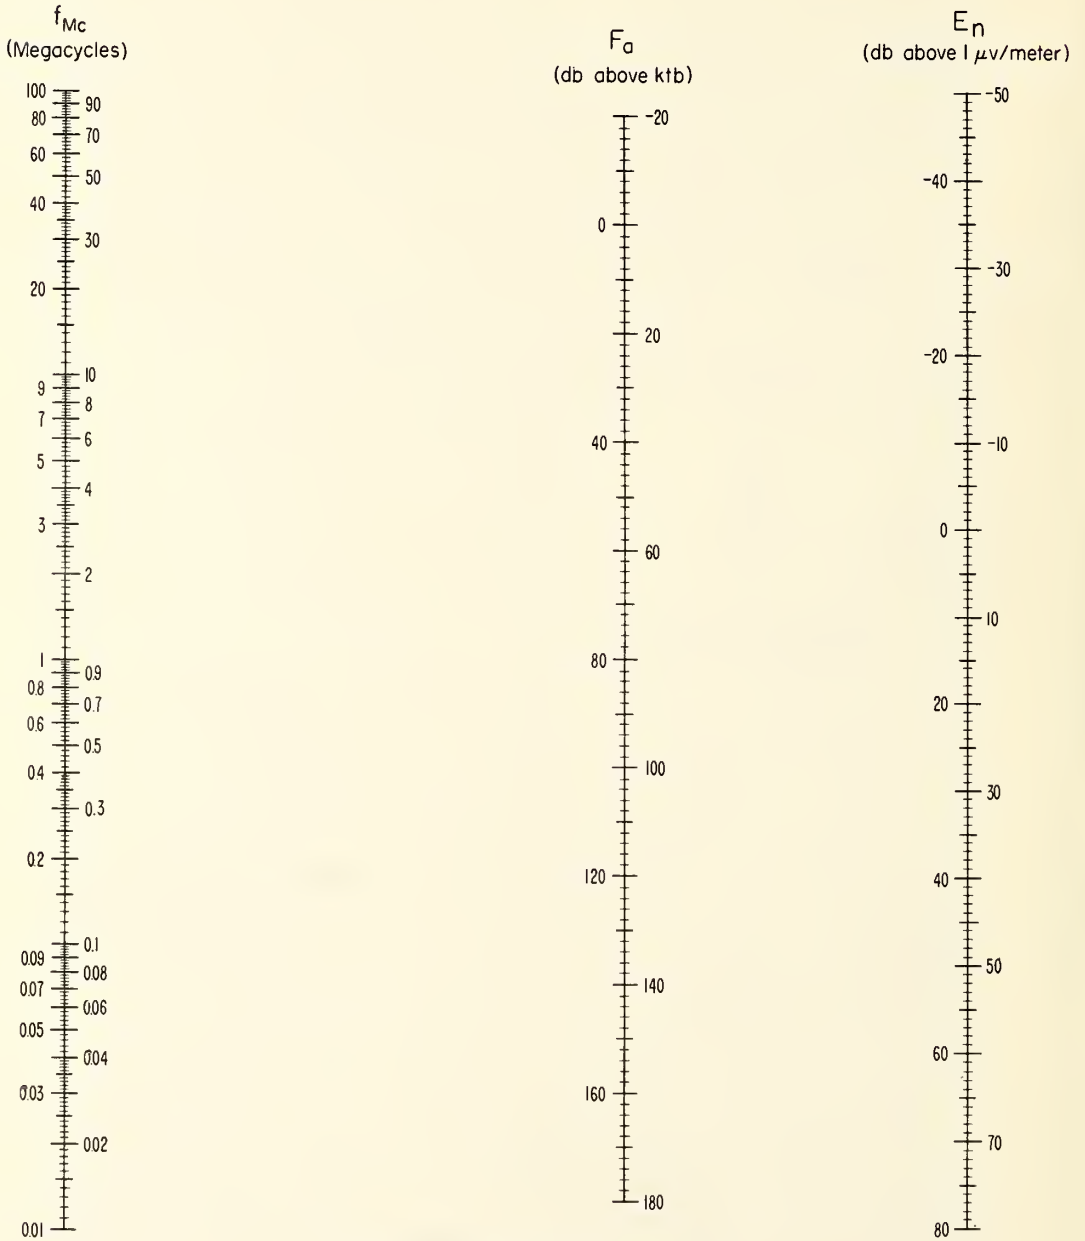

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above $1 \mu v/meter$ for a 1kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Quarterly Radio Noise Data
September, October, November 1963

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

Radio noise measurements are being made at eighteen stations in a world-wide network operated in a co-operative program co-ordinated by the National Bureau of Standards. The locations of these stations are shown on the map. The results of these measurements for the months September, October, and November are given in this report. Where the results for these months are not presently available, the data will be published in subsequent reports, and the data for previous months, which are now available but have not been published previously, are included. The tabulated values are based on three basic parameters of the noise; these are the mean power, the mean envelope voltage and the mean logarithm of the envelope voltage.

The noise power received from sources external to the antenna averaged over a period of several minutes is the basic parameter and can be conveniently expressed in terms of an effective antenna noise factor, f_a , which is defined by

$$f_a = p_n / kT_o b = T_a / T_o$$

where

p_n = noise power available from an equivalent loss-free antenna (watts)

k = Boltzman's constant = 1.38×10^{-23} joules per degree Kelvin

T_o = reference temperature, taken as 288° K

b = effective receiver noise bandwidth (c/s)

T_a = effective antenna temperature in the presence of external noise.

The antenna noise factors in this report are for a short vertical antenna over a perfectly conducting ground plane and are expressed in decibels, $F_a (= 10 \log_{10} f_a)$. This parameter is simply related to the rms noise field strength along the antenna by:

$$E_n = F_a - 95.5 + 10 \log_{10} b + 20 \log_{10} f_{\text{Mc/s}}$$

where:

E_n = rms noise field strength for bandwidth b in db above
 $1 \mu\text{V/m}$

b = effective receiver noise bandwidth in c/s

$f_{\text{Mc/s}}$ = frequency in Mc/s.

The value of E_n for a 1 kc/s bandwidth can be found from the attached nomogram. It should be noted that E_n is the vertical component of the field at the antenna. It should also be noted that the rms envelope voltage is 3 db higher than the rms voltage.

The other two noise parameters tabulated are given relative to the mean power. Thus, the mean voltage and mean logarithm expressed as deviations, V_d and L_d , respectively, are in db below the mean power.

Measurements of the three parameters reported were made with the National Bureau of Standards' Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 6.6294 meter (21.75') vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour during which they were recorded. The month-hour medians, F_{am} , V_{dm} and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

In addition to these month-hour values, corresponding values are tabulated for the time blocks as defined by CCIR Report 322. All recorded values for the four hours of the day and the three-month period are used to determine the median and decile values. When no data were available for one or two months of the season, it is so indicated and should be noted when considering seasonal trends.

The values presented in the tables reflect the actual measured values of radio noise. The only editing for man-made noise or station contamination of the records has been done by the station operators, and no additional attempt has been made to identify these values by systematic statistical means. These preliminary data values are presented in order to expedite dissemination of the data, and additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [Crichlow et al., 1960b] contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution with a form factor described in the above reference and can, therefore, be used to determine whether the measured value or the most probable value of L_d for any value of V_d should be used.

Station clocks are set to local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5). The data from the Floating Antarctic Research Vessel, USNS Eltanin, are grouped so that a block 10° in latitude by 15° in longitude is treated as a separate station. The station clock in this case is

corrected to the LST at the center of the block. Because of this grouping, very few readings may be used to obtain the median values tabulated in some cases. If, during the month, fewer than ten readings are obtained for any one block, the decile values are not given. If data for less than three months are used in the time block summaries, this fact is noted on the summary sheet. Because of the small sample size, some caution should be exercised when using these values.

The assistance of the station operators and other personnel of the operating agencies in obtaining the data contained in this report is gratefully acknowledged. Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii;
Warrensburg, Missouri; USNS Eltanin

U.S. Army Strategic Communications Command - Balboa, C. Z. ;
Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and Ahmadu Bello University, Electrical
Engineering Department, Zaria, Northern Nigeria

Ministry of Communications, Wireless Planning and Co-ordination
Organization - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) - Pretoria

Institut Scientifique Cherifien (Morocco) - Rabat

Comissão Nacional des Atividades Espaciais (Brazil) - São José
dos Campos

Department of Scientific and Industrial Research (Great Britain) -
Singapore

The following publications contain additional information on radio noise:

- Clark, C., "Atmospheric Radio-Noise Studies Based on Amplitude-Probability Measurements at Slough, England, during the International Geophysical Year," Proc. Inst. Elec. Eng., Pt. B, 109, 47, 393 (September, 1962).
- Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney, "Amplitude-Probability Distributions for Atmospheric Radio Noise," NBS Monograph 23 (November, 1960b).
- Crichlow, W. Q., C. J. Roubique, A. D. Spaulding, and W. M. Beery, (January-February, 1960) "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," J. Res. NBS 64D (Radio Propagation) No. 1, 49-56.
- Crichlow, W. Q., "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6 778 (1957).
- Crichlow, W. Q., D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
- "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- "World Distribution and Characteristics of Atmospheric Radio Noise," C. C. I. R. Report No. 322, Xth Plenary Assembly, Geneva, 1963, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- Fulton, F. F. (Jr.) (May-June, 1961), "Effect of Receiver Bandwidth on the Amplitude Distribution of VLF Atmospheric Noise," J. Res. NBS 65D (Radio Propagation) No. 3, 299-304.
- Horner, F., "An Investigation of Atmospheric Radio Noise at Very Low Frequencies," Proc. Inst. Elec. Eng., Pt. B, 103, 743 (1956).

- Horner, F., "Radio Noise of Terrestrial Origin," Proc. of Commission IV on Radio Noise of Terrestrial Origin during the XIIIth General Assembly of URSI, London, September, 1960.
- Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (November-December, 1962) "Conversion of the Amplitude-Probability Distribution Function for Atmospheric Radio Noise from One Bandwidth to Another," J. Res. NBS 66D (Radio Propagation) No. 6, 713-720.
- Obayashi, T. (January-February, 1960), "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," J. Res. NBS 64D (Radio Propagation) No. 1, 41-48.
- Taylor, W. L. (September-October, 1963), "Radiation Field Characteristics of Lightning Discharges in the Band 1 kc/s to 100 kc/s," J. Res. NBS 67D (Radio Propagation) No. 5, 539-550.
- Taylor, W. L. and A. G. Jean (September-October, 1959), "Very-Low-Frequency Radiation Spectra of Lightning Discharges," J. Res. NBS 63D (Radio Propagation) No. 2, 199-204.
- URSI Special Report No. 7, "The Measurement of Characteristics of Terrestrial Radio Noise," Elsevier Publishing Co. (1962).
- Watt, A. D. and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
- Watt, A. D. (September-October, 1960), "ELF Electric Fields from Thunderstorms," J. Res. NBS 64D (Radio Propagation) No. 5, 425-433.
- Watt, A. D. and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
- Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).


Data included in this report and the standards time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	Sept Oct Nov 1963	75W	+05
Bill	Sept Oct Nov 1963	105 W	+07
Boulder	Sept Oct Nov 1963	105 W	+07
Byrd Station	Sept Oct 1963	120 W	+08
Cook	Sept Oct Nov 1963	135 E	-09
USNS Eltanin	Sept Oct Nov 1963		
Enköping	Sept Oct 1963	15 E	-01
Front Royal	Sept Oct Nov 1963	75 W	+05
Ibadan	February 1962 Correction Sheet	GMT	0
Kekaha	Sept Oct Nov 1963	150 W	+10
New Delhi	Sept Oct Nov 1963	75 E	-05
Ohira	Sept Oct Nov 1963	135 E	-09
Pretoria	Sept Oct Nov 1963	30 E	-02
Rabat	Sept Oct Nov 1963	GMT	0
Saõ José	Sept Oct Nov 1963	45 W	+03
Singapore	Sept Oct Nov 1963	105 E	-07
Warrensburg	Sept Oct Nov 1963	90 W	+06

Previous data from the world-wide network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957-December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1959
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 September, October, November 1960
- 18-9 December, January, February 1960-61
- 18-10 March, April, May 1961
- 18-11 June, July, August 1961
- 18-12 September, October, November 1961
- 18-13 December, January, February 1961-62
- 18-14 March, April, May 1962
- 18-15 June, July, August 1962
- 18-16 September, October, November 1962
- 18-17 December, January, February 1962-63
- 18-18 March, April, May 1963
- 18-19 June, July, August 1963

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

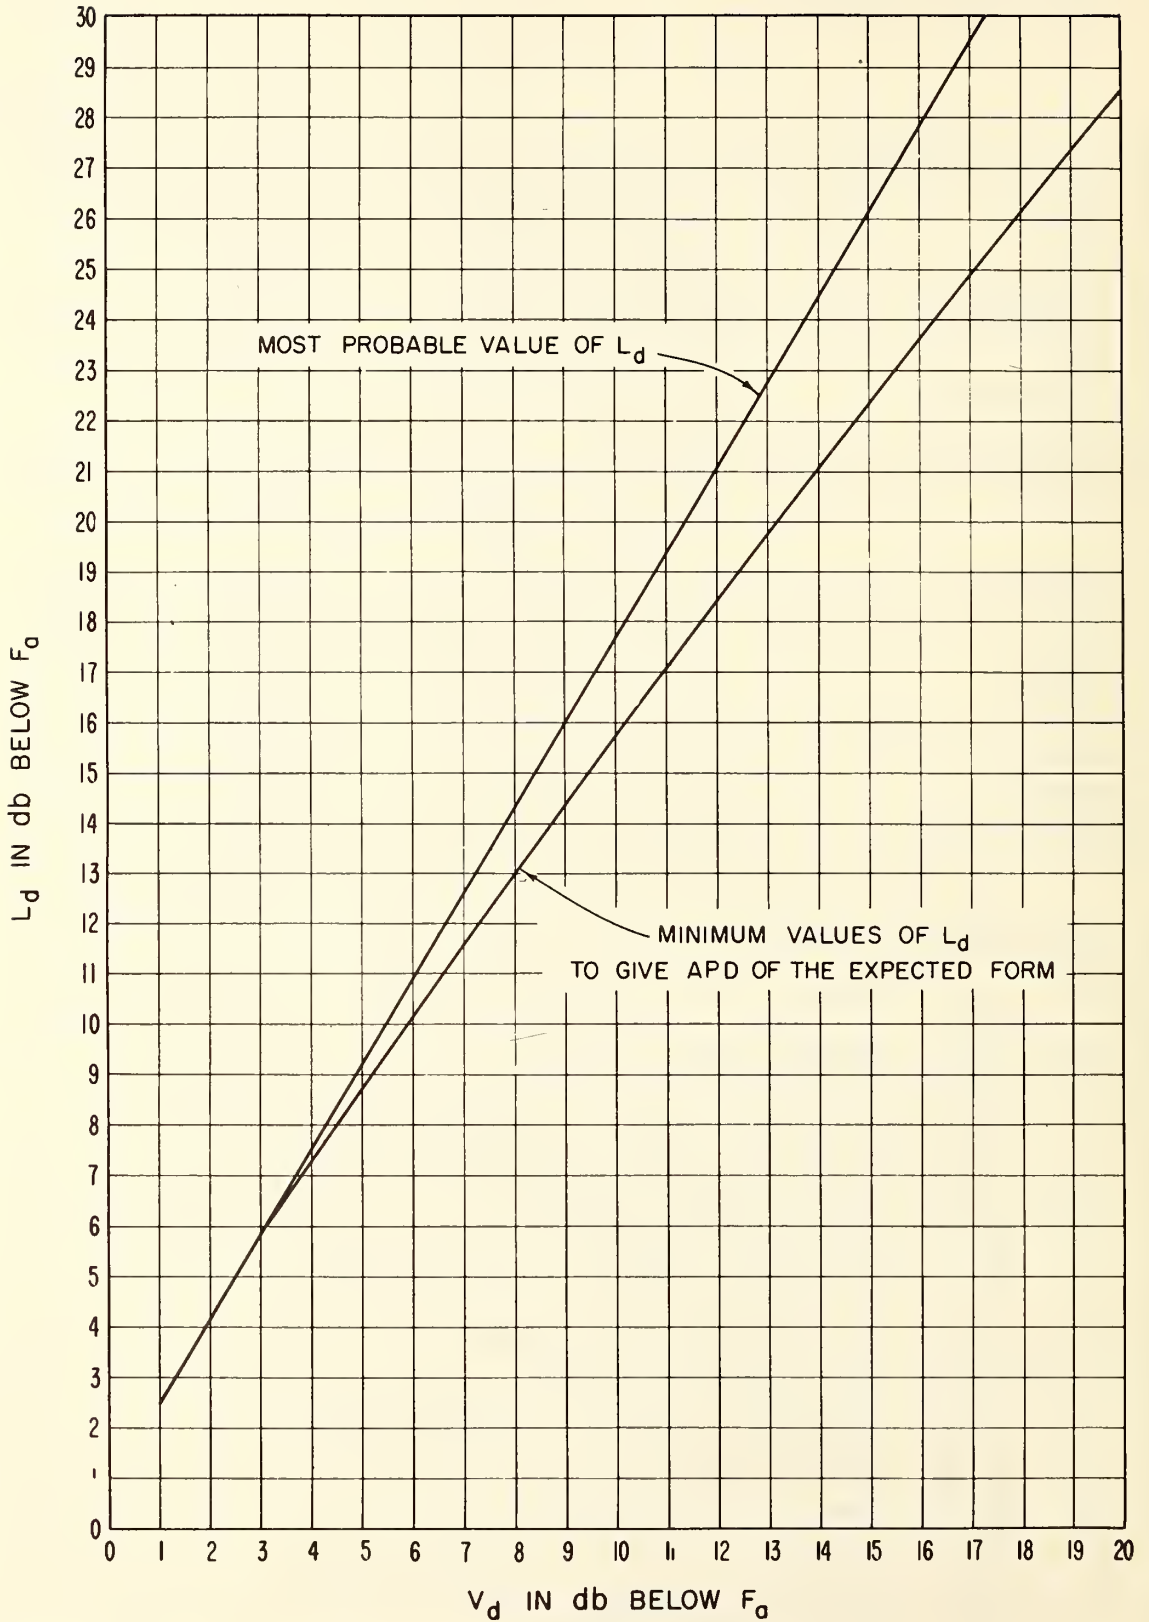

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N. Long. 79.5 W

Month September 19 63

Hour (LST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}	F _{dm}	D _f	V _{dm}	L _{dm}			
00	170	4	9	12.0	17.5	147	6	4	8.5	12.5	105	8	6	7.5	11.0	76	6	6	6.5	10.5	72	2	6	5.5	8.0	49	14	9	3.0	4.0	29	7	4	2.0	3.0
01	170	6	6	12.0	17.0	147	6	6	8.5	11.5	107	6	6	8.0	13.0	79	5	7	6.0	9.5	70	6	6	5.5	9.0	48	23	6	5.0	7.0	29	8	4	3.0	4.0
02	172	4	12	12.5	17.5	149	4	10	10.0	15.0	105	9	5	6.0	9.0	76	6	4	5.5	8.5	70	4	6	5.0	8.0	48	24	12	5.0	7.5	29	6	4	2.5	4.0
03	170	6	12	12.5	18.0	149	6	14	10.5	16.5	106	6	8	7.5	11.5	78	6	9	5.5	9.0	70	4	9	5.0	8.0	46	8	12	5.5	7.5	29	2	4	2.5	4.0
04	170	6	12	12.5	18.5	147	6	9	10.5	16.0	106	9	7	9.0	15.5	78	6	7	6.0	9.0	68	6	7	6.0	9.0	42	8	8	4.0	6.5	27	4	2	1.5	3.0
05	172	4	12	14.5	19.5	148	5	12	13.0	18.5	101	11	10	7.5	14.0	78	5	8	6.0	10.0	68	4	11	5.0	8.0	46	22	11	4.5	7.5	27	4	4	2.0	3.0
06	170	4	10	13.0	19.0	147	7	13	12.5	19.0	101	10	17	11.5	19.0	70	8	6	8.0	13.5	68	4	10	5.5	11.0	56	14	16	6.0	9.0	29	4	4	2.0	3.5
07	169	5	9	13.5	19.5	147	6	16	13.0	19.5	102	7	19	10.0	15.5	66	8	15	9.0	16.0	64	5	13	7.0	11.5	50	6	11	4.0	8.5	29	6	4	2.0	3.5
08	170	4	14	14.5	20.0	145	7	9	14.5	21.0	101	6	17	12.0	15.0	60	9	17	10.0	15.0	61	4	14	8.5	13.5	50	9	11	7.0	10.0	29	6	4	2.5	4.0
09	166	8	6	15.5	20.0	143	9	9	14.0	19.5	97	9	18	12.5	19.5	57	7	16	10.0	16.0	56	5	12	8.0	13.0	46	11	10	7.0	11.0	29	8	4	5.0	7.0
10	166	7	5	17.0	20.0	143	10	10	13.5	21.0	96	16	14	12.0	18.0	52	12	10	7.0	16.0	56	5	11	7.5	10.5	41	15	6	7.0	9.5	31	4	6	4.0	6.0
11	168	6	8	14.5	20.0	141	11	8	14.0	21.0	97	16	21	12.0	18.0	57	19	13	9.0	13.5	52	13	7	7.0	10.0	44	14	8	7.5	11.0	33	7	6	7.5	10.0
12	167	6	8	13.0	17.5	143	10	8	14.0	21.0	101	18	13	12.5	19.5	54	14	14	13.0	18.5	56	12	10	8.5	11.0	45	17	9	7.0	10.5	37	10	10	4.5	8.0
13	172	6	6	12.5	17.5	146	13	8	13.5	18.5	113	9	19	13.0	19.0	62	15	18	12.0	19.5	64	20	20	9.5	14.5	52	12	10	7.0	10.5	37	13	6	6.5	9.0
14	172	10	4	14.5	19.0	149	12	10	13.0	18.0	109	16	10	13.5	19.5	73	15	19	13.5	19.5	68	16	14	12.5	19.0	54	12	10	5.0	7.5	41	10	8	6.0	8.5
15	172	6	4	10.0	13.5	151	8	8	13.0	18.0	105	13	14	12.5	19.0	72	18	16	12.0	18.5	66	15	17	6.0	9.0	52	14	7	6.0	9.0	39	6	6	5.5	8.0
16	170	6	7	11.0	15.0	147	8	8	11.5	16.0	106	11	10	10.5	14.5	63	20	16	9.0	12.5	62	14	9	8.0	10.5	54	16	9	5.5	8.0	37	4	6	5.0	7.0
17	170	4	2	10.5	15.0	145	5	6	11.0	15.0	99	8	12	11.0	15.0	61	14	11	9.0	14.0	66	6	9	5.5	9.0	54	20	10	5.0	7.5	37	2	4	5.0	7.0
18	166	6	4	10.0	14.5	143	8	6	11.5	15.0	103	4	6	6.0	10.0	66	8	9	7.5	10.0	68	6	8	5.0	7.0	66	10	20	3.0	5.0	31	6	5	4.0	6.5
19	166	8	4	11.0	15.5	144	5	5	10.0	14.5	103	5	4	6.5	9.0	72	8	8	7.0	9.5	72	4	7	5.5	7.5	57	17	12	3.0	5.0	29	2	2	3.5	4.5
20	168	4	6	12.0	17.0	145	4	5	11.0	15.0	105	4	7	6.5	10.0	72	7	7	6.5	9.5	72	4	7	5.5	8.0	50	22	12	3.5	5.0	29	6	6	2.0	3.0
21	169	5	7	12.0	17.0	145	4	2	11.0	16.0	103	6	4	6.0	10.0	72	8	4	6.5	10.0	74	4	4	6.0	9.5	48	24	10	3.0	5.5	29	4	4	2.0	3.0
22	168	5	7	15.0	17.0	147	6	4	12.0	16.5	103	6	4	9.0	14.0	74	5	6	6.5	9.5	70	4	4	5.0	7.0	48	19	8	4.5	6.0	29	6	4	3.0	4.0
23	168	6	10	12.0	17.5	149	2	6	11.5	17.0	103	9	2	6.0	9.5	76	4	6	6.5	9.5	70	4	8	6.0	9.0	48	15	10	3.5	5.0	29	6	6	2.5	4.0

F_{dm} = median value of effective antenna noise in db above k1b

D_f = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

L_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																								
	.013				.051				.160				.495				2.5				5				10				20												
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}					
00	164	10	2	11.5	18.5	147	8	6	14.0	16.5	127	9	2	10.0	15.0	103	12	3	8.0	12.0	72	7	4	6.5	10.0	68	4	4	6.0	9.0	46	25	6	5.0	6.0	27	11	4	2.5	3.5	
01	166	6	3	11.0	17.5	147	5	6	13.0	15.5	127	6	5	11.0	15.0	103	8	4	10.0	15.0	72	7	4	8.5	12.5	68	4	6	6.0	9.5	44	28	6	5.0	6.5	27	4	4	2.0	3.0	
02	166	7	3	12.0	19.0	147	5	4	15.0	17.0	127	5	4	9.0	13.0	104	7	5	6.5	10.0	74	5	2	7.0	11.5	64	8	4	6.5	9.5	42	10	6	4.5	7.5	27	2	4	3.0	4.0	
03	168	4	7	12.0	21.0	149	4	7	17.0	17.0	125	6	4	10.0	15.0	103	8	6	11.0	16.0	74	4	4	7.5	11.5	64	6	5	6.0	9.0	38	8	4	4.5	7.5	27	2	4	3.0	4.0	
04	166	6	4	12.5	17.5	145	6	4	13.0	17.5	125	6	6	11.0	16.0	101	6	6	8.5	14.0	76	4	5	8.0	11.0	64	6	7	6.0	8.5	36	6	4	5.0	7.0	27	1	4	2.0	3.0	
05	166	8	7	12.0	18.0	145	6	4	14.0	17.5	123	6	8	14.0	19.5	95	12	8	13.5	20.0	75	5	4	8.0	12.5	64	6	10	7.0	11.0	38	12	4	5.0	7.0	27	2	4	2.0	3.5	
06	164	7	4	13.0	18.5	143	6	3	13.5	19.0	123	6	14	16.0	22.0	89	19	12	16.5	24.5	68	6	6	10.5	14.5	64	4	12	6.5	10.0	46	14	6	5.5	8.0	29	4	4	2.5	3.5	
07	164	6	6	18.0	18.0	141	10	12	14.5	23.0	120	9	14	7.0	22.0	91	17	12	7.0	11.5	60	10	9	11.5	16.0	60	6	13	10.0	14.5	44	4	6	7.5	10.0	29	6	4	3.5	5.5	
08	164	6	6	15.0	17.0	141	7	15	13.0	20.0	119	8	15	9.0	25.0	91	15	14	12.5	20.0	54	11	13	9.5	15.0	54	6	12	11.0	15.0	42	4	5	10.5	14.0	29	9	4	4.0	6.0	
09	164	4	6	16.5	17.5	141	7	12	14.0	20.5	117	11	12	19.0	25.0	91	16	14	16.5	25.0	48	9	11	12.5	17.0	48	8	12	11.0	18.0	40	6	4	7.0	10.0	29	14	4	4.5	7.0	
10	164	4	6	16.5	19.0	141	6	12	14.0	21.0	119	9	17	18.0	25.5	91	14	13	12	13.0	70.0	47	7	7	6.5	10.0	40	4	7	6.5	10.0	40	4	4	9.0	13.0	31	4	5	3.5	5.0
11	164	4	7	12.5	17.0	139	8	8	13.0	17.5	121	6	26	17.0	22.5	95	12	15	20.0	29.0	35	16	8	45	10	6	10.5	13.0	38	4	4	11.0	14.5	31	4	5	5.0	6.5			
12	166	4	7	13.5	16.0	143	6	6	12.5	18.5	123	10	11	16.0	22.0	96	17	13	16.0	24.0	48	11	11	14.5	19.0	46	12	4	9.0	12.0	40	6	4	9.0	12.0	33	7	3	7.0	9.0	
13	166	7	2	16.0	16.5	147	8	11	12.5	22.0	127	8	14	12.5	20.0	105	12	18	18.5	25.0	57	11	14	13.5	17.5	50	15	7	9.5	14.0	44	8	4	9.0	11.0	35	9	4	7.0	9.0	
14	168	7	4	13.5	15.0	147	10	6	11.0	19.0	126	11	9	18.0	22.0	102	13	9	16.0	22.5	60	20	18	12.0	17.5	56	16	8	9.0	12.5	46	6	4	9.5	13.0	37	4	6	6.5	8.0	
15	168	6	3	15.0	16.0	145	10	4	13.0	18.5	127	8	10	16.0	20.0	106	10	14	14.0	19.5	60	14	14	8.5	11.0	56	7	7	8.0	11.0	46	7	4	7.5	11.0	37	6	6	4.5	6.0	
16	168	5	4	13.5	16.0	147	8	8	12.0	17.0	125	9	10	15.0	22.5	101	12	12	12.0	17.5	59	18	10	12.0	18.0	59	9	7	9.0	13.0	48	8	4	5.0	7.5	37	4	5	4.0	6.5	
17	166	6	2	13.5	15.5	143	10	7	12.0	17.5	121	10	8	13.0	17.5	95	14	7	11.5	17.0	60	18	9	8.0	11.0	62	6	4	5.5	8.5	48	8	3	6.0	8.0	35	4	5	5.0	7.0	
18	164	5	4	15.5	17.5	143	6	5	13.5	16.0	121	7	4	10.0	14.5	101	9	3	6.5	9.0	66	7	6	7.0	10.0	66	6	4	6.5	8.5	48	17	4	5.5	7.0	31	4	4	4.0	6.0	
19	164	6	4	12.0	17.0	145	4	7	13.0	17.0	123	4	4	9.0	13.0	101	17	2	7.0	10.0	70	8	6	7.0	10.0	68	4	8	5.0	7.0	47	19	6	5.5	8.0	29	5	5	3.5	5.0	
20	166	5	4	11.0	18.0	145	6	6	13.0	16.0	123	6	4	11.0	15.0	103	6	5	7.0	10.0	69	9	3	7.0	10.5	68	4	6	6.0	10.0	42	7	4	5.5	7.0	27	8	2	3.5	5.0	
21	166	5	5	11.0	17.5	145	5	7	13.5	15.5	123	8	4	8.0	11.0	101	11	2	7.0	10.0	70	6	4	7.0	10.0	69	5	7	5.0	9.0	42	8	6	5.5	7.5	27	7	3	4.0	6.0	
22	164	7	4	13.0	19.0	145	8	7	14.0	17.5	123	10	4	11.0	15.0	103	13	4	7.0	10.0	72	4	6	8.0	11.0	66	6	6	6.0	8.0	43	13	7	5.0	7.0	27	12	4	2.0	3.0	
23	164	10	3	12.0	17.0	145	10	4	13.0	17.0	124	12	3	10.0	14.5	103	13	2	7.5	11.5	72	7	6	7.0	10.0	66	7	6	6.5	9.0	46	8	9	4.0	6.5	27	12	3	2.0	3.5	

F_{am} = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone

Lat. 9.0 N Long. 79.5 W

Month November 19 63

Frequency (Mc)

Time (ST)	.013															.051															.160															.495															2.5															5															10															20														
	Fom					Df					Vdm					Ldm					Fom					Df					Vdm					Ldm					Fom					Df					Vdm					Ldm					Fom					Df					Vdm					Ldm																																												
	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom																																																																	
	6	10	140	19.5	139	6	10	12.5	18.0	120	5	6	9.5	15.0	99	6	3	7.5	10.5	66	7	6	7.0	9.0	58	6	5	5.0	7.0	42	9	8	6.5	9.0	23	2	2	3.0	4.0	23	2	2	3.0	4.0	23	2	2	3.0	4.0	23	2	2	3.0	4.0																																																																		
00	159	6	10	140	19.5	139	6	10	12.5	18.0	120	5	6	9.5	15.0	99	6	3	7.5	10.5	66	7	6	7.0	9.0	58	6	5	5.0	7.0	42	9	8	6.5	9.0	23	2	2	3.0	4.0	23	2	2	3.0	4.0																																																																											
01	159	6	9	140	18.5	141	4	11	13.5	19.5	122	5	8	9.0	14.0	101	4	6	7.5	13.0	68	6	6	5.5	8.0	60	4	6	7.0	9.5	42	9	6	6.5	10.0	23	0	2	3.0	4.0	23	0	2	3.0	4.0																																																																											
02	161	4	6	12.5	16.0	141	4	9	12.0	17.0	120	5	5	9.0	14.5	101	3	5	7.5	12.0	70	5	7	7.0	11.0	58	4	4	5.5	9.0	38	8	6	5.0	7.0	23	1	4	1.0	2.0	23	1	4	1.0	2.0																																																																											
03	159	6	4	13.5	18.0	143	2	11	11.5	17.0	122	3	9	10.0	15.0	101	4	4	8.5	13.0	70	4	6	7.0	11.5	60	5	6	6.0	8.5	32	8	6	5.5	8.0	23	3	2	2.5	2.5	23	3	2	2.5	2.5																																																																											
04	161	4	6	13.0	18.0	139	6	8	12.0	17.0	120	6	7	11.0	17.0	98	8	4	11.0	17.5	68	6	4	9.0	13.0	56	7	3	6.0	8.0	36	7	6	7.0	9.5	23	3	2	3.0	4.5	23	3	2	3.0	4.5																																																																											
05	159	6	4	11.0	16.5	139	8	10	12.0	17.0	118	6	8	14.0	20.5	91	4	8	12.0	19.0	68	6	5	9.5	14.0	60	5	6	6.5	10.0	38	10	8	5.0	7.0	23	3	2	3.0	3.0	23	3	2	3.0	3.0																																																																											
06	159	4	4	12.0	17.5	134	9	7	14.0	18.5	108	15	11	15.5	24.0	87	15	12	11.0	19.0	64	6	12	9.0	14.0	58	4	6	5.5	8.0	42	10	2	6.0	10.0	23	6	0	4.0	4.5	23	6	0	4.0	4.5																																																																											
07	156	10	3	14.5	19.5	130	11	8	15.5	21.0	108	12	15	16.0	25.0	83	18	6	14.0	19.0	53	11	11	11.0	15.0	52	4	4	7.0	10.5	42	7	4	7.0	10.0	27	4	4	4.0	5.0	27	4	4	4.0	5.0																																																																											
08	155	8	6	13.5	19.5	129	11	10	17.0	25.0	107	16	13	16.0	24.0	81	18	6	10.0	17.5	45	14	9	7.5	9.5	46	6	7	6.5	10.0	40	6	4	7.0	10.0	27	3	4	4.0	5.0	27	3	4	4.0	5.0																																																																											
09	155	8	6	13.0	18.5	127	10	8	18.0	25.5	108	13	16	18.0	24.0	83	11	8	12.5	8.0	40	13	6	7.5	10.0	42	6	6	8.5	10.0	40	2	6	6.0	11.0	27	4	4	5.5	6.5	27	4	4	5.5	6.5																																																																											
10	155	8	6	14.0	18.5	129	10	9	15.0	20.0	102	17	7	14.0	21.0	79	16	5	11.0	17.0	38	17	5	5.5	7.0	40	5	7	4.0	5.5	38	4	6	3.5	9.0	27	3	3	4.5	6.0	27	3	3	4.5	6.0																																																																											
11	157	4	5	12.5	16.5	129	9	6	13.5	18.0	100	17	8	14.0	18.5	77	18	3	11.0	15.0	38	8	4	5.5	7.5	38	8	6	8.0	11.0	36	4	3	8.0	11.5	29	4	5	4.0	5.0	29	4	5	4.0	5.0																																																																											
12	159	4	2	10.0	16.0	131	9	3	13.5	18.5	104	16	11	14.0	21.0	81	18	6	3.5	5.0	38	9	5	6.0	8.0	38	10	6	8.0	9.5	38	3	4	8.0	11.5	31	3	6	2.0	3.5	31	3	6	2.0	3.5																																																																											
13	161	4	4	10.0	14.0	135	10	6	12.5	16.5	110	17	11	15.0	21.0	87	26	12	4.0	5.0	38	12	5	4.0	5.0	40	7	4	7.5	9.0	40	7	5	9.0	12.0	32	8	4	6.5	8.5	32	8	4	6.5	8.5																																																																											
14	163	6	4	10.0	13.0	137	15	7	12.0	16.5	113	20	11	15.0	18.5	91	22	12	12.0	17.0	42	34	8	13.0	18.0	45	20	6	7.0	9.0	42	12	4	5.0	7.0	32	8	3	6.0	7.5	32	8	3	6.0	7.5																																																																											
15	161	7	2	10.5	14.0	136	12	7	9.5	16.5	110	15	10	15.0	21.0	89	14	11	12.5	17.5	45	18	7	12.5	17.5	48	18	8	9.0	12.0	43	3	5	5.0	8.0	31	3	3	6.0	8.0	31	3	3	6.0	8.0																																																																											
16	161	3	2	11.0	16.0	136	10	6	11.0	15.5	111	12	9	15.5	24.0	89	11	10	12.0	16.0	50	16	7	15.0	20.0	52	7	5	7.5	10.5	44	4	4	5.0	8.0	29	4	4	5.0	8.0	29	4	4	5.0	8.0																																																																											
17	159	5	4	11.0	16.0	135	6	6	12.0	16.5	110	10	8	12.0	17.0	91	8	6	8.0	11.0	56	6	7	9.5	13.0	60	2	8	5.0	8.0	46	5	5	4.5	7.5	29	2	4	4.5	5.5	29	2	4	4.5	5.5																																																																											
18	157	4	6	12.5	17.0	135	8	6	11.0	16.5	116	5	6	9.0	14.0	99	4	4	7.0	10.0	64	8	8	9.0	13.0	62	4	4	4.5	6.0	46	4	6	6.0	8.5	25	4	2	5.0	6.0	25	4	2	5.0	6.0																																																																											
19	157	7	2	13.0	18.5	137	6	6	12.0	17.0	116	7	5	9.5	14.5	99	3	5	7.5	11.0	58	4	9	8.5	12.0	60	6	4	5.5	7.5	42	7	4	7.0	9.5	25	2	2	3.5	5.0	25	2	2	3.5	5.0																																																																											
20	157	6	5	13.0	17.5	137	6	5	12.5	17.5	118	4	6	10.0	15.0	99	3	8	7.5	11.5	66	5	8	8.5	12.0	62	2	6	5.5	7.5	39	6	4	5.0	7.0	23	2	0	2.0	4.0	23	2	0	2.0	4.0																																																																											
21	157	6	7	12.5	17.5	137	6	7	12.0	18.0	116	8	4	10.0	15.5	99	5	4	7.0	10.0	66	4	6	9.0	12.0	66	4	6	4.0	5.0	40	4	6	6.0	8.0	23	2	2	3.5	4.0	23	2	2	3.5	4.0																																																																											
22	157	5	7	12.5	17.0	137	7	7	12.0	17.0	118	6	6	10.0	16.0	99	7	5	7.0	10.0	62	6	5	7.0	9.0	60	4	6	5.0	8.0	40	4	5	4.5	6.5	23	3	2	3.0	4.0	23	3	2	3.0	4.0																																																																											
23	157	7	4	12.0	18.0	139	5	10	12.0	16.0	120	6	9	9.0	13.0	101	4	6	7.0	12.0	66	5	4	8.5	12.0	66	5	4	5.5	7.5	40	7	4	6.0	8.0	23	5	2	3.5	5.5	23	5	2	3.5	5.5																																																																											

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2.N Long. 105.2.W

Month September 19 63

Hour (LST)	Frequency (Mc)																																						
	.051				.160				.495				2.5				5				10				20														
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}							
00	164	5	10.5	17.0	138	7	9	8.0	14.5	99	12	17	6.5	11.5	69	7	13	4.0	8.0	57	7	5	4.0	8.0	38	6	6	2.5	5.0	25	5	0	1.0	2.5					
01	164	5	11.5	18.0	138	9	9	7.0	12.5	115	10	12	6.5	12.5	69	6	11	4.5	8.0	59	4	8	4.0	7.5	38	10	7	1.5	4.0	25	2	1	1.5	2.5					
02	164	5	11.5	18.0	138	9	9	6.0	12.5	117	9	14	7.0	13.0	70	5	11	4.5	8.5	58	5	9	4.5	8.0	34	10	4	2.0	4.0	25	3	2	1.5	2.5					
03	164	7	11.0	18.0	138	7	9	7.5	12.0	115	6	10	8.0	15.0	96	8	13	7.5	14.5	69	7	10	4.5	9.0	36	13	6	1.0	4.0	25	2	2	1.5	2.5					
04	162	5	11.5	18.5	136	8	8	8.5	13.0	113	10	13	10.0	17.0	92	7	17	9.5	18.0	68	6	12	5.0	9.0	38	8	8	1.5	4.5	25	2	2	1.5	3.0					
05	162	5	11.5	19.0	132	9	7	9.0	13.0	103	17	12	13.0	21.0	66	28	8	10.5	14.0	63	8	12	6.0	11.0	52	7	7	5.0	8.5	25	1	2	1.0	2.5					
06	160	6	12.0	19.5	132	9	9	8.0	12.0	103	18	27	13.0	20.5	66	25	16	3.0	5.0	45	14	12	8.0	13.0	48	7	10	5.5	9.0	25	0	2	1.5	2.5					
07	161	4	13.0	19.5	130	8	11	8.0	12.0	102	12	34	12.5	20.0	62	22	12	2.0	4.0	37	18	12	8.5	10.0	42	10	14	6.5	10.5	25	2	2	2.0	3.0					
08	160	7	12.5	19.0	129	10	11	9.0	13.5	95	11	26	12.0	20.0	56	25	6	2.0	3.0	37	15	6	9.0	11.0	35	10	14	6.5	11.5	35	7	7	3.0	5.0	25	2	2	1.5	3.0
09	160	4	12.0	18.5	126	11	8	9.0	13.5	90	26	19	11.0	17.0	54	34	4	1.5	4.0	23	14	2	7.0	9.0	29	12	10	7.0	12.0	32	6	6	3.0	6.0	25	2	2	1.5	2.5
10	160	4	11.0	18.5	129	9	13	9.0	13.0	99	18	26	13.0	20.5	64	26	12	6.5	10.0	23	16	2	5.0	6.5	28	11	9	6.0	12.0	33	5	5	4.0	6.5	25	2	2	2.0	3.0
11	162	2	9.5	13.5	132	6	16	8.5	13.0	104	13	29	11.5	17.5	64	24	14	3.5	5.5	23	16	3	8.0	11.5	29	13	13	7.0	11.5	34	4	6	4.5	7.0	25	2	0	2.0	3.5
12	163	3	8.5	14.0	134	7	16	7.0	11.0	103	20	28	10.0	17.5	74	22	22	8.0	14.0	23	20	2	7.5	10.0	29	16	14	6.5	11.0	38	4	10	4.0	7.0	26	3	1	1.5	2.0
13	165	3	8.0	13.0	134	10	13	7.0	10.5	106	18	24	9.5	17.0	76	23	24	7.0	15.0	23	32	2	4.5	7.5	33	20	16	6.5	10.5	39	7	9	4.0	7.0	26	5	1	1.5	3.0
14	166	4	7.5	12.5	138	8	17	7.5	12.0	111	14	30	10.5	17.0	80	23	27	9.0	15.0	29	36	8	5.0	9.0	33	17	21	5.0	9.0	44	8	11	3.0	5.0	27	4	2	2.0	3.5
15	167	5	11	8.5	13.0	138	9	13	8.0	113	18	25	10.5	16.0	89	21	33	10.5	16.5	39	31	18	6.0	10.0	45	13	18	5.5	9.0	50	10	14	2.0	3.5	29	4	2	3.0	4.5
16	168	4	13	9.0	14.0	138	8	16	7.5	118	11	28	11.0	18.0	92	16	39	9.5	17.0	49	18	25	6.0	9.0	51	10	22	4.5	7.5	62	4	23	4.0	7.0	29	3	3	2.0	4.0
17	166	4	10	9.0	15.0	139	7	14	8.0	117	10	22	7.5	13.5	87	19	26	8.0	15.0	55	12	27	5.0	11.0	55	8	20	4.0	7.0	63	8	24	1.0	3.0	27	3	2	2.5	4.0
18	164	4	9	9.0	15.0	138	7	11	7.5	117	11	17	6.5	12.5	93	14	18	6.0	10.5	63	4	17	3.5	8.0	61	6	14	2.5	5.5	62	10	22	1.5	3.0	25	2	0	1.0	2.5
19	166	4	9	10.0	16.5	140	6	13	7.5	119	10	18	7.0	13.0	96	10	18	5.0	10.5	69	6	14	4.0	7.0	63	6	10	3.5	7.0	53	15	18	2.0	4.5	25	2	0	1.5	2.5
20	166	4	9	10.5	16.5	140	7	13	6.5	119	8	19	7.0	13.0	98	7	20	5.5	11.5	69	6	15	4.0	7.5	63	4	13	4.0	7.0	48	19	16	2.0	3.5	25	2	0	1.0	2.0
21	166	4	9	10.0	16.5	140	7	12	6.5	118	8	15	7.0	13.5	98	6	20	5.0	11.5	69	6	20	5.0	8.5	59	7	8	4.5	7.5	44	16	12	2.0	4.0	25	2	0	0.5	2.0
22	166	2	9	10.5	17.5	140	6	14	7.5	118	7	16	8.0	14.5	98	7	17	6.0	11.0	71	4	18	4.5	8.0	59	6	10	4.0	7.0	39	10	7	2.0	3.5	25	2	0	1.0	2.0
23	164	4	6	10.5	17.5	138	7	12	8.0	117	8	14	8.0	14.0	98	8	17	5.5	11.5	69	6	14	4.5	8.0	57	7	7	4.0	7.0	38	10	6	1.5	3.0	25	2	0	1.0	2.5

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2 N Long. 105.2 W

Month October 19 63

Time (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm					
00	157	4	2	120	185	132	4	5	90	135	109	6	6	85	150	92	8	7	80	150	64	9	8	50	85	54	5	6	35	70	38	28	8	20	40	25	0	2	10	20
01	157	4	2	120	190	132	4	4	100	150	108	7	4	90	160	92	7	8	80	135	63	10	7	50	90	55	4	8	35	70	36	22	7	15	90	25	0	2	10	20
02	157	3	2	130	195	131	5	4	90	140	107	8	5	100	170	89	10	5	95	170	63	10	8	50	95	54	5	7	40	70	34	12	5	20	30	25	0	2	10	25
03	157	4	2	125	190	132	4	6	90	140	107	10	7	110	185	92	8	8	95	170	61	10	6	55	95	53	8	5	45	75	36	8	6	25	40	25	0	2	10	25
04	157	5	2	125	195	128	11	4	90	125	105	14	10	120	210	86	12	7	115	190	60	9	9	55	100	53	6	6	55	85	34	14	3	25	50	25	0	2	10	25
05	155	6	4	130	195	125	12	3	80	110	97	16	8	120	200	74	12	9	95	165	61	8	14	60	100	49	10	6	55	75	36	4	4	20	35	25	0	2	05	20
06	155	3	4	125	190	122	11	4	100	140	84	22	12	120	190	56	15	6	30	40	47	10	8	50	70	45	10	4	40	70	36	8	2	35	65	25	2	2	10	25
07	153	4	4	120	180	120	8	8	80	110	74	31	7	50	70	54	22	4	20	40	30	19	7	50	70	35	10	6	30	50	34	6	2	25	40	25	4	2	15	25
08	153	3	4	125	185	117	12	7	85	120	73	31	10	40	65	54	17	2	20	35	25	8	4	30	45	27	8	6	20	35	34	4	4	30	50	27	3	4	10	25
09	153	6	2	125	180	116	16	4	80	110	73	10	10	35	45	54	12	4	15	30	23	8	2	20	35	25	5	4	25	40	30	3	2	20	40	25	5	1	20	35
10	153	4	2	100	160	120	12	8	80	115	79	26	12	90	130	56	12	6	15	30	23	1	2	15	30	23	8	2	20	35	30	2	2	20	40	27	2	2	15	30
11	155	4	4	90	140	119	18	6	90	120	84	11	15	70	100	56	12	4	30	45	23	6	3	15	25	25	10	7	25	35	32	2	4	25	40	27	4	2	20	35
12	155	3	2	100	150	120	6	7	80	120	85	10	16	80	125	58	7	4	30	50	23	0	2	15	30	25	6	6	35	45	34	4	6	30	45	29	4	4	20	35
13	155	4	2	90	140	124	8	8	80	125	89	16	16	90	140	62	11	7	35	50	23	5	2	15	30	27	12	6	50	70	36	8	4	35	60	29	2	2	20	30
14	157	6	5	100	160	126	8	9	90	140	95	13	16	110	160	62	15	10	50	70	27	6	4	30	45	36	7	9	45	75	39	9	5	25	40	29	4	3	20	30
15	157	5	4	100	160	126	9	8	90	140	95	14	21	105	180	60	16	7	40	70	34	9	11	35	70	43	4	10	45	75	44	8	8	35	50	29	2	4	20	30
16	157	6	4	110	170	126	12	8	105	155	99	13	15	90	160	69	12	15	50	95	40	12	12	40	80	47	6	8	45	70	46	17	6	35	60	27	4	2	20	35
17	157	6	4	105	170	128	10	7	85	130	103	11	12	80	140	90	14	15	60	110	54	6	18	40	75	55	6	8	45	70	46	15	4	25	50	25	2	1	15	25
18	159	7	6	110	180	128	10	4	90	140	105	11	9	70	135	81	9	8	70	125	59	8	7	35	65	55	8	7	40	70	42	17	6	20	40	25	2	1	10	25
19	158	6	3	115	185	130	10	4	80	125	105	12	6	80	130	90	6	9	60	125	62	7	5	40	70	53	9	3	40	75	41	14	9	20	40	25	2	2	15	25
20	157	7	2	115	180	130	9	4	80	115	107	12	7	80	150	90	8	8	70	145	61	9	6	50	75	55	7	6	40	70	39	15	7	20	35	25	2	1	10	25
21	157	6	2	115	185	130	10	2	80	130	107	11	5	75	145	92	6	8	70	130	63	6	9	40	75	53	8	4	40	65	38	17	6	30	45	25	2	1	10	20
22	157	4	2	120	185	131	8	3	80	130	109	8	9	80	135	91	9	6	75	130	61	10	9	50	80	53	8	4	40	70	38	20	6	20	40	25	0	2	10	20
23	157	4	0	125	185	131	5	4	90	135	109	5	8	80	150	92	7	6	85	150	63	9	10	50	75	53	10	3	40	75	40	20	8	20	45	25	0	2	10	20

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Hour (EST)	.013					.051					.160					.495					2.5					5					10					20																																																															
	F ₀₁	D ₁	V ₀₁	L ₀₁	F ₀₂	D ₂	V ₀₁	L ₀₁	F ₀₃	D ₃	V ₀₁	L ₀₁	F ₀₄	D ₄	V ₀₁	L ₀₁	F ₀₅	D ₅	V ₀₁	L ₀₁	F ₀₆	D ₆	V ₀₁	L ₀₁	F ₀₇	D ₇	V ₀₁	L ₀₁	F ₀₈	D ₈	V ₀₁	L ₀₁	F ₀₉	D ₉	V ₀₁	L ₀₁	F ₁₀	D ₁₀	V ₀₁	L ₀₁	F ₁₁	D ₁₁	V ₀₁	L ₀₁	F ₁₂	D ₁₂	V ₀₁	L ₀₁	F ₁₃	D ₁₃	V ₀₁	L ₀₁	F ₁₄	D ₁₄	V ₀₁	L ₀₁	F ₁₅	D ₁₅	V ₀₁	L ₀₁	F ₁₆	D ₁₆	V ₀₁	L ₀₁	F ₁₇	D ₁₇	V ₀₁	L ₀₁	F ₁₈	D ₁₈	V ₀₁	L ₀₁	F ₁₉	D ₁₉	V ₀₁	L ₀₁	F ₂₀	D ₂₀	V ₀₁	L ₀₁	F ₂₁	D ₂₁	V ₀₁	L ₀₁	F ₂₂	D ₂₂	V ₀₁	L ₀₁	F ₂₃	D ₂₃	V ₀₁	L ₀₁	F ₂₄	D ₂₄	V ₀₁	L ₀₁	F ₂₅	D ₂₅	V ₀₁
00	155	4	4	110	170	132	6	4	30	60	704	7	6	95	160	86	8	85	140	52	9	7	35	60	51	7	7	30	60	40	12	10	15	35	25	0	2	10	25																																																												
01	154	5	3	105	170	134	3	5	35	70	104	6	6	90	160	86	7	6	80	150	53	12	4	40	65	52	6	6	35	65	38	12	8	25	50	25	0	2	15	25																																																											
02	155	4	4	115	185	134	2	6	35	70	102	8	6	100	170	84	11	6	95	175	55	6	8	40	70	52	6	6	35	65	38	13	8	15	40	25	0	2	15	25																																																											
03	155	3	4	120	185	134	2	6	35	70	100	10	4	100	185	82	11	8	100	165	55	6	8	40	65	51	5	9	40	70	33	17	3	15	30	25	0	2	10	25																																																											
04	155	2	4	115	185	134	4	6	30	65	102	8	8	110	190	78	12	8	95	165	54	7	7	40	60	51	5	7	40	70	34	12	4	20	30	25	0	2	10	25																																																											
05	153	4	4	120	190	133	4	11	30	60	93	11	5	110	180	72	14	8	95	160	53	8	12	40	60	48	8	8	30	55	34	10	4	25	40	25	0	2	10	25																																																											
06	153	4	4	125	190	132	4	14	30	60	87	11	7	100	170	62	5	5	60	95	47	8	12	25	55	46	2	6	30	55	36	8	6	25	50	25	2	2	10	25																																																											
07	153	2	4	120	190	128	2	10	30	65	75	11	7	85	135	64	4	4	30	50	43	6	12	40	65	42	6	8	30	55	36	8	2	20	40	25	2	0	15	30																																																											
08	149	4	2	125	180	122	6	12	35	65	74	10	10	65	100	64	4	4	25	45	27	6	6	20	35	32	8	6	25	45	36	3	8	25	45	27	2	4	10	25																																																											
09	149	4	4	115	180	120	4	10	50	90	76	8	12	35	60	64	2	2	20	30	24	6	5	15	35	28	4	6	20	35	34	2	4	15	30	27	2	2	10	25																																																											
10	149	4	2	105	160	120	2	4	35	70	76	10	12	35	50	64	2	4	20	35	21	4	2	10	25	26	4	8	15	30	32	2	4	20	35	27	4	2	10	25																																																											
11	149	5	2	90	150	120	6	12	30	70	74	12	10	55	80	64	4	4	20	40	21	4	2	15	25	24	4	6	15	30	32	2	4	15	30	29	2	4	20	40																																																											
12	149	7	2	100	160	121	5	11	45	75	76	21	10	75	100	64	4	2	20	40	21	6	2	15	25	23	5	5	20	30	32	2	2	20	35	29	2	2	15	30																																																											
13	150	3	3	100	160	122	2	10	40	75	74	16	12	80	115	64	4	2	20	40	21	6	2	20	35	24	4	8	10	20	32	6	2	20	40	29	2	2	10	25																																																											
14	149	6	2	105	165	121	3	9	40	75	76	10	12	90	140	64	4	2	30	50	23	11	4	25	40	26	7	6	20	30	37	7	5	25	45	29	2	2	15	30																																																											
15	149	6	4	120	180	120	4	10	40	80	79	13	12	85	145	64	10	2	30	50	27	18	8	20	30	32	9	9	15	30	40	8	4	30	50	27	2	2	15	30																																																											
16	149	6	4	115	180	122	5	8	40	80	84	19	6	75	150	64	14	8	60	110	35	11	6	15	30	40	6	4	25	50	41	7	5	25	45	25	0	0	10	20																																																											
17	151	6	3	110	180	124	4	4	35	70	92	14	8	95	170	64	14	10	70	135	47	10	10	40	60	44	8	4	25	45	40	8	4	35	55	25	0	0	10	20																																																											
18	153	4	4	120	180	128	3	5	40	80	94	13	7	80	150	78	14	7	60	110	51	14	8	35	65	46	9	4	25	50	35	11	5	10	20	25	0	2	10	20																																																											
19	153	6	4	120	190	132	3	8	30	70	99	10	8	85	150	82	10	10	80	130	53	13	7	45	65	48	6	6	25	50	34	13	4	20	40	25	0	2	10	20																																																											
20	153	6	4	120	190	132	5	5	30	70	100	6	7	85	150	84	10	6	85	130	55	6	9	45	75	50	4	7	25	55	33	8	3	20	30	25	0	2	10	20																																																											
21	153	6	4	125	190	132	6	5	30	70	102	7	6	90	155	84	9	5	65	120	54	7	7	45	75	48	8	4	40	65	33	12	3	20	35	25	0	2	15	25																																																											
22	153	6	4	120	190	132	7	4	30	70	104	10	8	80	150	84	8	4	70	130	55	10	8	35	60	50	9	8	35	60	36	10	6	15	35	25	0	2	10	25																																																											
23	153	6	2	110	170	132	5	4	30	70	104	7	7	90	160	84	9	4	75	130	55	8	8	45	65	52	6	8	40	70	40	10	8	15	35	25	0	2	10	25																																																											

F₀₁ = median value of effective antenna noise in db above ktb

D₁ = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V₀₁ = median deviation of average voltage in db below mean power

L₀₁ = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado

Lat. 40.1 N Long. 105.1 W

Month September 19 63

Hour (ST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm			
00	164	6	6	9.5	140	8.5	140	117	11	7	11.5	180	101	8	12	4.5	9.5	59	6	11	4.5	9.5	43	12	6	3.5	6.5	25	2	2	1.5	4.0			
01	164	6	6	11.0	139	8.5	140	116	11	6	9.0	150	101	10	14	6.5	12.5	72	4	6	6.0	10.0	43	9	9	3.5	6.5	25	2	2	2.0	4.0			
02	163	5	7	10.5	138	8.5	140	116	10	6	10.5	165	99	8	11	6.0	11.0	72	4	6	6.0	10.5	41	11	9	3.5	6.0	25	2	2	2.0	4.0			
03	162	10	7	10.5	170	10.0	16.0	116	10	8	10.0	160	100	7	12	8.0	12.5	72	6	6	6.0	10.0	41	15	10	3.5	5.0	25	4	2	1.5	2.0			
04	162	5	7	11.0	175	9.5	15.0	115	9	13	10.0	155	97	8	13	8.0	15.0	71	5	7	6.0	10.0	43	13	11	3.0	5.0	25	4	2	3.0	4.0			
05	161	9	7	11.0	170	10.0	13.0	110	8	20	12.0	200	79	14	14	7.5	15.0	68	7	9	7.0	11.5	49	12	10	4.0	3.5	25	2	2	3.0	4.5			
06	160	6	6	11.0	190	10.0	15.0	108	13	8	10.5	170	78	18	15	11.0	20.0	60	8	13	5.0	10.5	49	9	7	4.0	3.0	25	4	2	2.5	3.5			
07	160	6	6	11.5	180	9.5	14.5	108	12	8	13.0	210	77	17	12	9.5	15.0	58	9	13	6.0	11.0	48	7	11	3.5	7.0	25	6	2	2.5	3.0			
08	160			13.5	180	7.5	12.5	104	8	24	13.5	195	77	16	11	6.0	12.0	57	16	9	5.0	11.0	43	6	5	4.0	6.0	25	3	2	2.0	3.0			
09	156	8	2	12.0	190	10.5	14.0	89	23	9	8.5	150	74	18	9	4.5	10.0	56	10	13	5.0	10.0	42	7	5	4.0	6.0	25	2	2	2.0	3.5			
10	158	4	4	11.0	200	10.0	15.0	99	10	20	10.0	150	77	10	12	9.5	14.0	58	8	10	4.5	10.0	39	6	4	4.0	8.0	27	5	4					
11	161	7	5	11.5	180	10.0	15.0	106	15	26	13.0	190	77	20	14	11.5	16.5	47	9	10	5.5	12.0	41	5	7	2.0	5.0	27	7	2	5.5	8.0			
12	164	5	10	11.0	175	10.5	15.0	114	12	32	11.5	195	87	18	22	11.5	18.0	58	9	12	4.5	9.0	43	10	7	3.0	5.5	27	9	2	5.0	7.5			
13	166	4	8	8.0	150	139	7	14	10.0	14.5	115	14	32	135	99	8	31	10.5	80	62	5	14	4.0	10.0	45	9	9	4.5	7.0	41	9	10	4.5	10.0	
14	168	5	10	7.5	130	141	8	18	8.0	14.0	120	12	34	9.0	150	99	14	33	8.5	150	64	8	14	4.5	11.0	47	12	9	4.0	6.5	44	10	7	5.0	8.0
15	170	4	13	9.5	150	141	8	17	10.5	16.5	120	11	27	8.0	150	101	10	35	10.0	175	62	14	13	5.0	11.5	52	11	13	5.0	9.0	31	6	4	4.0	6.0
16	170	3	14	9.0	150	141	8	16	10.0	15.0	120	12	36	11.0	170	99	14	32	8.0	135	62	14	14	6.0	11.0	55	13	13	5.0	10.0	55	8	5	2.5	6.0
17	170	2	15	8.5	145	141	6	17	9.5	15.0	121	9	27	10.5	160	95	12	24	7.0	140	65	9	8	5.5	11.5	59	7	18	3.0	7.5	57	10	8	3.5	6.5
18	170	2	12	10.5	175	142	9	13	9.0	16.0	121	11	21	11.0	170	99	16	20	8.5	140	68	11	9	3.5	7.5	63	5	10	4.5	7.5	57	13	6	6.5	9.5
19	168	6	10	10.5	175	141	11	17	9.5	14.0	121	12	15	9.5	170	101	16	14	6.0	120	72	10	6	4.5	8.5	67	4	16	4.5	9.5	56	10	9	3.0	8.0
20	166	8	8	11.0	175	141	11	11	13.0	200	120	12	16	9.0	160	101	12	16	6.5	115	76	4	10	5.0	9.0	64	5	12	5.0	9.5	53	12	14	3.0	7.5
21	166	5	11	10.0	175	140	9	13	9.5	16.5	120	12	16	10.0	170	101	10	16	7.0	115	74	6	8	4.5	100	63	4	12	4.5	8.5	49	8	11	3.5	6.0
22	166	5	8	10.0	170	139	10	13	9.0	16.0	120	10	16	10.0	165	99	10	14	6.0	105	72	6	6	5.0	100	62	3	13	5.0	700	44	13	5	3.5	6.0
23	164	6	7	11.0	170	137	10	8	10.0	140	118	10	9	10.0	150	101	8	16	6.0	100	72	6	6	3.5	95	61	2	14	5.5	100	43	7	9	4.0	6.0

Fom = median value of effective antenno noise in db above ktb
 Du = ratio of upper decile to median in db
 Dz = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month October 19 63

Time (MST)	Frequency (Mc)																																								
	.013				.051				.160				.495				2.5				5				10				20												
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm					
00	160	5	3	13.5	20.0	137	7	6	11.0	16.5	113	8	6	11.0	17.5	96	5	11	9.5	17.5	61	10	6	5.0	9.0	54	5	8	6.0	10.0	42	9	10	6.0	8.5	22	4	0	1.5	3.0	
01	160	5	2	14.0	21.0	137	7	7	11.0	17.5	111	8	5	9.5	17.0	93	8	7	10.0	15.0	61	6	6	6.0	10.0	54	5	7	5.0	8.5	38	13	8	5.0	7.5	22	6	0	1.5	3.5	
02	160	4	2	13.5	20.5	135	9	5	11.0	17.5	110	7	3	11.0	18.5	94	7	10	8.0	16.5	63	6	6	10	6.0	9.5	53	4	8	5.5	10.0	35	12	4	4.0	6.0	22	4	2	3.0	4.5
03	160	5	4	14.0	21.5	135	10	6	11.5	18.5	110	7	7	11.0	18.5	92	7	9	8.5	16.5	59	10	8	6.0	10.0	53	4	8	6.0	10.5	34	16	5	4.0	8.0	22	5	2	2.0	3.5	
04	160	5	4	14.5	22.5	134	9	7	12.0	17.0	109	11	11	14.5	20.0	91	7	11	9.0	18.0	57	10	8	5.5	10.0	51	9	8	6.0	10.5	36	10	6	4.5	7.0	22	4	2	2.0	3.5	
05	158	5	4	14.5	21.0	132	7	8	13.0	17.5	99	16	12	13.5	21.5	72	17	5	11.0	19.0	45	9	7	7.0	10.5	49	6	8	5.5	10.0	36	6	4	5.5	8.0	22	4	0	2.0	3.5	
06	156	6	2	15.0	22.5	129	10	10	12.0	16.5	90	10	7	14.0	21.0	67	11	5	7.5	11.0	49	6	8	5.0	7.5	43	8	6	5.0	8.5	36	6	2	5.0	7.0	24	4	2	2.5	5.0	
07	156	4	4	14.0	20.0	124	8	10	12.5	17.0	89	20	9	14.5	23.0	66	8	4	3.5	8.0	45	4	6	2.0	4.5	37	11	5	5.5	7.5	36	8	4	3.5	7.5	24	4	2	2.0	3.5	
08	156	3	4	14.0	20.5	122	12	8	14.0	18.0	85	21	4	14.5	16.0	66	9	3	7.5	11.0	41	6	3	3.5	5.5	37	6	8	4.0	7.0	34	4	4	5.5	8.0	24	5	2	4.5	6.5	
09	156	4	4	13.5	20.0	118	8	11	11.0	16.0	85	20	4	9.0	11.5	66	15	4	4.0	6.0	45	4	5	3.0	5.0	37	6	8	4.0	5.0	32	4	3	3.0	5.5	24	8	1	4.0	7.0	
10	156	6	4	13.5	18.5	123	8	11	11.0	16.0	87	24	6	11.0	14.0	64	15	2	4.0	6.5	45	4	6	3.0	4.5	35	6	6	4.5	5.0	32	5	4	4.0	7.5	26	7	2	4.0	7.0	
11	158	4	4	14.0	18.5	125	8	11	12.5	18.0	91	19	10	10.0	13.0	66	10	2	4.0	7.0	45	4	5	3.5	7.5	37	5	7	4.0	6.5	34	5	5	6.5	10.0	26	10	2	5.0	9.0	
12	158	4	2	13.0	18.0	127	11	10	12.0	18.0	93	16	12	11.0	16.0	66	4	4	5.0	7.5	45	4	4	4.0	6.0	37	8	8	4.5	7.5	36	6	4	6.5	9.5	28	6	4	5.0	7.5	
13	159	6	3	12.0	18.0	126	14	7	11.5	16.0	94	21	10	12.0	20.0	66	24	4	6.0	8.5	47	4	6	3.0	5.5	39	4	8	3.5	6.0	38	5	4	6.0	9.5	29	7	3	3.0	6.0	
14	160	6	4	13.0	18.0	132	7	11	10.5	18.0	97	20	15	12.0	18.0	68	22	4	5.5	8.0	47	3	6	2.0	4.5	41	4	8	5.5	8.5	40	8	4	5.0	7.5	28	10	3	4.5	7.5	
15	160	6	4	13.0	19.0	131	8	11	11.5	17.0	99	20	20	12.5	19.0	69	24	7	6.0	11.0	47	3	6	4.0	7.0	41	6	6	8.0	10.0	42	8	4	5.0	7.0	28	6	2	4.0	6.0	
16	160	6	6	13.5	19.5	133	11	12	12.0	17.5	104	18	21	10.5	15.0	72	22	6	7.0	9.0	49	6	6	4.5	7.0	45	8	6	7.0	9.5	46	6	6	5.5	8.5	26	4	2	3.5	5.5	
17	160	6	6	13.0	19.0	133	10	9	9.5	16.0	108	11	13	8.5	14.0	88	10	12	6.0	11.0	57	13	4	6.0	9.5	52	7	6	5.5	9.0	46	9	2	4.0	7.5	24	4	2	2.5	4.5	
18	161	7	7	13.0	19.0	135	11	10	9.5	16.0	110	13	9	10.0	16.0	92	8	10	7.0	12.0	60	9	9	7.5	11.0	55	8	9	5.0	9.0	44	6	8	4.0	8.0	24	2	2	3.0	4.5	
19	162	6	6	14.0	21.0	131	12	6	9.5	16.0	109	14	6	9.5	15.0	93	7	7	7.5	13.5	60	11	7	6.0	11.5	53	10	9	5.0	10.0	42	17	8	4.5	7.0	24	2	2	2.0	4.0	
20	162	5	5	14.0	20.0	133	12	4	9.5	15.5	110	11	7	8.0	14.0	95	5	9	7.5	13.0	61	10	11	6.5	10.0	53	7	5	6.0	11.0	42	14	10	3.0	5.0	24	2	2	3.0	4.5	
21	162	4	6	14.0	20.0	135	10	5	9.5	17.0	111	8	6	10.5	17.0	94	6	8	8.5	15.0	61	10	8	6.0	9.0	53	4	4	6.0	11.0	42	10	8	4.5	9.0	24	2	2	2.0	4.5	
22	162	3	5	13.0	22.0	137	6	6	10.0	16.5	111	10	6	10.5	17.0	96	4	12	8.0	15.0	60	11	5	5.5	9.0	53	7	6	5.5	11.0	40	14	4	4.0	7.0	24	2	2	3.0	5.0	
23	160	5	2	14.0	20.0	137	6	6	10.0	15.5	112	7	5	11.0	18.5	96	4	10	8.5	15.5	61	10	6	5.0	9.0	55	4	9	6.0	11.0	42	20	6	5.0	7.0	24	2	2	3.5	5.0	

Fom = median value of effective antenna noise in db above ktb

Df = ratio of upper decile to median in db

Vdm = ratio of median to lower decile in db

Ldm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado

Lat. 40.1 N Long. 105.1 W

Month November 19 63

Hour (EST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm	Fam	D _u	D _l	Vdm				
00	156	4	4	12.0	19.0	135	4	4	5.5	9.5	109	8	10	8	9.0	15.0	89	10	8	8	4.0	7.0	53	6	10	8	10	3.5	6.0	25	2	1	2.0	4.0						
01	154	6	6	11.0	17.0	135	3	3	4.5	7.0	107	10	8	8	7.0	13.5	89	10	8	8	4.5	9.0	53	8	8	5.0	9.5	37	14	6	4.0	7.0	25	2	1.5	4.0				
02	156	4	4	11.5	17.5	135	2	2	5.5	7.5	107	11	9	9	10.0	16.0	87	10	8	8	6.0	9.0	54	5	9	4.0	8.5	37	14	8	3.0	5.5	25	2	1	2.5	4.0			
03	154	4	4	12.0	19.0	135	3	3	6.0	9.0	105	10	6	6	10.0	17.5	85	12	10	11.0	11.0	180	5	5	7	6.0	11.0	36	10	5	3.0	6.0	25	2	2	2.0	4.0			
04	154	4	4	13.0	19.0	135	2	2	6.0	9.5	102	11	9	11.0	16.5	83	12	10	10.5	9.0	9.0	52	7	5	6.0	11.0	33	10	2	4.0	7.0	25	2	2	2.0	4.5				
05	152	4	2	14.0	19.5	132	5	11	4.0	8.0	95	13	8	14.0	21.0	75	12	10	9.5	13.5	51	11	6	8.5	10.0	49	10	5	6.0	10.0	35	12	4	3.5	8.0	25	2	1	2.0	4.5
06	152	2	4	13.0	19.0	129	6	8	5.0	9.0	85	13	5	2.5	5.0	67	4	4	3.0	4.5	47	11	6	6.5	10.0	47	6	5	4.0	8.0	39	7	6	3.5	5.5	26	2	1	2.0	4.0
07	152	4	2	14.0	20.0	127	0	0	3.0	6.0	83	11	5	7.0	10.0	63	7	2	1.5	4.0	44	4	4	8.0	12.0	45	4	8	4.0	8.0	37	6	3	3.5	7.0	27	4	0	2.0	5.0
08	150	4	4	11.0	18.5	123	0	0	3.0	7.0	81	14	3	3.5	6.0	64	3	3	3.0	5.0	42	4	6	2.5	5.0	39	2	6	3.0	5.0	37	4	4	3.5	7.0	27	2	2	2.0	5.0
09	150	5	4	12.0	18.0	121	0	0	4.5	7.5	81	16	3	3.0	5.0	65	2	2	2.0	4.5	43	3	9	3.0	5.5	37	2	6	3.0	5.0	35	4	4	6.0	10.5	27	4	2	2.5	4.5
10	152	3	6	9.5	11.0	122	0	0	2.5	6.0	81	14	2	2.5	5.0	65	2	4	2.0	3.0	44	4	7	3.0	5.0	37	4	6	2.5	5.0	33	4	4	3.5	7.0	29	4	2	3.5	6.5
11	150	5	2	11.0	16.0	123	0	0	3.0	6.5	81	10	4	2.5	5.0	67	2	4	2.0	4.0	44	2	8	3.0	5.0	37	2	6	2.0	5.0	33	4	4	3.5	6.0	29	2	2	2.5	5.0
12	150	6	2	11.0	16.5	119	8	8	4.0	8.0	81	10	2	3.5	5.0	67	2	5	1.5	3.0	44	2	5	3.0	5.0	37	3	6	3.0	5.5	33	4	2	5.0	7.5	31	2	3	2.0	4.5
13	152	4	2	10.0	16.0	123	4	10	3.5	7.0	81	10	2	3.0	5.0	65	4	4	2.5	4.0	44	3	7	3.5	6.0	37	6	6	2.5	5.0	35	5	4	6.0	9.5	29	6	2	3.0	5.0
14	152	2	4	11.0	17.0	117	10	4	4.0	8.0	83	8	4	3.0	5.0	66	5	5	2.0	4.0	44	3	6	4.0	7.0	39	7	6	2.5	5.0	37	6	4	6.0	10.0	29	6	2	2.0	5.0
15	150	6	4	11.5	18.0	119	12	6	5.0	9.0	83	12	4	3.5	6.0	67	4	4	3.0	4.0	44	2	3	2.5	6.0	39	7	5	4.0	7.0	39	6	2	5.0	9.0	27	2	2	3.0	5.5
16	150	6	6	11.5	17.5	124	0	0	4.0	8.0	90	17	5	6.0	10.0	71	13	6	3.0	5.0	46	5	6	4.0	7.0	45	4	5	4.0	8.0	41	7	3	5.5	9.5	27	0	2	1.5	4.0
17	151	9	3	11.0	17.5	127	10	4	3.5	8.0	98	15	7	7.5	12.0	81	14	12	6.0	10.0	52	10	9	6.0	10.5	49	4	6	5.0	8.0	43	4	8	5.0	10.0	25	2	0	2.0	4.0
18	154	6	7	13.0	20.0	131	6	8	4.0	6.5	101	17	8	9.0	13.5	83	16	10	6.5	11.0	54	11	8	7.5	12.0	49	6	4	4.5	9.0	37	11	6	3.5	6.5	25	4	0	1.5	4.0
19	154	4	4	12.5	19.0	133	6	5	4.5	8.0	101	16	6	8.5	14.5	82	15	8	10.0	13.5	54	10	7	6.0	10.0	51	4	6	5.5	10.0	37	12	6	2.5	5.0	25	2	0	2.0	5.0
20	153	7	3	13.5	20.0	134	7	5	6.0	10.0	104	13	9	9.0	17.0	87	10	6	8.5	13.5	52	13	5	6.5	10.5	51	6	4	4.0	7.5	35	8	4	3.0	6.0	25	2	0	2.0	4.0
21	152	8	2	14.0	20.0	131	10	2	6.5	11.5	105	12	6	8.0	14.0	87	8	6	8.5	14.5	54	9	6	6.5	10.0	53	10	6	4.5	9.0	37	9	5	3.0	6.0	25	2	0	2.0	4.0
22	154	8	4	11.0	17.5	133	6	4	6.0	9.0	107	10	6	10.0	16.0	87	10	4	8.5	16.0	54	10	6	4.0	9.0	53	6	6	5.5	10.0	37	6	4	3.0	6.0	25	3	2	2.0	4.0
23	153	7	1	11.5	18.0	135	6	6	5.5	10.5	109	8	6	7.0	15.5	88	9	5	7.5	12.5	54	11	7	5.5	10.0	53	6	8	4.0	9.0	39	10	7	3.0	7.0	25	2	0	2.5	4.5

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant. 120.0 W Lat. 80.0 S Long. 120.0 W

Month September 19 63

Hour (LST)	Frequency (Mc)																								
	.051			.113			.246			.545			2.5			5			10			20			
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	
00	87			71			55	8	6	37	10	12	36	10	11				32	7	4		24	2	2
01	87			69			54			39	11	12	34	9	10				30	6	4		22	4	2
02	87			69			55			41			32	17	9				32	9	6		22	4	0
03	87			69			54			43			32	16	8				32	8	9		22	4	2
04	85			69			56			41	10	11	31	16	11				29	10	7		21	5	3
05	87			69			55	4	4	39	18	12	30	15	7				28	9	6		22	5	6
06	85			71			53			40	12	15	29	17	9				28	10	7		21	5	5
07	85			69			53	6	4	39	14	12	30	20	8				29	11	9		21	5	5
08	85			69			53	4	4	37			28	24	7				28	10	12		20	4	2
09	85			70			53			35	14	10	32	18	12				28	12	8		22	6	4
10	85			71			53	10	4	33			30	17	8				28	8	8		22	3	5
11	85			69			55	6	6	37	15	12	30	18	10				30	10	11		22	4	2
12	85			69			51	8	2	37	11	12	34	12	15				30	11	6		22	4	2
13	85			69			54	7	5	35	15	10	32	16	7				32	7	4		22	3	3
14	83			69			53	8	6	33	20	8	32	10	11				32	6	8		22	2	2
15	87			70			57	6	4	35	10	10	34	9	8				34	8	6		22	2	2
16	87			69			55	6	2	37	13	14	35	5	13				36	8	7		22	2	3
17	87			70			55			38	12	13	34	6	10				34	7	10		22	4	2
18	85			69			53			37	15	10	39	7	14				34	9	6		22	6	2
19	85			69			53			39			37	10	6				34	5	6		22	6	2
20	87			69			53			37	14	10	37	11	8				34	8	10		22	5	4
21	85			69			55			39			43						32	9	4		24	3	4
22	87			69			53			38	13	13	39	9	13				32	9	4		24	5	2
23	87			69			54			38			35	9	11				34	4	8		24	1	5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month October

19 63

F ₅₀	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}	F _{om} *	D _u	V _{dm} L _{dm}			
00	121			71	108		92			47	10	14			30	8	12			27	8	10			27	4	4
01	121			68	108		92			45	9	15			30	10	9			29	14	8			26	26	3
02	113			71	103		89			46	11	15			29	14	7			27	10	10			27	11	4
03	117			68	108		91			47	10	12			30	15	8			27	11	8			25	8	2
04	121			67	106		91			44					32	8	14			24	8	8			25	14	4
05	121			67	107		92			49	5	19			30	11	10			23	11	10			25	8	4
06	121			69	106		92			47	9	16			29	11	7			23	6	8			25	7	4
07	121			68	106		92			47	11	14			30	9	9			23	5	4			25	6	2
08	121			69	104		94			47	8	16			26					23	4	3			25	6	2
09	117			71	106		87			47	10	14			30	4	10			23	5	2			25	7	2
10	121			71	102		86			47	9	17			28	8	6			23	7	9			27	16	5
11	115			72	106		92			37					33					25	7	4			27	10	4
12	109			73	106		95			41	10	18			30					25	9	6			27	7	4
13	115			72	106		92			45	12	23			28	11	8			26	6	5			27	4	4
14	115			69	102		88			43	16	12			28	10	6			27	4	8			27	8	4
15	115			68	105		94			42					33					27	6	8			25	8	3
16	114			69	105		88			40					32					27	8	6			25	7	6
17	109			67	102		84			43	10	14			30	8	7			27	8	8			25	6	4
18	115			68	102		87			43	9	14			31	11	5			27	9	8			25	6	4
19	116			67	105		91			43	15	10			30	10	9			29					25	4	3
20	117			73	102		89			41	17	14			34	8	12			27	9	7			25	5	4
21	115			73	105		91			44	16	21			31	12	10			24	11	4			25	8	4
22	116			71	108		90			47					36	9	12			27	11	6			25	11	2
23	121			73	105		90			43					28	19	9			25	15	4			25	12	2

F_{om} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia

Lat. 30.6 S Long. 130.4 E

Month September 19 63

Hour (LST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm	Fam	D _f	Vdm											
00	154	4	2	6.0	10.0	127	5	3	9.5	15.5	105	5	5	7.0	13.0	87	7	7	7.5	14.0	57	9	6	6.5	14.0	54	4	4	7	5.0	9.0	38	8	5	3.0	6.0	22	2	0	3.0	4.5
01	156	2	2	7.0	10.5	127	5	2	8.0	14.0	105	4	5	7.0	12.0	86	6	4	7.0	12.5	57	8	6	7.5	13.0	53	5	5	4	5.0	9.0	37	5	5	4.0	8.0	22	0	0		
02	156	2	2	6.5	11.5	129	2	4	7.0	12.0	105	4	4	6.0	11.0	86	4	6	5.0	9.5	57	8	6	5.0	10.5	52	5	5	4	4.5	9.0	35	5	6	4.5	8.5	22	0	0		
03	154	4	0	7.0	12.0	129	2	3	6.5	11.0	103	5	4	6.0	11.0	84	4	4	5.0	11.0	57	6	6	6.0	10.5	52	5	5	5	4.5	8.5	38	5	4	3.5	6.5	22	0	0		
04	155	3	2	7.5	13.0	127	4	1	7.5	11.5	102	4	3	7.0	12.0	82	7	3	5.5	10.5	55	6	4	5.0	10.0	50	7	1	4.5	8.5	37	6	2	4.0	7.0	22	0	0			
05	154	3	2	8.0	13.0	126	4	3	7.0	12.5	99	4	5	6.5	11.5	77	7	4	6.0	11.0	54	3	5	5.0	9.5	50	5	3	5.0	8.5	41	10	2	3.0	5.0	22	0	0			
06	154	4	2	8.0	13.5	121	4	5	7.0	12.5	83	10	9	6.5	11.0	50	23	8			49	6	4	5.0	9.0	48	4	6	5.0	9.0	53	16	6	3.0	6.0	22	0	0			
07	152	2	4	7.5	14.0	115	4	4	7.0	12.5	67	14	2	4.0	6.5	24	24	2	4.0	6.5	29	7	4	5.5	10.5	34	6	4	4.5	9.5	49	11	9	3.0	6.0	22	2	0			
08	150	6	2	9.0	15.0	109	14	4	9.0	14.5	65	18	8	8.0	14.0	43	18	1	4.0	6.0	23	10	2	6.0	10.0	22	12	4	5.5	9.0	34	10	7	3.0	6.5	22	2	0	3.5	5.5	
09	152	4	4	10.5	16.5	109	14	8	12.0	19.0	69	18	12	8.0	12.0	49	17	7	10.0	15.5	24			8.0	12.0	22	10	6	7.0	8.5	27	6	2	3.0	5.0	22	2	0			
10	152	6	4	11.5	18.5	111	14	6	13.0	20.0	68	28	9	6.5	11.5	50	22	8	6.0	8.0	22			4.5	7.5	22	6	8	7.5	15.0	27	4	4	4.5	6.5	22	2	2	2.5	5.0	
11	152	4	4	12.0	19.0	111	14	6	13.5	22.0	71	20	10	11.5	17.0	46	27	4	4.5	6.0	23			6.0	9.5	22	5	8	3.5	9.0	25	6	2	4.0	7.0	22	2	2	3.5	6.0	
12	152	4	5	12.0	20.0	116	7	11	13.0	22.0	73	20	14	9.5	16.0	52	21	10	2.5	5.5	23			6.0	9.0	20	12	6	7.0	11.5	27	6	4	3.5	6.0	22	3	0	3.0	5.0	
13	152	3	6	12.5	20.0	117	6	8	13.0	20.0	74	28	10	14.0	20.0	52			18.0	20.5	23			8.0	12.0	23	11	9	5.0	9.0	29	8	5	3.0	5.5	22	4	1			
14	150	9	2	12.0	19.0	113	13	3	12.0	20.0	73	22	11	7.5	12.0	46					24					25	12	10	8.0	12.0	36	6	11	4.0	6.0	24	3	2			
15	152	2	2	9.5	17.0	117	3	8	9.0	15.0	76	14	12	10.5	16.0	44	15	2			23			5.5	9.0	26	8	10	10.8	15.0	41	10	12	4.0	7.0	24	0	2	2.5	4.0	
16	152	4	2	9.5	15.5	115	8	6	9.0	16.0	77	20	13	9.5	16.0	48	25	6	7.5	22.5	29	8	8	7.0	12.0	27	17	5	7.5	13.0	45	11	10	5.0	8.0	24	0	2	2.5	4.0	
17	152	4	2	9.0	15.0	119	9	10	12.0	19.5	93	10	16	12.0	20.5	66	12	10	7.0	14.5	37	8	14	8.5	15.0	42	10	6	7.0	12.0	51	8	11	5.0	8.5	24	0	2	2.5	4.5	
18	152	5	4	9.0	15.0	121	7	9	10.5	19.0	99	8	11	10.5	19.5	78	10	8	9.0	19.0	53	6	10	6.5	12.5	52	8	6	6.5	12.5	47	6	7	4.0	8.5	24	0	2	2.5	4.0	
19	154	4	3	8.0	16.0	124	8	7	10.5	19.0	99	10	7	10.0	19.0	86	7	9	7.5	14.5	57	8	6	7.0	14.0	54	6	4	6.5	12.0	47	8	6	4.5	9.0	24	1	2			
20	154	6	2	9.0	15.0	125	8	4	9.5	17.5	102	9	7	8.0	15.0	86	9	6	7.0	14.5	58	11	6	7.5	15.0	54	7	6	6.0	12.0	45	8	4	4.5	8.0	24	0	2			
21	155	4	3	8.0	13.5	127	7	6	9.0	15.5	103	8	4	7.5	14.0	87	8	4	7.0	14.0	59	8	6	6.0	12.0	54	8	6	6.0	10.0	42	8	3	2.5	6.0	24	0	0			
22	154	5	2	8.0	13.0	127	5	4	10.0	17.0	105	7	4	8.0	14.5	88	6	6	7.0	14.0	59	5	6	6.5	12.5	54	6	6	6.0	12.0	41	6	5	3.0	6.0	24	0	1			
23	154	3	2	8.0	13.0	127	6	4	9.0	16.5	105	7	5	8.0	15.0	89	6	6	7.5	14.0	61	4	9	7.0	13.5	55	7	7	6.0	12.0	39	6	6	3.0	6.0	24	0	2	2.5	4.0	

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_f = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cooks, Australia

Lat. 30.6 S Long. 130.4 E

Month October

19 63

Hour (ST)	Frequency (Mc)																																		
	.013				.160				.495				2.5				5				10				20										
	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}			
00	154	4	2	6.5	10.5	12.5	7	4	10.5	16.5	84	11	4	8.0	15.5	58	7	6	6.5	13.5	54	8	5	5.5	10.0	39	4	2	4.0	7.0	21	3	0	3.5	5.0
01	156	2	2	6.0	11.0	12.7	5	4	8.0	15.0	84	7	4	7.5	13.5	58	9	7	8.5	13.5	54	10	4	6.0	9.0	39	4	2	4.0	6.0	21	2	0		
02	156	2	2	7.0	11.5	12.9	2	4	8.0	13.5	84	7	6	7.0	14.0	57	8	4	6.0	9.0	54	9	4	4.0	7.5	37	5	2	4.0	6.0	21	1	0		
03	156	2	2	7.0	12.0	12.9	3	4	9.5	15.0	101	7	5	7.0	12.5	58	7	6	6.5	10.0	54	10	4	4.5	8.0	35	9	3	3.5	6.0	21	0	0		
04	156	2	4	9.0	14.0	12.7	4	4	10.0	16.0	99	7	6	8.0	14.0	82	7	5	7.0	11.0	54	5	4	4.5	7.5	35	7	4	3.0	6.0	21	0	0		
05	156	2	4	9.5	15.5	12.5	6	4	9.0	15.5	93	13	7	9.0	15.5	64	12	8	3.5	6.0	56	6	4	6.5	11.5	52	5	2	4.5	8.0	21	1	0	2.5	4.0
06	154	2	4	10.0	16.0	11.7	8	4	8.5	14.5	75	18	9	7.40	23.5	44	26	4	3.5	5.0	44	9	9	9.0	15.5	44	5	5	4.0	8.0	21	2	0		
07	150	2	4	10.0	16.0	10.9	8	2	7.5	14.0	70	23	13	17.0	30.0	42	25	2	6.0	8.0	28	19	7	9.0	12.0	30	6	8	11.5	16.5	33	6	2	4.0	6.0
08	150	2	2	10.5	16.5	10.8	10	7	13.0	19.0	67	28	8	5.0	6.0	42	26	2	3.5	4.5	22	22	2	6.0	7.0	22	15	4	8.0	14.0	29	7	2	5.0	7.0
09	150	3	2	11.5	19.0	10.7	16	4	14.0	22.0	67	36	10	8.0	10.5	42	24	2	4.0	5.5	22	16	2	4.5	6.0	22	18	6	12.0	17.0	27	6	2	4.0	7.0
10	150	4	2	12.0	19.0	10.9	18	6	16.0	23.0	63	40	6	5.5	8.0	42	23	2	3.0	5.0	22	16	2	5.0	7.0	24	10	6	6.0	9.5	25	8	0	3.0	5.0
11	149	7	3	13.5	19.5	11.1	18	5	15.0	24.0	66	32	7	9.5	13.0	41	24	1	3.0	4.0	24	16	4	8.0	13.5	20	9	6	6.0	9.0	25	8	2	3.0	5.0
12	150	7	4	13.5	20.5	11.3	18	8	14.0	22.5	70	30	11	9.5	13.0	44	22	4	4.0	5.5	22	14	2	9.5	15.0	19	13	5	6.5	11.5	25	10	2	4.0	6.0
13	150	8	3	12.5	20.0	11.5	16	6	13.5	21.0	73	24	12	9.0	10.0	42					22	16	2	3.5	5.0	22	10	6	3.5	7.0	28	11	3	4.0	7.0
14	150			12.5	20.0	11.3			12.5	20.0	83	30	18	11.0	16.5	50	28	10	11.0	21.5	20			8.0	5.0	22			3.5	7.0	37	6	10	5.5	8.0
15	153	9	5	10.5	18.5	11.6	15	8	10.0	19.0	89	21	25	10.0	17.0	50	31	10	6.5	10.5	24	30	4	5.0	7.0	28	17	10	6.5	11.0	37	11	8	3.5	6.5
16	154	5	5	10.0	17.0	11.7	14	11	10.0	16.5	89	21	29	11.0	17.0	52	26	12	4.5	12.0	26	25	6	4.0	7.0	34	17	10	6.0	11.0	41	11	6	4.0	8.0
17	153	4	5	8.0	14.0	11.6	15	11	9.0	15.5	86	21	18	11.0	17.5	56	24	10	5.0	8.0	39	17	15	9.5	16.0	43	13	7	5.5	10.5	43	7	4	5.0	8.5
18	152	6	4	10.0	16.0	11.6	16	7	11.0	18.0	94	16	13	11.5	20.5	77	16	13	9.5	16.0	52	12	13	5.5	13.0	50	1	7	4.5	9.5	43	6	4	5.0	9.0
19	154	4	4	10.5	17.0	12.1	11	6	12.0	20.0	99	12	11	10.5	18.0	85	13	13	9.5	17.0	58	14	10	5.5	12.0	55	7	8	6.0	12.0	43	10	4	4.0	7.5
20	154	5	3	10.0	15.5	12.3	14	6	12.0	19.0	101	10	11	9.0	16.5	86	12	10	9.0	17.0	62	9	10	6.0	12.5	54	8	6	6.0	12.0	43	5	4	4.5	8.0
21	154	6	4	9.0	14.5	12.5	9	4	10.0	17.0	99	12	6	9.0	16.0	84	13	6	9.0	16.5	58	13	6	6.5	11.0	54	6	6	7.0	12.0	41	4	2	4.0	8.5
22	154	4	2	9.0	14.0	12.5	9	4	10.0	17.0	101	10	6	9.0	17.0	86	11	6	8.0	14.5	58	15	6	8.5	14.5	54	4	4	6.0	10.5	41	10	3	5.0	7.5
23	154	4	2	8.0	12.5	12.6	8	4	12.0	19.0	101	10	4	10.0	18.0	85	10	5	9.0	17.0	58	11	6	8.0	13.0	52	9	3	6.0	9.5	39	3	2	4.0	7.0

F_m = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	158	4	4	9.0	135	133	3	4	9.5	14.0	109	6	8	8.0	14.0	92	4	12	7.0	135	64	5	9	7.0	12.0	57	5	6	6.0	10.5	42	4	2	4.5	7.5	22	0	2	2.5	3.5
01	158	2	2	8.0	130	133	4	4	9.5	15.5	109	6	7	7.5	14.0	90	6	9	7.0	14.0	64	7	9	7.5	13.0	57	4	4	6.0	9.0	42	6	2	5.0	8.5	20	2	0	2.5	4.0
02	158	2	2	8.5	14.0	133	2	4	9.5	15.0	106	6	6	8.0	15.0	90	4	12	7.5	14.0	62	6	7	7.5	13.5	57	6	3	4.5	8.5	42	3	4	4.0	7.0	20	2	0	2.5	4.0
03	158	2	2	10.0	16.0	131	5	7	9.5	16.0	103	6	10	7.5	13.0	80	11	10	9.0	16.0	61	8	7	7.0	12.0	57	5	3	4.0	7.5	40	2	5	4.5	7.0	20	2	0	2.5	3.5
04	158	2	2	10.0	16.0	131	5	7	9.5	16.0	103	6	10	7.5	13.0	80	11	10	9.0	16.0	61	8	7	7.0	12.0	57	5	3	4.0	7.5	40	2	5	4.5	7.0	20	2	0	2.5	3.5
05	158	2	2	10.0	16.0	131	5	7	9.5	16.0	103	6	10	7.5	13.0	80	11	10	9.0	16.0	61	8	7	7.0	12.0	57	5	3	4.0	7.5	40	2	5	4.5	7.0	20	2	0	2.5	3.5
06	154	4	4	10.5	16.5	121	6	7	11.0	17.0	85	18	21	13.5	22.0	54	26	10	7.0	11.0	37	13	6	8.5	17.0	41	9	6	6.0	10.0	36	5	2	4.5	7.0	22	2	2	2	2
07	154	4	4	11.0	17.5	117	10	5	12.0	19.0	81	22	17	13.0	22.0	50	22	8	4.0	7.0	33	11	7	7.5	10.5	31	13	8	10.0	14.5	32	7	5	5.0	8.0	22	1	2	2.5	4.0
08	154	4	2	13.0	22.0	117	9	7	14.0	21.5	83	16	12	13.0	23.0	54	18	12	3.5	5.0	26	10	4	7.0	12.5	25	15	6	8.0	13.0	28	8	2	3.5	5.5	22	0	2	2.5	4.0
09	154	2	2	13.0	22.0	119	5	8	13.0	21.5	83	14	13	11.0	18.5	55	14	13	7.5	11.5	24	10	4	6.5	8.5	25	6	8	7.0	9.0	27	5	3	6.0	8.0	22	0	2	2.5	4.0
10	154	2	4	13.5	24.0	118	9	7	14.0	21.5	83	10	14	15.0	25.0	56	11	12	7.5	13.5	24	10	4	5.5	9.0	23	6	8	5.0	10.0	26	4	4	4.5	7.0	22	0	2	3.0	4.0
11	154	2	4	13.5	22.0	119	8	6	13.5	21.0	85	15	15	8.5	15.5	56	12	14	4.5	6.5	24	10	4	4.5	7.0	23	8	6	7.0	13.5	26	7	4	4.5	7.0	22	2	2	3.5	6.0
12	154	4	2	13.0	22.0	122	7	7	11.0	19.5	90	11	17	8.0	15.0	58	18	13	5.0	7.5	26	10	4	4.5	6.5	23	4	8	9.0	15.5	26	9	4	5.0	8.0	22	3	2	2.5	4.5
13	156	2	4	11.0	18.0	127	4	8	9.0	15.5	95	18	20	4.5	9.5	60	18	13	4.0	6.5	26	10	4	4.0	6.5	26	9	9	5.0	7.0	30	8	6	5.5	9.0	24	4	2	3.0	4.5
14	158			10.0	17.0	129			7.5	12.5	100			10.0	18.0	60	35	13	3.5	6.5	22	10	4	4.0	6.0	28	10	10	10.0	15.5	36	10	13	5.5	9.0	26	6	2	3.5	6.0
15	158	6	4	8.5	13.0	129	11	8	7.0	12.0	100	19	18	6.0	12.0	61	32	13	5.0	7.0	26	36	4	6.0	12.5	33	13	9	6.5	10.0	28	7	7	4.5	8.0	24	6	2	3.0	5.0
16	158	4	3	8.5	14.0	129	7	10	7.0	12.0	99	18	10	7.0	13.0	63	30	16	4.0	7.0	28	30	4	7.5	12.0	39	12	10	6.0	9.5	40	6	5	4.5	7.5	26	8	4	3.5	5.5
17	158	4	3	8.0	13.0	129	7	11	7.5	12.5	99	18	8	7.5	11.5	65	28	11	4.5	9.0	39	23	10	6.0	10.0	47	9	10	5.5	10.0	46	2	6	4.0	8.0	26	6	2	3.0	5.0
18	158	2	4	7.5	12.5	129	8	10	7.0	13.5	105	13	13	5.0	10.5	82	15	19	7.0	14.0	54	10	18	6.5	12.0	55	7	9	5.5	9.0	46	6	4	5.0	8.0	26	5	2	3.0	5.0
19	156	4	4	8.0	13.5	133	5	10	9.0	15.0	111	7	5	5.0	9.5	92	7	17	5.0	9.0	64	9	14	5.0	10.0	61	4	9	5.5	10.0	48	4	5	5.0	8.5	24	3	2	3.5	5.5
20	158	4	4	9.5	15.0	135	4	8	8.0	13.0	111	6	7	5.5	11.0	94	4	13	6.5	11.5	68	5	10	5.0	9.0	61	5	6	5.0	10.0	46	4	3	4.5	8.5	24	1	2	3.0	5.0
21	158	2	4	10.0	16.0	134	4	5	9.5	14.5	111	4	8	7.5	14.5	96	2	14	7.5	12.5	68	5	8	7.0	12.0	59	6	6	5.5	10.5	46	4	4	4.0	7.0	22	2	0	2.5	4.0
22	158	3	4	9.5	14.5	133	5	6	9.0	14.5	109	9	8	8.0	15.0	92	5	11	7.5	14.0	66	6	10	6.5	11.5	59	4	6	5.5	10.0	44	4	2	5.0	7.5	22	1	1	2.5	4.0
23	158	2	4	9.0	14.0	133	3	5	9.5	14.5	109	6	9	7.5	14.5	92	4	11	7.5	14.5	66	4	11	6.0	12.0	57	4	5	6.0	10.0	44	2	4	4.5	8.0	22	0	2	2.5	3.5

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 50-60 S Long. 67.5-82.5 W Month September 19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]	F _{om} [*]	D _g	V _{dm} [*]
00	157	11.0	17.5	127	9.0	15.5	109	98	5.5	10.0	76	68	39			33			33			33		
01	158	11.0	17.5	126	9.0	15.5	108	96	7.0	12.0	75	66	40			33			33			34		
02	157	11.0	17.0	125	8.0	13.0	106	95	5.5	10.0	74	67	38			34			34			34		
03	155			124	8.0	13.0	105	93	7.5	14.5	71	65	36			34			34			34		
04	155			123	10.0	16.0	104	86	7.0	12.5	71	65	35			30			30			30		
05	155	11.5	18.5	119	9.5	15.0	93	80	8.0	13.5	65	60	36			29			29			29		
06	152	12.0	18.0	116	14.0	20.5	88	72	15.5	21.0	72	51	42			31			31			31		
07	150	11.0	17.0	112	14.0	21.0	87	76	14.5	18.5	76	46	38			29			29			29		
08	152	11.0		110	14.0	22.0	83	75	16.0	22.5	75	43	34			30			30			30		
09	152	9.5	14.5	106	7.5	12.5	76	76	4.0	8.0	39	42	31			30			30			30		
10	152			108	12.0	18.0	91	75	18.0	21.0	75	37	33			30			30			30		
11	153	10.0	15.0	113	9.0	14.0	89	70	18.0	23.0	70	39	33			30			30			30		
12	153	9.0	13.5	115	13.0	20.5	89	72	15.0	19.0	72	28	32			31			31			31		
13	155	8.0	13.0	114	7.0	10.5	91	72	17.0	21.0	72	44	34			32			32			32		
14	156	6.5	10.5	112	6.5	9.5	90	72	16.5	20.5	72	42	35			33			33			33		
15	156	7.0	11.0	107	8.5	12.0	90	90	5.0	7.5	37	39	37			33			33			33		
16	154			109	13.0	18.0	89	71	15.0	20.0	71	46	41			34			34			34		
17	153	7.0	11.5	112	11.0	16.0	94	82	13.0	16.0	82	56	42			31			31			31		
18	153	7.5	12.0	115	7.0	11.5	94	85	11.0	16.0	85	60	43			31			31			31		
19	155	9.0	14.5	116	8.0	13.0	92	92	9.0	13.0	88	61	42			33			33			33		
20	156	8.5	13.5	117			97	90	6.0	9.5	90	65	47			33			33			33		
21	156	10.0	16.0	118	7.0	11.0	100	92	5.5	9.0	92	63	43			33			33			33		
22	156	9.5	16.0	120	7.0	11.0	106	96	7.5	12.0	96	63	43			33			33			33		
23	154			126	8.0	13.5	108	96	6.0	10.0	73	65	43			33			33			33		

F_{om} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 D_g = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 52.5-67.5 W Month September 19 63

Hour (ST)	Frequency (Mc)																														
	.013			.051			.160			.495			2.5			5			10			20									
	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	F _{om} [#]	D _u	D _l	V _{dm} [#]	L _{dm} [#]	
00	150					92	6.0	9.5	84	3.5	7.0	5.9				55						45					29				
01	140	8.5	14.0	11.8	8.0	13.0	9.6		86	3.5	7.5	5.9				55						45					29				
02	136			11.6	6.5	11.0	9.4		86	4.0	7.5	5.9				53						41					29				
03	148	11.0	17.0	12.0			9.6	5.0	10.5	84						53						39					29				
04	152			11.2	6.5	12.5	9.0	6.5	12.5	78						59						35					29				
05	142	10.0	16.5	11.4			9.1	7.5	13.5	74						53						39					31				
06	144	11.0	17.0	10.6			8.5	11.0	16.5	85						85						35					29				
07	140	12.0	17.0	10.8	14.0	21.0	8.7	19.5	25.0	68						87						33					29				
08	142	8.5	13.0	10.8			8.7			68						87						35					29				
09	136	9.0	13.0	9.8	16.5	22.5				66						83						29					29				
10	144			10.6	8.0	13.5	8.3			70						83						29					31				
11	144	8.5	12.5	11.1			8.2	20.0	28.0	72						82						29					31				
12	144	7.0	11.0	10.8	10.0	14.0	8.1	18.0	20.0	72						81						29					29				
13	150	7.0	12.0	10.4			8.2	18.0	22.0	70						82						31					29				
14	146	6.0	10.0	10.0			8.3			68						83						35					29				
15	136	6.5	10.5	9.4			7.2	8.5	13.5	72						72						39					31				
16	152	5.5	9.5	9.6	3.5	6.0	8.1	15.0	21.0	72						81						35					31				
17	144	5.5	9.5	9.6	5.0	7.0	6.8			74						74						43					33				
18	146	5.5	10.0	10.4	5.5	8.5	8.0			74						74						53					33				
19	146	6.5	11.0	11.4	5.5	9.5	8.6	5.5	8.5	80						80						59					33				
20	148	8.0	13.0	11.2	5.5	10.0	9.0	7.0	9.0	84						84						57					33				
21	150			11.4	8.0	12.0	9.4	4.5	8.0	84						84						59					33				
22	145	8.0	13.5	11.4			8.5			79						79						58					30				
23	150			11.6	6.0	11.0	9.0	5.5	9.0	78						78						59					31				

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60.5 Long. 37.5-52.5 W Month September 19 63

Hour (EST)	Frequency (Mc)																									
	.013			.051			.160			.495			2.5			5			10			20				
	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}	F _{am} ⁺	D _u	L _{dm}		
00	150			118			96			83			60			45	80	55	40	70	43	20	40	27	20	30
01	150			119			98			85			59			50	75	52	65	95	36	40	55	29	45	45
02	150			120			99			85			59			50	75	52	65	90	38	20	35	27	20	30
03	151			119			96			82			57			30	60	51	35	65	36	30	45	27	05	15
04	152			119			95			79			57			50	80	54	65	100	43	20	30	30	15	35
05	152			120			94			78			61			45	80	53	40	70	35	55	70	30	60	95
06	152			114			91			74			54			50	90	51	35	65	38	40	55	27	20	35
07	145			111			90			73			42			65	105	39	55	85	38	30	50	28	20	35
08	143			108			91			73			40			40	110	32			33	35	50	29	20	40
09	142			110			90			68			37			90	110	30			31	35	50	28	15	30
10	144			102			64			68			31			80	120	29	100	135	29	35	50	28	20	35
11	148			100			90			66			36					27			30	20	40	28	15	30
12	147			98			78			67			34			85	115	28	90	120	31	40	50	29	20	35
13	146			94			68			68			35			80	110	29			31	20	30	31	20	35
14	148			106			90			70			35			75	110	31	60	90	37	40	50	33	20	40
15	148			108			84			70			33			95	135	35	40	65	41	40	50	31		
16	148			96			72			72			37			60	90	37			41	30	55	29	15	30
17	152			104			86			72			45			35	60	45	40	60	45	35	60	29	10	25
18	150			108			88			74			51			35	65	51	30	60	43	30	50	29	20	30
19	154			110			76			78			59			35	65	51	20	40	47	10	25	29	20	30
20	152			112			90			84			59			40	60	57	35	60	47	20	30	29	15	30
21	156			114			92			84			59			25	50	55	30	50	47	30	50	29	20	30
22	152			116			92			84			61			40	60	53	35	60	39	40	60	27	20	30
23	152			116			94			84			61			35	60	55	40	65	39	25	40	29	20	30

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 52.5-67.5 W Month September 19 63

Hour (LT)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]			
00	150			114			92		6.0	9.5					3.5	7.0	5.9					45			29		
01	140		8.5	140	118		86								3.5	7.5	5.9					45			29		
02	136			116		6.5	110	94							4.0	7.5	5.9					41			29		
03	148		11.0	170	120		96		5.0	10.5	84				5.9		5.9					39			29		
04	156			112			90		6.5	12.5	78				4.5	8.5	6.7					35			29		
05	142		10.0	16.5	114		91		7.5	13.5	74				5.3		5.3					39			31		
06	144		11.0	17.0	106		85		18.0	21.0	70				4.0	6.0	5.1					35			29		
07	140		12.0	17.0	108		87		19.5	25.0	68				4.0	7.0	3.7					35			29		
08	142		8.5	13.0	108		87								5.0	7.5	3.3					29			32		
09	136		9.0	13.0	98				16.5	22.5					6.6		3.1					28			29		
10	144			106					8.0	13.5	83				7.0		2.9					29			31		
11	144		8.5	12.5	111		82								5.0	9.5	3.1					27			31		
12	144		7.0	11.0	108		81		20.0	28.0	72				5.5	12.0	3.3					29			29		
13	150		7.0	12.0	104		82		18.0	22.0	70				5.0	10.0	3.1					27			30		
14	146		6.0	10.0	100		83								5.5	11.0	3.3					25			29		
15	136		6.5	10.5	94		72		8.5	13.5	72				5.5	12.0	3.0					27			31		
16	152		5.5	9.5	96		81		15.0	21.0	72				5.5	9.0	3.9					35			31		
17	144		5.5	9.5	96		68								4.0	9.0	5.1					43			33		
18	146		5.5	10.0	104		80								5.7		5.7					53			33		
19	146		6.5	11.0	114		86		5.5	8.5	80				3.0	5.5	6.1					59			33		
20	148		8.0	13.0	112		90		7.0	9.0	84				3.0	5.5	5.7					45			33		
21	150			114			94		4.5	8.0	84				6.0	10.0	5.9					43			33		
22	145		8.0	13.5	114		85								7.9		6.1					58			30		
23	150			116			90		5.5	9.0	78				6.1		6.1					41			31		

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 37.5-52.5 W Month September 19 63

Hour (UT)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	F _{am} ⁺	D _z	V _{dm} ⁺	
00	150			118			96			83	4.5	80	55			4.0	70	43	2.0	40	27			2.0	20
01	150			119			98			85			62			6.5	95	36	4.0	55	29			4.0	45
02	150			120			99			85	5.0	75	52			6.5	90	38	2.0	35	27			2.0	30
03	151			119			96			82	3.0	60	57			3.5	65	36	3.0	45	27			0.5	15
04	152			119			95			79	5.0	80	54			6.5	100	43	2.0	30	30			1.5	35
05	152			120			94			78	4.5	80	53			4.0	70	35	5.5	70	30			6.0	95
06	152			114			91			74	5.0	90	51			3.5	65	38	4.0	55	27			2.0	35
07	145			111			90			73	6.5	105	39			5.5	85	38	3.0	50	28			2.0	35
08	143			108			91			73			32					33	3.5	50	29			2.0	40
09	142			110			90			68	9.0	110	30					31	3.5	50	28			1.5	30
10	144			102			64			68	8.0	120	29			100	135	29	3.5	50	28			2.0	35
11	148			100			90			66			27					30	2.0	40	28			1.5	30
12	147			98			78			67	8.5	115	28			90	120	31	4.0	50	29			2.0	35
13	146			94			68			68	8.0	110	29					31	2.0	30	31			2.0	35
14	148			106			90			70	7.5	110	31			6.0	90	37			33			2.0	40
15	148			108			84			70	9.5	135	35			4.0	65	41	4.0	50	31			1.5	30
16	148			96			72			72	6.0	90	37					41	3.0	55	29			1.0	25
17	152			104			86			72	3.5	60	45			4.0	60	45	4.0	60	45			1.0	25
18	150			108			88			74	3.5	65	57			3.0	60	43	3.0	50	29			2.0	30
19	154			110			76			78	3.5	65	51			2.0	40	47	1.0	25	29			2.0	30
20	152			112			90			84	4.0	60	57			3.5	60	47	2.0	30	29			1.5	30
21	156			114			92			84	2.5	50	55			3.0	50	47	3.0	50	47			2.0	30
22	152			116			92			84	4.0	60	53			3.5	60	39	4.0	60	27			2.0	30
23	152			116			94			84	3.5	60	55			4.0	65	39	2.5	40	29			2.0	30

F_{am} = median value of effective antenna noise in db above ktb

D_z = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

F_{am} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60.S Long. 22.5-37.5.W Month September 19 63

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	F _m	D _f	V _{dm} ⁺ L _{dm} ⁺	
00	150	7	14 6.5 11.0	123	8	13 6.0 10.0	96	11	15 6.0 11.0	82	9	11 4.0 7.0	63	8	3 3.0 5.0	56	5	3 3.0 5.0	35	14	3	2.0 3.0	27	11	0 1.5 3.0
01	154	4	22 7.5 12.5	124	8	10 5.0 8.5	102	8	16 4.0 8.0	86	7	8 3.0 5.0	65	8	6 3.0 6.0	57	8	4 3.5 5.5	35	11	4	1.5 3.0	29	9	2 1.0 2.5
02	152	8	10 7.0 12.0	124	10	5.0 9.0	104	6	18 3.5 7.0	88	4	9 2.0 5.0	67	6	4 4.0 7.0	57	13	3 3.0 5.0	35	6	2	2.0 4.0	28	9	1 1.0 2.5
03	148	10	7 7.5 12.0	122	10	7 5.0 9.0	96	12	8 3.5 6.5	85	8	9 3.0 5.0	69	6	12 3.0 5.0	57	6	6 3.0 5.5	35	13	4	1.5 2.5	27	12	0 1.0 2.5
04	150	8	9 8.0 12.5	120	10	7 4.0 7.5	96	12	10 4.0 8.0	84	11	7 3.0 5.0	71	5	16 4.0 7.5	57	8	8 4.0 7.0	35	9	2	1.0 2.5	29	2	3 1.0 2.0
05	152	6	8 7.5 12.5	122	10	10 4.5 8.5	94	12	10 4.0 8.0	82	9	6 4.0 7.0	65	9	11 5.0 8.5	57	6	7 5.0 8.5	37	13	6	3.5 5.5	29	4	1 2.0 4.0
06	152	6	6 7.0 12.0	120	12	8 7.0 11.5	90	14	11 3.5 7.0	74	8	11	67	7	7 5.5 11.0	59	4	6 9.0 14.0	39	12	6	2.0 3.5	27	2	2 1.5 3.0
07	148	9	4 8.0 13.5	118	2	11 6.0 10.0	84	7	20 6.0 10.5	66	9	11 3.5 7.0	59	7	13	49	12	3 5.0 8.5	45	8	6	3.0 6.0	27	2	1 1.0 2.0
08	146	6	4 7.0 12.0	118	7	14 6.5 11.5	85	13	20 4.0 8.0	67	11	8 5.0 7.5	43	10	11 4.0 6.0	39	8	6 4.5 7.0	43	4	6	4.0 7.0	27	4	1 1.0 2.0
09	148	6	6 7.0 11.5	111	6	16 7.0 11.0	83	14	19 4.5 23.0	70	7	6 7.0 11.0	39	9	8 6.0 8.0	34	12	6 5.5 8.0	40	8	7	3.0 6.0	27	2	0 1.5 3.0
10	148	9	4 8.5 13.5	110	*	7.5 13.0	90		8.0 15.0	62	10	9 2.0 4.5	41	4	9 5.0 7.0	36		7.5 10.5	39			4.0 7.5	29	0	2 1.5 3.0
11	151	3	12 7.5 12.0	108	11	15 10.0 15.0	86	4	17 4.5 8.5	72	4	15 2.5 5.0	39	2	7 7.0 10.5	31	7	3 9.5 14.0	34	5	3	2.0 4.0	31	3	4
12	150	3	12 7.5 11.5	104	10	9.0 15.0	83	3	19 16.0 19.0	71	6	13 12.5 16.0	41	9	5 7.0 10.0	31	26	4 3.5 6.0	35	2	4	5.0 7.0	29	5	1 2.0 3.0
13	148	4	17 8.0 12.5	105	7	11 8.0 13.0	77	9	14 5.5 10.0	74	2	20 5.0 11.0	38	3	8 7.0 9.0	33	9	5 4.0 7.5	34	4	3	3.0 4.5	29	9	0 2.0 3.5
14	150	2	16 8.0 12.0	106	6	8 8.0 14.5	78	9	12 6.0 10.0	76	1	20 3.5 6.5	38	5	7 4.5 7.5	33	10	7 1.5 3.0	37	2	5	3.0 5.0	31	7	3 3.0 6.0
15	148	4	12 8.0 12.5	105	6	9 7.5 13.0	72	15	10 6.0 10.0	71	6	18 4.5 9.0	37	6	4 2.0 4.0	34	3	6 3.0 5.5	37	4	2	2.0 3.0	30	7	2 1.5 3.5
16	148	5	12 7.5 12.5	106	6	14 9.5 15.0	77	10	9 7.0 11.5	67	12	11 4.5 11.0	41	8	4 6.0 8.0	41	3	7 2.0 4.0	41	7	4	3.0 4.5	31	4	2
17	148	5	8 6.0 10.0	107	7	8 9.0 16.0	76	10	11 7.0 12.5	72	6	12 3.0 7.0	47	8	5 3.0 5.5	57	7	6 3.0 6.0	45	12	5	3.0 5.0	29	17	1 4.5 6.0
18	148	5	9 6.0 10.0	111	9	9 7.0 11.5	80	10	14 5.0 10.0	73	5	4 4.0 8.0	53	9	5 2.5 5.0	51	7	3 2.5 5.0	42	8	6	3.0 5.0	29	16	1 3.0 4.0
19	146	9	6 6.0 10.0	116	6	11 6.5 11.5	87	9	13 5.5 10.5	74	19	1 5.0 10.5	59	4	4 4.5 8.5	53	8	2 3.0 6.0	43	11	9	1.5 3.0	29	16	1 4.0 5.0
20	150	5	8 7.0 11.0	117	8	10 6.0 11.0	88	15	13 5.5 10.5	81	5	8 5.0 9.5	61	7	1 3.5 6.5	53	5	2 4.0 6.0	48	8	11	2.5 4.0	29	16	2 3.5 5.0
21	151	6	9 6.0 11.0	119	7	10 7.0 12.5	88	19	9 5.0 11.0	82	8	7 3.5 7.0	63	8	2 4.0 7.0	56	5	5 3.0 6.0	42	11	8	3.0 5.0	29	19	2 3.0 4.5
22	152	4	6 7.5 12.0	118	10	7 7.5 11.5	90	13	8 6.0 12.0	80	8	3 4.0 8.0	63	10	4 3.5 7.0	55	4	2 2.5 5.5	39	9	5	3.0 5.0	29	16	2 2.0 3.0
23	151	5	12 8.0 12.0	121	8	13 5.5 9.5	92	11	12 4.0 8.0	82	7	8 5.0 9.0	63	7	3 3.0 5.5	55	4	4 3.5 5.5	37	16	4	2.0 4.0	29	15	2 1.5 3.0

F_m = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 40-50S Long. 67.5-82.5W Month September 19 63

Hour (ST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{om} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	F _{am} ⁺	D _f	V _{dm} ⁺	
00	156	11.0	17.5	130	7.0	12.0	108	5.5	10.0	92	7.0	13.5	73	5.9		49							29		
01	158	13.5	20.5	130	8.5	14.0	106	8.0	14.5	92	3.5	6.5	71	6.1		43							29		
02	156	11.5	18.0	128	9.0	14.5	106	7.0	14.5	92	7.0	12.5	71	6.1		43							31		
03	158	10.0	16.0	126	8.5	14.0	104	7.5	13.0	90	6.9		6.9	6.1		43							29		
04	158	12.0	19.5	126			102			84	6.0	10.5	71	5.9		39							27		
05	158	11.5	18.0	126	8.5	13.5	98	14.0	21.0	74	6.0	9.0	6.9	5.5		45							27		
06	156	11.0	17.5	122	12.0	17.5	96	18.0	25.0	70	4.5	6.0	5.7	4.9		41							29		
07	152	11.0	16.5	118	13.5	21.0	92	19.0	23.5	72	4.5	7.0	4.3	4.5		37							31		
08	152	10.5	15.5	124			88	7.0	23.0	70	7.0	9.0	3.9	4.5		33							27		
09	152	12.0	18.0	117	12.0	18.0	92	10.5	18.0	71	3.0	5.5	3.7	3.4		33							29		
10	155	9.5	15.0	117	12.0	16.0	92	20.0	22.0	72	4.0	5.0	4.0	3.1		33							29		
11	156	9.5	15.0	116	10.0	15.0	94	14.5	22.5	72	3.5	5.0	3.9	3.1		33							29		
12	158	7.5	12.0	118	9.0	13.0	94	20.0	22.0	74	4.0	5.5	3.9	2.7		33							31		
13	158	6.5	11.0	118	5.0	9.0	94	16.0	20.0	72	6.0	7.0	3.7	3.1		33							31		
14	158	7.0	11.0	118	8.0	12.0	92	18.0	22.0	74			3.7	3.9		35							33		
15	160	6.5	11.0	116	8.0	12.0	94	20.0	22.5	74	3.0	5.5	4.3	4.1		41							31		
16	156	7.0	12.0	116	20.5	19.0	96	17.5	23.0	72	3.5	7.0	4.3	4.1		45							31		
17	156	8.0	13.0	112			94	17.5	25.0	78	4.0	7.0	5.1	4.9		41							29		
18	154	8.5	12.5	126	7.0	11.5	110	10.0	16.0	86	3.5	7.0	6.1	5.5		47							31		
19	156	9.0	14.0	128	5.5	9.0	110	5.5	9.0	92	4.0	7.0	6.9	6.1		47							31		
20	156	8.0	12.5	128	6.5	12.0	102	6.0	11.0	86	3.0	5.0	6.9	6.1		47							29		
21	154	8.0	13.0	130	7.0	11.5	110	4.0	8.0	90			6.5	5.9		47							29		
22	158	9.0	15.5	132	8.0	13.0	114	5.5	10.5	90	4.0	7.0	6.7	6.1		45							29		
23	158	12.0	19.0	132	9.5	15.5	112	6.5	12.5	90	3.0	6.0	7.7	6.5		47							29		

F_{om} = median value of effective antenna noise in db above k1b

D_f = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 30-40.S Long. 67.5-82.5 W

Month September 19 63

Hour (ST)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*	Fam*	Du	Vdm*
00	162		6.0 9.5	138		5.0 9.0	124		3.0 5.5	106		3.0 5.5	85		6.5		47		29		47		29		47		29
01	162		5.5 9.5	138		5.0 8.0	124		3.0 6.0	104		4.0 6.0	83		6.5		49		27		49		27		49		27
02	160		7.0 11.5	138		6.0 10.0	124		3.5 6.0	104		3.0 5.5	81		6.3		49		49		49		49		49		49
03	162		6.5 10.5	140		5.0 8.5	122		4.0 7.0	104		3.5 6.5	83		6.5		51		37		51		37		51		37
04	160		7.5 12.5	136		6.0 10.0	116		4.0 8.0	96		5.0 10.0	81		6.5		43		29		43		29		43		29
05	160		8.0 14.0	136		10.5 15.0	106		5.5 9.5	88		7.0 11.5	77		5.9		43		37		43		37		43		37
06	158		9.0 14.5	124		9.0 14.0	98		4.5 7.0	70		2.0 5.0	67		5.5		43		27		43		27		43		27
07	156		11.0 17.5	122		8.0 14.0	92			70		1.0 2.5	65		5.5		43		31		43		31		43		31
08	157		9.0 13.5	128			102		6.0 10.0	74		1.0 2.5	59		4.5		37		30		37		30		37		30
09	156		9.0 15.0	126		6.0 12.5	98		7.5 13.0	75		1.5 2.5	42		4.2		34		30		34		30		34		30
10	160		9.0 14.0	120		10.0 17.0	86		5.5 9.0	68		2.5 5.5	35		3.3		29		29		29		29		29		29
11	158		9.0 14.0	122		7.0 12.5	86		5.0 9.0	72		1.5 3.0	37		3.3		27		31		27		31		27		31
12	162		7.0 12.0	126		5.5 9.5	86		7.0 14.0	76			39		3.3		33		31		33		31		33		31
13	164		6.0 10.0	128			90			78		3.0 4.5	39		3.7		37		31		37		31		37		31
14	164		7.0 11.0	126		5.5 9.0	96		9.0 17.0	78			37		4.1		39		37		41		37		39		37
15	162		6.0 9.5	124		6.0 9.5	96		7.0 13.0	78		3.5 6.5	51		4.7		41		41		47		41		41		41
16	162		5.5 9.5	118		6.0 9.5	100		5.5 6.5	80		3.0 5.5	57		5.3		49		47		49		47		49		47
17	160		7.0 11.0	124		6.0 10.0	112		4.0 8.5	98		4.0 7.0	67		6.1		57		43		61		43		57		43
18	160		6.5 11.0	132		5.5 9.5	116		3.5 6.5	98		3.5 6.0	79		6.3		49		33		63		33		49		33
19	158		7.0 11.0	134		4.5 8.0	114		4.0 7.0	98		3.0 5.0	75		6.3		49		31		63		31		49		31
20	160		7.5 12.5	136		3.5 7.0	116		4.0 7.0	102		3.0 5.5	83		6.5		49		31		65		31		49		31
21	158		6.0 10.0	136		5.0 8.5	120		4.0 7.0	104			85		6.5		45		31		65		31		45		31
22	158		7.5 12.5	136		6.0 10.5	124		3.5 6.5	106		3.5 7.0	83		6.5		45		29		65		29		45		29
23	158		7.5 12.0	138		6.0 10.0	120		5.0 9.0	94		4.0 7.5	85		6.5		45		29		65		29		45		29

Fam = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70 S Long. 82.5-97.5 W

Month October 19 63

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	
00	150		9.0	14.5	12.4	7.0	11.5	9.4	4.0	8.0	8.4	3.5	7.0	5.9						4.3			2.8		
01	152		10.0	16.0	12.4	6.0	11.0	9.6	4.0	8.0	8.4	3.5	7.0	5.9						4.3			2.8		
02	152		16.5	16.5	12.2	7.0	12.5	9.2	5.5	10.5	7.9	5.0	9.0	5.7						4.3			3.2		
03	150		6.0	16.0	11.4	8.0	13.0	8.4	8.5	14.0	6.4	2.0	4.0	5.3						3.9			2.8		
04	148		10.0	16.0	11.0	9.0	13.5	7.4	7.0	11.0	6.2	2.0	4.0	4.5						3.7			2.8		
05	148		10.0	15.0	10.6	10.5	15.5	7.2	9.0	13.0	7.2	4.0	8.0	3.7						3.3			2.8		
06	148		9.5	15.0	10.4	8.0	12.0	6.8	4.0	6.5	7.3	2.5	6.0	3.9						3.3			2.9		
07	149		12.0	14.0	10.4	8.0	13.0				7.4	3.0	7.5	3.9						3.0			2.8		
08	146		9.0	14.0	10.4	7.5	12.0	6.8	4.5	6.5	7.4	3.0	6.0	3.9						3.0			2.8		
09	150		8.0	13.0	10.3	8.0	13.0	6.8	8.5	10.0	7.7	3.5	8.5	3.8						2.9			2.9		
10	150		8.5	13.0	10.4	7.0	12.0	6.7	2.5	4.0	7.7	4.0	9.0	3.9						3.0			2.8		
11	152		7.5	11.5	10.6	6.5	10.5	7.2	5.5	10.0	6.8	1.0	3.0	4.3						3.1			3.0		
12	152		6.0	9.5	10.6	6.0	9.5	6.8	8.5	8.0	6.6	2.0	4.0	3.9						3.1			3.0		
13	154		8.0	10.0	10.6	5.5	9.0	6.8	1.5	3.0	7.0	1.5	3.0	3.9						3.1			3.0		
14	154		6.0	9.5	10.3	4.5	7.5	6.8	4.0	5.5	7.6	3.0	7.5	4.1						3.3			3.2		
15	152		7.0	11.0	10.0	5.0	8.5	7.1	3.5	5.0	8.0	4.0	9.0	3.9						3.7			3.0		
16	150		7.0	12.0	10.2	6.0	9.5	7.3	7.0	9.0	7.6	3.0	6.0	4.3						4.3			3.0		
17	148		7.5	13.0	11.0	6.0	10.5	7.8	4.5	8.0	7.6	2.0	4.0	4.5						4.5			3.0		
18	150		9.0	14.0	11.4	5.5	10.0	8.2	5.0	8.5	7.8	3.0	6.0	5.7						4.5			2.8		
19	150		10.0	15.0	11.6	6.0	11.0	8.4	4.5	8.5	7.8	3.5	6.0	5.7						4.3			2.8		
20	150		8.5	14.0	11.8	6.0	11.0	8.6	5.0	9.0	8.0	4.5	8.0	5.9						4.1			2.8		
21	152		8.0	13.5	12.1	6.0	11.0	9.2	4.5	8.0	8.2	3.0	6.0	5.9						4.3			2.8		
22	150		8.5	14.0	12.2	5.0	9.5	9.2	4.0	7.0	8.3	4.0	7.0	6.0						4.4			2.8		
23	151		9.0	14.5	12.2	6.0	11.0	9.4	3.5	7.0	8.4	3.5	6.5	6.1						4.3			2.8		

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70.S Long. 67.5-82.5 W Month October

19 63

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	F _{am} [*]	D _u	V _{dm} [*]	
00	150			122			94			57			40	6.0	56	45	7.0	41	35	6.0	26			1.0	2.0
01	151			123			97			57			30	6.0	54	40	7.0	44	40	6.5	28			2.5	3.5
02	151			124			95			59			35	7.0	54	40	7.5	40			31				
03	152			116			87			59					56		41				29				
04	152			116			75			51			90	13.0	50	55	7.5	38	5.0	8.0	27			2.0	3.0
05	149			111			71			39			25	4.5	42	55	7.5	37	40	7.0	27			2.0	3.5
06	149			105			72			37			30	5.0	37	65	9.0	35	40	6.0	27			2.0	3.0
07	148			105			70			39			15	3.0	39	40	6.5	31	45	6.0	28			1.5	3.0
08	148			104			68			38			25	4.0	34			29	35	5.0	29			3.0	4.0
09	148			105			70			38			20	4.0	34	45	7.0	29	2.0	3.5	27			1.0	3.0
10	148			108			70			37			30	4.5	35	50	7.0	29	2.0	3.5	28			1.0	3.0
11	151			110			69			37			30	5.0	34	25	5.0	29	2.0	3.5	27			1.0	2.5
12	153			110			69								39	95	10.5	29	2.0	3.5	28			2.0	3.5
13	154			108			70			37			40	6.0	34	70	8.5	29	3.0	4.0	28			1.5	3.0
14	154			108			72			37			35	6.0	31	45	6.0	31	2.5	4.0	28			2.0	3.0
15	154			106			72			35			30	5.0	36	45	9.5	33	2.0	3.5	28			1.5	3.0
16	152			102			72			36			20	4.0	40	60	8.5	35	3.0	4.5	29			2.5	4.0
17	150			106			73			38			20	4.0	46	30	4.5	39	1.5	3.0	29			1.0	3.0
18	151			115			80			44			20	4.0	50	20	5.0	43	2.0	4.0	31			1.0	2.5
19	151			121			86			35			20	4.0	58	20	5.0	45	3.0	5.0	31			2.0	4.0
20	152			121			90			61			25	5.0	56	25	4.5	43	30	5.0	29			1.0	2.5
21	152			125			94			63			25	4.5	58	25	5.0	45	30	5.0	27			2.0	3.0
22	152			126			96			62			25	5.0	61	30	7.0	44	35	6.0	27			2.0	3.0
23	152			127			99			61			25	4.0	59	30	5.0	42	3.0	5.0	27			2.0	3.5

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 V_{dm}^{*} = ratio of median to lower decile in db
 L_{dm}^{*} = median deviation of average logarithm in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60S Long. 82.5-97.5W

Month October

19 63

Fr #	Frequency (Mc)																									
	.013			.051			.160			.495			2.5			5			10			20				
	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]	F _m [†]	D _u	V _{dm} [†]		
00	124			102			88			65			25	50	56	25	60	47	25	50	28	25	50	28	20	30
01	126			100			88			63			30	50	58	30	60	43	35	60	28	35	60	28	20	30
02	128			100			82			61			30	60	60	40	70	43	40	75	28	40	75	28	15	30
03	122			94			74			57			40	75	54	40	70	41	35	65	28	35	65	28	20	30
04	116			80			64			53			50	90	50	50	85	41	50	85	30	35	65	30	15	30
05	108			74			66			41			65	100	42	60	100	39	60	100	32	40	65	32	15	30
06	108			68			68			37			45	70	38	70	100	35	40	65	28	40	65	28	20	45
07	104			68			64			35			45	95	36	80	115	32	80	115	28	30	50	28	10	20
08	105			66			68			35			35	65	33	80	115	29	80	115	29	20	35	28	10	25
09	106			66			66			33			50	80	33	80	140	29	80	140	29	15	30	29	20	30
10	106			64			66			33			45	75	34	105	125	27	105	125	27	15	25	30	20	30
11	108			67			64			33			30	55	34	95	135	29	95	135	29	20	25	28	15	30
12	108			64			66			31			30	50	30	55	90	29	55	90	29	20	35	34	20	35
13	108			64			66			29			30	60	32	85	130	31	85	130	31	20	40	30	20	40
14	104			73			66			33			50	75	34	70	110	33	70	110	33	20	35	30	10	25
15	104			73			66			39			60	100	38	50	70	37	50	70	37	30	55	30	20	40
16	108			76			66			47			40	80	42	25	50	41	25	50	28	30	50	28	10	20
17	116			88			74			57			35	60	50	40	60	44	40	60	30	40	60	30	15	30
18	118			86			80			62			35	60	53	30	50	44	30	50	44	30	60	29	20	40
19	120			86			84			62			30	60	53	25	45	44	25	45	44	35	60	28	15	30
20	120			80			84			61			30	55	56	30	50	45	30	50	45	25	55	28	20	30
21	122			94			85			65			30	55	58	30	50	49	30	50	49	30	60	28	15	30
22	122			96			86			65			30	60	58	35	60	49	35	60	49	40	70	28	15	30
23	124			100			88			66			30	55	56	30	60	45	30	60	45	30	50	28	20	35

F_m = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 40-50S

Long. 67.5-82.5W

Month October

19 63

F _m (FS)	Frequency (Mc)																													
	.013			.051			.160			.495			2.5			5			10			20								
	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}	F _m [†]	D _u	L _{dm}						
00	156			132			92						68			55	110	64	30	60	48			40	60	35	40	55	40	55
01	157			133			94						73			30	60	64	30	50	49			40	75	36	40	55	40	55
02	153			134			95						73			30	50	66	30	50	48			55	100	31	20	35	20	35
03	155			134			95						74			25	50	65	25	45	53			45	75	27	25	35	25	35
04	156			130			83						70			35	60	65	25	50	45			40	60	30	20	40	20	40
05	154			125			66						60			45	75	60	50	80	46			40	70	36	30	55	30	55
06	154			119			60						60			50	90	55	50	90	43			25	45	35	40	60	40	60
07	154			114			58						47			90	85	50	50	80	40			35	60	32	30	60	40	60
08	154			120			57						37			50	80	48	45	80	36			30	60	31				
09	152			119			56						27			55	75	39	70	100	33					31				
10	155			120			56						27			50	60	38	65	100	32			45	75	32				
11	155			118			56						28			45	60	34	60	90	30			30	50	32				
12	158			122			66						29			35	75	36	50	85	33			40	70	30				
13	160			122			68						31			55	65	36	55	100	35			50	80	32				
14	160			122			71						41					40	85	140	39			60	90	33				
15	161			120			70						39					44	80	115	39			20	45	38				
16	156			106			64						39			40	80	46	50	75	41			40	60	32				
17	154			108			68						53			30	60	52	35	60	43			30	55	34				
18	152			114			82						61			40	70	56	25	50	45			30	50	34				
19	156			120			88						65			40	70	56	20	50	45			30	55	30				
20	156			124			90						67			35	60	57	35	60	43			35	65	29				
21	156			128			92						67			55	100	60	30	55	45			30	60	30				
22	154			130			92						67			20	45	64	20	45	45			35	60	30				
23	156			128			90						69			30	50	62	40	65	47			25	50	28				

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 30-40.5 N Long. 67.5-82.5 W Month October 19 63

Hour (UT)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	F _m *	D _l	V _d m	
00	156			132	115		96	73	70	105	65			70	100	49			3.0	6.0	29				
01	159			135	116		98	73	60	100	64			50	80	49			4.0	7.0	32			3.5	5.5
02	159			136	117		99	70	40	70	63			30	55	51			5.0	9.0	33			2.5	5.5
03	159			137	117		96	72	5.0	80	64			30	55	49			4.0	7.0	51				
04	160			133	109		86	72	5.5	100	64			40	80	47			4.0	6.0	31			2.0	3.5
05	159			128	95		69	67	5.0	85	59			60	100	46			5.0	8.0	34			2.0	4.5
06	156			119	92		72	54	6.5	95	49			6.5	95	41			6.5	95	41			2.0	3.5
07	156			115	89		72	43	40	60	47			40	60	38			4.5	8.0	30			2.5	4.0
08	156				80		70	41	30	50				30	50	39			5.0	6.5	30			30	40
09	155			116	86		70	39	30	50	39			80	155	34			5.0	8.0	30			3.5	5.5
10	156			124	90		70	41	2.5	50	40			40	6.5	33			6.5	9.0	32			3.0	5.0
11	158			124	90		72	37	2.0	40	38			70	100	33			5.0	8.0	32			2.5	5.0
12	159			125	87		66	37	3.5	55	41			40	6.5	38			7.5	120	35			2.5	5.0
13	163			127	91		64	63	1.5	30	46			40		40			5.0	8.0	37			50	80
14	165			128	97		66	42	2.0	40	51			70	115	47			5.0	9.0	41			50	80
15	164			127	100		66	44	3.5	70	56			55	90	47			3.0	6.0	40				
16	162			123	101		69	53	3.0	55	58			45	80	50			3.0	5.0	41			2.0	4.0
17	160			127	107		91	67	2.0	35	66			30	6.5	50			2.0	4.5	46			4.5	10.0
18	158			132	112		92	78	4.0	70	68			45	90	49			4.0	70	30			2.0	4.0
19	159			132	113		95	77	2.5	40	66			60	100	47			4.5	70	30			2.0	3.5
20	157			130	112		96	75	40	80	66			50	90	48			40	70	29			2.5	40
21	157			130	112		97	73	6.5	115	66					48			2.0	4.0	28			1.5	30
22	156			129	116		98	73	4.5	80	66			45	80	66			30	50	28			30	40
23	156			131	116		97	71	40	65	64			45	75	50			35	60	28			3.0	40

F_m = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 V_dm = median deviation of average voltage in db below mean power
 L_dm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70S Long. 67.5-82.5W Month November 19 63

Hour (LST)	Frequency (Mc)																											
	.013			.051			.160			.495			2.5			5			10			20						
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}				
00	152	4	16	126	6	9	98	8	9	78	10	13	62	4	4	3.5	6.5	4.5	7.5	4	4	4.5	7.5	30	2	2	2.0	3.0
01	153	3	14	126	6	7	97	10	6	77	11	9	61	7	5	4.0	7.5	4.0	7.0	4	4	4.5	7.0	30	2	2	1.5	3.0
02	153	5	10	125	6	7	92	12	7	73	9	14	60	6	4	4.0	8.0	4.0	7.5	6	2	5.0	7.5	31	12	3	1.0	2.5
03	152	4	14	116	4	8	84	6	10	66	4	12	58	6	6	*5.0	*9.0	*5.5	*9.0	4	4	*5.0	*8.0	30	12	2	7.0	2.5
04	150	2	12	114	4	10	72	8	4	63	5	15	48	7	8	*5.0	*8.0	5.5	9.0	6	6	4.5	7.0	30	8	2	1.5	3.0
05	150	2	13	108	4	6	70	8	6	66	7	16	40	5	6	3.0	6.0	3.0	8.5	4	4	5.0	6.5	37	3	5	4.5	6.5
06	150	2	6	104	2	6	72	7	6	70	9	10	36	4	4	3.0	5.0	3.0	8.5	2	6	5.0	5.0	30	3	2	2.0	3.0
07	151	1	4	99	9	5	71	6	7	72	9	8	36	4	6	3.0	4.5	3.5	8.5	3	5	6.5	8.5	32	2	2	2.5	4.0
08	*150			*105			*74			*72			*40			*4.5	*6.0	*3.0	*12.0			*2.5	*4.0	*30			*1.5	*2.5
09	150	3	4	105	6	10	66	11	2	70	10	10	36	2	3	3.0	5.0	3.0	7.5	2	4	5.5	7.5	30	0	2	2.0	3.5
10	150	2	2	106	10	9	70	10	5	70	10	4	38	2	8	2.5	4.5	3.0	7.5	2	4	5.5	7.5	30	0	2	2.0	3.0
11	152	4	7	109	7	9	70	10	6	73	5	7	36	2	4	3.0	5.0	3.0	11.0	7	2	8.0	11.0	30	2	2	2.0	3.0
12	154	2	6	112	6	6	69	13	4	70	2	5	32	4	4	8.0	11.0	*8.0	*11.0	4	4	*8.0	*11.0	30	2	2	2.5	3.5
13	154	4	4	112	4	7	74	7	5	70	10	5	36	2	7	3.0	5.0	3.5	10.0	4	4	7.5	10.0	30	4	2	1.5	3.0
14	156	0	7	110	2	9	70	15	5	72	8	6	36	2	8	3.0	5.5	3.0	8.5	8	2	6.5	8.5	30	3	0	2.0	3.5
15	154	2	3	106	6	6	70	14	6	72	6	8	36	4	5	3.0	5.0	3.5	10.0	5	5	5.5	10.0	32	4	2	2.5	4.5
16	153	3	3	101	9	7	76	6	10	74	7	6	36	5	6	2.5	4.5	3.3	7.5	11	3	6.0	7.5	35	9	3	3.0	5.0
17	150	4	2	100	10	6	70	17	6	67	11	17	38	10	6	3.0	5.0	3.8	6.5	8	4	4.0	6.5	37	3	3	3.5	5.5
18	150	4	6	102	2	6	80	12	6	71	7	7	42	22	8	3.0	5.0	4.6	6.5	10	5	3.5	6.5	40	4	4	3.5	5.5
19	150	5	6	105	18	5	83	14	15	71	11	5	50	9	10	3.5	7.0	5.2	8.5	4	6	3.0	5.5	41	5	3	4.0	7.0
20	149	6	3	119	6	13	93	6	13	73	10	9	56	7	6	4.0	7.0	5.5	8.5	3	1	*8.0	*11.0	44	2	6	4.5	7.0
21	151	4	5	122	7	6	93	8	7	73	10	5	60	9	3	4.0	7.5	5.8	8.5	2	4	3.0	5.0	44	0	6	4.5	8.0
22	150	3	7	123	4	5	95	7	8	76	10	8	61	9	9	4.0	7.0	5.8	8.5	2	4	3.5	6.5	42	4	4	4.5	8.0
23	152	3	14	124	5	7	95	5	9	74	16	6	63	5	8	4.0	7.5	5.4	8.0	8	4	4.0	8.0	42	4	2	5.0	8.0

F_{am} = median value of effective antenna noise in db above k1b

D_f = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 67.5-82.5 W Month November 19 63

Hour (LST)	Frequency (Mc)																																			
	.013				.051				.160				.495				2.5				5				10				20							
	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	Fam	Du	D _L	Vdm	L _{dm}	
00	152	4	6	9.5	15.5	128	4	10	5.0	85	79	9	9	4.0	7.0	66	4	10			45	7	5			30	12	2								
01	154	4	4	8.5	14.0	128	4	8	5.0	9.0	103	5	14	4.0	8.0	80	8	9	4.0	6.5	64	6	8			30	2	2								
02	154	4	6	9.5	15.0	127	5	7	5.0	8.5	99	3	10	5.0	9.0	72	6	8	2.0	4.0	64	6	10			30	4	2								
03	154	4	4	9.0	14.0	123	1	7	5.0	8.0	87	7	5	11.0	17.0	66	13	14	2.0	3.0	61	5	7			32	6	4								
04	152	4	2	10.0	16.0	117	3	9	5.5	9.0	78	6	6	7.0	12.0	64	17	14	1.5	3.0	48	4	4			32	8	4								
05	152	4	6	10.5	17.0	112	4	4	6.0	9.0	73	9	7	5.0	7.0	66	4	16	2.0	3.5	39	7	5			38	6	4								
06	152	2	4	10.5	16.5	108	6	8	8.5	14.0	74	4	4	3.5	5.5	70	10	6	3.0	6.0	36	6	8			34	6	2								
07	152	2	6	10.5	16.0	107	7	9	8.5	13.5	74	4	8	5.0	9.0	73	7	6	2.5	5.0	36	6	10			33	3	1								
08	152			* 20	* 19.0	* 115			* 10.0	* 16.0	* 70			* 4.0	* 7.0	* 72			* 11	* 10	* 2.0	* 4.5	* 38					* 34								
09	150	5	4	10.0	16.0	112	7	16	9.5	15.0	68	26	4	2.5	4.0	71	29	9	2.5	5.5	38	2	6			30	4	2								
10	152	8	4	7.5	12.5	112	8	14	8.5	14.5	70	24	6	2.0	4.0	76	17	6	4.0	8.0	36	4	6			30	2	2								
11	152	6	4	7.0	12.0	114	8	10	6.5	11.5	70	12	6	3.0	5.0	76	6	8	2.0	4.5	35	5	9			32	10	4								
12	154	2	4	7.0	12.0	114	8	8	6.0	10.5	70	12	6	4.0	7.5	68	12	8	2.0	3.5						34	14	6								
13	154	4	5	6.0	10.0	112	10	6	6.0	9.0	70	17	4	4.0	6.0	70	6	14	2.5	5.0	33	3	3			34	14	4								
14	156	4	8	6.0	10.0	112	10	8	5.0	9.0	70	24	4	4.0	5.5	74	22	8	2.0	4.0	35	5	5			32	11	6								
15	155	3	3	6.0	10.0	110	10	10	5.0	8.5	71	13	7	3.0	5.0	75	5	7	3.5	9.5	34	2	8			32	6	6								
16	154	4	4	6.0	11.0	110	8	14	5.0	8.0	72	12	8	4.0	6.0	72	11	8	2.5	5.0	36	6	8			32	14	4								
17	152	4	4	7.5	12.5	104	14	10	5.5	10.0	73	11	9	3.0	5.0	74	4	8	3.0	6.0	36	8	6			38	8	6								
18	150	4	9	8.0	13.5	106	16	6	6.0	10.0	74	4	8	4.0	7.0	73	7	13	2.0	3.5	45	7	9			49	11	9								
19	150	4	11	8.0	14.0	111	5	9	5.0	9.0	82	10	10	4.5	8.0	72	6	8	2.0	5.0	54	4	10			53	3	3								
20	150	6	10	9.5	15.0	119	7	9	7.0	12.0	96	8	13	4.5	8.0	74	8	6	3.0	6.0	62	4	6			57	5	5								
21	152	4	6	10.0	16.0	126	4	8	6.0	11.0	99	6	9	5.0	9.0	76	8	10	3.0	6.0	62	6	6			59	4	2								
22	152	2	4	9.0	14.5	126	6	8	4.5	8.0	100	10	8	4.5	9.0	78	4	10	3.5	6.5	62	6	2			60	2	6								
23	152	2	4	10.0	15.5	128	4	10	5.0	9.0	102	4	12	5.0	9.0	78	8	8	3.5	6.0	62	8	6			56	6	6								

Fam = median value of effective antenna noise in db above ktb
Du = ratio of upper decile to median in db
D_L = ratio of lower decile to median in db
Vdm = median deviation of average voltage in db below mean power
L_{dm} = median deviation of average logarithm in db below mean power

Hour (LT)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	Fam	D _l	V _{dm}	L _{dm}	
00	155	2	85	140	129	3	6	130	185	106	4	7	80	130	85	7	6	6.0	100	61	6	5	5.0	90	35	17	6	3.0	45	19	0	2	1.0	2.5						
01	155	4	95	160	129	2	6	120	185	104	5	6	70	120	85	6	6	6.0	90	63	2	10	5.5	105	53	6	7	5.0	95	33	13	4	2.5	55	19	0	2	1.5	2.5	
02	155	2	100	160	128	4	6	120	190	104	5	5	75	150	83	5	4	4.0	55	61	3	6	7.0	130	51	7	6	4.0	70	34	11	6	3.0	50	19	0	2	1.0	2.5	
03	155	4	110	170	129	3	9	120	180	103	5	5	90	140	81	6	6	9.0	145	59	6	9	6.0	110	51	5	9	5.0	90	33	8	4	2.0	40	19	0	2	1.5	2.5	
04	155	2	100	165	125	6	5	120	180	103	5	9	40	60	77			8.0	125	59	4	12	7.0	110	49	8	6	2.5	110	34	6	4	4.0	70	19	0	2	1.5	2.5	
05	155	2	95	160	123	5	6	135	195	95	7	7	130	205	56	23	7	180	205	53	6	4	6.0	110	49	6	6	5.0	80	35	3	6	4.5	70	19	0	2	1.5	3.0	
06	153	2	110	170	121	7	5	155	225	94	6	12	150	210	57	22	8	110	150	41			7.5	125	41	7	10	6.5	95	36	3	9	3.5	55	18	1	2	1.5	3.0	
07	151	4	0	105	175	119	10	6	77.5	240	82	21	6	200	200	53	24	4	55	80	36					33														
08	151	3	3	110	175	119	10	10	77.5	245	78	22	4	130	200	53			190	280	37					35														
09	151	3	4	115	190	119			175	240	80			185	250	55	26	6	200	280	33			5.5	90															
10	151	4	2	125	190	119	10	18	77.0	245	82	18	10	160	205	53	26	2	180	250	33			5.0	85															
11	151	4	4	120	175	123	4	8	160	225	83			170	230	55			195	260	30			2.5	50															
12	153	4	4	115	185	122	9	7	150	220	94	12	18	140	190	55			200	265	32			3.0	55															
13	154	5	3	90	155	125	8	6	160	225	86	20	10	200	260	63	19	13	155	215	41			3.0	50															
14	155	5	6	80	140	123	8	7	140	195	94	13	15	180	240	58	23	7	130	195	41	2	14	30	70															
15	155	6	4	80	135	127	7	6	145	205	93	13	17	180	240	57	25	6	100	155	43	6	14	60	90															
16	155	6	4	90	145	127	6	6	130	200	94	12	15	130	210	57	28	5	45	80	41	10	9	30	65															
17	155	6	4	80	130	125	7	4	150	210	93	8	13	165	220	66	14	12	165	210	45			8.5	120															
18	155	3	3	85	130	126	10	8	135	195	100	6	4	105	175	77	12	12	70	100	57			2.0	60															
19	155	2	2	85	135	127	2	5	110	180	104	2	4	75	130	83	8	14	65	100	61	4	8	5.5	95															
20	155	4	2	80	145	129	2	5	120	175	105	3	7	70	120	87	5	5	60	85	63	4	11	4.5	80															
21	155	4	2	90	135	129	4	6	105	160	106	2	6	65	115	87	5	9	25	65	64	4	6	5.0	90															
22	155	4	2	80	130	129	4	4	95	150	104	6	6	80	130	85	8	8	75	130	61	5	5	5.0	95															
23	155	4	2	85	140	129	4	5	135	195	104	10	4	90	140	87	4	9	40	60	61	6	8	4.5	80															

F_{am} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E.

Month October 19 63

Hour (S _T)	Frequency (Mc)																																																
	.013			.051			.160			.495			2.5			5			10			20																											
	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}	Fam	D _f	V _{dm}																						
	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}	Du	L _{dm}	L _{dm}																						
00	153	0	2	9.0	14.5	*	119	7	5	6	9.0	13.0	*	99	4	4	5.5	10.0	*	67	7	13	2.0	3.5	*	57	*	5.5	9.5	*	51	4	4	5.0	6.0	3.5	19	0	2	1.5	3.0								
01	153	2	2	8.0	14.0	*	119	5	6	9.0	14.0	*	102	1	5	6.5	11.0	8.5	10.0	8.5	9	13	1.5	3.0	*	57	*	4.0	7.5	5.2	4	4	3.5	6.5	3.5	10	6	2.0	4.0	1.5	3.0								
02	153	2	2	10.0	16.0	*	119	5	6	9.0	14.0	*	100	3	6	3.5	7.5	8.5	10.0	8.5	9	13	1.5	3.0	*	56	5	6	3.5	7.0	5.1	3	4	4.0	6.5	3.5	7	6	2.0	3.5	1.8	1	1.5	3.0					
03	153	2	4	7.0	16.0	*	119	6	8	8.0	13.0	10.1	4	6	4.5	8.5	8.5	10.0	8.5	4	12	1.0	2.5	*	56	8	8	4.0	8.5	5.1	4	4	3.5	6.0	3.1	9	2	1.5	3.0	1.8	1	2.0	3.0						
04	153	2	4	10.0	16.0	*	120	5	10	9.5	15.5	*	99	5	3	5.5	10.0	7.7	8	16	2.5	3.5	*	54	8	6	4.0	8.0	4.9	5	4	4.0	9.0	3.1	11	2	1.5	3.0	1.9	0	2	2.0	3.0						
05	153	2	4	10.0	16.0	*	115	6	10	9.5	14.5	*	97			3.0	6.0	5.7	6	6	2.5	5.0	*	54	4	5	7.0	11.0	4.9	4	4	4.0	7.0	3.1	9	2	2.5	4.0	1.7	2	0	1.5	3.0						
06	151	2	2	10.0	16.0	*	115	4	12	8.5	14.0	*	86			5.0	9.5	5.6	7	5	2.5	4.0	*	46	6	3	3.0	6.0	4.5	6	6	3.0	6.0	3.5	5	5	3.5	6.0	1.7	2	0	2.0	3.5						
07	149	4	2	9.5	15.5	*	109	10	8	10.0	15.5	*	83			3.5	9.0	5.5	5	6	2.0	4.0	3.7	4	4	6.5	11.5	3.9	6	6	4.0	7.0	3.7	4	5	2.5	4.5	1.9	2	2	2.0	3.5							
08	149	2	4	11.0	17.5	*	105	12	11	10.0	17.0	*	79	11	6	6.0	10.5	5.3	*	1.5	3.0	3.1	8	2	5.0	7.0	3.3	8	2	4.5	7.0	3.7	1.5	6	2.5	4.5	1.9	3	2	2.0	3.5								
09	146	4	3	12.5	20.0	*	103	*	*	12.0	18.5	*	75			5.1	*	3.2	*	3.5	5.5	3.2	*	3.2	*	5.0	6.5	2.7	*	3.0	5.0	3.5	*	3.0	5.0	3.5	*	1.9	*	2.5	3.5								
10	145		*	12.0	18.5	*	103	10	10	12.5	18.5	*	75			5.3	*	3.2	*	4.0	6.0	2.3	*	3.2	*	4.0	6.0	2.3	*	3.0	5.0	3.5	*	4.5	6.5	2.2	*	4.5	6.5	1.5	3.5								
11	147	4	4	11.0	16.5	*	103	*	*	12.5	17.5	*	73			5.7	*	3.2	*	1.5	3.0	3.2	*	3.2	*	5.0	7.0	2.3	*	2.5	4.5	3.3	*	6.0	8.5	2.1	*	6.0	8.5	2.5	4.5								
12	145	*	*	7.0	12.0	*	107	*	*	8.5	13.0	*	79			5.1	*	3.1	*	2.5	5.0	3.1	*	3.1	*	2.5	5.0	2.3	*	4.0	7.0	2.5	*	4.5	6.0	2.1	*	4.5	6.0	2.1	2	1.5	3.0						
13	147	4	4	6.0	11.5	*	107	10	16	8.5	13.0	*	77			5.3	*	3.7	*	3.0	7.0	3.7	*	3.7	*	4.0	7.0	2.5	*	4.0	6.0	3.7	*	4.0	6.0	2.3	*	4.5	7.5	2.3	2	4	3.5	5.0					
14	149	2	4	5.5	9.5	*	107	11	15	7.5	11.0	*	79	6	10	4.5	7.0	5.3	*	2.5	5.0	3.3	*	3.3	*	2.5	5.0	3.1	*	2.5	5.0	3.1	*	2.5	5.0	3.1	*	2.5	5.0	3.1	*	2.5	5.0	3.1	4	0	2.5	4.5	
15	149	2	2	4.0	9.0	*	108	9	11	8.5	12.5	*	79	8	10	5.0	7.0	5.3	*	5.0	7.5	3.3	*	3.6	*	4.0	7.0	3.3	*	4.0	6.5	3.6	*	4.0	6.5	3.6	*	4.0	6.5	3.6	*	4.0	6.5	3.6	2	2	2.5	4.0	
16	147	4	2	5.5	9.0	*	109	8	6	11.0	15.5	*	81	7	6	3.0	6.0	5.9	5	6	1.0	3.0	4.1	7	9	2.0	4.0	4.3	*	2.0	4.0	4.3	*	3.0	6.0	2.1	*	3.0	6.0	2.1	*	3.0	6.0	2.1	2	2	2.0	3.5	
17	147	4	2	6.0	10.0	*	109	10	4	8.0	13.5	*	89	6	2	2.5	6.0	6.7	4	4	2.5	4.0	4.8	4	49	2.3	5	4.0	4.3	*	4.0	7.5	4.3	*	4.0	7.5	4.3	*	4.0	7.5	4.3	*	4.0	7.5	4.3	1	1	1.0	2.5
18	151	2	2	5.0	10.0	*	115	5	3	5.0	9.5	*	95	8	6	4.0	8.0	6.9	6	4	3.0	4.0	5.7	8	4.0	7.0	5.3	8	8	6.0	9.0	4.3	4	4	3.0	6.0	4.3	4	4	3.5	6.0	1.9	2	1	1.5	3.0			
19	151	2	2	6.0	11.0	*	119	4	4	6.0	11.5	*	99	4	5	4.0	8.0	7.1	12	6	2.5	4.5	5.8	4	6.0	4.5	5.1	7	6	3.5	6.0	4.1	12	4	3.0	5.5	1.9	1	1	1.0	2.0								
20	151	4	2	6.0	11.0	*	119	6	4	6.0	10.0	*	99	5	7	5.5	10.5	8.6	9	15	2.0	5.5	5.8	9	4.0	7.0	5.2	12	6	3.0	6.0	4.1	6	6	3.0	6.0	4.1	6	6	3.0	6.0	1.9	1	2	1.0	2.5			
21	151	2	2	7.5	12.0	*	119	7	4	6.0	11.5	*	99	6	6	3.0	6.5	8.7	8	12	2.5	4.5	5.7	8	5.0	9.0	5.2	10	6	4.0	7.0	3.9	7	7	3.0	5.0	1.9	2	2	1.5	2.5								
22	152	2	3	7.0	12.5	*	120	4	6	6.0	10.0	*	99	6	4	5.0	11.0	8.7		1.5	3.0	5.6			3.0	6.0	5.1	4	6	3.5	6.5	3.5	12	4	2.5	5.0	1.9	0	2	1.0	2.5								
23	153	1	3	7.0	11.5	*	120	5	6	8.5	13.5	*	101	7	5	7.0	11.5	8.3		2.0	4.0	5.8			6	6	3.5	6.5	5.7	4	4	4.0	7.0	3.7	6	6	2.0	4.0	1.9	1	2	1.0	2.5						

F_{am} = median value of effective antenna noise in db above kTb
 D_u = ratio of upper decile to median in db
 D_f = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8N Long. 78.2W Month September 1963

Hour (ST)	Frequency (Mc)																	
	.135			.500			2.5			5			10			20		
	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}
00	88	6	9	71	3	7	61	5	6	37			24	1	2			
01	89	5	8	71	3	9	61	6	6	37			23	1	1			
02	88	7	7	71	4	7	61	5	6	37			23	1	2			
03	88	6	9	70	5	6	61	3	6	36			23	1	2			
04	87	10	6	70	5	7	59	5	6	35			25	1	3			
05	82	9	5	65	9	5	57	6	6	35			25	1	2			
06	62	4	5	46	6	6	51	8	8	36			24	2	1			
07	61	4	4	40	8	5	43	9	5	36			24	2	1			
08	60	5	2	35	6	3	34	8	6	37			24	3	2			
09	60	5	1	34	5	3	31	6	5	35			24	3	1			
10	61	5	3	34	5	3	30	4	5	34			25	2	3			
11	61	4	3	34	4	2	28	4	3	34			24	3	2			
12	60	5	2	34	4	2	30	6	3	34			27	2	3			
13	60	5	1	34	6	2	30	7	2	34			28	2	2			
14	61	5	2	34	6	2	31	8	2	37			*28					
15	61	8	3	36	4	4	32	16	3	39			*28					
16	61	10	2	37	10	3	38	10	7	40	3	2	32	4	1			
17	61	14	3	42	17	5	44	15	2	44	2	3	*30					
18	67	13	5	55	16	7	53	10	4	46	3	5	29	2	2			
19	80	9	7	63	15	8	59	8	5	45	4	5	28	3	2			
20	81	10	5	63	16	6	61	8	7	44	5	6	24	3	1			
21	85	7	7	67	12	8	61	7	6	42	4	4	25	1	2			
22	86	5	6	67	10	8	61	5	5	39	7	3	24	2	2			
23	87	6	9	69	7	9	61	5	5	39	6	5	24	2	1			

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month October 19 63

Hour (ST)	Frequency (Mc)																	
	.135			.500			2.5			10			20					
	F _{am}	D _z	V _{dm} -L _{dm}	F _{am}	D _z	V _{dm} -L _{dm}	F _{am}	D _z	V _{dm} -L _{dm}	F _{am}	D _z	V _{dm} -L _{dm}	F _{am}	D _z	V _{dm} -L _{dm}			
00	108	3	3	87	5	4	65	5	4	59	5	4	40	3	3	23	3	1
01	108	4	5	87	5	3	65	5	7	59	5	4	39	6	3	23	3	1
02	108	5	5	87	5	3	64	6	6	59	6	3	38	6	3	22	2	0
03	107	6	5	86	4	4	64	4	8	58	5	3	38	4	3	22	3	0
04	106	8	3	85	5	5	62	5	6	58	3	4	38	3	2	22	2	0
05	104	9	5	79	8	4	60	7	7	56	5	3	38	3	3	22	2	0
06	98	10	6	63	9	5	48	9	6	51	7	4	40	3	4	22	2	0
07	93	15	5	59	13	3	40	8	5	43	7	2	41	4	3	23	1	1
08	94	12	7	56	12	2	36	6	4	37	7	2	39	6	3	26	2	1
09	93	11	8	56	10	2	34	6	4	34	6	3	37	6	2	26	2	1
10	94	9	9	57	11	2	34	3	5	33	4	3	36	6	2	26	2	1
11	94	10	9	58	6	3	33	5	3	31	4	2	36	6	3	26	2	1
12	94	10	7	59	8	3	31	7	3	33	4	2	37	6	3	26	3	1
13	94	12	8	59	12	3	31	7	2	34	8	2	39	6	4	27	3	1
14	95	13	10	59	13	3	32	6	2	36	11	4	41	5	4	28	3	1
15	96	11	10	59	15	3	34	7	5	39	8	5	43	6	3	30	2	3
16	97	11	12	59	17	3	41	7	5	45	6	5	44	7	3	28	3	2
17	98	10	10	61	16	5	49	12	7	52	6	6	46	3	6	27	3	2
18	104	6	18	64	10	10	57	10	7	57	7	5	46	3	7	26	2	1
19	107	5	25	81	7	11	63	7	9	59	6	4	43	5	5	26	1	1
20	107	5	27	83	8	5	63	7	8	59	6	4	41	5	5	24	1	1
21	107	6	29	84	6	4	64	5	6	59	6	4	40	6	3	24	1	1
22	107	6	29	86	3	6	63	7	5	59	5	4	39	6	2	23	1	0
23	107	5	30	86	5	4	65	5	6	59	5	3	40	3	3	23	1	1

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 D_z = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia

Lat. 38.8 N Long. 78.2 W

Month November 19 63

Hour (ST)	Frequency (Mc)																		
	.135			.500			2.5			5			10			20			
	F _{am}	D _z	V _{dm} L _{dm}	F _{am}	D _z	V _{dm} L _{dm}	F _{am}	D _z	V _{dm} L _{dm}	F _{am}	D _z	V _{dm} L _{dm}	F _{am}	D _z	V _{dm} L _{dm}	F _{am}	D _z	V _{dm} L _{dm}	
00	107	7	5	86	4	5	58	8	6	5	54	8	5	36	2	2	22	2	0
01	108	6	8	86	6	5	58	7	6	5	53	7	5	35	3	1	22	2	0
02	106	8	5	85	6	6	59	7	7	6	54	7	6	35	3	2	22	2	0
03	105	11	5	83	9	5	60	6	10	7	55	6	7	35	3	2	23	1	1
04	104	11	6	79	9	7	62	8	8	6	56	6	6	37	3	2	23	1	1
05	102	8	6	74	10	6	61	7	8	6	55	7	6	37	2	1	23	1	1
06	100	5	6	65	6	6	57	8	7	4	51	9	4	37	3	1	23	1	1
07	94	8	3	57	3	4	48	5	5	6	48	4	6	40	6	2	23	1	1
08	89	10	3	55	5	3	37	4	5	5	37	4	5	39	6	3	24	1	2
09	89	8	3	56	4	3	35	4	4	5	33	4	5	39	6	3	24	2	1
10	91	6	5	55	5	3	33	7	3	6	32	3	6	38	5	2	24	2	1
11	91	4	4	56	3	2	32	6	3	6	29	6	6	38	4	2	25	2	1
12	89	8	4	56	4	3	32	6	3	6	29	4	6	40	4	2	25	3	1
13	89	8	4	56	4	3	32	7	3	3	30	4	7	41	4	3	26	2	2
14	90	8	5	56	6	4	33	7	2	2	31	6	5	42	4	3	26	2	2
15	91	8	6	56	6	3	35	4	4	5	35	5	5	45	3	4	26	2	2
16	93	8	6	61	5	3	43	6	5	6	45	5	6	45	3	5	26	2	2
17	97	8	8	67	7	6	51	5	7	6	50	5	6	43	5	4	24	3	1
18	102	5	7	76	7	7	55	6	6	6	53	5	7	41	4	3	24	2	1
19	103	6	6	79	6	6	57	6	6	6	54	6	6	39	5	2	24	1	1
20	106	6	7	84	4	6	58	6	7	7	53	5	6	36	4	2	24	1	1
21	108	4	6	84	7	5	60	5	10	5	53	6	5	36	2	2	23	2	1
22	108	4	6	85	6	6	61	4	9	6	54	7	6	36	2	2	23	2	1
23	106	7	5	85	6	4	58	8	7	4	53	8	4	36	2	2	23	1	1

F_{am} = median value of effective antenna noise in db above k1f
 D_z = ratio of upper decile to median in db
 D_z = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4N Long. 3.9E

Month February 19 62

Hour (LT)	Frequency (Mc)																													
	.051			.113			.246			.545			2.5			5			10			20								
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	133	6	12			108	4	13			90	5	11			67	8	8			46	4	12			25	3	1		
01	134	5	11			106	7	12			90	6	11			68	8	12			42	6	10			26	0	2		
02	133	8	9			106	8	10			88	10	8			70	4	12			42	6	10			26	0	2		
03	135	6	12			107	8	12			90	9	10			68	6	14			42	6	14			26	2	2		
04	135	4	12			102	12	7			88	10	7			68	6	9			36	10	4			28	6	4		
05	131	8	10			98	11	13			74	17	12			66	8	6			40	9	10			30	5	5		
06	127	6	12			85	12	14			66	16	12			58	10	15			44	4	14			30	5	6		
07	124	9	13			85	13	6			64	18	14			44	15	8			38	8	10			32	6	8		
08	123	14	9			88	16	8			60					40	8	10			42	9	8			30	4	4		
09	125	13	18			86	13	13			64					40	9	14			37	12	7			33	12	8		
10	121	13	12			80	17	13			61					38	8	7			32	14	5			30	6	8		
11	125	12	17			81					66					38	5	12			35					32	10	8		
12	121	18	13			78	26	13			65					38	10	12			34	10	7			31	9	7		
13	123	16	12			76	26	12			60					36	14	9			31	13	6			34	6	10		
14	125	15	12			82	23	16			66	20	10			36	16	5			40	6	8			36	6	8		
15	123	18	9			86	24	20			66	26	14			36	22	6			42	3	14			42	3	14		
16	129	12	18			92	26	27			69	30	17			48	15	14			48	8	18			44	6	11		
17	127	18	18			96	25	20			83	18	20			52	15	13			58	8	14			46	10	8		
18	129	15	15			104	11	12			87	11	8			66	12	16			62	6	15			44	4	10		
19	133	10	12			102	12	8			88	8	10			69	7	14			62	6	12			43	5	7		
20	133	10	14			100	14	10			86	11	10			68	5	15			64	4	18			46	4	10		
21	133	10	16			104	8	14			89	6	12			68	6	16			60	8	11			48	4	11		
22	133	8	13			106	4	14			90	6	11			68	7	14			60	6	16			46	4	11		
23	133	8	14			107	3	16			90	6	15			68	8	15			58	8	10			44	6	11		

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

This sheet is a correction for corresponding sheet appearing in Technical Note 18-18. 20 Mc Du for 0400 should be 6 db instead of 0.

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Month September 19 63

Hour (LST)	Frequency (Mc)																																											
	.013				.051				.160				.495				2.5				5				10				20															
Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	153	2	2	9.0	14.0	128	4	9.5	14.5	106	10	4	9.5	14.5	82	14	4	7.5	12.5	58	6	4	7.5	11.5	56	2	6	3.6	4	4	3.5	5.5	2.2	2	0	1.5	3.0							
01	153	2	2	8.5	14.0	130	4	8.0	13.0	106	10	4	9.0	14.0	86	10	8	8.0	12.5	58	8	4	7.0	11.5	56	4	4	3.6	4	4	4.5	6.5	2.2	2	1.5	3.5								
02	153	2	2	9.0	14.5	132	4	9.0	14.5	108	8	5	10.0	17.0	84	10	6	9.5	15.0	58	4	6	7.5	10.5	54	4	2	3.6	6	4	3.5	5.5	2.2	2	1.5	3.0								
03	151	4	2	10.0	16.5	130	4	10.0	16.0	106	8	4	9.5	16.0	82	14	4	9.0	16.5	56	6	2	9.0	14.0	52	7	0	3.4	4	4	2.5	4.0	2.0	4	0	1.5	3.0							
04	151	4	2	11.0	17.0	132	4	11.0	19.0	108	8	6	11.0	19.0	84	13	8	8.0	14.5	58	4	6	9.0	14.0	52	6	4	3.4	4	4	2.5	4.0	2.0	4	0	1.0	2.5							
05	153	2	4	10.5	17.0	132	4	11.0	17.5	106	8	8	10.0	16.0	82	12	10	10.0	12.5	58	6	4	9.5	15.0	50	6	4	3.0	6	4	5.5	8.0	3.0	6	0	2.0	3.5							
06	153	4	2	11.5	18.0	130	4	11.0	18.0	96	8	8	8.5	14.5	62	13	4	3.0	6.0	56	6	4	8.0	12.0	48	4	4	3.2	4	4	2.0	4.0	2.2	2	2	2.0	4.0							
07	151	2	2	11.5	18.5	122	2	10.5	16.0	74	10	6	4.0	5.5	50	10	2	3.0	5.5	42	6	4	4.0	5.0	38	4	4	3.2	4	4	3.5	6.0	3.2	4	0	2.0	4.0							
08	151	0	4	10.5	17.0	112	8	9.0	14.5	70	12	8	2.5	5.0	50	10	2	3.5	6.0	38	4	8	3.5	5.0	26	8	4	4	4.5	6.0	4.0	6.0	2.0	2	0	2.0	3.5							
09	149	4	2	10.0	16.0	108	6	4	7.5	12.0	71	15	7	3.0	5.5	48	12	2	3.5	6.0	30	6	2	3.0	5.0	22	6	4	4	3.0	4.5	2.3	5	3	3.0	5.0	2.0	2	0	2.0	4.0			
10	149	4	2	10.0	16.0	108	12	4	8.0	11.5	74	16	10	3.0	6.0	50	8	4	4.5	6.0	29	9	3	3.0	5.0	20	8	4	4	2.5	4.5	2.0	6	2	4.0	6.0	2.0	2	2.0	4.0				
11	149	4	2	11.0	17.0	110	6	4	9.0	12.5	74	8	10	3.0	5.5	48	8	2	3.5	6.5	28	6	2	3.0	5.0	19	7	3	4	2.5	4.5	1.8	4	4	3.5	5.0	2.0	2	2.0	4.0				
12	149	4	2	11.0	17.0	110	6	4	8.5	12.5	70	10	6	5.5	8.5	48	14	4	2.5	4.5	28	6	2	3.0	5.0	20	6	4	4	2.0	4.5	1.8	2	2	4.0	6.0	2.0	2	2	1.5	3.5			
13	149	4	2	11.0	17.5	110	8	4	9.0	12.0	70	12	6	7.0	9.0	50	12	6	4.0	7.0	28	4	2	2.5	4.5	19	3	3	4	2.5	5.0	1.8	2	2	4.0	6.0	2.0	2	2	2.5	5.0			
14	149	2	2	10.5	17.0	110	8	4	11.0	15.5	66	18	4	4.5	6.5	50	14	4	2.5	5.0	28	6	2	2.5	3.5	20	4	4	4	3.0	5.0	1.8	6	2	4.0	6.0	2.2	2	4	2.5	4.5			
15	149	2	4	11.0	18.0	110	8	6	9.0	13.0	66	14	5	5.0	7.5	46	8	2	3.0	5.5	28	8	4	2.0	3.5	22	6	6	4	2.0	4.5	2.6	2	7	2.5	5.0	2.2	2	2	2.0	3.5			
16	147	4	3	12.0	19.0	107	8	5	8.5	12.0	64	16	4	4.0	5.5	48	18	4	3.0	5.5	28	11	2	2.0	4.5	24	6	8	4	4.0	6.5	2.2	1	2	4.0	7.5	2.2	2	2	3.0	5.0			
17	147	3	2	11.5	18.5	106	6	4	7.0	11.0	69	10	5	2.5	4.5	51	8	5	3.0	5.0	32	11	6	3.0	5.0	32	6	7	4	4.0	4.5	3.6	4	4	4.0	7.5	2.2	2	2	2.0	5.0			
18	147	2	2	10.5	16.5	109	6	1	7.0	11.0	86	5	5	5.5	9.0	62	5	2	3.0	5.5	40	5	8	2.5	4.5	46	6	6	4	4.0	6.5	2.2	4	2	4.0	6.5	2.2	4	2	2.0	3.5			
19	147	2	0	9.0	16.0	116	5	4	7.0	11.0	92	10	4	6.0	10.0	74	6	7	4.0	7.0	48	6	4	4.0	6.0	50	5	3	4	4.5	7.0	2.4	1	2	4.5	7.0	2.4	1	2	2.0	3.5			
20	149	2	2	8.5	15.0	118	4	2	8.0	13.0	95	13	6	6.5	12.0	76	12	5	4.5	7.5	52	11	4	7.0	10.5	52	4	5	4	3.5	6.0	3.6	4	2	4.5	6.5	2.2	3	0	1.0	3.0			
21	151	2	4	9.0	14.0	121	3	4	8.0	12.5	98	12	4	7.5	12.5	78	13	5	5.0	9.0	54	8	4	6.0	9.0	54	2	6	4	3.0	5.5	3.6	3	4	3.0	5.0	2.2	3	0	1.0	2.5			
22	151	2	2	8.0	13.0	124	5	3	9.5	14.5	102	8	6	8.0	13.0	82	11	5	8.5	12.5	56	6	4	6.5	12.0	54	6	2	4	3.5	6.5	3.6	4	2	4.0	6.5	2.2	3	0	1.5	3.0			
23	151	2	2	8.0	13.5	126	6	4	10.0	15.5	104	7	6	8.5	14.5	84	10	8	7.0	11.5	58	5	4	6.5	12.5	54	8	1	4	4.0	6.0	3.6	4	3	4.0	7.0	2.2	4	0	1.5	3.0			

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_f = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Month October 19 63

ST	Frequency (Mc)																																										
	.013			.051			.160			.495			2.5			5			10			20																					
Fam	Du	Dl	Vdm	Ldm	Fam	Du	Dl	Vdm	Ldm	Fam	Du	Dl	Vdm	Ldm	Fam	Du	Dl	Vdm	Ldm	Fam	Du	Dl	Vdm	Ldm																			
00	153	4	12.0	19.0	133	4	5	13.5	21.0	109	8	8	12.0	20.0	56	4	4			33	2	2	4.5	6.5	23	0	2	1.5	3.0														
01	153	3	12.5	19.5	132	5	4	12.0	19.5	113	6	6	10.5	18.5	92	10	11	11.0	20.5	56	4	3			23	1	2	2.0	4.0														
02	153	7	11.5	18.0	134	5	7	11.5	18.5	113	8	8	11.0	18.0	92	8	11	11.5	22.0	56	5	3			35	9	4	0	2.5	4.0													
03	153	4	13.0	20.0	134	4	6	13.0	20.5	111	9	4	11.0	20.5	88	9	8	11.5	20.0	55	4	4			33	5	2	0	3.0	5.5													
04	153	3	11.5	18.0	134	2	7	13.0	21.0	109	10	4	11.0	18.0	92	6	14	12.5	21.5	54	2	6			33	2	0	2.5	4.0														
05	153	4	12.0	17.5	132	5	5	14.0	21.0	107	12	6	11.5	18.0	82	15	7	10.0	17.0	61	6	8			50	7	4																
06	153	4	12.0	18.0	130	5	2	13.5	21.0	103	10	6	11.0	17.5	72	12	7	10.0	17.0	58	9	8			50	5	5	0															
07	151	3	12.0	18.0	122	7	2	11.0	18.5	87	16	10	8.0	12.0	62	15	11	5.5	8.0	47	10	5			37	3	8	7.5	10.5	2	2	4.0	6.0										
08	149	5	12.0	18.5	116	8	4	12.5	19.0	77	23	8			58	20	8	4.5	8.0	40	9	3			36	4	7																
09	149	4	12.0	18.0	109	9	6	12.0	16.0	76	19	7			56	13	7	5.0	8.0	34	5	5			29	3	8	8.0	11.0	2	1	4.0	6.0										
10	149	2	12.5	18.0	110	7	8	12.5	18.5	73	20	6			59	24	11	8.5	15.0	32	4	5			25	2	6	6.0	8.0	2	2	3.0	5.0										
11	149	2	12.5	18.5	112	6	8	13.5	18.5	73	22	8			55	26	6	5.0	8.0	31	5	5			21	9	4	7.0	10.0	3	2	3.0	5.0										
12	149	4	12.0	18.0	112	10	8	8.5	13.0	69	24	4			53	13	2	5.0	8.0	30	6	4			23	7	5	3.5	7.0	19	6	4	2.5	4.5									
13	149	5	14.0	20.5	114	8	8	13.0	17.0	69	32	4			56	16	6	4.5	7.0	30	5	4			20	12	3	2.5	4.5	21	10	5	7.0	11.5	2	4	2	4.0	6.5				
14	149	4	15.0	22.0	118	5	11	13.0	16.5	74	26	9			60	18	12	10.0	18.5	30	9	4			23	12	3	3.5	5.0	23	13	5	8.5	11.5	2	3	5.0	7.0					
15	149	5	15.5	23.0	114	12	9	11.0	15.5	72	22	7			56	20	8	6.0	8.5	30	11	2			24	5	5	3.5	5.5	27	10	6	9.0	14.0	4	1	4.0	7.0					
16	149	3	14.5	21.0	110	9	4	13.0	17.0	69	28	6			54	21	6	5.5	7.0	32	10	4			28	10	9	5.0	8.0	29	10	4	8.0	11.5	2	5	2	8.0	11.0				
17	149	5	13.0	21.5	108	16	6	8.0	11.5	83	16	17			62	18	6	4.0	6.0	37	12	6			38	5	6	4.5	7.0	35	6	4	9.0	13.5	2	3	4	2	5.0	7.0			
18	147	5	11.5	18.5	111	14	4	8.0	11.5	91	13	13			71	15	8	5.0	7.5	48	4	7			46	7	5	3.5	5.5	38	3	5	9.5	13.5	2	2	0	3.0	5.0				
19	147	4	11.0	17.5	118	9	6	13.0	17.5	99	10	7			82	9	7	10.0	17.0	54	10	7			54	10	7	11.0	16.0	49	7	6	4.5	7.5	35	6	1	7.0	9.5	2	0	4.0	6.5
20	149	7	12.0	18.5	120	11	4	13.5	20.5	103	12	6			83	14	7	12.0	20.0	58	9	8			50	6	6	6.0	8.5	35	2	1	4.5	6.0	23	2	0	2.0	4.0				
21	150	6	12.5	18.5	124	12	5	15.0	21.0	105	12	6			86	11	8	10.0	17.0	60	11	9			51	9	5			37	3	3	5.0	7.0	2	1	0	2.0	4.0				
22	150	5	11.0	18.0	128	7	4	14.5	21.0	108	7	6			85	11	6	11.0	21.0	58	10	5			52	6	5	6.0	10.0	38	3	4			23	0	1	2.0	3.5				
23	151	4	11.5	18.5	129	6	2	12.5	20.5	109	9	3			90	8	6	12.0	21.0	60	6	4			54	4	5	5.0	8.0	35	5	0			23	1	2	1.0	3.0				

Fam = median value of effective antenna noise in db above kit
 Du = ratio of upper decile to median in db
 Dl = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii

Lat. 22.0 N Long. 159.7 W

Month November 19 63

Hour (ST)	Frequency (Mc)																																					
	.013				.051				.160				.495				2.5				5				10				20									
	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}		
00	154	4	120	180	130	8	4	120	180	109	10	7	105	180	87	12	6	100	190	60	8	6	75	120	54	4	2	36	2	40	65	21	2	0	15	30		
01	154	4	115	180	132	7	4	105	170	109	11	6	105	175	87	10	8	105	175	58	10	2	70	120	54	5	4	36	2	45	70	21	2	0	15	30		
02	154	4	115	185	132	6	4	115	180	111	7	7	110	170	88	9	7	105	180	58	11	4	80	120	54	5	4	34	4	45	65	21	2	0	10	30		
03	154	5	110	170	134	4	5	125	170	111	6	6	110	160	91	6	6	125	180	60	8	6	80	135	52	4	4	34	2	40	60	21	2	0	15	30		
04	156	3	120	185	132	6	2	120	190	109	8	5	110	170	87	10	10	110	185	62	5	7	90	150	52	4	5	30	4	0	30	45	21	2	0	15	30	
05	156	4	120	180	134	3	4	115	185	107	8	4	110	160	86	9	7	120	205	60	7	5	85	140	50	3	5	30	3	1	20	40	21	2	0	10	30	
06	156	4	120	185	132	4	4	120	190	105	8	7	100	150	79	9	8	85	135	60	8	7	75	130	48	5	4	30	3	0	30	50	21	2	0	10	25	
07	154	3	115	185	122	4	1	110	175	93	4	16																										
08	150	5	130	195	118	7	4	120	180	81	16	7																										
09	150	4	130	200	112	3	10	110	150	87	16	13																										
10	150	5	130	185	114	12	12	120	150	83	21	12																										
11	150	6	125	190	112	14	10	100	130	87	12	16																										
12	150	7	145	215	112	12	8	125	185	87	16	16																										
13	150	7	140	220	112	14	10	115	185	85	16	16																										
14	150	6	145	230	114	10	12	135	190	83	18	14																										
15	150	6	150	225	110	14	8	100	140	79	19	12																										
16	150	5	140	225	109	13	9	120	170	79	18	12																										
17	150	4	145	225	108	14	8	80	130	85	14	13																										
18	148	4	125	195	114	11	8	80	120	95	14	16																										
19	148	8	125	200	120	10	7	105	175	99	14	10																										
20	150	7	120	190	120	12	5	125	180	105	11	12																										
21	152	5	115	180	124	12	6	130	180	103	14	6																										
22	152	5	100	165	126	10	5	115	180	109	9	10																										
23	154	4	115	175	130	7	4	115	180	111	8	8																										

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Sl. No.	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}													
00	155	2	4	7.0	9.0	134	4	8.0	11.0	114	7	6	5.5	8.0	96	6	8	6.5	9.5	15	8	57	8	4	5.0	7.0	43	3	4	23	2	2	2.0	2.5							
01	155	2	4	6.5	8.5	134	6	7.5	12.0	112	8	4	8.0	11.0	94	10	6	7.0	9.5	16.5	8	57	10	4	4.0	6.5	43	4	10	3.5	5.0	23	4	2	3.0	3.5					
02	155	2	4	8.0	10.0	135	5	7.0	11.0	114	10	6	8.0	11.0	94	12	6	7.0	9.0	16.7	10	56	8	9	6.0	8.0	42	11	11	4.5	6.0	25	2	4	8.0	13.5					
03	155	2	2	7.5	10.0	134	6	6.5	12.5	113	11	7	6.5	9.5	92	14	6	6.0	9.5	16.8	10	56	8	9	7.0	9.0	47	9	18	4.0	6.0	23	2	2	2.0	3.0					
04	155	4	4	9.0	12.5	135	8	8.5	12.5	112	12	10	8.0	11.0	93	12	11	8.5	12.5	16.5	15	53	14	8	5.5	8.0	41	14	12	4.0	6.0	23	4	2	2.0	3.0					
05	155	2	4	8.5	10.5	135	8	10	11.0	109	11	13	7.0	10.5	84	18	12	8.0	11.5	16.0	19	53	11	7	5.5	8.5	39	18	7	3.0	5.0	23	2	2	1.0	2.5					
06	152	6	3	9.5	12.0	128	9	8	11.0	96	24	4	13.5	19.5	76	23	7	8.5	10.0	35	14	55	12	17	4.0	6.5	44	12	12	5.0	6.5	25	2	2	2.5	3.0					
07	151	5	3	5.5	7.5	124	12	10	10.0	130	91	24	11	9.5	15.0	74	27	6	5.0	5.5	47	16	12	7.5	11.0	53	12	25	6.0	10.5	35	12	8	2.5	4	3	4	3			
08	149	6	4	6.5	8.5	118	16	8	6.0	8.0	90	24	15	9.5	15.0	76	18	10	5.0	7.0	41	17	7	2.0	2.5	39	27	27	14	6.0	10.0	30	16	6	6.5	8.0	2.4	4.0	5.0		
09	150	2	4	9.0	13.0	122	12	11	9.0	12.0	94	24	4	9.5	13.0	74	22	7	2.0	3.5	38	21	7	6.0	15.5	35	35	35	7	6.0	15.5	35	21	7	6.0	15.5	35	21	7	6.0	15.5
10	150	5	3	8.0	11.5	124	12	10	8.0	11.5	96	22	16	7.0	12.5	74	28	4	10.5	15.0	39	17	8	9.0	14.5	30	17	9	9.0	14.5	29	17	9	9.0	14.5	29	17	9	9.0	14.5	
11	151	6	2	8.0	11.0	124	14	9	8.0	11.5	96	25	13	10.5	15.0	80	22	12	3.0	14.0	41	14	7	9.5	13.0	35	23	10	7.5	10.0	31	12	8	6.0	8.5	2.5	4	2	4.5	5.0	
12	153	4	2	7.0	9.0	126	12	6	9.0	11.5	108	13	17	13.0	18.0	85	20	12	5.0	6.5	45	19	11	4.0	5.0	37	28	13	9.0	12.5	34	13	13	6.5	9.5	2.5	5	3	3	3	
13	155	4	4	7.5	9.0	130	10	6	8.0	10.5	110	16	18	8.0	10.5	93	12	23	9.5	10.5	57	10	24	10	24	47	22	21	7.5	12.0	37	11	12	4.0	10.0	2.7	4	4	4.5	5.5	
14	157	4	4	9.5	11.5	132	9	10	9.0	12.0	110	14	16	13.5	17.5	88	18	18	13.5	17.0	54	13	22	16	3.0	5.0	47	45	16	18	5.0	8.0	41	9	13	2.9	2	4	4.0	5.0	
15	156	4	3	9.0	12.5	130	10	6	12.0	15.5	114	6	19	11.0	15.0	88	17	14	13.0	17.0	53	13	16	3.0	5.0	47	53	11	18	7.0	10.0	47	11	7	7.5	11.5	2.9	4	4	5.0	5.5
16	157	4	5	7.0	10.5	132	10	8	8.0	10.0	112	8	20	8.5	11.5	88	18	11	6.0	8.0	54	10	59	10	22	45	10	22	4.5	5	19	5	19	2.9	5	4	5.0	5.5			
17	155	5	4	8.0	10.0	130	10	4	7.5	8.5	134	4	10	9.0	12.0	94	11	8	8.0	12.0	65	10	22	10	22	59	8	11	5.0	8.0	47	6	12	6.0	8.0	2.7	5	5	4.0	5.0	
18	153	4	2	5.5	7.5	133	7	7	6.0	9.0	112	6	6	8.0	11.0	96	10	8	6.0	8.5	65	8	15	6.0	9.0	43	7	9	6.0	10.0	43	7	6	3.5	5.5	2.7	3	4	2.5	3.5	
19	155	2	2	6.0	8.0	132	6	6	8.0	11.0	114	8	10	6.5	10.0	96	10	8	6.5	10.0	63	12	17	5.0	7.0	59	9	12	5.0	7.5	43	3	6	3.5	5.5	2.5	2	2	2.0	3.0	
20	155	4	2	5.5	8.0	134	2	6	8.5	11.5	114	8	8	7.5	10.5	94	12	6	7.5	11.0	65	8	5	5.5	8.0	57	8	4	4.5	6.5	43	6	8	3.0	4.5	2.5	2	3	2.5	3.5	
21	155	2	2	7.0	9.0	132	6	2	6.0	8.0	114	8	6	6.5	9.0	95	9	7	7.5	10.5	64	9	13	7.0	10.0	55	11	5	5.0	8.0	41	4	4	3.5	5.5	2.3	4	0	1.0	2.5	
22	155	2	4	7.0	9.5	134	6	4	7.5	10.0	115	7	7	7.5	10.0	96	8	8	9.0	12.0	63	10	8	7.0	10.0	57	11	6	4.0	6.0	43	2	4	4	3	2.4	3	2.0	2.5		

F_m = median value of effective antenna noise in db above ktb

D_g = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Month October 19 63

Hour (LST)	Frequency (Mc)										20																										
	.013			.051			.160			.495			2.5			5			10			20															
	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}	F _m	D _f	V _{dm} L _{dm}													
00	152	4	2	7.0	10.0	132	4	4	9.5	12.5	113	6	6	8.5	11.5	93	6	8	8.5	11.5	64	6	10	5.0	8.0	75	4	12	3.5	6.0	26	2	2	3.5	4.0		
01	152	4	3	8.5	11.0	132	4	5	10.0	13.5	112	5	7	10.0	14.5	92	6	7	10.0	14.5	64	6	16	5.0	7.0	45	2	8	3.5	5.5	25	3	3	3.5	5.0		
02	152	4	2	8.0	10.0	132	4	5	9.5	12.5	111	6	6	10.0	14.5	92	6	7	10.0	13.0	64	4	6	4.5	7.0	45	2	6	5.5	8.0	26	2	4	3.0	4.0		
03	152	4	2	7.5	10.0	130	5	4	10.0	13.5	111	6	6	11.5	16.0	90	8	6	8.5	8.0	64	4	12	3.0	5.5	45	2	7	4.0	6.0	26	2	4	3.0	4.0		
04	152	4	2	8.0	10.0	130	6	4	10.0	13.0	107	6	4	11.5	16.5	89	6	5	10.0	14.0	62	8	8	4.5	5.5	64	4	3	11	5.0	6.5	24	4	4	2.0	2.5	
05	152	4	3	8.0	10.0	128	6	4	9.0	12.0	105	6	2	8.0	12.5	82	6	6	5.0	7.0	62	2	8	4.0	5.5	64	6	10	4.0	7.0	45	8	12	3.0	4.5		
06	151	3	3	7.5	9.5	124	8	4	7.0	9.5	91	12	4	6.5	8.0	78	4	4	3.0	5.0	60	4	4	3.0	6.0	67	3	11	3.0	5.0	26	2	4	2.0	3.5		
07	150	2	4	6.5	8.0	119	7	3	8.0	11.0	91	8	4	7.0	9.0	80		4	3.0	4.5	6.0	5	8	4.0	5.5	65	4	10	4.0	7.0	45	6	8	2.0	5.0		
08	146	6	2	6.0	8.0	116	4	2	6.0	8.0	91	8	4	5.0	7.0	78	4	2	3.0	5.0	62	2	2	1.5	3.0	6.0	6.0	4	1.2	2.0	5.5	4.5	6	6	2.5	4.0	
09	146	6	3	5.0	7.0	118	6	6	5.0	7.0	93	7	6	5.0	8.0	80	4	2	3.0	5.0	58	8	8	2.0	3.5	6.0	5	13	4.0	7.0	47	3	9	2.0	4.5		
10	146	6	2	5.0	7.0	118	6	6	6.5	9.0	92	7	5	7.0	10.0	80	1	6	3.0	4.0	61	3	5	4.0	6.5	6.0	4	12	4.0	7.0	49	2	19	4.0	6.5		
11	148	4	4	5.5	7.5	120	6	6	6.0	8.5	93	8	4	7.0	10.0	80	2	5	3.0	4.0	62			3.0	5.0	6.0	4	11	3.5	7.0	28	4	11	3.5	7.0		
12	148	6	2	8.0	10.0	122	6	6	8.0	11.0	95	10	4	9.0	12.0	80	4	4	3.0	5.0	60	4	14	3.0	5.0	6.0	4	10	4.0	6.5	47	4	6	2.5	5.5		
13	150	6	4	6.0	8.0	124	8	8	7.0	10.0	98	9	7	10.5	15.0	80	4	2	3.0	4.5	60	4	8	2.0	5.0	6.0	4	9	4.5	5.5	47	4	6	3.5	5.0		
14	151	5	7	8.0	10.5	123	7	5	8.0	10.0	97	10	8	10.5	15.5	80	4	2	3.0	4.5	62	2	5	2.5	5.0	6.0	2	10	3.5	5.5	49	2	6	3.5	5.5		
15	152	4	6	7.0	9.0	124	8	10	8.0	10.0	99	10	8	7.5	12.0	80	5	4	4.0	6.0	62	2	5	2.0	5.0	6.0	3	10	3.0	6.0	48	5	6	4.5	6.5		
16	152	4	6	6.5	8.5	124	6	10	8.0	11.0	97	10	6	9.0	13.0	82	4	6	5.0	7.0	61	3	5	3.0	5.5	6.0	2	4	3.0	5.0	47	4	4	4.0	6.0		
17	152	2	6	6.0	7.5	126	6	8	9.0	13.0	105	10	8	8.0	12.5	88	8	8	6.0	10.0	62	3	6	4.0	6.0	6.0	6	8	3.5	6.0	47	6	3	4.0	6.5		
18	151	3	3	5.5	7.5	128	6	8	8.0	11.0	107	10	4	9.0	13.5	94	6	14	8.0	11.0	60	10	6	2.5	5.0	5.0	9	7	2.5	5.0	45	9	9	2.0	4.0		
19	150	4	2	5.0	7.0	127	7	5	9.0	12.5	109	6	6	7.0	14.5	94	6	12	8.0	12.0	60	10	6	1.5	3.0	6.0	6	7	2.0	4.0	43						
20	152	2	2	5.5	7.5	128	9	6	8.5	11.0	113	5	6	9.0	11.5	94	6	10	7.0	10.0	60	10	6	3.5	6.0	5.0	4	43	5	9	2.0	4.0	43	5	9	2.0	4.0
21	152	2	2	5.5	7.5	130	4	2	8.0	10.5	113	2	4	9.0	13.0	92	8	8	8.0	11.5	62	11	4	4.5	8.0	6.0	6	8	3.5	6.0	43	6	7	3.5	5.5		
22	152	4	2	6.5	9.0	132	4	4	8.0	11.0	115	4	6	7.0	10.5	91	11	5	9.0	12.0	62	8	6	3.0	5.0	6.0	6	11	5.0	7.5	43	5	3	3.0	5.0		
23	152	4	2	7.0	9.5	132	4	3	8.0	11.5	117	4	10	8.0	12.0	93	5	7	8.0	10.5	61	11	3	4.0	5.5	6.0	8	11	3.5	6.0	45	3	4	3.0	4.0		

F_m = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India. Lat. 28.8 N Long. 77.3 E Month November 19

63

Hour (IST)	Frequency (Mc)																																			
	.013				.051				.160				.495				2.5				5				10				20							
	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}	F _m	D _g	V _{dm}	L _{dm}				
00	152	4	2	9.0	11.0	14.0	11.4	9	5	10.0	12.5	9.1	16	7	8.0	12.0	6.3	11	4	5.5	9.5	6.2	6	12	3.5	6.0	4.3	8	12	4.0	6.0	2.5	2	2	2.0	4.0
01	152	6	2	9.0	11.0	14.0	11.4	8	6	9.0	13.5	9.4	10	10	9.0	12.5	6.5	12	6	6.0	8.5	6.2	9	10	4.5	7.5	4.0	10	9	4.0	6.0	2.5	4	2	2.0	3.0
02	154	6	4	9.0	12.0	14.0	11.2	10	6	11.0	14.0	9.2	15	8	9.0	12.5	6.5	8	4	4.5	6.5	6.2	8	10	5.0	8.0	4.3	8	10	4.0	6.0	2.6	2	3	3.0	4.0
03	154	4	2	8.5	11.5	15.0	11.2	10	6	10.5	15.5	9.1	13	7	8.0	12.5	6.5	8	6	7.0	10.0	6.2	8	10	3.5	5.5	4.3	8	10	3.5	5.5	2.5	4	2	2.0	3.0
04	154	2	4	7.5	10.0	13.0	11.0	10	6	14.5	21.0	9.2	8	8	11.0	14.0	6.5	6	5	9.0	12.5	6.0	10	10	5.0	7.5	4.1	10	10	3.5	5.0	2.5	4	2	2.0	3.0
05	154	4	2	8.5	11.5	14.0	11.4	7	11	10.5	14.5	9.0	8	11	11.0	14.0	6.5	6	4	7.0	10.0	6.0	10	13	4.0	8.0	4.2	9	13	3.0	4.5	2.5	4	2	2.0	3.0
06	154	2	2	8.5	10.5	11.0	10.2	11	9	8.0	11.0	9.8	14	8	3.5	8.5	6.5	5	10	5.0	7.0	6.0	10	10	3.5	6.5	4.3	10	10	2.5	5.0	2.7	2	3	2.0	3.0
07	150	2	2	8.0	10.0	12.0	9.6	17	8	6.5	11.5	8.0	10	12	2.5	4.0	6.1	2	10	5.0	9.0	6.0	10	14	3.0	5.5	4.3	9	8	3.0	6.0	2.7	2	4	1.5	2.5
08	148	6	5	8.0	11.0	11.0	9.8	12	14	8.5	14.0	7.8	5	11	2.5	4.0	5.6	9	15	3.0	5.5	5.8	12	18	10.0	14.0	4.3	8	12	6.0	9.0	2.6	2	3	2.0	3.5
09	148	6	5	8.5	11.0	17.0	10.0	7	5	13.0	20.0	7.6	6	8	3.5	5.0	5.5	10	11	7.0	9.0	6.6	3	30	3.5	7.0	3.7	14	8	3.0	6.0	2.7	2	4	2.0	3.5
10	150	2	3	8.0	10.0	10.0	10.0	10	7	11.0	18.0	7.6	13	10	3.5	4.5	4.9	16	9	3.5	5.0	6.2	9	2.8	4.5	6.0	4.0	11	7	4.0	6.0	2.7	2	4	2.0	3.0
11	148	4	4	9.0	12.5	12.0	10.2	8	13	8.5	11.5	7.7	14	10	4.5	6.0	4.5	18	8	5.0	8.0	5.7	13	2.3	3.5	6.0	4.5	5	14	5.0	7.0	2.7	4	2	2.0	3.5
12	150	4	6	8.0	10.0	10.0	10.1	15	6	13.0	21.5	7.8	18	8	6.0	7.0	5.4	10	12	2.5	4.0	6.4	6	3.2	4.0	5.0	4.6	8	16	4.0	6.0	2.9	2	2	2.5	4.0
13	150	4	2	8.0	10.5	12.5	9.9	23	9	7.5	9.5	8.2	20	14	4.5	6.0	5.8	8	17	3.0	4.0	5.3	18	2.1	3.0	6.0	4.6	8	14	3.0	5.5	3.1	3	6	3.0	5.0
14	152	2	4	8.0	10.5	12.4	16	10	8.0	10.5	10.5	8.3	21	15	2.5	6.5	5.9	9	2.3	2.5	4.0	5.8	13	2.7	4.0	7.0	4.4	10	16	3.0	4.0	2.9	6	2	5.0	7.0
15	150	4	4	6.5	9.0	12.4	14	12	8.5	9.5	10.0	8.1	21	12	3.0	5.5	5.7	12	16	3.5	5.0	6.4	8	2.3	4.5	8.5	4.5	8	12	4.0	5.0	2.9	4	4	3.0	5.0
16	150	5	4	8.0	9.0	12.2	13	10	12.0	15.0	10.4	17	15	4.0	11.0	8.4	16	14	9.5	12.0	5.9	7	1.5	4.0	7.5	5.9	10	18	4.5	9.0	2.9	3	4	1.5	4.0	
17	150	2	3	6.5	8.5	12.4	12	6	9.5	13.0	10.7	13	7	14.0	20.0	8.8	14	8	6.0	8.0	6.0	12	12	4.0	6.5	5.8	14	9	4.5	6.5	2.9	4	4	4.0	5.5	
18	152	4	4	7.0	10.0	12.9	9	7	10.0	12.0	11.0	12	8	11.0	14.0	9.0	16	10	7.0	9.5	6.1	12	6	4.0	8.5	6.0	8	7	4.5	7.5	2.5	5	1	2.0	3.0	
19	152	4	4	8.5	10.5	13.0	13	8	8.5	11.0	11.0	12	6	8.0	12.5	8.8	16	6	9.0	12.0	6.1	14	6	6.5	10.0	6.0	8	7	4.5	7.0	2.5	4	2	2.5	3.5	
20	153	1	3	7.0	10.0	13.2	10	4	11.5	15.0	11.2	11	6	7.0	11.5	9.0	16	4	10.5	14.0	6.5	6	7	9.0	13.5	6.2	6	11	3.5	7.0	2.5	4	2	1.0	2.0	
21	154	3	2	8.0	10.0	12.0	10	4	9.5	12.0	11.4	10	6	8.0	12.0	9.2	14	8	7.0	7.5	6.4	5	9	5.0	9.5	6.0	9	13	4.0	6.5	2.5	4	2	2.0	3.5	
22	154	4	4	9.0	10.5	13.2	8	4	9.5	12.5	11.3	12	3	9.0	14.0	9.0	18	4	5.0	7.0	6.3	8	10	4.0	8.5	5.9	11	9	3.0	5.5	2.5	4	2	2.0	3.0	
23	152	4	2	9.0	12.5	13.2	10	4	8.5	11.0	11.4	7	5	10.0	18.0	9.2	10	8	7.0	8.0	6.4	9	9	5.5	8.5	6.2	8	16	4.0	6.0	2.5	4	4	2.0	3.0	

F_m = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6 N Long. 140.5 E

Month November | 19 63

Fr Qz	Frequency (Mc)																																									
	.013					.160					.495					2.5					5					10					20											
Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm	Fom	D _f	Vdm	Ldm											
00	147	8	4	11.5	17.5	127	7	5	15.0	21.5	116	6	7	10.0	17.0	90	6	8	9.0	14.0	61	10	8	9.0	15.0	59	5	5	5.5	9.5	36	6	6	3.0	5.5	23	4	2	1.5	3.0		
01	146					127	8	6	14.5	21.0	115	6	7	11.0	18.0	89	11	4			61	10	4	5	5.0	9.5	36	6	6	3.5	6.0	23	6	0	1.0	3.0						
02	148	9	7	15.5	21.5	125	10	4	18.0	22.0	114	8	6	10.0	16.5	84	12	9	9.0	17.5	59	12	4	7	7.0	11.0	58	6	4	6.0	10.0	34	4	4	3.0	5.5	23	4	0	1.5	3.0	
03	147	8	6	13.5	20.0	127	8	6	14.0	21.0	113	5	8	11.5	19.0	84	14	4	11.0	20.5	61	11	6	8.0	13.0	58	6	6	6.0	9.5	34	8	4	2.5	5.0	23	4	0	1.5	3.0		
04	147	13	5	14.0	20.0	129	5	8	12.5	19.5	110	10	14	12.5	19.0	82	18	4	9.5	19.0	61	10	6	8.5	13.0	54	6	4	5.5	9.0	32	4	2	2.5	4.5	23	4	0	1.0	3.0		
05	147	11	6	14.0	20.0	127	8	6	14.0	22.0	106	12	7	11.0	20.0	80	15	7	8.0	14.0	59	10	4	7.0	11.0	54	6	6	4.5	8.5	33	5	3	2.5	5.0	23	6	0	1.0	3.0		
06	147	10	6	13.0	19.0	121	6	6	13.0	20.0	93	13	10			64	24	6	19.0	29.5	55	10	6	14.0	16.0	54	9	5	8.0	12.0	40	5	6	4.0	7.0	25	8	2	2.0	3.5		
07	143	9	2	12.5	18.0	119	10	9	17.0	21.5	88	16	12			64	15	7			45	12	4	6.0	10.0	50	10	6	4.0	6.0	42	4	5	4.0	7.0	26	3	1	2.0	4.5		
08	142	12	1	14.0	20.0	113	3	7			87	20	13	7.0	14.0	62	21	6	8.5	14.0	43	4	4	7.5	11.5	46	6	8	7.0	10.0	40	6	6	5.0	8.0	27	2	2	3.0	4.5		
09	143	10	2	17.0	23.0	113	10	8			86	14	13	8.0	14.5	62	9	6	9.5	15.0	41	4	2	7.5	11.0	40	12	4			38	7	6	5.0	8.0	27	4	2	2.0	4.0		
10	150			16.5	22.5	120			15.5	21.5	90			15.5	21.5	63			14.0	21.0	41			7.0	11.0	38					11.5	15.0	34			8.0	10.0	26	3	1	4.0	6.0
11	147					115	12	5			90	26	15	13.0	21.0	64	20	6	14.5	25.0	41	6	4	7.0	11.0	37	12	3	7.5	10.5	34	6	4	3.0	5.0	23	6	0	2.5	4.0		
12	147	10	4	16.0	22.0	113	14	2	20.0	27.0	85	20	11	12.5	20.0	61	19	5	17.0	26.0	39	15	2	7.0	10.5	36	10	4	7.0	11.5	32	6	2	4.0	7.5	25	4	2	3.5	7.0		
13	147	7	4	16.0	22.5	117	9	7	14.0	21.5	88	29	16	18.5	26.5	64	28	4	11.0	17.0	41	5	2	7.0	10.0	40	10	6	7.0	10.0	36	6	4	4.0	7.0	27	4	2	2.0	4.0		
14	146	7	7	15.0	21.5	115	10	6	16.5	23.0	84	33	10	17.0	25.5	66	26	8	12.5	23.0	41	14	2	7.0	10.0	40	14	4			36	6	4	4.5	7.0	27	2	2	2.5	5.0		
15	147	7	5	14.0	21.0	115	12	8	17.0	24.0	90	18	12	17.0	22.0	72	18	11	4.5	7.5	41	12	2	8.0	10.0	46	12	5	5.0	8.0	40	3	4	4.5	7.5	25	4	0	2.0	4.0		
16	147	6	5	12.5	19.0	111	14	5	15.0	22.0	93	14	13	12.5	19.0	80	6	14			45	12	2	6.0	9.0	52	8	5	8.0	12.5	40	6	2	2.5	5.0	25	4	0	2.0	3.5		
17	143	10	2	11.0	18.5	113	11	6	15.0	21.0	95	15	7	11.0	19.0	82	14	10	10.0	18.0	53	10	7	7.0	10.0	44	11	3	6.0	13.0	40	6	6	3.5	6.0	25	2	2	1.5	3.0		
18	144	12	3	13.0	18.5	123	8	2	13.0	19.5	100	14	8	12.0	18.5	82	15	2			53	13	4	8.0	12.0	54	6	4	6.0	10.0	40	8	6	3.5	6.0	25	2	2	1.5	3.0		
19	145	12	4	13.0	19.5	125	6	2	12.0	18.0	106	7	12	10.5	18.0	86	14	6	7.0	14.0	57	9	5	8.5	13.5	54	8	4	4.5	7.5	38	4	4	3.5	6.0	23	4	0	1.5	3.0		
20	145	13	4	12.5	18.0	123	11	2	17.0	22.0	108	6	10	10.0	17.0	86	10	6	8.0	16.0	58	10	5	5.0	8.5	56	5	4	5.5	9.5	36	6	4	3.0	5.5	23	6	0	2.0	3.5		
21	147	9	7	15.0	21.0	126	9	5	11.0	17.5	112	9	13	15.0	21.0	87	8	5	6.5	13.0	59	9	6	5.0	8.0	56	3	4	6.0	9.5	36	6	5	3.0	5.5	23	4	0	1.0	2.5		
22	147	10	6	14.0	18.0	125	8	4			112	9	7	11.5	19.0	87	11	5	9.0	15.5	59	9	2	8.0	12.0	56	4	3	6.0	9.0	34	10	4	3.0	5.0	23	6	0	1.0	3.0		
23	147	8	6	13.0	19.0	127	6	6	12.0	19.0	113	9	7	8.5	16.5	90	6	8	12.5	21.0	59	9	2	8.0	13.5	56	5	4	6.0	9.0	36	8	8	3.0	5.5	23	4	0	1.5	3.0		

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_f = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month September 19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}	F _{am}	D _f	L _{dm}
00	158	2	4	128	6	6	108	8	4	92	9	5	65	6	7	56	5	7	41	17	7	20	2	2
01	158	4	4	128	8	4	110	7	6	92	8	8	66	5	8	56	6	7	36	15	4	20	2	2
02	156	6	2	128	9	6	108	11	5	90	11	5	64	8	8	55	7	5	38	10	8	20	2	3
03	158	5	4	128	8	4	108	10	8	90	9	6	65	4	9	53	7	6	36			20	2	4
04	156	6	2	130	5	7	106	8	6	90	8	8	65	6	8	54	6	7	37	4	6	20	2	6
05	156	6	2	128	8	4	100	10	2	78	13	6	63	7	9	54	5	6	40	6	8	20	2	4
06	156	4	2	122	8	6	80	23	5	60	1	4	53	9	4	51	5	5	44	10	6	20	2	4
07	154	4	4	124	5	14	76	22	4	58	4	2	47	4	4	43	5	9	44	8	8	20	3	5
08	152	5	2	114	8	8	*	84		60			45	4	4	36			34			*		
09	153	3	3	112	13	14	73	18	4	58	6	2	45	4	2	34	3	2	32	12	4	20	4	2
10	152	4	4	112	16	10	72	27	4	60	4	2	45	2	3	34	6	2	32	6	4	22	1	4
11	152	9	4	114	16	10	74	24	6	60	3	2	45	3	3	34	9	2	32	6	4	22	4	3
12	154	6	6	118	8	14	74	26	6	58	12	2	45	3	4	34	7	2	32	9	3	22	4	3
13	156	4	6	118	12	8	78	22	10	58	17	2	45	4	3	34	4	2	36	6	4	22	5	2
14	158	4	6	120	10	8	82	24	12	58	17	2	45	4	2	34	6	2	40	6	8	24	4	2
15	160	2	4	122	8	8	84	26	14	60	20	4	45	3	2	34	11	2	40	7	4	26	4	4
16	160	4	2	124	8	8	92	22	22	60	29	4	45	6	3	40	12	7	46	5	6	26	4	5
17	160	2	4	124	13	9	95	23	24	69	23	11	49	10	6	46	11	6	48	4	4	26	3	6
18	158	4	2	124	12	8	96	22	6	86	10	6	60	11	7	55	8	6	50	2	2	25	3	6
19	160	6	2	128	12	6	104	16	4	90	10	2	67	7	10	52	8	6	48	5	2	22	5	4
20	160	4	2	128	10	3	106	12	4	92	8	5	69	5	8	56	5	8	44	5	2	22	2	7
21	158	4	2	130	7	4	108	11	6	94	9	8	69	5	10	56	6	7	43	11	5	22	2	7
22	158	4	2	128	8	4	110	9	9	94	8	8	67	8	9	54	6	7	44	12	10	20	4	2
23	158	6	4	128	8	6	108	10	4	93	10	7	67	7	9	53	8	7	44	11	11	20	2	4

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}
00	159	7	4	132	9	5	115	12	7	98	11	8	70	8	8	60	7	10	42	6	4	26	2	2
01	157	6	2	131	10	4	115	11	9	98	11	7	70	8	10	58	8	6	42	8	6	26	2	2
02	157	6	2	131	11	4	113	12	9	98	8	8	60	6	8	58	6	4	38	12	7	26	2	2
03	159	4	4	131	10	4	113	12	10	97	7	7	70	6	8	58	4	6	34	6	4	26	2	2
04	157	6	4	131	8	6	109	12	8	94	10	6	68	8	4	58	4	4	36	6	6	26	2	2
05	157	6	4	127	11	4	103	14	14	78	16	18	66	8	4	56	6	6	36	8	6	26	2	4
06	155	4	4	125	10	6	97	16	23	62	20	4	52	12	4	52	7	10	42	10	4	26	4	2
07	153	6	5	127	4	11	96	14	17	62	20	4	46	11	2	44	12	6	38	8	4	28	2	4
08	155	4	6	125	6	12	91	20	17	62	8	4	48	6	5	42	18	6	39			28	2	2
09	151	8	0	118	10	12	88	19	15	62	15	4	46	2	6	38	7	7	32	8	4	28	2	4
10	153	7	6	119	9	13	95	14	24	62	17	3	46	5	4	36	7	3	32	10	4	28	4	2
11	153	8	5	122	12	12	96	21	22	66	29	8	46	10	6	36	10	4	34	9	6	30	2	3
12	157	6	5	127	13	11	106	19	34	72	31	12	46	20	4	38	11	6	38	8	10	30	4	2
13	160	7	5	131	12	12	111	18	32	80	30	22	48	25	4	38	19	4	43	5	11	32	4	2
14	163	9	6	134	14	11	113	20	32	87	26	28	51	25	5	42	22	6	46	6	12	36	4	4
15	165	6	6	135	13	11	115	19	26	94	19	36	52	26	6	48	14	12	47	7	7	36	4	2
16	165	8	6	139	9	15	118	18	29	94	21	35	60	20	12	54	15	14	50	5	6	38	7	2
17	163	10	4	139	10	17	121	14	27	92	24	30	62	21	11	60	8	13	54	4	6	38	6	4
18	163	8	6	137	11	17	117	15	21	100	16	17	72	10	10	65	6	12	54	4	4	38	8	6
19	163	9	5	137	12	14	117	16	14	102	15	10	76	9	8	64	14	9	52	6	2	34	10	4
20	163	6	4	137	9	9	119	12	13	104	8	11	76	9	6	62	11	6	50	15	2	30	15	3
21	161	8	5	137	9	10	119	20	14	104	8	12	76	14	8	62	8	8	46	8	2	28	7	4
22	160	9	5	135	10	8	118	12	11	101	9	8	74	8	6	60	6	7	44	6	6	28	2	2
23	158	9	3	133	12	6	115	12	9	102	8	10	72	6	8	60	6	8	43	5	5	28	2	4

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month November 19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}	F _{om} *	D _u	L _{dm}
00	162			138			104			73			61			39			20			20		
01	160			138			102			71			60			41			20			20		
02	160			134			100			69			57			41			20			20		
03	160			136			98			71			57			35			20			20		
04	161			134			93			71			57			33			20			20		
05	158			129			64			63			57			41			20			20		
06	156			130			60			51			53			41			20			20		
07	156			129			61			44			45			37			22			22		
08	156						60			41			40			33			22			22		
09	154			123			61			41			32			34			23			23		
10	158			126			61			42			35			32			24			24		
11	159			128			64			43			35			33			26			26		
12	162			132			90			46			35			34			26			26		
13	163			137			94			47			39			39			28			28		
14	166			138			92			57			43			43			28			28		
15	166			130			90			57			47			48			30			30		
16	166			138			97			59			51			49			32			32		
17	166			138			95			61			59			59			30			30		
18	164			137			90			77			77			43			30			30		
19	165			139			96			79			79			49			28			28		
20	164			138			102			78			78			49			24			24		
21	162			139			102			76			76			46			22			22		
22	163			138			102			74			74			45			20			20		
23	162			138			103			75			75			40			20			20		

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9 N Long. 6.8 W

Month September 19 63

Time (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm
00	159	3	5	132	4	4	114	6	6	93	6	6	53	4	4	49	12	4	34	12	13	23		
01	158	4	5	132	6	5	116	7	8	91	9	10	53	7	5	52	9	6	31	12	13	23		
02	159	3	6	132	6	6	116	7	11	91	8	9	54	6	6	50	10	4	35	9	16	24		
03	158	6	5	132	7	3	115	7	7	89	10	8	53	6	6	51	11	5	26	16	9	23		
04	157	6	4	132	5	6	116	6	6	89	8	13	54	6	10	52	11	7	27	14	9	23		
05	159	3	6	136	6	4	104	6	8	73	12	6	52	9	5	48	13	7	26	13	9	24		
06	157	7	4	126	6	6	93	13	11	63	10	4	47	6	8	46	7	6	27	12	12	23		
07	155	5	4	124	6	10	88	18	6	63	14	4	45	7	8	40	6	11	31	10	11	23		
08	153	6	2	120	8	12	90	14	10	63	14	6	43	6	15	31	13	17	29	13	10	23		
09	155			117			88			65			40			28			27			23		
10	151	8	5	113	11	7	88	18	6	62	31	6	34			23			25			24		
11	155	3	6	119	9	7	98	4	10	65	24	10	36			28	8	12	23	28	5	25		
12	156	4	5	122	8	7	94	20	10	67	24	10	31	15	10	24	14	8	21	16	5	25		
13	157	5	6	124	10	6	94	22	6	65	24	8	33	11	8	27	10	10	19	18	2	29		
14	157	7	6	124	8	6	96	20	10	65	27	10	35	6	12	28	9	10	23	5	5	31		
15	157	7	4	129	8	10	92	24	8	67	21	12	35	6	10	36	14	11	28	5	4	27		
16	157	6	4	126	8	10	92	23	12	65	18	8	37	8	9	39	10	11	33	11	4	27		
17	157	7	4	126	10	10	94	22	10	68	19	7	41	7	7	44	8	8	35	8	6	31		
18	156	10	6	124	10	4	106	10	14	83	13	6	47	7	8	51	10	8	36	9	3	29		
19	157	4	5	128	6	4	109	7	7	91	5	8	53	4	6	52	9	4	41	8	9	29		
20	157	4	4	132	2	7	112	6	5	93	4	11	53	6	7	52	8	4	37	20	9	29		
21	157	5	4	132	3	7	112	7	6	91	6	6	52	4	2	52	9	6	37	11	13	29		
22	158	3	3	132	4	6	113	6	5	91	8	6	52	5	2	51	7	6	34	14	9	29		
23	157	5	4	132	4	5	115	10	5	93	2	9	52	4	3	52	6	6	33	12	11	29		

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9N Long. 6.8 W

Month October

19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}
00	152	3	4	128	4	6	113	4	6	86	6	5	49	3	8	44	6	2	25	13	8	21	2	2
01	152	4	8	128	4	7	111	6	6	84	7	3	48	5	7	46	7	4	25	9	6	19	2	2
02	152	4	5	128	4	9	113	4	10	84	6	5	48	5	7	47	6	7	25	8	7	19	2	3
03	152	4	6	128	4	9	111	7	7	84	2	4	47	7	9	44	8	7	27	13	9	19	2	4
04	151	5	3	128	2	8	113	4	8	82	6	5	47	6	12	46	9	8	25	15	6	19	2	4
05	152	4	9	126	4	6	105	8	10	76	8	8	45	7	9	42	8	6	21	20	8	19	4	4
06	152	3	5	124	6	7	91	8	8	72	10	6	38	13	7	40	9	9	24	14	9	21	5	6
07	150	2	6	118	6	6	88	9	9	60	8	6	33	11	9	32	12	14	20	9	5	21	5	5
08	150	6	8	114	7	10	90	8	15	64	6	8	29	6	6	19	15	7	21			21		
09	150			114			83			55			27			14			21			23		
10	148	2	4	112	9	6	87	10	8	54	10	2	29			54			20	6	9	24	5	7
11	148	5	2	112	10	2	91	8	4	56	6	4	52			12	7	2	25	8	6	23	4	6
12	148	6	4	114	8	4	87	10	4	58	4	6	31	4	4	12	7	4	25	9	5	25	3	4
13	150	2	4	118	6	4	88	13	7	56	12	4	33	5	4	12	8	2	19	5	4	27	3	6
14	150	4	2	118	4	4	86	12	8	58	15	6	39	2	11	14	10	6	17	11	2	29	1	6
15	152	2	4	118	4	6	85	15	8	58	12	6	34	7	3	26	4	12	23	7	3	26	6	3
16	150	2	2	116	6	6	87	13	8	60	15	7	41	3	6	32	14	8	25	8	3	27	4	5
17	150	2	4	116	6	4	98	5	8	76	9	12	41	4	4	38	14	5	28	5	6	23	6	3
18	150	2	6	120	6	4	107	5	7	84	3	6	47	3	8	40	10	4	26	8	3	21	5	2
19	150	2	4	124	4	5	107	7	6	84	7	2	47	6	7	42	9	6	24	10	4	21	3	5
20	150	2	3	124	4	6	107	4	7	85	5	3	47	4	8	42	8	5	25	6	4	21	3	2
21	152	2	7	126	4	6	109	8	8	86	4	4	47	4	7	44	6	8	27	5	6	21	4	3
22	152	2	6	126	4	6	113	6	12	86	5	7	49	3	7	44	10	5	27	5	7	19	5	2
23	152	2	7	128	2	6	111	5	9	86	5	5	47	6	7	44	8	5	25	11	7	20	4	3

F_{am} = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

L_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	
00	153	2	5	128	5	3	113	4	4		85	8	8	44	10	6	53	2	10	22	5	7	15		
01	153	3	7	126	9	6	113	8	5		87	8	8	46	6	8	51	4	8	21	8	8	13		
02	153	2	4	128	5	6	113	4	4		85	10	8	44	9	8	51	4	10	21	8	6	13		
03	153	2	5	128	4	4	113	4	7		87	6	9	42	12	6	51	6	11	22	7	9	13		
04	153	3	6	129	7	7	113	3	5		81	10	10	44	6	6	55	6	14	21	10	10	14		
05	153	3	5	129	4	8	113	4	8		81	6	10	44	6	8	49	8	9	17	11	8	13		
06	151	6	4	124	7	9	99	9	6		72	15	13	42	8	6	49	4	10	19	8	12	15		
07	150	5	3	118	6	11	97	9	9		65	11	12	37	11	8	45	6	9	21	8	8	15	6	3
08	149	4	4	112	14	10	99	7	9		61	20	4	34	5	6	33	11	7	22	4	12	17		
09	151			*	112		94				*	61		*	52		*	27		*	20		*	17	
10	149	6	4	109	13	6	95	14	11		59	15	5	32	6	2	27	6	6	17	6	3	19	22	6
11	149	5	4	114	8	11	97	6	10		58	19	7	36	4	4	25	8	4	15	6	4	19	4	6
12	149	3	6	109	13	4	95	12	8		57	21	4	36	2	7	25	8	4	15	6	5	19	3	7
13	149	4	6	112	11	6	97	4	7		61	17	8	34	4	2	23	5	2	17	4	6	19	8	4
14	149	4	4	112	13	9	95	9	14		56	21	5	38	4	6	25	8	4	21	4	11	19	4	9
15	151	4	8	110	14	8	95	8	12		*57			38	4	8	30	10	8	21	8	9	19	5	5
16	149	4	6	108	8	6	91	15	6		67	20	10	39	7	7	33	14	4	24	9	10	17	7	5
17	149	4	4	114	12	7	99	7	6		78	9	8	34	12	6	45	8	6	23	6	4	17	4	7
18	149	4	4	120	6	6	105	7	8		82	6	7	38	13	4	47	8	5	21	13	4	15	6	9
19	151	4	3	124	4	9	107	4	6		84	6	7	42	8	6	48	7	7	23	7	4	16		
20	153	1	7	124	4	6	109	6	8		87	8	8	44	8	6	51	6	8	23	7	4	19		
21	153	2	2	124	4	2	111	4	3		87	4	8	44	9	5	53	2	8	25	5	6	13		
22	153	2	4	126	4	4	111	5	5		85	6	7	44	6	4	53	4	13	22	7	5	14		
23	153	2	4	126	6	3	111	5	4		87	8	7	44	12	4	53	4	9	21	5	4	13	10	4

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Saõ José, Brazil

Lat. 23.35 S Long. 45.8 W

Month September 19 63

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
00	128	6	12	121	8	11	105	8	17	91	7	18	69	6	13	67	6	13	52	22	12	27	19	4
01	127	8	9	122	7	5	109	4	24	92	4	20	69	5	13	58	11	13	47	23	8	27	15	4
02	121	13	6	121	8	10	105	8	15	90	8	18	71	5	8	63	6	14	49	16	14	25	21	3
03	127	9	8	122	8	6	107	8	22	92	8	12	69	6	19	55	14	8	45	22	8	23	19	2
04	126	10	10	121	7	11	103	12	14	89	9	11	71	4	14	61	12	12	42	22	9	24	15	3
05	126	11	11	122	10	10	103	8	26	90	7	25	65	10	11	57	14	10	43	18	12	23	12	2
06	122	8	12	108	13	14	83	14	9	80	10	9	61	11	9	64	8	20	46	10	3	25	15	4
07	120	11	14	105	14	8	83	14	9	82	9	14	52	13	13	55	9	18	45	8	10	25	16	4
08	119	9	15	108	12	10	83	18	9	86	5	13	45			51	11	18	45	8	8	25	15	4
09	113	16	14	106			83			86	6	12	35	18	6	45	11	17	45	6	18	23	8	2
10	113			111	15	11	81	7	9	90	4	15	34			44			*	43		*	27	
11	112	14	10	101			79			84	10	10	31	26	6	41	8	16	41	5	12	25	22	4
12	112	8	9	98	14	8	79	11	8	86	7	12	33	22	8	40			*	41		*	29	
13	113	8	9	102			78			82			33	18	11	37	14	18	41	4	12	28	17	6
14	116	8	14	103	11	11	85	6	21	90	5	20	37			43			*	44		*	31	
15	119	5	11	101			83			90			31			31			*	40		*	33	
16	116			104	9	11	79	12	4	90	5	12	35			48			*	47		*	33	
17	117	12	11	110	13	18	85			90	6	8	43			53			49	6	9	33	18	9
18	118	14	16	112	13	15	90	17	15	86	8	16	60	11	8	62	13	20	52	14	10	33	19	9
19	124	11	13	116	11	9	97	12	14	88	10	19	63	14	12	55	20	12	53	8	6	35	22	5
20	124	13	11	118	11	12	99	16	14	86	14	11	67	12	13	63			*	63		53	12	6
21	128	4	16	120	6	8	103	10	6	92			69	8	17	57	18	10	57	13	6	34		
22	127	9	13	118	9	8	105	9	13	90	10	10	70			65	13	18	52	11	7	35	16	12
23	126	8	2	124	9	12	107	9	21	92	8	16	68	10	14	65	12	17	49	10	5	31	16	7

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Saõ José, Brazil

Lat. 23.3 S Long. 45.8 W

Month October 19 63

Hour (EST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}	F _{om}	D _g	V _{dm} -L _{dm}
00	136	15	6	126	8	8	111	7	12	97	5	5	67	8	16	68	18	7	46	13	10	35	11	4
01	136	4	8	124	9	6	110	9	8	94	8	7	66	13	15	64	13	9	45	13	13	33	5	2
02	136	5	10	124	7	9	108	11	7	96	8	7	65	12	12	63	15	7	44	11	13	33	10	4
03	138	5	10	126	5	11	109	10	10	98	6	10	67	10	14	68	10	11	45	16	15	31	8	2
04	138	5	11	126	4	13	107	11	12	97	4	13	65	10	13	67	13	11	42	13	12	31	4	2
05	136	3	15	115	10	13	101	8	28	88	7	14	67	8	15	68	12	6	39	16	8	31	6	2
06	130	6	16	108	11	18	85	18	13	85	6	12	55	10	18	64	11	14	43	11	15	33	4	6
07	130	4	14	114	8	18	91	19	16	82	13	10	47	8	15	56	12	12	46	8	13	33	4	4
08	124	11	11	108	10	11	89	12	16	78			34	19	9	48	13	14	37	12	18	31		
09	*	122		108			*87			82	21	8	*29			*40			*33			*31		
10	124	6	15	108	16	13	87	8	14	85	19	8	*27			*42			36	11	17	30		
11	126	14	13	108	21	11	89	11	16	86	21	6	33	28	8	39	13	12	37	8	18	31		
12	126	7	11	108	27	15	93	10	17	90	19	6	31	25	4	40	11	4	39	8	16	33		
13	128	9	9	114	11	12	95	18	19	89	15	10	37	25	12	44	11	9	44	11	9	37		
14	130	10	2	116	13	6	99	21	23	90	11	16	49	20	18	50	15	8	39	8	10	37		
15	132	16	8	116	22	10	105	20	19	92	18	13	53	19	25	64	3	22	39	17	7	37		
16	132	14	4	120	19	12	103	17	18	88	18	12	61	14	29	61	12	19	42	15	7	40		
17	136	13	9	118	15	8	104	18	19	88	20	6	55	26	12	68	10	10	45	14	7	45	4	8
18	135	13	9	116	38	6	102	23	9	92	22	5	65	19	12	73	8	11	49	13	9	50	9	10
19	134	17	8	120	20	4	107	15	12	94	14	6	71	16	13	73	9	10	51	8	11	49	18	11
20	136	15	6	124	11	7	108	13	9	98	6	14	71	14	13	75	8	13	50	8	12	50		
21	136	9	6	125	6	7	109	9	5	96	6	9	71	8	10	75	6	9	47	13	10	41	13	8
22	138	5	9	128	7	11	111	10	9	96	9	7	69	9	14	72	9	8	46	12	7	37	8	6
23	135	8	4	126	8	8	109	9	4	98	6	8	65	11	15	68	15	6	51	7	15	36	14	7

F_{om} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 D_g = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

F _r (Hz)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}
00	139	7	7	120	12	10	92	12	19	74	5	7	63	17	8	40	10	16	29	4	5	29	4	5
01	139	6	9	120	13	18	94	17	18	72	10	6	56	15	8	38	13	17	29	8	5	29	8	5
02	139	6	13	118	15	26	93	10	28	70	10	7	56	13	11	38	10	14	27	5	5	27	5	5
03	139	4	12	118	14	16	94	14	21	72	9	7	55	26	8	39	14	13	25	2	3	25	2	3
04	139	5	14	118	13	23	97	15	12	74	5	12	55	15	10	35	13	11	25	4	3	25	4	3
05	131	6	8	104	14	16	*85	11	11	68	8	13	57	16	12	34	15	13	27	5	5	27	5	5
06	129	8	12	104	18	12	81	12	14	60	9	16	51	14	12	34	13	12	29	4	4	29	4	4
07	127	8	16	*106			*81	11	8	50	10	14	44	18	7	26	15	8	27	4	4	27	4	4
08	123	12	14	100	17	13	77	14	12	40	17	5	35	13	6	28	13	7	25	4	4	25	4	4
09	123	14	17	*98			*75	9	14	38	12	6	34	11	8	28	9	7	25	2	4	25	2	4
10	125	9	15	98	19	11	75	14	12	38	10	5	27	21	4	28	11	8	26	5	5	26	5	5
11	127	10	17	98	22	10	80	17	15	40	10	6	30	15	7	26	12	5	25	8	4	25	8	4
12	131	17	15	106	20	16	81	15	14	44	23	10	31	23	4	28	24	6	28	15	7	28	15	7
13	135	17	10	116	20	24	102	13	25	46	42	12	*53			30	17	8	31	13	7	31	13	7
14	140	13	10	116	24	15	99	18	20	66	20	30	49	18	21	34	20	16	35	9	8	35	9	8
15	140	20	14	119	17	19	102	14	20	70	20	32	49	16	12	39	21	17	35	10	6	35	10	6
16	143	8	26	125	14	19	103	16	17	70	18	28	53	19	12	40	14	16	36	9	11	36	9	11
17	140	11	10	119	11	12	96	21	13	68	14	14	56	13	7	44	13	20	37	10	10	37	10	10
18	141	13	11	120	12	13	99	20	15	72	13	12	59	18	6	44	10	24	39	13	12	39	13	12
19	139	10	11	122	13	17	103	26	13	76	12	8	60	17	5	44	9	21	39	11	10	39	11	10
20	141	8	12	120	11	31	99	12	19	77	9	7	62	19	5	43	9	21	39	11	16	39	11	16
21	139	8	7	120	13	7	105	8	16	76	8	6	59	20	6	42	9	20	38	5	11	38	5	11
22	139	7	5	120	12	23	101	10	9	74	8	4	57	16	4	40	10	17	29	8	6	29	8	6
23	139	8	7	118	16	14	101	11	9	72	9	5	61	20	6	36	13	13	27	6	4	27	6	4

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																																										
	.013				.051				.160				.495				2.5				5				10				20														
	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm							
	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
00	161	7	3	7.0	141	6	2	7.5	121	6	6	7.5	97	6	9	6.0	63	5	6	2.0	120	57	4	6	5.0	46	6	10	3.5	25	1	3	1.5	3.0									
01	162	8	4	7.0	143	4	4	7.0	123	4	6	8.0	97	7	5	7.0	65	5	7	6.5	13.0	55	9	4	5.0	42	11	10	4.0	23	2	1	2.0	3.0									
02	162	9	2	8.0	143	5	6	8.0	123	6	5	7.0	98	7	5	7.0	66	5	6	6.0	11.0	55	9	3	5.5	40	6	8	2.0	40	2	1	1.0	3.0									
03	164	4	4	8.0	143	5	6	8.5	124	5	7	9.0	99	6	7	7.0	66	7	3	6.0	11.5	53	6	8	5.0	38	8	7	3.0	50	2	2	1.0	3.0									
04	163	7	5	8.0	141	7	6	10.0	122	6	5	10.0	99	4	10	7.5	66	6	8	5.5	11.5	51	10	7	5.5	38	5	8	2.0	40	2	0	1.5	3.0									
05	164	6	6	9.5	140	5	7	10.0	120	7	11	10.5	93	7	14	9.0	65	8	12	7.0	13.0	51	8	6	5.0	37	13	7	3.5	55	2	0	1.5	3.0									
06	161	7	3	9.0	140	10	8	13.0	120	11	13	19	93	9	19	8.0	57	4	10	6.5	14.0	54	5	7	5.5	50	4	5	2.0	4.5	2	1	3.5	5.0									
07	160	10	4	10.0	134	9	11	12.5	123	11	9	9.5	87	10	8	7.0	140	5	18	9.0	17.5	49	6	11	6.5	44	9	9	3.0	70	2	2	2.0	4.0									
08	161	9	7	10.5	140	13	13	9.0	121	19	22	17.0	86	20	16	5.5	130	4	13	12.0	19.0	45	5	18	10.0	42	6	8	5.5	90	2	2	2.0	3.5									
09	158	10	4	10.5	133	10	12	13.5	124	10	19	18	81	27	11	9.0	200	40	21	13		35	9	10	8.5	40	7	11	7.0	100	2	3	4.5	4.5									
10	158	9	5	14.0	133	12	12	14.0	103	29	12	14.0	83	27	8	9.0	185	36	23	11	8.0	35	10	10	9.5	32	12	6	4.0	65	2	1	2.0	4.0									
11	159	9	5	13.5	131	16	9	13.0	105	25	13	13.0	86	26	11	10.0	215	33	33	5	12.0	31	17	8		32	12	6	5.0	80	2	2	2.0	3.5									
12	160	14	4	11.5	136	17	13	12.5	109	26	18	14.0	90	28	20		39	34	14	9.5	185	33	32	8	13.0	40	14	8	9.0	150	2	2	2.0	3.0									
13	162	15	5	11.5	136	21	10	11.5	109	29	12	11.5	97	22	24	9.0	170	49	26	22	100	42	23	15	10.5	42	8	9	7.0	115	2	1	2.0	12.5									
14	164	11	4	10.0	135	14	13	10	115	16	10	8.5	97	23	16		55	24	24	9.5	180	55	10	24		44	6	10	8.0	140	2	6	14	4	9.5	14.5							
15	165	10	3	11.0	140	13	12	7	110	15	10	8.5	99	18	11	13.5	240	55	22	14	8.0	155	48	14	16	9.0	44	8	6	5.5	100	2	7	12	2	3.5	5.5						
16	166	7	4	9.0	143	11	13	11.0	118	15	12	10.0	90	26	8	13.5	220	57	16	18	9.5	160	48	14	8	9.0	46	8	3	2.5	50	2	2	2.0	5.0								
17	166	5	6	8.5	143	5	11	10.0	116	12	8	12.5	93	15	6	8.0	170	53	16	11	12.5	135	53	6	4	6.0	50	8	3	2.0	4.5	2	7	3	3.0	7.0							
18	162	8	2	8.0	130	4	7	9.0	120	9	6	8.0	96	12	5	7.5	160	61	7	6	5.0	50	57	6	3	4.0	7.5	50	6	4	3.0	5.5	2	7	4	4.0	7.0						
19	164	6	4	8.5	140	14	8	2	9.0	121	7	3	6.5	97	7	2	6.0	120	63	6	7	5.0	100	15	4	5	4.0	7.5	50	8	3	3.0	5.0	2	7	3	2	2.5	5.0				
20	162	4	4	8.0	140	14	6	4	9.0	121	6	4	8.0	97	8	6	7.0	130	61	4	4	5.0	100	5	3	5.0	52	7	6	3.0	5.5	2	8	2	4	3.0	5.5						
21	162	4	4	8.5	140	4	4	10.5	119	8	4	9.0	95	6	4	6.5	125	62	7	5	4.0	80	57	4	5	4.5	52	4	4	3.0	5.5	2	8	7	4	3.0	6.0						
22	162	5	4	7.5	141	5	4	8.5	121	8	6	7.5	97	7	8	7.0	140	61	7	4	5.5	105	61	5	6	4.5	50	4	4	3.0	5.5	2	7	2	3	2.0	4.0						
23	162	6	4	6.0	141	5	4	7.0	121	6	5	8.0	97	4	8	7.0	130	63	5	7	7.0	130	57	4	17	5.5	48	6	2	2.0	4.5	2	3	1.5	4.0								

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E

Month October 19 63

Hour (LT)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm
00	163	4	9.0	15.0	142	4	10.5	16.0	122	4	6	8.0	15.5	65	4	10	7.0	15.5	63	12	10	9.0	11.5	43	6	11	5.0	7.0	27	3	4	2.5	3.5		
01	163	4	11.0	15.0	142	4	10.5	17.5	122	4	6	9.5	19.5	65	5	7	8.0	15.0	63	8	8	6.0	10.5	41	7	9	4.5	6.5	25	3	2	1.0	2.5		
02	163	3	11.5	17.0	142	2	6	11.0	18.0	120	6	6	10.0	18.5	65	8	7	8.0	16.0	63	8	8	7.0	12.0	39	7	8	5.0	8.5	25	3	2	1.5	3.0	
03	163	3	11.5	17.0	142	4	6	12.0	19.5	122	4	7	9.0	17.0	65	8	6	8.0	14.5	63	9	10	6.5	11.0	33	16	3	3.5	6.0	25	3	2	1.5	3.0	
04	163	4	11.0	17.0	142	4	6	13.0	19.5	120	7	6	12.0	21.5	65	8	11	8.0	16.0	59	7	10	7.0	11.5	32	5	5	2.0	4.0	25	3	2	1.0	2.5	
05	161	6	5	9.0	14.0	140	6	6	13.5	21.0	116	8	5	14.0	24.5	65	6	13	9.0	17.5	57	6	18	7.0	18.0	35	4	6	3.0	5.5	25	3	2	1.5	2.5
06	161	4	5	12.0	19.5	136	6	9	15.0	22.5	113	8	21	16.5	29.0	53	8	7	10.0	19.0	57	9	14	7.5	12.5	45	4	10	5.0	7.5	27	2	4	4.5	8.0
07	159	6	9	12.5	19.0	133	5	9	16.5	26.0	109	11	12	18.0	30.0	47	9	9	12.0	22.0	51	8	19	11.0	18.0	45	4	10	3.0	6.5	27	2	4	2.0	4.5
08	159	4	8	14.0	23.5	132	7	9	17.5	28.0	108	12	27	16.5	29.0	39	12	4	11.0	21.0	45	10	8	7.0	18.5	41	6	12	7.0	11.0	26	5	3	2.0	5.0
09	159	2	10	15.0	23.0	132	4	15	17.0	27.0	105			18.0	29.0	35	10	6	9.0	13.0	39	9	10	4.5	11.0	35	7	15	6.0	9.0	25	4	2	2.5	4.0
10	157	5	6	14.5	21.5	130	8	14	17.0	27.0	102			18.0	29.0	33	14	8	12.0	16.0	37	15	6	7.0	11.0	35	6	15	5.0	8.5	25	6	2	2.0	3.0
11	157	8	10	15.0	23.0	131	5	16	13.5	26.0	114	12	28	16.5	29.0	35	15	8	11.0	14.5	39	11	12	8.5	13.0	35	8	15	4.0	4.5	27	9	4	3.5	4.5
12	161	6	11	15.5	24.5	138	14	20	16.5	30.0	116	11	22	18.0	29.0	43	18	16	16.0	26.0	39	20	14	9.0	12.0	39	10	14	7.5	12.5	30	11	7	8.0	11.5
13	163	8	9	13.5	22.0	141	9	16	14.5	23.0	122	11	26	15.5	26.0	46	20	19	10.5	18.0	46	23	14	10.0	19.0	37	16	10	5.5	8.5	28	16	5	7.5	5.0
14	165	4	11	13.0	21.0	144	8	15	13.0	23.0	120	14	20	13.5	24.0	45	28	16	6.5	10.0	49	14	12	9.0	17.0	41	12	11	6.0	8.5	29	10	6	2.5	5.5
15	165	6	6	12.0	21.5	142	6	13	11.5	21.0	118	10	15	12.5	23.0	49	12	16	7.0	14.0	49	10	16	7.0	14.0	45	6	10	5.5	9.5	30	5	6	3.0	5.5
16	165	4	8	11.0	18.0	142	6	8	12.0	20.5	116	8	12	11.5	24.0	49	9	11	9.5	16.0	55	5	19	6.5	13.5	47	4	11	5.0	8.0	31	6	7	3.0	5.5
17	163	5	7	9.0	17.0	141	5	9	13.5	23.0	116	8	16	12.0	20.5	53	6	12	7.5	15.5	59	5	10	9.0	11.5	49	3	12	3.0	5.0	30	7	6	2.0	5.0
18	163	6	8	11.0	18.0	140	8	4	12.5	21.0	121	7	14	9.5	17.0	61	4	8	6.5	14.0	63	8	11	5.5	10.5	47	7	10	5.0	8.0	27	6	3	2.0	4.0
19	163	5	6	10.5	16.5	142	6	4	11.5	19.5	122	6	13	10.0	17.0	65	4	12	6.0	12.0	65	6	13	5.0	8.5	51	6	14	3.5	7.5	28	5	5	2.0	4.0
20	162	4	7	9.5	15.0	142	4	6	11.0	19.5	120	8	12	9.0	17.5	65	3	9	8.5	14.0	65	8	12	5.0	9.0	57	8	16	6.0	10.0	29	4	6	3.0	5.0
21	161	5	5	9.0	13.0	142	4	6	11.0	19.0	120	6	11	9.5	17.0	63	6	10	7.0	14.5	63	11	12	6.0	11.0	57	4	14	3.5	6.0	31	4	8	3.0	4.5
22	161	6	6	9.0	13.0	141	7	5	12.0	19.0	120	8	11	11.0	18.5	63	6	10	8.0	15.0	65	12	14	6.0	11.0	57	3	14	3.5	5.5	31	4	8	3.5	5.0
23	163	4	5	9.0	13.5	142	6	6	9.5	15.5	120	6	10	10.0	17.5	65	4	13	8.0	15.0	65	9	10	5.5	10.5	47	6	12	3.5	7.0	27	4	4	2.0	3.0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltages in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E

Month November 1963

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}								
00	166	2	5	11.5	18.0	147	5	5	11.5	19.5	125	4	5	10.5	18.5	99	6	3	8.0	17.0	69	3	4	6.0	12.0	61	2	8	6.0	10.0	44	10	6	4.0	6.5	22	2	0	1.0	3.0
01	164	5	4	11.5	18.0	146	4	5	11.0	19.0	125	4	4	10.0	19.0	101	4	4	9.5	18.0	71	2	6	7.5	12.5	59	4	4	4.5	8.5	40	9	4	4.0	7.0	22	2	2	1.5	3.0
02	166	3	5	11.0	17.5	148	2	6	11.0	18.5	125	4	4	10.5	18.5	101	4	5	9.0	19.0	71	3	4	7.5	13.0	59	4	14	4.5	8.0	40	6	6	4.5	8.0	22	2	0	1.0	3.0
03	166	3	5	11.5	18.0	146	4	4	11.5	19.5	125	4	6	11.0	19.0	99	6	5	9.5	19.0	71	3	4	7.0	13.0	59	4	8	5.5	9.5	38	6	4	3.5	5.5	22	2	0	1.0	2.5
04	166	2	4	11.0	17.5	146	3	6	11.5	19.5	124	3	5	10.0	19.0	99	4	6	12.0	20.5	71	2	4	7.0	13.5	57	6	7	6.0	10.5	38	6	6	3.5	5.0	22	2	2	1.0	3.0
05	165	3	3	10.5	16.5	144	4	6	12.0	20.0	119	4	6	13.5	23.0	89	12	6	12.5	22.0	69	4	3	7.0	13.0	56	6	12	5.5	9.0	38	4	4	5.0	7.0	22	2	0	2.0	4.0
06	164	2	4	11.5	18.5	138	6	4	13.0	21.0	111	14	8	14.5	25.5	83	10	8	13.0	23.0	57	7	4	9.0	15.0	57	3	11	6.0	11.0	46	8	4	4.0	8.0	24	2	2	3.0	6.0
07	162	2	3	13.0	21.0	136	8	6	14.5	24.0	108	11	9	16.0	27.0	84	15	13	14.5	25.0	57	6	8	11.0	16.5	49	4	13	8.0	13.0	48	10	6	4.5	8.0	24	2	2	2.0	4.5
08	162	4	4	14.0	22.0	136	6	8	16.0	25.0	107	6	10	15.5	25.5	81	10	8	16.0	28.0	42	11	7	8.0	13.5	41	10	10	8.0	14.5	44	6	6	6.0	10.0	24	2	2	2.0	4.5
09	162	4	6	14.5	23.0	134	8	4	15.5	24.5	108	10	10	15.0	26.0	81	12	10	14.0	28.0	39	9	5	11.0	15.0	41	4	9	8.5	14.0	42	5	6	6.0	12.0	24	1	2	3.0	5.0
10	162	4	6	14.0	23.0	134	8	8	15.5	24.5	109	7	11	14.5	25.5	83	23	12	14.0	25.5	36	6	6	11.0	16.0	37	8	7	8.0	13.5	40	3	6	6.5	10.5	22	8	0	3.0	5.0
11	162	6	4	13.5	23.0	137	7	5	14.5	23.5	113	12	9	15.0	26.0	91	18	8	11.5	20.5	36	17	7	7.0	12.0	31	9	2	7.5	12.0	40	4	6	8.5	12.0	24	4	2	2.5	4.5
12	164	4	4	14.5	23.0	139	9	3	13.5	21.5	121	9	10	13.0	22.0	99	16	16	12.0	19.0	39	14	6			39	12	9	11.5	18.5	41	13	4	6.5	12.0	28	10	4	4.5	8.0
13	166	2	4	12.0	19.0	145	7	6	12.0	21.0	123	14	6	11.0	22.0	103	12	6	11.0	19.5	49	16	12			45	15	6	7.5	14.0	46	6	4	7.0	12.0	28	7	4	6.0	13.0
14	166	6	2	12.5	20.0	146	9	4	13.0	22.0	125	12	5	11.5	20.5	105	12	8	13.5	24.0	52	24	8	10.5	16.0	49	15	5	10.5	17.0	48	6	4	7.0	12.0	30	14	2	4.5	7.5
15	168	5	2	12.5	20.5	146	8	4	12.0	20.0	123	10	2	12.0	20.0	101	14	6	10.0	18.0	53	23	8			49	13	4	6.5	12.5	50	6	4	3.5	7.0	30	6	5	3.0	6.0
16	168	3	4	12.0	20.0	146	6	3	11.5	20.0	123	7	6	12.5	21.0	101	8	7	11.0	20.0	59	8	8	10.0	17.0	55	5	7	6.0	12.0	50	4	4	4.5	8.0	30	4	4	2.0	5.0
17	166	2	4	11.0	19.0	145	6	4	12.0	21.0	123	4	6	12.0	23.0	101	4	6	7.5	14.0	63	5	5	6.0	12.0	57	3	3	6.0	10.0	50	4	2	4.0	8.0	28	6	4	3.0	6.0
18	166	2	5	12.0	20.0	146	3	3	10.0	18.0	125	4	4	8.5	16.5	103	4	8	5.5	12.5	68	3	3	6.5	12.0	61	2	4	4.5	8.5	50	6	2	5.0	8.0	26	2	3	2.5	4.5
19	164	4	2	11.5	19.0	146	3	4	11.0	19.5	125	3	5	10.0	18.0	101	6	6	7.5	15.0	69	2	2	6.0	11.0	59	4	4	6.0	10.0	48	6	4	4.5	7.5	26	2	4	2.5	5.0
20	164	4	3	11.0	17.0	146	2	4	11.5	20.0	125	3	5	10.0	18.0	101	5	5	8.0	16.0	67	4	4	7.0	13.5	61	2	4	5.0	9.5	51	4	3	5.0	9.0	26	7	2	2.5	5.0
21	164	2	4	10.5	16.0	146	6	4	11.0	19.0	125	4	7	10.0	18.5	101	6	5	8.0	16.0	67	2	4	7.0	12.5	61	2	4	5.5	10.0	52	4	2	5.0	8.0	29	2	3	3.5	6.0
22	164	4	4	11.0	18.0	146	4	6	12.0	19.5	125	4	4	9.5	18.0	101	3	6	7.5	15.5	68	3	5	7.5	13.0	61	4	2	6.0	11.0	50	4	4	4.0	8.0	26	3	2	3.0	5.0
23	166	4	6	12.0	18.5	146	6	4	11.5	19.0	127	2	7	10.5	18.5	101	2	6	9.5	16.5	67	6	2	7.5	13.0	61	2	4	6.5	11.5	46	8	4	3.5	7.0	24	2	2	2.0	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_z = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																			
	.013				.051				.160				.495							
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	166	8	6			142	13	6			118	10	8			99	11	6		
01	166	6	6			142	9	8			118	8	6			101	11	10		
02	166	7	6			142	10	8			118	10	8			99	10	8		
03	166	7	6			142	9	8			120	9	10			99	12	8		
04	164	12	4			142	10	8			120	10	12			97	12	8		
05	164	8	4			140	8	8			116	12	16			85	20	13		
06	164	6	6			136	12	8			114	14	20			85	21	10		
07	164	4	6			136	12	8			114	16	22			89	18	14		
08	164	6	6			136	12	10		*	115					89				
09	164	5	5			131	12	5			113	10	25			83				
10	164	2	6			135	7	11			110	13	24			85	22	12		
11	164	4	6			134	8	10			110	10	24			83	19	11		
12	166	4	6			136	7	10			112	10	24			85	19	12		
13	166	4	6			136	10	10			112	13	22			85	18	14		
14	166	6	6			136	12	8			114	12	18			87	15	14		
15	167	7	6			137	13	11			114	14	14			87	20	12		
16	167	5	6			137	13	9			115	15	17			89	20	14		
17	166	6	5			137	11	7			112	15	19			85	15	12		
18	166	4	6			136	11	6			115	12	13			89	15	10		
19	165	7	4			138	9	5			115	15	7			95	15	9		
20	166	8	4			138	10	5			116	13	7			97	12	7		
21	166	6	6			140	8	6			117	10	9			98	9	6		
22	166	6	5			140	8	5			117	13	8			99	12	8		
23	166	8	5			140	12	3			118	14	8			101	6	10		

Fom = median value of effective antenna noise in db above ktb
Du = ratio of upper decile to median in db
Df = ratio of median to lower decile in db
Vdm = median deviation of average voltage in db below mean power
Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo.

Lat. 38.7 N Long. 93.8 W

Month October

19 63

Fom	Frequency (Mc)																										
	.013				.051				.160				.495														
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm		
00	160	11	3			133	15	2			113	18	6			94	15	3									
01	160	11	3			135	10	4			113	16	4			96	12	6									
02	160	9	2			135	13	5			113	16	4			94	13	4									
03	160	8	2			135	13	4			112	16	5			94	13	5									
04	160	6	4			134	11	4			111	15	5			93	11	8									
05	159	8	3			131	13	4			106	19	8			88	13	15									
06	158	4	4			129	11	6			95	26	10			*	92										
07	156	7	3			125	14	5			97	26	10			*	87										
08	156	5	3			125	12	8			113					86											
09	155					123	11	6			101	16	16			*79											
10	155	6	4			123	10	6			93	20	8			*80											
11	157	3	5			123	10	6			93	16	7			*70											
12	158	4	4			125	10	6			95	20	9			*84											
13	158	4	2			127	10	8			97	24	12			*83											
14	160	4	4			127	13	7			101	25	16			*88											
15	160	5	4			127	16	6			111	18	23			*90											
16	158	8	4			127	16	7			109	21	19			*96											
17	158	7	4			127	16	4			103	25	16			84	23	14									
18	160	6	4			129	16	6			109	25	9			88	23	7									
19	160	8	4			131	17	4			109	22	5			94	16	8									
20	160	6	4			133	9	4			111	16	6			94	11	6									
21	160	8	4			133	12	3			111	15	4			94	10	5									
22	160	9	4			135	11	4			111	17	4			94	13	2									
23	160	9	2			133	13	2			113	17	6			96	14	7									

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W

Month November 19 63

Hour (ST)	Frequency (Mc)																					
	.013				.051				.160				.495									
	F _m	D _u	V _{dm}	L _{dm}	F _m ⁴	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}		
00	158	8	6		138								91	13	6							
01	158	6	4		137								91	12	8							
02	158	7	4		138								89	13	6							
03	158	5	4		138								87	12	6							
04	158	5	4		137								85	12	7							
05	158	4	4		136								85	11	10							
06	156	6	6		134								72	9	3							
07	156	6	5		128								72									
08	154	7	4		124								73									
09	152	8	2		121								73									
10	154	6	6		122								73									
11	154	5	2		120								75									
12	154	6	2		122								87									
13	156	3	4		122								90									
14	154	6	2		122								73									
15	154	6	2		124								84									
16	154	7	4		124								77									
17	154	8	5		126								79	16	5							
18	156	7	5		128								85	14	8							
19	156	8	4		134								87	12	8							
20	156	10	5		136								87	12	8							
21	156	10	4		137								91	11	8							
22	156	10	4		137								91	11	6							
23	156	10	4		138								91	13	7							

F_m = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Autumn (Sept. Oct. Nov.) | 9 63

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.013	166	8	6	164	10	8	164	6	6	166	8	6	164	8	6	164	8	6	164	8	8
.051	145	8	10	143	8	14	139	10	14	143	12	12	143	8	10	143	6	8	143	6	8
.160	125	6	6	123	8	15	117	12	20	123	14	18	121	8	10	123	6	8	123	6	8
.495	103	8	6	97	12	16	89	16	14	101	18	20	99	9	10	101	8	4	101	8	4
.25	73	6	8	71	8	15	47	16	10	53	26	16	65	10	14	71	6	6	71	6	6
.5	66	6	10	62	8	10	48	12	10	52	20	14	54	8	10	68	6	10	68	6	10
10	43	15	8	43	14	8	43	14	8	45	16	8	49	21	8	43	10	8	43	10	8
20	28	2	6	34	5	3	30	6	4	36	8	6	32	6	6	26	8	2	26	8	2

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Season Autumn (Sept. Oct. Nov.) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}
.013	157	8	11.5	155	8	12.0	153	8	11.0	155	12	9.5	157	10	10.5	157	10	11.5
.051	134	6	7.0	130	8	6.5	120	14	7.0	124	18	6.5	130	14	6.5	134	8	6.0
.160	108	12	9.0	96	20	11.0	80	28	7.5	90	31	9.5	104	20	8.0	108	14	8.0
.495	90	12	8.0	68	24	6.5	54	23	4.5	58	36	5.0	82	18	6.5	90	12	7.0
.25	61	14	4.5	49	18	5.5	23	10	3.5	23	26	3.5	53	16	4.0	61	14	4.5
.5	53	8	4.0	47	10	4.5	27	12	3.5	29	20	4.0	51	12	3.5	53	10	4.0
1.0	37	14	2.0	37	12	2.0	33	6	2.5	37	12	3.0	47	20	3.0	39	16	2.0
2.0	25	2	1.0	25	2	1.0	27	2	1.5	27	4	2.0	25	4	1.5	25	2	1.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Autumn (Sept. Oct. Nov.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																											
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400							
	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}	F _{am}	D _u	D _l	V _{dm}				
.013	159	6	6	120	155	8	4	120	157	12	6	110	159	10	8	115	159	10	8	115	159	10	8	115	159	10	6	120
.051	135	9	4	85	131	8	8	90	127	16	12	85	133	14	8	80	135	12	6	85	135	12	6	85	135	12	6	85
.160	111	10	8	100	99	18	18	115	87	22	8	90	107	20	16	95	111	14	10	95	111	14	10	95	111	14	10	95
.495	93	10	10	80	74	21	11	75	67	12	4	50	69	36	6	60	89	18	18	70	95	10	12	75	95	10	12	75
2.5	61	12	12	50	53	14	10	60	45	14	6	40	47	16	6	35	57	14	12	55	61	14	12	55	61	14	12	55
5	55	8	8	50	49	10	10	55	39	6	8	30	39	12	4	40	51	14	8	50	55	10	8	50	55	10	8	50
10	37	14	8	40	37	11	6	40	33	8	4	45	39	8	6	55	45	16	10	40	41	12	8	35	41	12	8	35
20	24	4	2	20	24	4	2	25	28	4	4	35	30	4	4	40	26	4	2	35	26	4	2	35	26	4	2	35

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Season Spring (Sept. Oct. ***) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																			
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400				
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}
.051	104	18	2			102	20	2			103	19	3			104	18	4		
.113	86	22	2			86	22	4			86	24	4			82	22	2		
.246	70	22	4			70	24	4			70	26	5			70	22	4		
.545	55	16	4			57	14	4			57	13	7			55	18	4		
2.5	43	11	6			41	11	12			39	15	6			41	13	14		
5	34	14	12			30	14	10			32	14	10			34	8	10		
10	30	8	9			26	10	8			30	8	9			32	8	10		
20	24	5	4			22	7	4			24	6	4			24	6	4		

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Spring (Sept. Oct. Nov.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m										
.013	156	2	2	7.0	12.0	154	4	4	9.0	15.0	152	4	4	12.0	19.0	152	8	4	11.5	18.5	154	6	4	9.0	15.0	156	4	4	9.0	14.0
.051	129	4	4	9.0	14.5	123	8	10	9.0	15.0	113	12	8	13.5	21.0	119	12	10	11.0	18.0	123	12	12	9.5	16.5	127	10	4	10.0	16.0
.160	105	6	6	7.5	13.5	91	14	26	10.0	17.0	73	24	14	9.0	14.5	83	24	20	9.0	14.5	97	18	21	9.0	16.0	107	8	10	8.0	15.0
.495	86	8	6	7.0	13.5	66	18	24	5.5	9.5	46	24	6	5.0	7.5	52	26	12	6.5	10.0	74	20	26	7.0	13.5	86	8	8	7.5	14.5
2.5	60	8	8	7.0	12.0	52	10	24	7.0	12.0	24	12	4	6.0	9.5	24	17	4	6.5	10.0	48	18	24	6.5	12.0	62	8	8	6.5	12.5
5	57	6	4	5.0	9.0	51	8	18	6.0	10.0	25	10	6	7.0	11.5	27	12	8	6.5	12.0	59	6	6	6.0	11.0	51	12	14	6.0	13.0
10	39	6	6	4.0	7.0	35	8	4	3.5	6.5	27	8	4	4.0	6.5	31	12	6	4.5	7.0	45	8	6	4.5	8.0	43	6	4	4.0	7.5
20	21	2	0	3.0	4.0	21	2	0	2.5	4.0	21	2	0	3.0	5.0	29	6	2	3.0	5.0	23	6	2	3.0	5.0	23	2	2	2.5	4.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 82.5-97.5 W Season Spring (*** Oct. ***) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																														
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400															
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}													
.013	150	6	2	9.0	14.0	14.8	4	3	10.5	15.0	15.0	4	4	8.0	13.0	13.0	15.2	4	13	6.0	10.0	10.0	2	6	8.5	13.5	15.0	5	2	8.5	14.0
.051	122	6	8	7.0	12.0	10.6	6	6	9.0	13.5	13.5	8	4	7.0	12.0	12.0	10.4	12	8	5.0	8.5	8.5	9	16	6.0	10.0	12.2	7	4	6.0	10.5
.160	92	9	10	5.5	10.0	7.2	6	6	7.0	10.0	10.0	6	5	5.0	7.5	7.5	6.9	6	6	4.5	5.5	5.5	13	8	5.0	8.5	9.2	10	6	4.0	8.0
.495	80	7	16	3.5	7.0	7.2	8	10	3.0	6.5	6.5	6	6	8	3.0	6.5	7.6	6	8	2.5	6.0	6.0	10	13	3.0	5.5	8.2	7	6	3.5	7.0
2.5	59	6	7			3.9	7	6				3.9	7	4			3.9	4					4	6			5.3	12	10		
5	54	7	6			4.3	6	6				3.6	10	4			3.6	10	4				2.4	2			5.2	8	12		
10	43	8	6			3.5	4	4				2.9	2	2			2.9	2	2				9	3			4.3	9	4		
20	28	5	1			2.8	2	0				2.8	10	0			2.8	6	2				6	0			2.8	6	0		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No September of November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 67.5-82.5 W Season Spring (*** Oct. Nov.) 19_63

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.013	152	4	12	150	2	10	154	4	2	154	2	4	150	4	4	152	4	6			
.051	122	8	8	106	10	8	108	6	10	108	6	6	104	18	8	122	10	10			
.160	94	10	14	72	6	6	70	8	6	70	12	4	76	18	10	94	8	10			
.495	74	12	12	66	12	4	72	8	8	70	8	6	74	6	10	74	14	6			
.25	60	6	4	40	10	8	38	2	4	36	2	8	36	8	8	40	8	8	25	45	45
.5	55	6	4	39	8	6	33	2	4	33	7	4	33	45	9.0	45	12	12	35	6.0	6.0
10	42	4	4	36	6	4	30	2	2	35	4	2	30	4	2	38	8	4	3.0	5.0	5.0
20	29	8	2	29	4	2	29	4	2	30	4	0	29	4	0	31	4	2	2.0	3.0	3.0

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No September data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 82.5-97.5 W Season Spring (*** Oct ***) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400					0400-0800					0800-1200					1200-1600					1600-2000					2000-2400				
	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}
.013	152	2	2			150	2	6			152	4	3			150	6	4			152	4	4			152	4	12		
.051	124	6	2			110	8	7			108	6	6			118	6	12			122	8	6			122	8	6		
.160	100	6	6			75	7	9			68	14	4			86	12	10			98	8	11			98	8	11		
.495	84	8	10			66	7	2			66	8	2			78	6	12			86	6	4			86	6	4		
2.5	63	6	6	3.0	6.0	41	15	9	5.0	9.0	33	11	6	4.0	7.0	33	6	6	4.0	7.0	57	8	11	3.5	6.5	65	6	4	3.0	5.5
5	58	4	4	3.5	6.5	42	13	6	6.5	10.0	32	8	4	6.5	10.0	32	7	4	6.5	10.0	51	5	9	3.0	5.0	58	7	6	3.0	5.5
10	43	8	2	3.5	6.0	37	9	5	3.5	6.0	29	7	2	2.0	3.0	33	12	4	2.0	4.0	43	8	2	3.5	6.0	45	8	4	3.0	6.0
20	28	4	0	2.0	3.0	30	4	2	1.5	3.0	28	9	0	1.5	3.0	30	6	2	2.0	3.5	28	6	2	1.5	3.0	28	14	2	2.0	3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No September or November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 67.5-82.5 W Season Spring (Sept. *** Nov) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _l	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _l	V _{dm}	F _{am}	D _l	V _{dm}
.013	153	4	10.0	151	4	11.0	151	5	9.5	155	2	7.0	151	4	7.5	151	6	9.5
.051	125	6	7.0	111	8	9.5	111	8	14	112	9	7.0	107	10	7.5	123	8	6.5
.160	99	8	6.5	73	15	9.0	70	22	7	73	20	10.0	76	16	8.0	99	10	5.5
.495	77	14	4.5	69	13	4.5	75	9	10	73	8	3.5	75	10	3.0	79	14	4.0
2.5	64	8		38	14		36	4	7	34	4		42	16	12	62	10	
5	56	8		38	12		32	8	4	34	12		46	12	14	58	6	
10	44	8		36	10		30	3	2	32	4		40	6	6	46	4	
20	30	8		32	6		30	8	2	32	4		32	8	2	32	8	

F_{am} = median value of effective antenna noise in db above ktb

D_l = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No October data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 52.5-67.5 W Season Spring (Sept. ****) 19 63 ****

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	V _{d_m} L _{-d_m}	F _{am}	D _u	V _{d_m} L _{-d_m}	F _{am}	D _u	V _{d_m} L _{-d_m}	F _{am}	D _u	V _{d_m} L _{-d_m}	F _{am}	D _u	V _{d_m} L _{-d_m}	F _{am}	D _u	V _{d_m} L _{-d_m}												
.013	148	8	16	100	15.5	144	20	22	11.0	17.0	143	11	17	8.5	13.0	126	18	17	6.5	11.0	146	6	4	6.0	10.0	150	6	6	8.0	13.0
.051	118	12	13	7.0	12.0	111	11	18	12.5	19.0	108			12.0	18.0	100	22	8	10.0	14.0	106	8	10	5.0	8.0	115	14	7	6.5	11.0
.160	96	19	9	5.5	10.0	90			13.0	18.0	86			20.0	28.0	82			15.0	20.0	82			10.0	15.0	81	9	13	5.5	8.5
.495	86	13	4	3.5	7.5	72	14	14	4.0	7.0	71			4.5	7.5	72	6	6	5.5	11.0	74	9	6	4.0	8.0	84	15	6	4.5	8.0
2.5	59	16	2			53	22	15			31	8	4			33	36	6			51	15	12			60	14	5		
5	55	12	2			51	8	16			29	15	4			27	20	2			53	8	17			59	9	6		
10	45	3	8			35	10	2			31					34	7	5			45	4	2			44	5	7		
20	29	2	2			29	5	0			31	4	2			27	4	0			33	0	4			33	2	4		

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{-d_m} = median deviation of average logarithm in db below mean power

* * * No October or November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 37.5-52.5 W Season Spring (Sept. ***) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																			
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400				
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}		
.013	150			149			146			148	6	2	150	4	2	152	6	2		
.051	118			116			109			106	4	12	108	6	11	116	8	4		
.160	98			94			90			87	7	23	86	6	18	92	18	2		
.495	84			76			78			68	4	2	76	7	6	84	38	5		
2.5	59			59			38			35	4	4	8.5	12.0	14	61	7	4	3.5	6.0
5	55			51			30			30	10	3	10.0	13.5	5	55	7	4	3.5	6.0
10	37			37			31			35	8	4	3.0	5.0	4	45	6	6	3.0	4.5
20	27			29			29			29	2	2	2.0	3.5	2	29	30	2	2.0	3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No October or November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 22.5-37.5 W Season Spring (Sept. ***) 1963 (***)

Frequency (Mc)	TIME BLOCKS (LST)																																		
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400														
	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}	F _{am}	D _u	D _l	V _{d_m}	L _{d_m}					
.013	152	6	10	7.0	12.0	150	8	6	7.5	12.5	148	7	8	7.5	12.0	150	2	15	8.0	12.0	148	6	4	6.5	10.5	152	4	6	7.0	11.5	152	4	6	7.0	11.5
.051	124	8	10	5.0	9.0	120	12	8	5.5	9.5	110	12	12	8.0	12.5	105	7	9	8.0	14.0	110	10	10	8.0	13.5	119	9	9	6.5	11.0	119	9	9	6.5	11.0
.160	98	10	12	4.0	8.0	92	14	10	4.5	8.5	86	11	21	5.0	13.5	79	7	15	8.5	12.0	81	10	13	6.0	11.0	90	15	10	5.0	10.5	90	15	10	5.0	10.5
.495	86	6	9	3.0	5.5	78	12	16	3.5	6.5	70	6	10	4.0	7.0	74	4	18	6.5	10.5	74	7	14	4.0	9.0	81	8	6	4.5	8.5	81	8	6	4.5	8.5
.25	67	8	8	3.0	6.0	65	8	12	5.0	9.0	39	10	8	5.5	8.0	39	6	6	5.0	7.5	51	11	10	4.0	7.0	63	7	2	3.5	6.5	63	7	2	3.5	6.5
.5	57	8	4	3.0	5.5	57	6	10	6.0	9.5	35	12	4	7.0	10.0	33	8	6	3.0	5.5	51	7	11	2.5	5.0	55	4	4	3.0	6.0	55	4	4	3.0	6.0
1.0	35	12	4	2.0	3.0	41	10	8	2.5	4.5	39	8	6	3.0	6.0	35	4	4	3.0	5.0	43	11	6	2.5	4.5	41	12	7	2.5	4.5	41	12	7	2.5	4.5
2.0	28	7	1	1.0	2.5	29	2	2	1.5	3.0	29	2	2	1.5	2.5	31	6	2	2.0	4.0	29	6	0	4.0	5.0	29	8	2	2.5	4.0	29	8	2	2.5	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{d_m} = median deviation of average logarithm in db below mean power

* * * No October or November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 40-50 S Long. 67.5-82.5 W Season Spring (Sept Oct ***) 1963

Frequency (Mc)	TIME BLOCKS (LST)																							
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400			
	F _{am}	D _u	D _l	V _d m	F _{am}	D _u	D _l	V _d m	F _{am}	D _u	D _l	V _d m	F _{am}	D _u	D _l	V _d m	F _{am}	D _u	D _l	V _d m	F _{am}	D _u	D _l	V _d m
.013	157	2	4	11.5	155	4	2	11.5	154	5	1	10.5	159	4	4	7.0	155	5	2	8.0	155	8	2	9.0
.051	131	6	6	8.0	123	8	8	11.5	120	6	8	11.5	120	5	5	7.5	117	14	11	11.0	129	13	5	8.0
.160	109	8	4	7.0	99	6	14	17.0	89	9	5	14.0	92	6	10	18.5	97	15	14	12.5	107	22	7	5.5
.495	93	4	6	6.0	71	16	10	5.0	69	2	22	4.5	72	3	9	4.5	83	14	15	4.0	91	15	7	3.5
2.5	72	4	6	3.5	64	8	18	5.5	37	6	9	5.0	38	8	8	4.5	60	12	19	4.0	68	16	5	3.5
5	64	2	6	3.0	56	8	8	4.5	34	13	5	6.0	36	8	8	7.0	54	8	9	3.0	62	6	6	3.0
10	46	6	6	4.5	44	4	8	3.5	32	7	2	3.5	36	4	4	4.0	46	5	8	3.0	46	8	5	3.0
20	28	12	2	3.0	29	7	3	3.0	30	2	4	2.5	30	7	0	3.0	32	6	4	2.5	28	2	0	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

* * * No November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 30-40 S Long. 67.5-82.5 W Season Spring (Sept. Oct. ***) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}					
* .013	161	4	4	6.0	10.0	159	4	2	9.0	14.0	163	2	2	6.5	10.5	159	4	2	6.5	10.5	157	8	2	7.0	12.0
* .051	139	2	6	5.0	9.0	127	10	8	8.5	13.0	127	2	2	5.5	9.5	129	6	10	5.5	9.0	131	10	2	5.0	9.0
* .160	123	4	12	3.5	6.0	103	14	18	4.5	8.0	93	10	6	8.0	14.5	111	10	10	4.0	7.0	115	12	4	4.0	7.5
* .495	103	4	10	3.0	6.0	75	20	6	4.0	7.0	75	4	16	3.0	5.5	95	6	22	3.5	6.0	99	10	6	3.5	6.5
** 2.5	80	4	8	5.5	9.0	68	12	20	5.0	8.5	40	12	4	2.5	5.0	72	8	16	3.0	5.0	74	10	2	5.0	8.5
** 5	66	2	4	4.5	7.0	56	10	14	5.0	8.5	44	12	8	5.5	9.0	64	6	10	4.5	8.5	66	2	4	5.0	8.0
** 10	48	8	6	4.0	7.0	42	14	4	4.5	7.5	40	10	8	5.0	7.0	50	4	6	3.5	6.0	44	12	2	3.0	5.5
** 20	36	22	10	3.0	5.5	30	24	4	2.0	4.0	36	8	6	4.0	7.0	38	12	8	2.5	5.5	30	18	2	2.5	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* No October data

** No September data

*** No November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Season Autumn(Sept. xxx) 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.013	153	4	7.5 15.5	153	2	4 10.0 16.5	149	4	4 11.5 18.0	151	6	6 7.5 13.0	153	4	6 7.0 12.0	153	4	4 7.5 12.5
.051	123	8	10.5 16.0	119	10	12 12.0 18.0	119	8	24 14.5 21.0	117	12	16 11.5 17.0	121	8	12 10.5 16.0	125	6	10 9.0 14.0
.160	102	6	6.5 11.5	98	4	18 8.0 13.0	78	21	6 14.0 20.0	84	16	10 13.0 17.5	96	8	16 7.5 12.5	102	6	8 6.5 11.0
.495	85	8	4.0 6.5	57	22	6 6.5 9.0	53	24	4 12.0 17.0	53	22	4 9.0 13.5	69	14	14 5.5 8.0	87	8	10 3.5 6.5
2.5	58	6	5.0 9.5	54	6	20 6.0 10.0	32	10	5 5.5 7.0	36	8	8 2.5 6.5	50	11	12 4.5 8.0	59	7	7 4.5 8.0
5	50	6	4.5 7.5	44	7	10 5.5 8.5	28	10	6 5.0 8.0	31	8	9 4.5 7.5	50	8	12 4.5 7.5	54	6	8 4.0 7.5
10	33	12	2.0 4.0	35	6	6 3.0 5.0	35	8	6 3.5 6.0	37	8	8 5.0 8.0	45	4	6 4.0 7.0	40	14	9 3.0 5.5
20	19	0	1.5 3.0	19	0	2 1.5 3.0	19	4	2 1.5 3.5	21	2	2 2.0 3.5	19	4	0 1.5 3.0	19	2	2 1.0 2.5

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No November data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Autumn (Sept. - Oct. - Nov.) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m	F _{am}	D _u	D _l	V _d m	L _d m			
.135	108	6	6			101	9	9			92	9	6			100	8	10			107	6	4
.500	86	7	5			73	14	15			59	6	5			69	15	10			85	6	6
2.5	64	9	10			56	12	15			33	7	3			52	13	13			63	8	9
5	58	5	6			53	8	10			32	8	4			51	10	11			57	6	6
10	37	5	2			38	4	3			40	5	5			44	5	5			38	7	3
20	23	2	1			23	2	1			27	3	2			26	4	2			24	2	1

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Season Autumn (Sept. Oct. Nov.) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.013	153	4	11.0 17.0	153	4	11.5 18.0	149	4	2 12.0 18.0	149	4	2 13.0 20.0	147	6	2 12.0 19.5	151	4	4 10.5 16.5
.051	132	6	11.0 17.5	130	6	12.0 19.0	112	10	8 11.0 15.5	112	10	8 11.0 15.5	112	12	10 9.0 13.5	124	10	6 11.5 17.5
.160	109	10	10.5 17.5	105	9	9.5 15.0	77	21	10 3.0 5.5	75	24	10 5.5 8.0	87	20	20 6.5 10.0	105	12	10 10.0 15.5
.495	86	12	10.5 18.0	78	14	8.0 14.0	52	20	4 5.0 8.0	50	18	4 5.0 12.5	64	20	14 6.0 9.0	76	12	8 9.5 16.5
2.5	60	8	9.0 14.0	56	8	12 8.5 13.5	34	11	6 3.5 6.0	30	8	4 3.0 4.5	42	14	14 5.0 7.5	58	10	7 8.0 13.0
5	54	4	8	50	4	8 5.0 8.0	26	12	8 4.0 6.0	22	12	4 3.0 5.0	42	10	16 3.5 6.0	52	6	5 4.5 7.5
10	34	4	5.0 7.5	32	4	4.0 5.5	26	10	8 6.5 9.5	22	12	6 7.0 10.5	34	6	4 5.5 8.5	36	4	4 4.0 6.0
20	23	0	1.5 3.5	23	2	2.0 3.5	21	4	0 3.0 5.0	23	4	2 3.0 5.5	23	2	2 3.0 5.0	23	2	2 1.5 3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Autumn (Sept. Oct. Nov.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}					
.013	154	2	4	8.0	10.5	152	4	4	7.0	10.0	152	4	6	7.5	10.0	152	4	4	7.0	9.0	154	2	4	7.0	9.0
.051	132	6	4	9.5	13.0	128	8	10	7.0	9.5	126	12	10	9.0	11.5	128	10	8	9.0	12.0	132	6	4	8.5	11.0
.160	114	8	8	9.0	12.5	106	12	18	8.5	13.0	96	14	8	10.0	14.0	110	10	12	9.0	13.5	114	8	6	8.0	12.0
.495	93	11	8	8.0	11.0	81	18	10	4.0	6.5	77	12	10	6.0	8.0	89	14	10	7.5	10.5	93	10	8	7.5	10.5
2.5	65	8	6	6.0	8.0	63	8	12	5.0	8.0	53	12	2.0	3.0	4.5	61	10	12	4.0	7.0	63	10	8	5.5	8.5
5	60	8	10	5.0	7.5	60	8	13	3.5	8.5	58	10	3.0	4.5	7.5	60	8	11	4.5	7.5	58	10	8	4.0	6.5
10	44	6	12	11.0	6.0	44	8	12	4.5	7.0	42	8	16	4.0	6.0	46	6	10	4.5	7.0	44	6	10	3.5	5.5
20	25	4	2	3.0	4.5	25	4	2	2.0	3.0	27	4	4	3.5	5.0	29	4	4	3.0	4.0	25	4	2	2.5	3.5

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Season Autumn (Sept. Oct. Nov.) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	V _d m	F _{am}	D _u	V _d m	F _{am}	D _u	V _d m	F _{am}	D _u	V _d m	F _{am}	D _u	V _d m	F _{am}	D _u	V _d m
.013	153	6	10	151	6	8	149	8	8	151	6	8	153	6	12	153	6	12
.051	131	5	10	123	10	10	115	12	10	117	10	10	121	10	14	129	6	8
.160	112	6	6	98	14	20	86	16	14	86	18	14	98	14	16	112	6	8
.495	90	8	8	72	16	16	62	16	6	64	18	8	82	12	16	90	8	8
2.5	59	10	6	53	12	12	36	4	4	39	6	2	53	12	10	59	8	4
5	56	6	6	52	8	12	36	12	4	36	12	4	52	10	6	56	6	5
10	36	8	4	36	10	4	34	8	6	36	10	6	44	6	6	38	10	6
20	24	2	2	24	4	2	26	4	2	26	4	2	26	4	2	24	2	0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median deviation of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Spring (Sept. - Oct. - Nov.) 19 63

TIME BLOCKS (LST)

Frequency (Mc)	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.013	157	6	3			155	6	4			159	8	7			161	8	4			159	8	4
.051	132	8	7			128	8	10			120	24	7			126	22	6			132	12	6
.160	109	15	5			101	15	24			98	29	27			113	18	26			115	12	10
.495	95	10	8			73	22	14			59	52	2			91	20	30			99	8	10
2.5	70	6	10			60	12	14			46	18	2			66	14	20			72	8	8
5	58	6	8			52	8	10			36	9	4			58	10	18			58	10	8
10	39	10	6			39	8	6			33	10	6			51	6	6			45	8	6
20	24	4	6			22	6	4			26	4	6			30	11	8			24	6	4

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Autumn (Sept. Oct. Nov.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	
.013	155	5	6			153	6	4			153	6	6			153	6	4			
.251	130	6	6			126	6	10			118	10	10			122	8	10			
.160	113	7	6			103	6	18			93	10	12			103	10	8			
.495	87	10	6			73	14	14			61	14	8			81	10	10			
2.5	49	8	9			44	10	11			35	6	9			42	10	8			
5	49	7	7			46	11	13			25	12	13			44	10	12			
10	25	12	8			23	12	8			21	11	8			29	10	6			
20	17	4	6			19	6	8			21	6	8			21	6	7			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São Jose, Brazil Lat. 23.3 S Long. 45.8 W Season Fall (Mar. Apr. ***) 1962

Frequency (Mc)	TIME BLOCKS (LST)																						
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.051	130	12	10			122	6	16			128	12	8			132	10	6			132	8	10
.113	108	14	10			88	10	8			98	14	10			108	6	12			108	12	8
.246	96	12	8			68	10	8			76	30	13			94	8	22			99	9	7
.545	86	6	12			86	4	6			86	6	6			88	4	4			88	6	6
2.5	58	8	6			32	10	4			36	22	8			56	14	12			60	8	4
5	51	8	5			32	8	5			33	13	6			51	10	10			53	10	4
10	43	8	5			34	6	6			36	9	8			44	8	4			44	6	4
20	26	7	2			26	8	4			30	8	4			32	6	4			28	6	4

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* * * No May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São José, Brazil Lat. 23.3 S Long. 45.8 W Season Spring (Sept. Oct. Nov.) | 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.051	134	8	10	128	10	14	122	9	18	128	14	20	132	14	19	134	10	12
.113	122	10	10	112	16	16	104	15	14	110	22	16	118	15	14	122	10	10
.246	106	10	16	90	21	17	82	14	13	90	25	17	99	18	19	106	9	14
.545	94	8	16	86	11	14	84	10	10	90	18	15	90	18	12	94	8	10
2.5	60	14	12	54	18	22	29	21	13	36	28	18	56	18	20	62	14	12
5	60	16	12	57	15	15	39	8	15	44	16	16	62	15	17	66	14	12
10	43	14	14	39	14	14	35	12	16	37	12	13	46	13	11	46	11	14
20	29	10	6	27	8	5	27	8	6	33	14	8	39	16	10	35	14	10

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Season Autumn (Sept. Oct. Nov.) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}					
.013	163	6	4	10.0	15.5	163	4	6	10.5	17.0	165	6	8	12.5	20.5	165	4	6	10.0	17.0	163	6	6	9.0	14.5
.051	144	5	6	10.0	17.0	140	8	8	13.0	21.0	144	9	10	14.5	24.0	144	6	8	11.0	19.5	143	5	5	10.5	17.5
.160	123	4	6	9.5	17.5	117	10	14	13.0	23.5	121	12	8	13.0	22.5	121	6	11	10.0	19.0	122	5	7	9.5	17.0
.495	100	4	6	8.5	17.0	92	12	14	12.0	21.5	84	10	12	12.5	23.0	102	8	9	8.5	16.5	99	5	7	8.0	15.0
2.5	55	6	6	7.0	13.0	48	11	13	8.5	15.5	27	14	10	10.0	15.5	37	24	18	7.5	13.0	53	6	8	7.0	12.5
5	55	7	11	5.5	10.0	49	10	14	6.5	11.0	33	12	12	8.0	14.0	43	16	18	9.5	16.5	55	6	14	6.0	10.5
10	41	8	8	4.0	6.5	41	10	10	3.5	6.0	39	8	12	6.0	9.0	45	7	12	6.5	11.0	49	6	6	4.0	6.5
20	23	2	2	1.5	3.0	23	3	3	2.0	4.0	23	6	4	2.5	4.0	27	12	5	4.5	9.0	27	6	6	2.5	5.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Season Autumn (Sept. ___ Oct. ___ Nov. ___) 1963

Frequency (Mc)	TIME BLOCKS (LST)																									
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400										
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}						
.013	160	9	6			158	8	6			160	8	6			160	10	8			160	10	6			
.051	138	10	8			126	16	8			128	16	8			134	12	12			138	10	8			
.160	113	12	8			98	21	13			103	20	18			108	17	15			111	16	8			
.495	95	10	10			81	21	12			85	20	16			87	16	12			93	12	8			

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

