

National Bureau of Standards  
Library, N.W. Bldg  
FEB 11 1965

Reference book not to be  
taken from the library.



# Technical Note

No. 18-21

---

## QUARTERLY RADIO NOISE DATA DECEMBER, JANUARY, FEBRUARY, 1963-64

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins



U. S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS

## THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

**Institute for Basic Standards.** Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.\* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.\*\* Office of Standard Reference Data.

**Institute for Materials Research.** Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.\*\* Office of Standard Reference Materials.

**Central Radio Propagation Laboratory.**\*\* Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

**Institute for Applied Technology.** Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

---

\* NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado.

\*\* Located at Boulder, Colorado.

# NATIONAL BUREAU OF STANDARDS

## *Technical Note 18-21*

Issued January 25, 1965

### QUARTERLY RADIO NOISE DATA DECEMBER, JANUARY, FEBRUARY, 1963-64

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins  
Central Radio Propagation Laboratory  
National Bureau of Standards  
Boulder, Colorado

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.







Radio Noise Recording Station

NATIONAL BUREAU OF STANDARDS


RADIO NOISE RECORDER

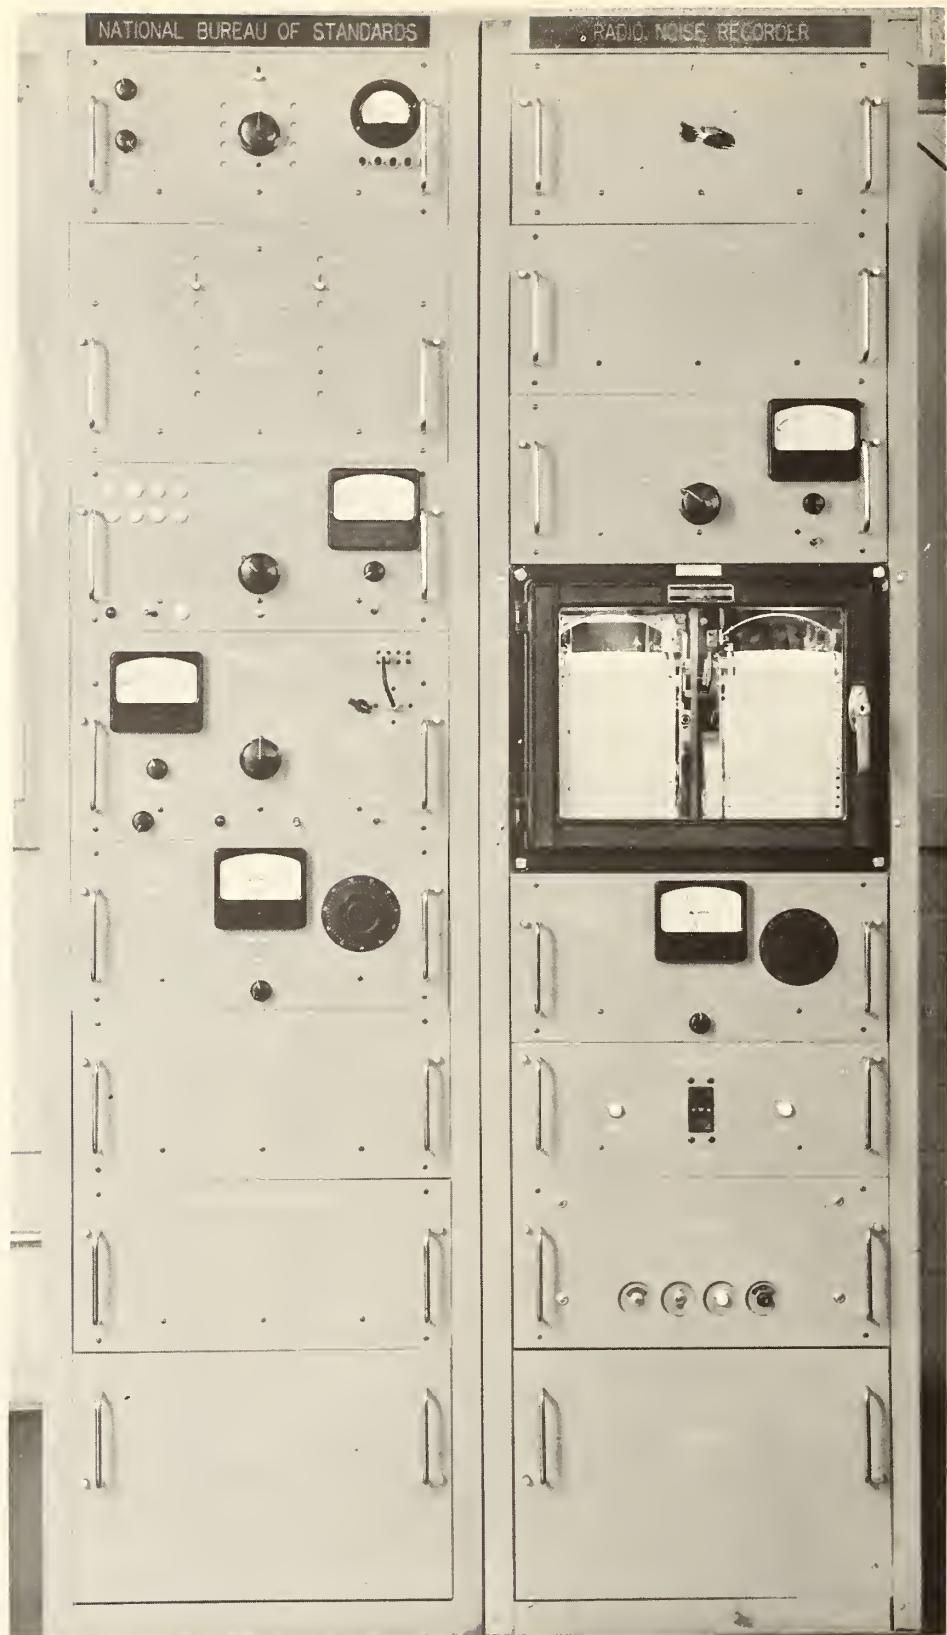

ARN-2 Atmospheric Radio Noise Recorder

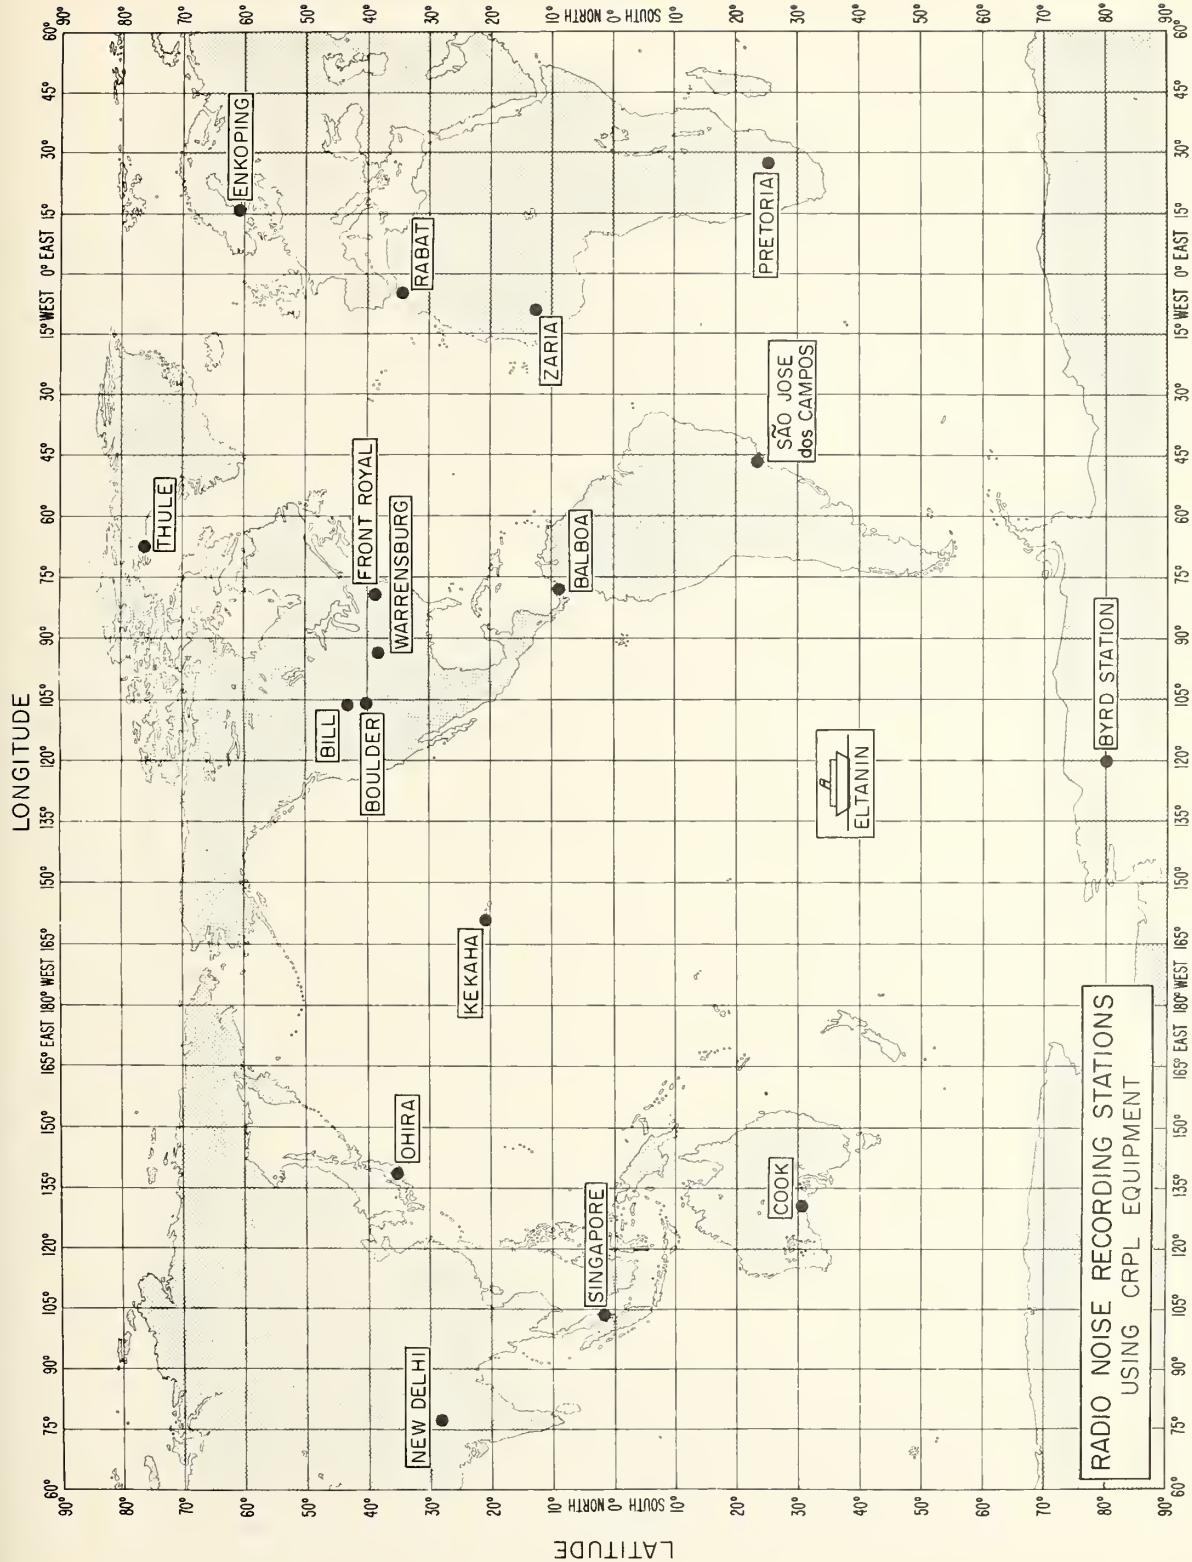

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE  
TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

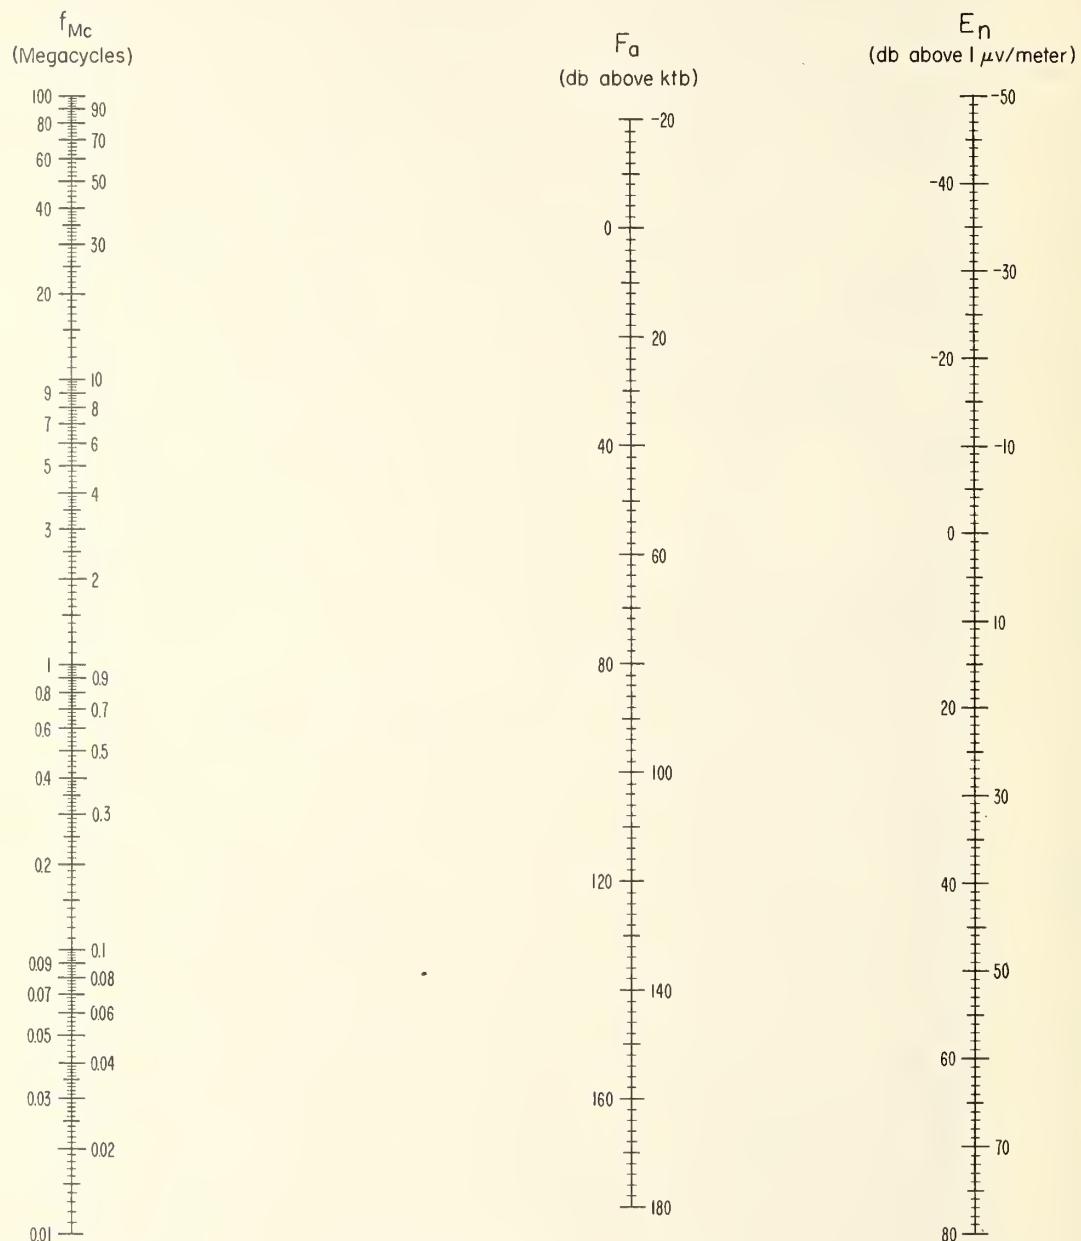

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

$F_a$  = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

$E_n$  = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above  $1 \mu\text{v}/\text{meter}$  for a 1 kc Bandwidth.

$f_{Mc}$  = Frequency in Megacycles.

Quarterly Radio Noise Data  
December, January, February, 1963-64

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

Radio noise measurements are being made at eighteen stations in a world-wide network operated in a cooperative program coordinated by the National Bureau of Standards. The locations of these stations are shown on the map. The results of these measurements for the months of December, January, and February are given in this report. Where the results for these months are not presently available, the data will be published in subsequent reports, and the data for previous months, which are now available but have not been published previously, are included. The tabulated values are based on three basic parameters of the noise; these are the mean power, the mean envelope voltage, and the mean logarithm of the envelope voltage.

The noise power received from sources external to the antenna averaged over a period of several minutes is the basic parameter and can be conveniently expressed in terms of an effective antenna noise factor,  $f_a$ , which is defined by:

$$f_a = p_n / k T_o b = T_a / T_o$$

where

$p_n$  = noise power available from an equivalent loss-free antenna (watts)

$k$  = Boltzman's constant =  $1.38 \times 10^{-23}$  joules per degree Kelvin

$T_o$  = reference temperature, taken as  $288^{\circ}$  K

$b$  = effective receiver noise bandwidth (c/s)

$T_a$  = effective antenna temperature in the presence of external noise.

The antenna noise factors in this report are for a short vertical antenna over a perfectly conducting ground plane and are expressed in decibels,  $F_a$  ( $= 10 \log_{10} f_a$ ). This parameter is simply related to the rms noise field strength along the antenna by:

$$E_n = F_a - 95.5 + 10 \log_{10} b + 20 \log_{10} f \text{ Mc/s}$$

where:

$E_n$  = rms noise field strength for bandwidth  $b$  in db above  
1  $\mu$ V/m

$b$  = effective receiver noise bandwidth in c/s

$f$  Mc/s = frequency in Mc/s.

The value of  $E_n$  for a 1 kc/s bandwidth can be found from the attached nomogram. It should be noted that  $E_n$  is the vertical component of the field at the antenna. It should also be noted that the rms envelope voltage is 3 db higher than the rms voltage.

The other two noise parameters tabulated are given relative to the mean power. Thus, the mean voltage and mean logarithm expressed as deviations,  $V_d$  and  $L_d$ , respectively, are in db below the mean power.

Measurements of the three parameters reported were made with the National Bureau of Standards' Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 6.6294 meter (21.75') vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour during which they were recorded. The month-hour medians,  $F_{am}$ ,  $V_{dm}$  and  $L_{dm}$  are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of  $F_a$  are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median,  $F_{am}$ , and designated by  $D_u$  and  $D_l$ , respectively.

In addition to these month-hour values, corresponding values are tabulated for the time blocks as defined by CCIR Report 322. All recorded values for the four hours of the day and the three-month period are used to determine the median and decile values. When no data were available for one or two months of the season, it is so indicated and should be noted when considering seasonal trends.

The values presented in the tables reflect the actual measured values of radio noise. The only editing for man-made noise or station contamination of the records has been done by the station operators, and no additional attempt has been made to identify these values by systematic statistical means. These preliminary data values are presented in order to expedite dissemination of the data, and additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications. The parameter that will first reflect any such contamination will be the logarithmic parameter,  $L_d$ . This contamination generally will cause the value of  $L_d$  to be less than it would have been had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [Crichlow et al., 1960b] contaminated values of  $L_d$  may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of  $L_d$  be ignored and the most probable value of  $L_d$  from the curve on the graph of  $L_d$  vs.  $V_d$  be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of  $L_d$  that will give an amplitude-probability distribution with a form factor described in the above reference and can, therefore, be used to determine whether the measured value or the most probable value of  $L_d$  for any value of  $V_d$  should be used.

Station clocks are set to local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5). The data from the Floating Antarctic Research Vessel, USNS Eltanin, are grouped so that a block  $10^{\circ}$  in latitude by  $15^{\circ}$  in longitude is treated as a separate station. The station clock in this case is

corrected to the LST at the center of the block. Because of this grouping, very few readings may be used to obtain the median values tabulated in some cases. If, during the month, fewer than ten readings are obtained for any one block, the decile values are not given. If data for less than three months are used in the time block summaries, this fact is noted on the summary sheet. Because of the small sample size, some caution should be exercised when using these values.

The assistance of the station operators and other personnel of the operating agencies in obtaining the data contained in this report is gratefully acknowledged. Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;  
Front Royal, Virginia; Kekaha, Hawaii;  
Warrensburg, Missouri; USNS Eltanin

U.S. Army Strategic Communications Command - Balboa, C.Z.;  
Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and Ahmadu Bello University, Electrical  
Engineering Department, Zaria, Northern Nigeria

Ministry of Communications, Wireless Planning and Co-ordination  
Organization - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) - Pretoria

Institut Scientifique Cherifien (Morocco) - Rabat

Comissão Nacional des Atividades Espaciais (Brazil) - São José  
dos Campos

Department of Scientific and Industrial Research (Great Britain) -  
Singapore

The following publications contain additional information on radio noise:

- Clark, C., "Atmospheric Radio-Noise Studies Based on Amplitude-Probability Measurements at Slough, England, during the International Geophysical Year," Proc. Inst. Elec. Engs., Pt. B, 109, 47, 393 (September, 1962).
- Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney, "Amplitude-Probability Distributions for Atmospheric Radio Noise," NBS Monograph 23 (November, 1960b).
- Crichlow, W. Q., C. J. Roubique, A. D. Spaulding, and W. M. Beery, (January-February, 1960) "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," J. Res. NBS 64D (Radio Propagation) No. 1, 49-56.
- Crichlow, W. Q., "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6 778 (1957).
- Crichlow, W. Q., D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
- "Report on Revision of Atmospheric Radio Noise Data," C.C.I.R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- "World Distribution and Characteristics of Atmospheric Radio Noise," C.C.I.R. Report No. 322, Xth Plenary Assembly, Geneva, 1963, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- Fulton, F. F. (Jr.) (May-June, 1961), "Effect of Receiver Bandwidth on the Amplitude Distribution of VLF Atmospheric Noise," J. Res. NBS 65D (Radio Propagation) No. 3, 299-304.
- Horner, F., "An Investigation of Atmospheric Radio Noise at Very Low Frequencies," Proc. Inst. Elec. Engs., Pt. B, 103, 743 (1956).

Horner, F., "Radio Noise of Terrestrial Origin," Proc. of Commission IV on Radio Noise of Terrestrial Origin during the XIIIth General Assembly of URSI, " London, September, 1960.

Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (November-December, 1962) "Conversion of the Amplitude-Probability Distribution Function for Atmospheric Radio Noise from One Bandwidth to Another," J. Res. NBS 66D (Radio Propagation) No. 6, 713-720.

Obayashi, T. (January-February, 1960), "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," J. Res. NBS 64D (Radio Propagation) No. 1, 41-48.

Taylor, W. L. (September-October, 1963), "Radiation Field Characteristics of Lightning Discharges in the Band 1 kc/s to 100 kc/s," J. Res. NBS 67D (Radio Propagation) No. 5, 539-550.

Taylor, W. L. and A. G. Jean (September-October, 1959), "Very-Low-Frequency Radiation Spectra of Lightning Discharges," J. Res. NBS 63D (Radio Propagation) No. 2, 199-204.

URSI Special Report No. 7, "The Measurement of Characteristics of Terrestrial Radio Noise," Elsevier Publishing Co. (1962).

Watt, A. D. and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).

Watt, A. D. (September-October, 1960), "ELF Electric Fields from Thunderstorms," J. Res. NBS 64D (Radio Propagation) No. 5, 425-433.

Watt, A. D. and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).

Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).

Data included in this report and the standard time for each station are as follows:


Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	December, January, February, 1963-64	75 W	+05
Bill	December, January, February, 1963-64	105 W	+07
Boulder	December, January, February, 1963-64	105 W	+07
Cook	December, January, February, 1963-64	135 E	-09
USNS Eltanin	December, January, February, 1963-64		
Enköping	December, January, February, 1963-64	15 E	-01
Front Royal	December, January, February, 1963-64	75 W	+05
Kekaha	December, January, February, 1963-64	150 W	+10
New Delhi	December, January, February, 1963-64	75 E	-05
Ohira	December, January, February, 1963-64	135 E	-09
Pretoria	December, January, February, 1963-64	30 E	-02
Rabat	December, January, February, 1963-64	GMT	0
Sao Jose	December 1963	45 W	+03
Singapore	December 1963	105 E	-07
Warrensburg	December, January, February, 1963-64	90 W	+06

Previous data from the World-Wide Network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957 - December 31, 1958
- 18-2 March, April, May, 1959
- 18-3 June, July, August, 1959
- 18-4 September, October, November, 1959
- 18-5 December, January, February, 1959-60
- 18-6 March, April, May, 1960
- 18-7 June, July, August, 1960
- 18-8 September, October, November, 1960
- 18-9 December, January, February, 1960-61
- 18-10 March, April, May, 1961
- 18-11 June, July, August, 1961
- 18-12 September, October, November, 1961
- 18-13 December, January, February, 1961-62
- 18-14 March, April, May, 1962
- 18-15 June, July, August, 1962
- 18-16 September, October, November, 1962
- 18-17 December, January, February, 1962-63

18-18 March, April, May, 1963  
18-19 June, July, August, 1963  
18-20 September, October, November, 1963

MOST PROBABLE AND MINIMUM VALUES OF  $L_d$  VERSUS  $V_d$   
FOR ATMOSPHERIC RADIO NOISE

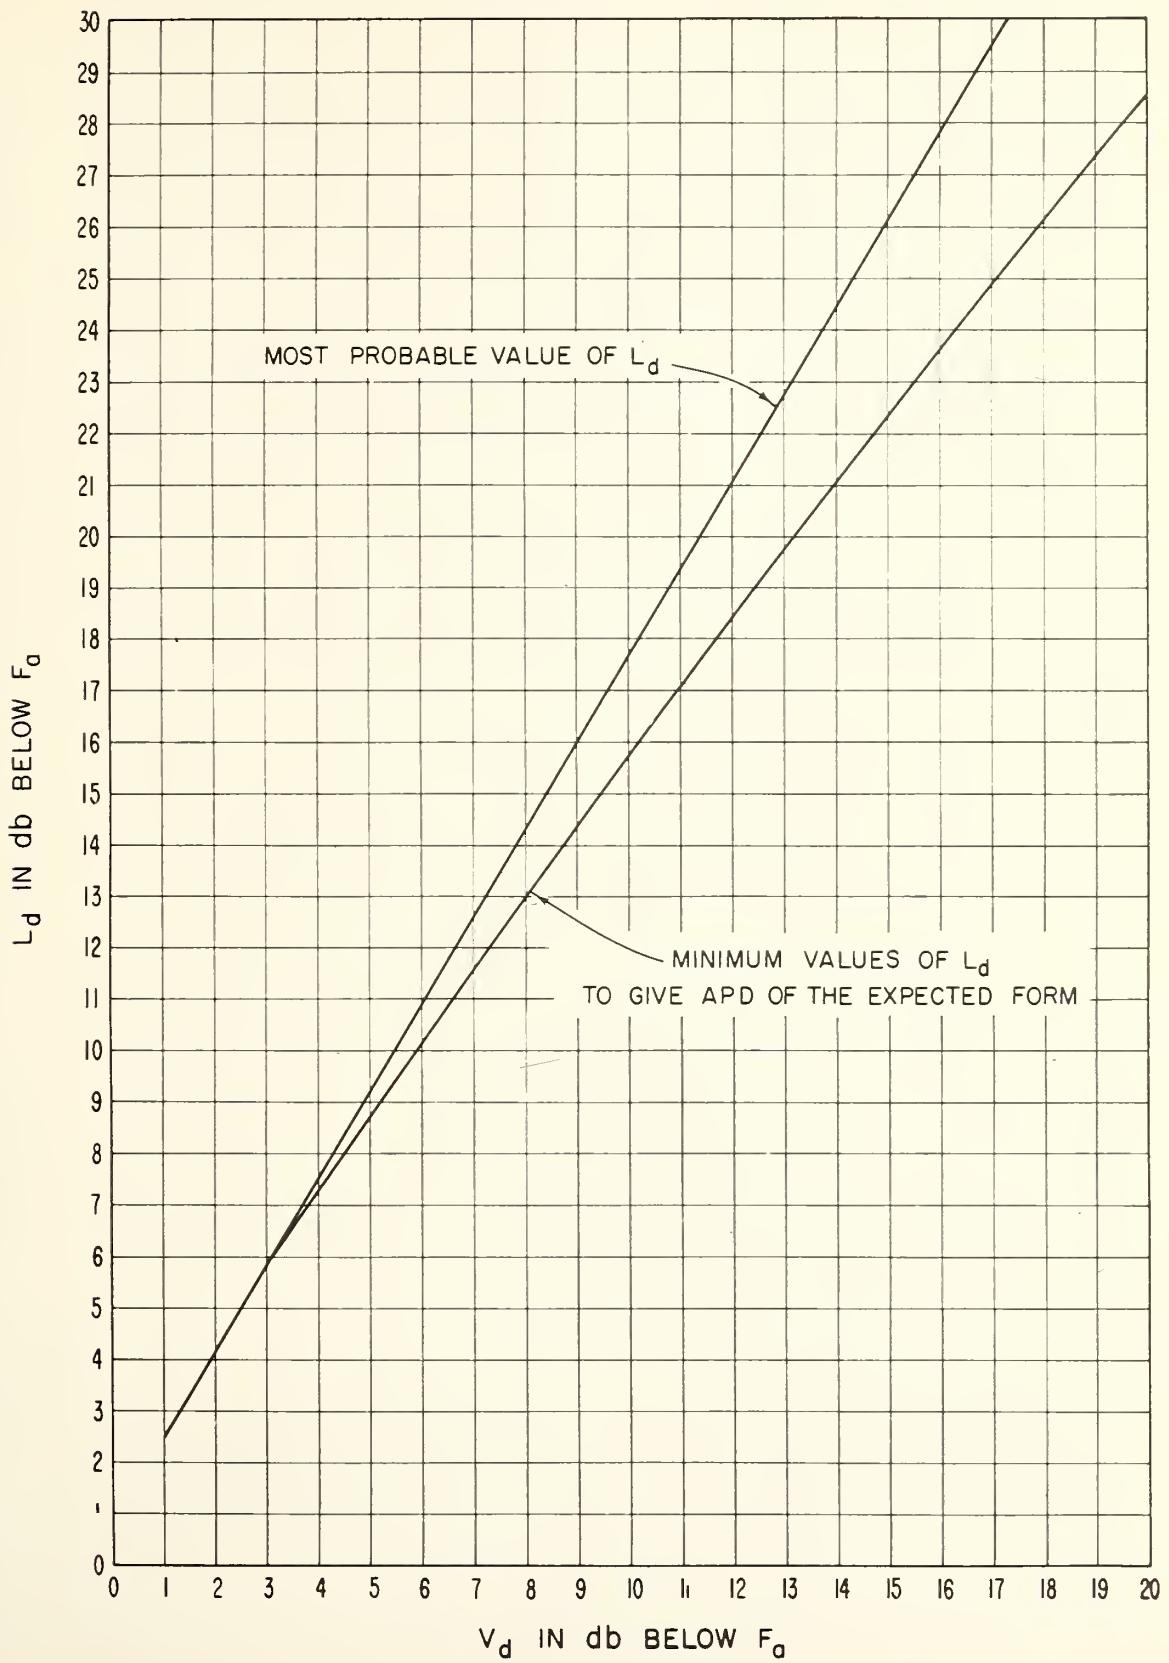

MONTH-HOUR VALUES OF RADIO NOISE Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month December 19 63

### Frequency (Mc)

$\sigma_{\text{ant}} = \text{median value of effective antenna noise in dB above kTB}$

$\text{gfb}_{10} = \text{ratio of upper decile to median in gfb}$

$\eta^2$  = ratio of median to lower decile in dB

$\frac{d}{dm} = \text{median deviation of average voltage in } \text{db}$  below mean power

MONTH-HOUR VALUES OF RADIO NOISE      Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month January 19 64

F <sub>ST</sub> )	Frequency (Mc)												Frequency (Mc)																																
	.013				.051				.160				.495				2.5				5				10																				
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>																					
00	1/48	2	5	13.5	185	124	6	7	11.0	16.5	104	8	6	2.0	16.0	90	7	4	7.5	140	59	7	4	4.0	8.0	42	8	4	4.0	5.5	23	4	4	2.0	2.5										
01	1/48	2	5	13.0	19.0	124	6	6	10.0	16.0	106	6	6	9.0	15.5	91	5	5	7.5	140	61	7	6	6.5	1.0	53	6	9	4.0	14	4	4	4.5	23	4	4	2.0	2.5							
02	1/48	4	2	11.5	18.0	124	7	5	9.0	15.0	106	7	10	8.0	14.0	90	6	5	6.0	120	61	7	4	6.0	9.0	51	9	7	4.0	7.0	42	11	4	3.5	6.0	23	4	3	2.0	3.0					
03	1/50	3	4	* 12.0	17.5	126	7	6	11.0	17.0	108	6	12	9.5	15.5	89	6	4	* 8.0	* 15.0	61	6	8	* 5.5	* 10.0	53	6	11	* 4.5	7.5	38	5	0	3.0	5.0	23	5	2	2.0	3.0					
04	1/50	5	2	11.5	16.5	126	5	4	9.5	15.0	106	6	12	8.0	15.0	89	8	12	9.0	15.0	59	9	4	* 9.5	* 14.0	50	8	6	5.0	85	40	2	4	4.5	4.0	25	4	4	2.0	3.0					
05	1/50	5	2	10.5	16.0	126	5	7	10.5	16.5	102	7	11	10.0	18.0	85	6	13	* 9.5	* 13.5	59	12	8	* 8.0	* 13.0	51	4	6	4.5	7.5	38	4	1	2.0	3.0	25	4	4	1.5	2.5					
06	1/50	5	3	11.0	16.5	124	7	6	12.0	17.0	93	9	7	11.5	* 18.0	75	12	4	* 2.5	* 5.5	53	12	6	6.0	9.5	56	10	11	4.0	6.5	48	6	7	3.0	5.5	27	4	6	1.5	2.5					
07	1/48	4	2	11.0	16.5	118	5	5	11.0	18.0	82	15	4	11.0	* 19.0	75	5	2	* 2.0	* 4.0	45	8	4	* 5.5	* 7.5	52	5	11	* 3.5	7.0	48	6	6	3.0	6.5	26	6	5	2.0	3.0					
08	1/46	4	2	11.0	16.0	112	9	12	11.0	17.0	86	12	12	9.0	* 18.5	75	12	2	* 3.0	* 3.5	43	8	5	* 2.0	* 3.5	45	6	12	* 3.5	7.0	44	4	4	* 2.5	* 5.0	27	4	6	1.5	3.0					
09	1/46	6	4	11.5	16.5	111	7	13	12.0	* 17.5	84	18	12	10.0	* 15.0	73	14	0	* 3.0	* 6.5	39	9	2	* 2.0	* 3.0	37	9	6	* 5.5	* 9.0	42	10	6	4.5	8.0	27	7	6	3.0	4.5					
10	1/46	4	4	* 10.0	15.5	112	7	13	12.0	* 18.0	84	18	13	12.0	* 18.0	73	5	2	* 2.0	* 3.5	39	3	4	* 3.0	* 6.0	41	7	6	* 4.0	* 6.0	45	7	5	3.0	5.0	27	7	6	* 1.0	* 2.0					
11	1/48	4	5	11.0	16.0	114	6	9	12.0	17.0	84	9	13	7.0	* 2.0	73	4	2	* 1.5	* 3.0	41	3	4	* 3.5	* 3.0	35	4	5	* 3.0	* 3.5	38	13	2	4.5	6.0	25	5	6	* 1.0	* 2.0					
12	1/50	4	4	10.5	16.0	118	8	6	10.0	16.0	96	9	10	7.5	* 12.5	75	4	2	* 1.5	* 5.5	39	5	4	* 3.0	* 4.5	35	7	5	* 2.5	* 4.0	38	5	2	4.0	6.5	25	4	5	* 1.0	* 2.0					
13	1/52	2	5	* 10.0	15.0	120	7	6	10.0	15.5	98	5	9	* 6.0	* 13.0	73	5	2	* 5.0	* 8.0	39	4	4	* 2.0	* 4.0	36	7	5	* 4.5	* 7.0	39	10	3	3.0	5.5	27	4	5	* 4.0	* 5.0	27	4	5	3.0	4.5
14	1/52	4	3	10.0	15.5	122	4	6	9.5	15.0	89	9	5	8.0	13.5	73	4	2	* 3.0	* 5.0	39	4	4	* 3.0	* 4.5	38	7	5	* 4.0	* 6.0	42	7	6	* 4.5	* 7.0	25	5	3	3.0	4.5	25	5	3	3.0	4.5
15	1/54	2	5	10.0	15.0	120	6	5	10.0	15.0	96	6	7	9.0	14.0	75	3	4	* 7.5	* 10.5	39	4	2	* 3.0	* 4.5	35	7	5	* 2.5	* 4.0	38	5	2	4.0	6.5	25	4	4	* 1.5	* 2.5	25	5	4	3.5	5.0
16	1/52	2	3	11.0	16.0	118	6	6	9.5	16.0	98	10	5	8.5	14.5	73	7	0	* 4.0	* 5.5	41	3	3	4.0	5.0	51	4	9	* 5.5	* 9.0	50	5	7	4.0	7.0	23	5	2	3.0	4.5	25	5	4	2.5	3.5
17	1/50	2	3	11.5	17.0	114	11	7	12.5	18.0	90	10	4	9.5	+ 15.0	77	6	4	* 12.0	* 19.0	45	4	4	* 5.0	* 7.0	59	5	6	* 5.5	* 9.0	50	5	7	4.0	7.0	23	5	2	3.0	4.5	25	5	4	2.5	3.5
18	1/48	3	4	13.5	19.0	120	8	5	10.5	16.5	100	9	4	7.5	+ 13.0	87	6	4	* 6.0	* 10.0	51	7	4	* 4.5	* 7.0	60	7	7	* 5.0	* 8.0	46	9	5	* 3.5	* 5.0	23	5	4	2.0	3.0					
19	1/48	4	3	13.0	19.0	124	4	5	10.0	15.5	104	5	6	8.0	+ 13.0	89	6	4	* 7.0	* 12.0	57	3	4	* 4.5	* 7.5	67	8	15	* 5.0	* 8.0	43	7	4	3.0	5.0	21	5	2	2.0	3.0					
20	1/48	5	6	13.0	18.0	124	6	6	10.5	16.0	104	8	5	8.5	14.5	89	6	4	6.5	11.5	57	6	4	* 5.0	* 8.0	63	8	9	* 3.5	* 6.0	42	4	3	4.0	6.0	23	3	4	2.0	3.0					
21	1/48	5	6	13.0	18.0	124	5	6	10.0	15.0	104	11	5	8.0	13.5	89	8	4	6.0	10.0	57	6	5	* 4.0	* 6.5	63	10	10	* 5.0	* 8.0	42	4	4	4.0	6.0	23	3	4	2.0	3.0					
22	1/46	6	4	12.0	17.0	124	7	6	9.5	15.0	104	11	5	8.0	13.5	89	8	4	6.0	10.0	58	7	5	* 3.5	* 6.5	59	8	8	* 3.0	* 6.0	40	5	2	2.0	3.0	21	5	2	1.5	3.0					
23	1/46	5	4	12.0	18.0	124	7	7	9.0	15.0	102	11	4	8.0	15.0	91	5	6	4.0	7.5	54	7	8	* 5.0	* 7.5	40	5	2	3.0	5.0	23	4	4	2.0	3.0	20	3	4	2.0	3.0					

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>2</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average lagarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone   Lat. 9.0 N   Long. 79.5 W   Month February 19 64

		Frequency (Mc)																		.013						.051																
		Fam						D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>												
50	±	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>											
00	148	5	5-	* 1.0	1.65	1/28	7	9	** 1.0	1.60	1/08	10	5	* 9.0	15.0	94	7	7	* 8.0	15.0	61	10	9	6.0	10.0	4	5.0	8.0	41	10	2	4.0	6.0	22	4	2	1.5	3.0				
01	150	4	5-	* 1.0	1.70	1/27	9	8	* 1.0	1.60	1/08	10	13	10.0	16.0	94	5	9	2.5	12.5	61	8	7	7.0	11.0	57	4	6.0	5.0	8.0	43	8	4	4.0	6.0	24	0	3	3.0	4.0		
02	148	6	2	10.5	15.5	1/28	6	7	1.0	17.0	1/10	5	10	11.0	17.0	94	5	7	* 1.5	15.0	64	8	10	6.0	10.0	56	6	4	4.0	6.0	24	0	2	2.0	3.5							
03	150	5	4	* 1.0	1.70	1/28	8	9	* 1.0	17.5	1/08	10	9	12.0	17.5	96	3	9	* 1.0	16.0	62	8	7.0	12.0	56	7	5	5.0	8.5	39	5	1	3.5	5.0	24	1	2	2.5	3.5			
04	150	6	2	11.0	15.5	1/26	10	6	* 1.0	10.0	1/10	15.0	108	9	10	8.0	10	8.0	4.5	15.5	62	9	7	7.0	12.0	55	8	3	4.5	8.5	39	7	2	4	7.0	24	1	2	2.0	3.0		
05	152	4	4	11.0	11.5	1/26	11	6	11.0	17.0	1/06	9	13	11.5	* 19.0	87	10	13	* 9.0	15.0	62	6	9	* 8.0	13.0	54	14	6	7.0	11.0	39	8	2	3.5	5.5	24	1	2	2.0	3.0		
06	150	3	2	11.5	16.5	1/24	8	6	* 1.0	12.0	1/06	16	13	13.0	* 19.5	74	20	16	* 12.0	15.5	90	54	11	6	8.0	13.0	58	8	6	4.5	7.5	49	4	3	2.0	3.0						
07	150	4	6	* 1.0	12.5	1/20	14	8	* 1.0	18.0	1/04	16.0	93	21	19	* 16.0	24.0	79	18	5	4.7	9	9	*	54	6	8	4.7	9	47	4	6	4.5	8.5	26	4	4	3.0	4.5			
08	150	4	4	12.5	16.0	1/16	18	12	* 1.0	15.0	1/08	26	14	* 11.5	* 16.0	78	15	6	4.4	8	6	* 6.0	9.0	50	6	6	5.0	8.5	43	6	4	3.5	7.5	24	8	2	2.0	4.0				
09	150	3	6	10.0	15.0	1/16	16	14	* 1.0	17.0	1/22	22	83	30	13	7.5	* 19.5	76	10	4	* 2.0	3.5	38	6	4	* 5.0	7.5	46	4	8	6.0	4.0	24	8	2	2.0	3.0					
10	148	5	4	* 1.0	16.0	1/11	19	5	* 1.5	13.5	1/05	9.5	80	28	8	* 11.0	15.5	74	8	2	* 4.5	* 5.5	38	8	4	* 5.0	7.0	46	2	8	8.0	13.0	41	6	6	4.5	7.5	24	10	2	3.0	4.0
11	150	4	5	* 1.0	16.0	1/16	11	8	* 10.5	17.0	1/06	23	12	* 7.0	* 15.0	76	8	4	* 2.5	* 3.0	38	4	4	* 7.0	10.0	44	4	4	4.0	7.0	24	6	2	4.0	5.5	24	6	2	2.0	4.0		
12	152	4	6	* 1.0	11.5	1/22	8	11	* 1.5	16.0	1/06	90	16	16	* 8.0	13.5	76	4	4	* 1.0	19.0	36	6	2	* 5.0	7.0	44	2	8	7.0	13.0	38	7	3	5.5	8.0	24	2	4	4.0	5.0	
13	154	4	6	* 9.5	* 15.0	1/20	25	7	9	* 2.0	11.5	1/06	96	8	14	* 10.5	16.5	76	9	4	* 4.5	* 6.0	38	2	4	* 5.0	7.0	42	4	6	9.0	12.0	39	8	2	4.5	7.0	26	4	2	3.5	5.0
14	154	4	2	* 8.5	13.5	1/27	5	9	* 1.0	16.0	1/08	9.0	10	12	* 8.5	16.5	76	10	4	* 5.0	* 7.0	38	4	2	* 5.0	7.0	44	4	4	8.0	12.5	41	6	4	4.0	6.5	25	3	3	4.0	6.0	
15	158	2	6	* 10.5	13.5	1/26	4	8	10.0	14.5	1/09	9.9	10	12	8.0	13.5	76	14	2	* 4.5	* 7.0	39	4	2	* 5.0	7.0	48	5	6	6.0	9.5	43	6	4	4.5	6.5	26	4	4	4.0	6.0	
16	156	2	4	10.0	15.0	1/24	10	9	* 10.0	15.0	1/09	15.0	98	11	11	16.0	15.0	80	14	6	6.0	9.0	39	6	3	* 4.0	6.0	51	6	3	5.5	9.5	46	7	3	5.0	7.5	24	6	0	3.5	5.5
17	154	5	5	11.0	16.0	1/22	16	8	* 12.0	16.5	9.6	18	6	9.0	13.5	80	10	4	* 5.0	* 7.5	46	6	7	6.0	9.5	56	10	4	5.0	8.0	49	4	6	4.5	7.0	24	6	2	4.0	5.5		
18	152	4	6	11.0	16.5	1/24	10	8	11.0	17.5	1/04	8	6	9.0	14.0	92	4	6	6.0	10.0	52	8	6	* 8.5	11.5	65	10	10	5.0	9.0	49	4	4	4.5	7.0	22	3	1	2.5	4.0		
19	152	3	7	* 1.0	17.0	1/28	6	6	* 9.0	15.0	1/06	6	6	8.5	14.0	94	4	6	7.0	11.5	58	7	6	* 6.0	10.0	68	10	12	5.5	8.5	45	6	5	5.5	8.0	22	4	2	2.0	3.0		
20	149	5	5-	* 10.5	* 16.0	1/28	7	7	* 9.5	* 15.0	1/08	4	10	9.0	15.0	94	4	6	7.0	12.0	58	8	5	* 8.0	10.0	67	7	7	2.5	5.0	44	10	6	4.0	7.0	22	4	2	2.5	4.0		
21	150	2	7	13.5	17.0	1/26	8	7	9.0	15.0	1/08	7	9	9.0	15.0	94	6	6	7.0	12.5	58	12	6	* 6.0	10.0	62	10	6	4.5	7.0	22	4	2	2.5	3.5							
22	148	5	5	13.0	17.0	1/27	6	8	* 9.5	* 15.0	1/08	8	8	9.0	16.0	94	6	8	7.0	13.0	60	9	12	* 6.0	9.0	56	10	4	* 4.0	7.0	41	8	4	* 4.0	6.0	22	4	2	2.0	3.5		
23	148	6	6	* 1.0	17.0	1/26	10	7	* 10.0	16.0	1/10	8	14	* 8.0	* 14.0	94	6	6	* 7.5	* 13.5	58	12	8	* 8.0	* 8.5	56	14	6	5.5	9.0	43	10	6	4.5	6.0	22	12	3	2.0	3.0		

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station - Bill, Wyoming      Lat. 43.2 N Long. 105.2 W      Month December 19 63

[ES]		Frequency (Mc)												.013				.051				.160				.495				2.5				5				10				20			
		F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>														
00	152	2	4	8.5	13.5	128	3	4	2.5	5.0	95	5	8	8.5	15.5	78	6	6	6.5	11.5	50	6	4	3.0	5.5	46	6	3	2.0	5.5	43	0	1/2	1.0	3.5	25	0	0	1.0	2.5					
01	152	3	2	8.5	14.0	130	2	6	2.0	5.0	94	7	6	7.5	14.5	77	6	5	6.5	11.0	50	5	6	3.5	5.5	48	6	4	2.5	5.0	46	6	1/4	2.0	4.0	25	0	0	1.0	2.5					
02	152	2	2	8.5	14.5	130	4	5	2.0	5.0	93	6	6	8.0	14.0	76	8	8	7.5	12.5	48	7	3	3.0	5.0	48	4	2	3.0	6.0	44	1/2	1.5	4.5	25	0	0	0.5	2.5						
03	152	4	2	9.5	15.5	130	4	4	1.5	4.5	93	4	7	9.0	14.5	74	8	4	7.5	13.0	48	7	2	3.0	5.0	48	4	2	3.5	4.5	42	1/6	1.0	2.0	4.0	25	0	0	0.5	2.0					
04	152	2	2	10.5	16.5	130	4	3	2.0	5.0	91	6	7	9.0	14.5	72	9	8	8.0	12.5	48	6	2	3.0	6.0	48	4	4	3.0	6.0	40	1/4	8	1.5	3.5	25	2	0	0.5	2.0					
05	152	2	2	10.5	16.5	131	3	4	2.0	4.5	89	6	6	8.0	14.0	68	8	7	6.5	11.5	48	5	3	3.0	4.5	48	2	4	2.5	6.0	34	1/4	4	1.0	3.0	25	2	0	0.5	2.0					
06	152	2	2	11.5	17.5	130	3	2	1.5	4.5	84	7	8	8.5	13.5	60	10	4	5.0	8.0	46	5	3	2.5	4.5	44	4	2	2.5	4.5	36	9	4	2.0	4.0	25	2	0	1.0	2.5					
07	152	2	3	11.5	17.0	122	4	4	1.5	4.0	73	9	4	6.0	8.5	54	6	4	1.5	4.0	44	2	2	2.0	4.0	38	3	4	2.0	4.0	25	2	0	1.5	3.0	25	2	0	0.5	2.0					
08	149	1	2	10.0	16.0	124	2	8	2.0	5.0	69	15	5	1.5	3.5	52	6	2	1.5	3.5	28	10	4	2.5	5.0	38	6	4	3.0	4.5	36	4	4	2.0	4.0	27	0	2	1.0	3.0	25	2	0	0.5	2.0
09	148	4	4	10.5	16.5	122	2	14	2.0	5.0	67	18	4	1.5	3.0	52	6	2	2.0	4.0	22	6	4	1.5	3.5	30	4	6	1.5	3.0	34	2	4	1.5	4.0	27	1	2	1.5	3.0	25	2	0	0.5	2.5
10	146	4	2	10.0	16.0	120	4	4	2.0	4.5	69	16	4	1.5	3.0	52	6	2	2.0	3.5	20	4	2	1.0	2.5	26	6	6	1.0	3.0	32	2	3	2.0	4.0	27	2	0	0.5	2.5					
11	146	4	4	10.5	16.5	120	4	4	2.0	5.0	69	16	6	1.5	3.0	52	6	2	2.0	4.0	20	4	2	1.5	3.0	22	6	5	1.0	2.5	32	2	4	1.5	3.0	27	2	2	1.0	3.0	25	2	0	0.5	2.5
12	146	4	4	11.0	16.0	120	4	4	2.0	4.5	69	15	6	1.5	3.0	52	6	2	2.0	3.5	20	2	2	1.0	2.5	22	6	7	1.5	3.0	32	2	3	1.0	3.0	27	3	2	0.5	2.5					
13	146	4	5	10.5	15.5	120	4	3	2.0	5.0	69	15	5	1.5	3.0	52	6	2	2.0	4.0	20	5	2	1.5	3.0	22	7	5	1.0	3.0	34	4	4	2.5	4.0	27	1	2	1.0	3.0	25	2	0	0.5	2.0
14	146	4	5	10.5	16.0	120	4	8	2.5	5.0	69	15	6	1.5	3.0	52	6	2	2.5	4.0	20	6	2	1.5	3.5	24	8	4	1.5	3.0	39	9	6	2.0	4.0	25	2	0	2.0	2.5					
15	144	4	5	11.0	16.5	120	4	12	2.0	5.0	69	11	4	1.5	3.5	54	4	4	2.0	3.5	28	10	4	1.5	3.0	30	7	2	1.0	2.5	44	8	7	2.0	4.5	25	2	0	0.5	2.0					
16	144	4	4	11.5	16.0	122	2	8	2.0	5.0	77	10	6	1.0	6.0	58	6	6	2.5	5.0	30	8	4	1.5	3.0	42	5	5	2.0	4.0	46	11	8	2.0	4.5	25	2	0	0.5	2.0					
17	144	6	2	11.5	18.0	122	3	6	2.5	5.5	81	10	6	8.0	14.0	64	7	6	5.0	8.5	42	5	8	2.0	3.5	44	6	3	2.0	4.0	42	8	9	2.0	4.0	25	2	0	1.5	2.0					
18	146	4	4	12.5	18.0	124	4	2	1.5	5.0	86	12	9	7.5	13.0	70	10	6	6.0	10.0	44	6	4	2.0	5.0	46	5	4	2.0	4.0	38	12	8	1.5	3.5	25	1	0	1.0	2.5					
19	148	4	6	12.0	18.0	128	2	4	2.0	5.0	89	9	8	8.0	13.0	74	10	6	6.5	11.0	46	7	3	3.0	5.5	48	4	6	2.0	4.0	36	16	4	1.5	3.5	25	0	0	0.5	2.5					
20	148	4	4	12.5	18.0	128	3	4	3.0	6.0	91	10	6	8.5	15.0	75	10	7	6.5	11.0	48	6	4	3.0	5.5	46	9	4	2.0	4.5	36	10	6	2.0	3.5	25	0	0	1.0	2.5					
21	148	5	2	11.0	17.0	128	4	3	2.5	5.5	93	8	9	8.0	15.0	78	6	6	6.0	11.0	50	4	4	3.0	5.5	46	8	4	2.5	5.5	34	17	4	1.5	3.5	25	0	0	1.0	2.5					
22	150	4	4	9.0	14.5	128	2	4	2.5	5.0	93	9	6	8.0	15.0	80	2	7	6.0	11.0	50	3	4	3.5	5.5	46	5	2	2.5	5.5	38	12	8	2.0	4.0	25	0	0	1.0	2.5					
23	150	4	2	9.0	14.0	128	2	4	2.5	5.0	95	6	9	8.5	15.5	78	6	6	6.0	11.5	50	4	4	3.0	5.5	46	6	2	3.0	5.5	40	13	8	1.5	3.0	25	0	0	1.0	2.5					

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Month January 1964

## Frequency (Mc)

No.	.013				.051				.160				.495				2.5				5				10				20												
	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	Ldm											
00	148	7	0	10.0	16.0	128	4	4	2.5	4.5	90	14	6	9.0	15.0	76	8	8	2.0	11.0	48	8	5	3.0	5.0	48	6	4	2.5	5.0	33	14	4	1.5	3.0	24	0	0.5	2.0		
01	150	5	2	10.5	16.5	128	5	3	2.5	5.0	92	11	7	8.0	13.0	76	9	7	2.0	11.5	48	5	5	3.0	6.0	48	5	3	3.0	6.0	33	13	4	1.0	2.5	24	2	0	0.5	2.0	
02	152	3	4	10.5	16.5	128	5	4	2.0	4.5	90	14	6	8.5	13.5	76	9	10	6.5	11.0	48	6	6	3.0	6.0	48	6	2	3.0	6.5	31	16	2	1.5	4.0	24	2	0	0.5	2.0	
03	150	5	2	10.0	17.0	128	4	4	2.0	4.5	88	16	6	9.5	14.0	72	9	8	7.5	12.0	48	8	4	2.5	4.5	48	4	4	3.0	6.0	33	13	4	1.0	3.0	24	2	0	0.5	2.5	
04	150	4	4	11.5	18.0	128	2	3	2.0	4.5	88	11	5	9.0	13.5	70	18	9	6.0	11.0	48	6	6	3.0	5.0	6.0	33	8	3	1.0	2.5	26	0	2	1.0	2.5					
05	150	5	4	12.5	19.0	128	3	2	2.5	5.0	84	14	4	8.0	13.0	64	12	9	5.0	8.0	48	4	6	2.5	4.5	48	4	3	3.5	6.0	33	8	3	1.0	2.5	26	0	2	1.5	3.0	
06	150	3	2	11.5	17.5	128	2	4	2.5	5.0	82	5	5	8.0	12.0	60	4	5	4.5	7.0	46	6	4	2.5	4.0	46	9	4	3.0	5.0	35	5	4	1.5	3.0	26	0	2	1.5	2.5	
07	150	4	2	11.5	17.5	118	4	4	2.5	5.0	74	9	6	6.0	9.0	54	4	2	2.0	4.0	42	4	2	2.0	4.5	44	4	3	2.5	5.0	35	7	2	2.0	4.0	26	0	2	1.0	2.5	
08	148	4	4	11.5	17.0	120	2	3	2.0	4.5	70	5	5	8.5	10.5	56	2	6	2.0	4.5	36	7	7	2.5	4.5	38	4	6	2.5	4.0	35	4	3	1.5	4.0	26	0	2	1.0	2.5	
09	146	6	6	11.0	17.0	114	6	8	2.0	4.5	72	12	6	1.5	3.0	54	6	4	2.0	3.5	22	2	4	1.5	3.0	32	2	12	1.5	3.0	33	4	4	1.5	3.5	26	0	2	0.5	2.0	
10	144	10	3	10.0	15.0	114	6	8	2.0	4.0	74	10	20	3.5	54	4	4	2.0	3.5	20	4	4	1.5	2.5	26	6	10	1.5	3.0	33	2	6	2.0	4.0	26	0	2	0.5	2.5		
11	144	6	4	10.0	15.0	116	4	8	1.5	3.5	76	10	10	1.5	3.0	54	4	2	2.0	4.0	18	4	2	1.0	3.0	24	6	8	1.5	3.0	33	2	8	1.5	3.0	26	0	2	1.5	3.0	
12	144	7	5	9.5	14.0	116	4	4	2.0	4.5	76	10	10	2.0	3.5	54	5	4	1.5	3.5	18	6	2	1.5	3.0	32	8	8	1.5	3.0	33	3	6	1.5	4.0	26	0	2	1.0	3.0	
13	144	6	4	10.0	14.5	116	5	4	2.5	4.5	78	10	12	1.0	2.5	54	4	4	1.5	3.5	18	6	2	1.5	3.0	30	24	5	8	2.0	3.5	33	9	5	1.5	3.5	24	2	0	0.5	2.5
14	142	9	3	9.5	14.5	114	6	3	1.5	4.0	76	10	9	1.5	3.0	54	4	2	1.5	4.5	20	6	4	2.0	3.5	27	5	10	1.0	3.0	39	8	8	2.0	4.0	24	2	0	0.5	2.0	
15	142	6	4	10.0	16.0	112	8	7	2.0	4.0	80	10	12	1.5	3.5	56	4	6	2.0	4.0	22	7	4	1.5	3.0	32	4	10	1.0	3.5	41	10	7	1.5	4.0	24	2	0	1.0	2.5	
16	142	5	5	11.5	16.0	116	4	7	2.5	4.5	80	12	12	3.0	4.5	58	12	6	2.0	4.0	26	14	4	2.0	4.2	5	17	20	4.5	43	10	8	2.5	4.5	24	2	0	0.5	2.0		
17	144	6	5	11.0	16.0	120	4	2	2.5	4.5	82	16	9	5.0	7.5	63	17	6	3.0	6.0	42	8	11	2.0	4.0	48	6	4	2.0	5.0	37	12	4	2.0	4.0	24	4	0	1.0	2.5	
18	144	7	4	12.0	17.0	124	3	5	2.5	4.5	84	18	8	5.0	10.0	66	15	4	5.5	9.0	44	11	7	2.5	5.0	48	8	2	2.0	5.0	33	12	4	1.5	3.5	24	0	0	1.0	2.5	
19	146	6	5	12.0	17.5	124	5	2	2.0	4.5	86	16	8	7.0	12.0	72	10	7	5.0	8.5	46	8	5	2.5	4.5	48	5	2	3.0	6.0	31	9	2	1.5	3.0	24	0	0	1.0	2.5	
20	146	5	4	12.5	18.5	126	4	4	2.5	4.5	90	15	10	8.0	12.5	74	12	8	5.5	10.0	48	7	4	2.5	5.0	48	5	3	2.5	5.0	31	10	2	1.0	2.5	24	0	0	1.0	2.5	
21	146	7	2	12.0	18.0	126	4	2	2.5	4.5	88	20	6	7.0	11.5	74	13	6	5.5	9.5	50	8	2.5	5.5	46	8	4	3.0	6.0	31	6	2	1.0	2.5	24	0	0	1.0	2.0		
22	148	5	4	11.5	17.5	126	5	2	2.5	4.5	90	16	8	8.5	12.5	76	11	9	5.5	11.0	49	6	4	2.5	5.5	46	6	4	3.0	6.0	31	9	3	1.0	2.5	24	0	0	0.5	2.0	
23	148	5	2	11.0	17.0	126	5	4	2.5	5.0	90	15	6	9.0	15.0	76	11	7	5.5	10.0	48	8	4	2.0	5.0	46	7	4	2.5	5.0	31	11	2	1.0	2.5	24	0	0	0.5	2.0	

Fam = median value of effective antenna noise in db above kib

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Bill, Wyoming — Lat 43.2 N Long 105.2 W Month February 19 64

FS	Frequency (Mc)												.013				.051				.160				.495				2.5				5				10				20			
	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm									
00	148	5	2	105	120	127	4	4	* 3.0	5.5	92	11	5	6.0	10.5	7.6	10	7	5.0	10.0	5.5	7	4	3.5	6.0	5.2	2	5	3.0	6.0	3.2	13	2	1.0	2.5	2.5	1	1	0.5	2.0				
01	148	4	2	110	125	127	4	6	3.0	5.5	92	11	7	* 10.0	17.0	7.6	8	9	6.0	10.5	5.1	4	5	3.0	6.5	5.0	4	2	2.5	6.0	3.8	7	8	1.0	2.5	2.6	0	2	0.5	2.0				
02	148	4	1	120	165	126	4	2	1.5	4.5	92	12	11	9.0	16.5	7.4	13	9	7.0	11.5	5.1	5	6	3.5	6.0	5.2	2	3	3.0	6.5	3.2	10	2	1.5	3.0	2.6	0	2	0	2.5				
03	150	2	2	120	190	127	4	1	3.0	6.0	88	14	5	10.0	16.0	6.8	16	4	5.5	9.5	4.9	12	4	3.5	6.0	4.8	4	2	4.0	7.0	3.2	7	2	1.5	3.0	2.6	0	2	0	2.5				
04	150	1	2	120	180	128	4	4	2.5	5.5	87	17	6	9.5	14.0	6.6	14	5	5.5	8.5	4.9	12	5	3.0	5.0	5.0	4	2	3.5	6.0	3.2	7	2	1.5	3.0	2.6	0	0	0	1.5				
05	148	4	1	120	165	128	2	4	* 2.0	5.0	82	11	9	8.5	12.5	6.3	7	4	5.0	8.0	4.7	10	3	2.5	4.0	4.6	3	2	2.0	5.0	3.2	4	2	1.5	3.0	2.6	0	0	0	1.5	2.5			
06	148	3	2	* 120	185	128	1	2	2.5	5.0	79	7	5	9.0	14.5	5.6	5	3	* 4.0	6.5	4.5	5	7	2.0	4.0	4.4	2	0	3.5	5.5	3.8	3	4	1.5	4.0	3.6	0	0	0	1.5	3.0			
07	148	3	2	115	175	120	4	1	* 1.0	4.0	68	6	5	* 5.0	7.0	5.0	4	0	* 2.0	3.5	4.1	7	8	3.5	6.0	3.5	2	3	3.5	6.0	3.5	3	3	1.5	3.5	2.6	0	2	0	1.5	3.0			
08	144	3	2	120	165	118	2	3	2.5	5.0	66	15	4	1.5	3.0	5.0	2	0	* 1.0	3.0	2.7	2	6	2.0	3.5	3.4	4	5	2.0	3.5	3.4	2	2	1.5	3.5	2.6	0	2	0	2.5				
09	142	3	2	115	170	113	3	7	* 2.0	4.5	72	10	10	* 1.0	2.5	5.0	3	0	* 1.5	3.5	2.1	5	3	1.5	2.5	3.0	2	9	1.0	2.5	3.4	0	4	1.5	4.0	3.6	2	0	0	1.5	3.0			
10	144	2	4	* 120	170	113	5	7	* 2.0	4.5	74	12	9	* 1.0	2.5	5.0	4	0	* 2.0	3.5	2.1	2	4	2.0	3.0	2.5	5	4	1.5	3.0	3.0	3	2	3.0	3.5	2.6	0	2	0	2.5				
11	144	2	4	* 120	150	116	4	7	2.5	5.0	76	7	12	* 0.5	2.5	5.0	4	0	2.0	3.5	1.9	2	1	1.5	3.0	2.4	4	9	1.5	2.5	3.2	2	3	1.5	3.5	2.6	1	2	1.0	3.0				
12	144	2	5	95	150	116	4	8	2.0	5.0	76	4	12	2.0	3.0	5.1	3	1	* 2.0	4.0	2.1	2	4	1.5	3.0	2.2	5	5	2.0	3.5	3.2	2	3	2.0	4.0	2.4	2	0	0	1.5	2.5			
13	144	2	5	95	150	116	4	11	2.5	6.0	74	5	14	* 2.5	5.0	7.2	3	2	* 1.0	3.0	1.9	6	1	2.0	3.5	2.2	5	5	1.0	2.5	3.2	5	2	1.5	3.5	2.4	2	0	0	1.5	3.0			
14	144	1	5	* 150	116	4	6	2.5	* 5.0	74	5	10	* 1.0	2.5	5.0	4	0	* 2.0	3.5	2.1	1	3	1.5	3.0	2.6	3	6	2.0	3.5	3.0	4	5	1.0	3.0	2.6	1	2	0	1.5	3.0				
15	142	2	5	* 155	114	3	4	2.0	5.0	70	9	6	* 1.0	3.0	5.1	3	1	* 2.0	3.5	2.3	2	4	1.5	2.5	2.9	3	5	0.5	2.0	41	6	6	2.0	5.0	2.4	0	0	0	1.5	3.0				
16	142	2	7	* 115	160	114	4	7	* 3.0	5.0	72	11	6	* 3.5	5.5	5.2	5	2	* 2.0	3.5	2.3	14	3	1.5	3.0	3.8	9	4	1.0	3.5	45	7	8	1.5	4.0	4.0	0	0	0	1.0	2.5			
17	142	2	3	* 125	175	120	3	2	* 3.0	5.0	83	6	9	* 5.0	* 8.5	5.8	6	5	* 2.5	5.0	3.3	11	2	1.5	3.0	5.0	3.5	4	2.5	5.0	4.4	11	9	2.0	5.0	5.0	3	4	0	0	1.5	2.5		
18	143	4	4	* 120	185	120	6	2	3.0	5.5	88	11	9	4.0	8.5	6.6	7	11	* 3.5	6.5	4.6	6	6	2.0	4.5	5.1	5	1	2.5	5.5	3.3	14	3	1.5	3.0	2.4	0	0	0	1.0	2.5			
19	145	3	6	* 130	180	124	5	3	* 2.5	5.5	88	11	10	* 6.0	* 10.0	7.0	7	5	* 5.0	* 8.0	4.9	3	9	* 2.5	4.5	5.2	2	4	2.0	5.0	3.2	4	2	1.0	3.0	2.4	0	0	0	1.0	2.5			
20	145	5	4	* 120	180	126	4	4	* 2.0	5.0	92	9	5	* 5.0	* 9.5	7.4	5	7	* 6.5	* 10	5.1	4	9	3.0	5.5	5.0	3	2	2.0	5.0	3.0	3	6	2.0	3.5	2.4	0	0	0	1.0	2.5			
21	145	5	3	* 125	180	126	5	3	* 2.5	5.0	92	11	4	* 10.0	17.0	7.4	9	7	* 5.0	* 9.5	5.1	4	7	* 2.0	* 5.0	5.0	2	4	3.0	6.5	3.0	11	2	1.5	2.5	2.4	0	0	0	1.0	2.5			
22	146	5	4	* 125	185	126	5	4	* 1.5	5.0	92	10	11	* 5.0	* 8.5	77	7	8	* 6.0	* 10.0	5.1	7	2.0	4.0	5.1	7	3	4.0	6.5	3.3	11	4	1.5	4.0	3.4	1	0	0	1.0	2.5				
23	146	7	2	* 10.0	170	128	3	5	* 3.0	6.0	93	11	7	* 5.0	* 9.0	76	12	9	* 5.0	* 10.0	5.1	7	6	* 2.0	* 4.5	5.0	4	2.5	6.0	3.0	3	12	3	1.0	2.5	2.4	2	0	0	1.0	2.5			

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>4</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station - Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month December 19 63

E.S.T.	Frequency (Mc)																												
	.013			.051			.160			.495			2.5			5			10			20							
	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>4</sub>	Vdm	Ldm				
00	1/53	2	3	10.0	15.5	1/29	4	4	4.0	7.5	96	10	6	8.5	13.0	81	7	4	6.5	10.0	51	8	4	6.0	9.0	* 51			
01	1/53	4	2	11.5	16.0	1/29	4	10	4.0	6.0	98	7	8	8.0	12.0	*	7.5	12.0	51	6	4	6.0	7.5	11.5	46	8			
02	1/53	3	2	10.5	16.0	1/30	3	7	3.0	5.5	94	11	7	2.5	10.5	*	80	6	6	6.0	9.0	57	6	4	5.5	8.0	47	7	
03	1/53	5	2	11.5	18.0	1/29	6	4	3.5	6.0	97	4	8	8.5	13.0	*	78	7	5	90	13.0	50	7	6	5.5	9.0	44	10	
04	1/53	4	1	13.0	19.0	1/29	6	4	4.0	6.0	93	4	8	8.0	12.5	*	76	6	8	5.5	8.5	52	3	5	5.5	9.0	44	10	
05	1/53	3	2	13.0	18.0	1/29	4	4	3.5	6.0	89	10	6	9.0	10.5	*	71	10	4	4.0	7.0	51	4	4	4.0	7.0	10.0	36	
06	1/53	6	2	12.0	17.5	1/27	4	4	3.0	5.5	85	4	6	5.0	8.0	*	68	4	2	2.5	5.0	50	3	5	5.0	7.5	8.5	40	
07	1/52	1	1	11.5	18.0	1/23	4	4	3.0	5.0	81	2	2	3.5	6.0	*	64	4	0	2.5	4.0	47	2	2	4.0	7.0	10.0	36	
08	1/50	3	3	12.0	18.0	1/21	2	4	3.0	5.5	81	2	2	3.0	5.0	*	67	*	4	2.0	4.0	45	2	4	3.0	5.5	8.0	40	
09	1/49	4	4	13.0	18.5	1/19	*	4	2.5	5.0	81	4	2	2.5	4.5	*	68	2	4	3.0	4.0	44	4	5	4.0	7.0	10.0	36	
10	1/47	4	3	12.5	18.0	1/19	*	3.0	6.0	81	5	3	3.0	5.0	*	68	2	2	2.0	3.5	45	4	4	4.0	7.0	10.0	36		
11	1/49	5	5	12.0	18.0	1/21	2	4	2.5	5.5	81	4	2	3.0	4.5	*	68	3	2	3.0	4.0	45	4	6	4.0	7.0	10.0	36	
12	1/47	6	4	12.0	17.5	1/21	4	8	4.0	6.5	81	3	2	2.5	5.0	*	68	2	4	2.5	4.5	45	4	4	4.0	7.0	10.0	36	
13	1/47	6	4	12.0	17.0	1/21	4	8	4.0	6.5	81	4	3	3.0	5.5	*	68	2	2	2.0	4.5	45	5	6	4.0	7.0	10.0	36	
14	1/49	2	8	13.5	19.0	1/20	3	7	3.5	6.5	80	7	2	3.0	5.0	*	68	4	4	2.5	4.5	45	6	4	4.5	6.5	37	4	
15	1/47	3	6	14.0	19.5	1/18	5	7	4.0	7.0	81	2	2	3.0	5.0	*	68	2	2	3.0	4.0	45	4	4	4.0	7.0	10.0	36	
16	1/44	5	3	15.0	20.5	1/21	2	6	4.5	7.0	83	10	4	3.5	6.0	*	70	4	3	3.0	5.0	45	4	4	4.0	7.5	45	4	
17	1/43	6	4	13.0	19.5	1/23	3	8	3.5	6.5	89	4	10	8.0	10.5	*	74	4	6	4.0	6.0	60	47	6	4	4.5	6.0	44	12
18	1/47	5	4	14.5	20.0	1/23	4	6	3.5	6.0	91	10	8	6.0	8.5	*	76	4	6	3.0	4.5	45	4	4	4.0	7.0	10.0	36	
19	1/49	3	6	14.0	19.5	1/25	5	5	4.0	7.0	90	14	7	9.0	7.0	*	77	9	7	5.0	7.0	49	6	2	4.5	6.5	45	4	
20	1/51	2	6	14.5	20.5	1/27	2	2	4.5	7.5	93	12	8	9.0	13.5	*	79	12	5	5.0	8.0	51	6	4	5.0	7.0	10.0	36	
21	1/49	4	2	14.0	19.0	1/27	2	6	4.0	7.0	97	6	10	9.0	13.0	*	82	7	6	5.5	8.0	52	5	3	4.0	7.0	9.0	38	
22	1/51	4	3	11.5	18.0	1/27	4	2	4.0	7.0	97	8	9	9.0	12.0	*	84	2	7	6.0	9.0	51	4	4	4.0	7.5	9.0	42	
23	1/51	4	2	12.0	16.5	1/27	4	10	4.0	7.0	95	8	4	9.5	14.0	*	80	8	4	6.0	10.0	53	2	4	5.0	8.0	9.0	44	

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>4</sub> = ratio of median to lower decile in db

Vdm = median deviation at average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Month January 19 64

FS#	Frequency (Mc)												Frequency (Mc)																	
	.013				.051				.160				.495				2.5				5				10					
	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	L <sub>dm</sub>	Fam	D <sub>u</sub>	D <sub>l</sub>	Vdm	L <sub>dm</sub>					
00	150	4	2	14.0	20.5	127	6	10	4.0	6.0	93	10	8	7.0	11.0	5.0	10	4	6.0	8.0	7.9	6	8	* 4.0	6.5	* 3.5	* 3.0	4.5		
01	150	4	4	12.0	18.5	128	5	6	3.0	6.5	93	8	8	7.0	11.0	5.2	3	7	7.0	11.0	7.9	8	8	* 5.0	6.5	* 5.0	* 3.0	4.0		
02	152	2	4	12.0	18.0	126	7	6	4.5	6.0	89	14	4	6.5	10.0	5.0	6	4	7.0	12.5	7.5	11	5	6.0	* 8.0	* 5.1	2	6	4	
03	152	2	3	13.0	19.5	127	5	7	2.5	5.0	89	15	6	8.5	12.0	5.0	5	6	5.5	9.5	7.3	10	4	* 4.0	* 5.5	* 4.0	* 3.0	4.0		
04	152	2	4	13.5	20.0	124	6	4	4.0	6.0	85	15	4	6.0	9.5	5.0	3	5.5	8.0	7.1	8	4	* 6.0	* 8.0	5.0	3	4.0			
05	150	2	2	14.5	20.0	124	4	3	4.0	6.0	83	16	3	5.0	6.0	5.1	4	5	6.0	8.0	6.9	10	4	* 6.5	* 5.5	* 5.1	2	6	4	
06	150	4	2	14.0	20.0	124	3	7	3.0	4.5	83	3	3	5.0	7.5	5.0	5	4	3.0	5.0	6.7	4	4	* 6.0	* 8.0	7.0	4	6	4	
07	150	4	2	14.5	20.0	118	4	6	4.0	5.5	80	11	2	4.0	7.0	4.8	4	3	3.0	4.0	6.6	5	4	* 7.0	* 9.5	* 4.3	6	2	6	4
08	148	2	2	13.5	19.0	116	8	5	2.5	5.5	86	9	1	3.0	5.0	4.6	5	4	3.0	5.0	6.7	4	6	* 8.0	* 10.0	3.9	7	4	4	4
09	144	5	3	13.5	19.5	110	7	2	4.0	6.5	81	2	2	3.0	4.5	9.6	3	6	4	6.0	7.0	3.0	7.0	3.5	* 4.0	* 6.0	* 5.5	* 3.4	4.0	
10	145	8	6	13.0	18.5	112	11	8	3.5	5.5	83	6	6	4.0	6.5	4.6	2	8	3.0	4.0	6.9	4	3	* 3.5	* 5.0	* 3.5	3	4.0	4	
11	146	7	7	13.0	19.0	114	8	8	4.0	6.0	82	11	4	3.0	5.0	4.6	7	7	3.0	4.0	6.9	2	4	* 6.0	* 8.0	3.5	* 4.0	5.5	3.4	
12	146	7	6	13.0	18.5	116	4	8	3.0	5.5	83	6	6	3.5	5.5	4.6	6	20	3.5	5.0	5.0	3	2	* 3.5	* 5.0	* 3.5	4	4	4	
13	146	6	6	14.0	18.5	114	6	7	3.5	5.5	81	8	4	3.0	5.0	4.6	4	6	2.0	3.0	6.0	2	4	* 4.0	* 5.0	* 3.5	3	4.0	4	
14	144	8	2	13.5	20.0	114	6	4	3.5	5.5	82	9	3	3.0	4.0	4.6	4	6	2.5	4.0	6.4	2	2	* 4.5	* 5.5	* 3.5	3	4.0	4	
15	144	6	4	14.0	20.5	110	10	8	3.5	6.0	83	6	4	3.5	6.0	4.6	5	8	3.0	5.0	6.5	6	2	* 4.5	* 6.0	* 3.5	3	4.0	4	
16	144	4	4	16.0	21.0	114	8	6	3.0	5.0	85	10	6	5.0	8.5	4.6	4	6	3.5	6.0	6.7	13	4	* 4.0	* 5.0	* 3.4	6	2	3.0	
17	146	6	6	15.0	21.0	118	11	4	3.0	5.0	89	17	8	5.5	8.0	4.6	6	2	3.5	5.5	6.9	16	4	* 5.0	* 7.0	* 5.0	3	4.0	4	
18	144	8	2	15.0	21.0	120	12	4	4.0	6.5	89	20	6	9.0	13.0	5.2	6	8	5.0	7.0	7.1	16	4	* 5.0	* 6.5	* 5.1	3	4.0	4	
19	148	4	1	15.0	20.0	122	8	8	3.0	5.0	93	13	10	10.0	15.0	5.0	9	6	5.5	8.0	7.5	12	6	* 5.0	* 6.5	* 5.1	2	3.0	4.0	
20	146	6	4	15.0	21.0	123	8	7	4.0	6.0	93	14	8	9.0	13.0	5.0	8	3	6.0	8.5	7.7	14	4	* 5.5	* 7.5	* 5.0	3	4.0	4	
21	150	6	6	15.0	21.0	124	8	6	4.5	7.0	93	18	10	7.0	12.0	5.0	8	2	7.0	11.5	7.7	14	6	* 5.5	* 7.5	* 4.9	6	4	4.5	
22	149	5	3	15.0	21.5	126	5	7	4.0	6.0	96	15	11	7.0	11.0	5.2	8	5	6.0	7.5	4.9	5	6	* 6.0	* 8.5	* 3.2	10	2	3.0	
23	148	6	2	14.5	20.0	127	4	13	3.0	5.5	95	12	8	8.0	11.0	5.2	6	5-	6.0	10.0	9.9	11	8	* 7.0	* 8.5	* 4.9	2	7	4	

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Month February 1964

(ES)	Frequency (Mc)												0.013			0.051			0.160			0.495			2.5																								
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>																								
00	149	3	3	12.0	17.0	126	6	3	4.5	8.0	97	8	5	8.0	13.0	79	9	6	6.0	11.0	5.4	6	4	5.0	8.5	5.4	4	4.5	8.0	3.3	1/2	2	2.5	4.0															
01	148	6	2	12.0	18.5	125	8	2	4.0	7.0	99	8	1/2	9.0	15.0	79	1/2	7	7.0	11.0	5.4	4	6	5.0	7.5	5.4	4	4.0	8.0	3.3	6	2	3.5	4.0															
02	150	5	3	13.0	20.0	127	8	6	5.5	9.0	97	13	14	8.5	14.5	79	1/2	11	8.0	13.0	5.4	6	4.5	7.5	5.4	4	2	6.0	8.5	3.3	1/2	2	2.4	2.0	3.5														
03	152	2	3	14.0	21.0	127	6	10	4.0	7.0	93	17	11	8.5	13.0	73	20	6	6.0	11.0	5.2	8	4	5.0	8.0	5.4	4	6	5.5	10.0	3.3	8	2	3.0	5.0	2.7	2	2.4	2.5	4.0									
04	152	3	4	14.0	19.5	125	7	2	5.5	8.0	99	22	7	6.0	9.5	69	22	4	4.5	6.5	5.2	6	4	5.0	7.5	5.4	4	6	5.0	9.0	3.5	8	4	3.0	5.0	2.7	2	2.4	2.5	4.0									
05	150	4	3	15.0	20.0	127	4	5	4.0	7.0	85	12	6	4.0	6.5	67	8	2	3.0	5.5	5.0	8	2	4.0	6.0	5.0	4	6	6.0	10.0	3.5	6	4	4.0	5.5	2.7	2	2	4	2.5	3.5								
06	151	3	4	14.0	19.5	125	6	8	3.5	6.5	83	9	6	4.0	5.5	65	4	4	3.5	5.0	5.0	6	4	3.0	5.0	5.0	4	4	4.0	6.0	3.0	6	4	2	2.7	2	2	4	2.5	4.0									
07	150	2	5	4.0	16.0	123	4	7	4.0	7.0	81	6	4	2.5	5.0	64	3	1	3.0	4.5	4.8	2	4	4.0	5.5	4.4	4	4	4.5	7.0	3.9	2	6	4.0	7.5	2.7	2	4	2.5	4.0									
08	146	4	4	13.5	19.0	117	4	6	4.0	7.0	80	5	4	3.0	5.0	65	2	2	1.5	3.5	4.6	4	6	3.0	5.0	3.8	2	2	3.0	5.0	3.7	2	2	2	4	2	2	4	3.0	4.0									
09	146	2	6	4.0	19.5	113	*	4.0	7.0	82	7	7	3.0	5.0	67	6	4	3.0	5.0	4.6	3	4	3.0	4.5	3.6	2	3	3.0	4.5	3.5	4	2	2	2	2	2	2	4	3.0	4.0									
10	146	2	4	12.5	17.5	114	*	3.0	5.5	83	5	6	3.0	7.0	71	2	8	2.5	4.5	4.4	2	4	3.0	4.0	3.6	2	4	3.0	4.0	3.3	2	2	2	2	2	2	4	3.0	4.0										
11	146	3	5	10.5	16.0	117	4	4	5.0	8.0	82	4	5	3.5	7.5	75	70	2	8	2.0	4.5	4.5	3	4	3.0	4.5	3.6	2	4	3.0	5.0	3.3	2	1	5.0	6.5	2.5	5	2	3.0	4.0								
12	148	2	7	12.0	17.5	117	6	6	3.0	6.0	83	2	7	2.0	4.0	69	2	5	3.0	5.0	4.6	5	5	2.5	4.0	3.6	2	3	3.5	6.0	3.6	2	2	3	2.0	4.0													
13	146	2	7	10.5	16.5	118	5	4	3.5	7.0	62	3	5	3.0	5.0	69	3	5	2.0	3.5	4.6	4	5	3.0	4.0	3.6	2	3	3.0	4.0	3.5	2	2	2	2	2	2	4	3.0	4.0									
14	146	2	7	11.0	16.5	115	8	4	4.0	7.0	81	4	4	2.0	4.0	68	5	6	2.5	4.0	4.6	4	5	1.5	4.0	3.6	5	4	3.0	5.5	3.7	4	2	4.0	7.0	2.7	2	2	2	2	2	4	3.0	4.5					
15	146	2	7	12.0	17.5	113	8	5	3.0	6.0	81	4	4	2.5	5.0	65	6	2	1.5	6.0	4.6	2	5	3.0	5.5	3.8	6	4	3.5	6.0	4.1	6	7	2.0	2.5	4	2	3.0	4.0										
16	142	5	2	13.0	19.0	113	6	5	4.0	6.5	83	2	5	2.5	5.0	65	5	4	2.0	5.0	4.6	2	4	2.5	4.0	4.2	6	4	4.5	7.0	4.3	6	2	3.5	6.0	2.5	2	1.5	3.0										
17	144	4	3	13.5	19.0	119	4	3	3.5	7.0	85	8	4	4.0	7.5	67	9	5	4.0	7.0	4.6	2	3.0	4.5	5.3	3	5	5.0	8.5	4.5	7	4	4.5	8.0	2.3	4	2	2	2	2	2	4	3.0	4.5					
18	145	6	3	13.5	18.5	121	7	4	4.0	7.5	89	12	8	2.5	6.5	71	13	8	4.0	8.5	50	9	4	3.0	5.5	5.4	2	2	5.0	8.0	4.1	6	7	2.0	2.5	4	2	3.0	4.0										
19	146	4	5	14.0	20.0	121	6	2	3.0	6.0	89	15	6	5.0	8.0	73	13	6	4.0	7.5	5.2	4	4	3.5	7.0	5.4	4	2	5.0	9.0	3.3	10	4	4.0	5.0	2.5	2	4	1.5	3.5									
20	149	2	7	14.0	21.0	125	3	9	4.0	6.0	92	10	5	6.5	10.5	77	10	8	5.0	10.0	52	4	4	3.5	8.5	5.2	4	4	5.5	8.5	3.8	8	4	4.0	5.0	2.5	2	2	2	2	2	2	3.0	4.0					
21	146	6	4	15.0	20.0	125	4	7	4.0	7.0	95	4	6	6.0	10.0	79	4	8	5.0	9.0	54	2	4	5.0	7.5	52	6	4	5.0	9.0	3.3	4	4	3.0	5.0	2.5	2	2	2	2	2	2	3.0	4.0					
22	148	6	6	14.5	20.5	125	5	8	4.0	7.0	97	8	7	6.5	10.5	79	10	6	6.0	11.0	54	4	4	6.0	9.0	52	4	4	5.0	8.0	44	3	15	3.0	4.5	2.5	2	2	1.5	3.0	2.0	2	2	2	2	2	2	3.0	4.0
23	150	5	5	15.0	20.0	125	6	6	5.0	8.0	98	10	5	8.5	13.0	81	9	8	5.0	10.0	54	6	4	6.0	10.5	37	8	8	3.0	5.0	37	2	4	2.0	2.0	2	2	2	2	2	2	3.0	4.0						

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month December 19 63

Month-Hour	Frequency (Mc)																											
	.013			.051			.160			.495			2.5			5			10			20						
F <sub>ST</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>dm</sub>	L <sub>dm</sub>				
00 16/1 5-4	10.5	16.5 <sup>t</sup>	37	4	6	11.0	16.0	11.4	4	8	8.0	15.5 <sup>t</sup>	9.2	8	7	2.0	12.5	6.6	6	6.0	11.0	5.7	4	3.5	2.5	4.0		
01 16/1 5-	6	16.0	37	4	6	10.0	17.0	11.2	.5	5	8.5	15.5 <sup>t</sup>	9.0	8	4	8.0	14.5	6.4	4	5.5	10.0	5.7	4	2.0	3.0	4.0		
02 15/9 4 2	10.5	17.0	135	6	4	11.0	17.5	11.2	6	6	9.5	17.5	9.0	10	6	9.0	17.0	6.4	6	6.0	11.5	5.7	4	2	5.5	6.5		
03 16/1 2	6	11.5	18.0	135	4	6	10.0	16.5	11.0	.5	6	9.5	16.5	8.8	9	7	10.5	9.5	6.4	6	6.0	11.0	5.7	3	4	5.0	7.5	
04 15/9 4	4	11.0	18.0	133	6	4	9.5	16.5	11.0	.5	7	9.5	17.5	8.2	9	10.0	18.0	6.4	3	8.0	11.0	5.7	2	4	4.5	7.0		
05 15/9 3	8	12.0	19.0	125	7	4	12.5	19.0	9.0	10	8	12.5	20.0	5.0	17	5	*3.0	6.0	5.8	5	6.5	11.0	5.3	4	4	4.5	7.5	
06 15/7 2	6	11.5	18.0	123	8	4	12.0	20.0	8.4	12	13	13.5	22.0	4.4	24	4	7.5	17.0	4.2	8	9	7.0	12.0	4.3	5	9	6.5	
07 15/5 5	4	13.0	19.5	121	6	9	12.5	20.0	8.4	12	15	14.0	23.0	4.4	18	4	4.5	6.0	3.0	9	10	8.0	13.0	3.3	5	3	3.0	
08 15/7 2	6	13.5	20.5	121	8	6	13.0	21.0	8.5	13	12	12.5	19.5	4.5	22	5	4.0	2.0	6	0	5.0	6.5	2.9	6	10	8.5		
09 15/7 2	8	14.5	21.5	225	4	10	14.5	22.0	8.8	14	14	13.0	21.0	4.8	22	8	4.5	8.5	2.0	2	5.0	6.0	2.2	4	5.5	8.5		
10 15/7 2	7	14.0	21.5	125	6	11	14.0	21.0	8.8	20	12	14.5	22.0	4.6	28	4	9.0	*22.0	20	8	0	4.0	5.0	21	3	3.5	4.5	
11 15/7 2	8	13.0	21.0	24.0	126	5	8	11.5	20.0	9.2	12	15	10.5	20.5	1.7	10	9.0	*10.5	2.0	4	0	4.0	7.0	21	11	6	7.0	
12 15/9 3	7	13.5	20.5	225	4	10	14.5	22.0	8.8	14	14	13.0	21.0	4.8	22	8	4.5	8.5	2.0	2	5.0	6.0	2.2	4	5.5	8.5		
13 16/1 3	6	11.5	19.0	131	5	5	9.0	15.5	10.0	15	13	7.5	13.0	5.4	30	12	9.0	17.0	2.0	5	0	*3.5	4.5	2.5	4	5.0	6.5	
14 16/1 8	8	9.0	14.0	132	10	7	7.5	13.5	10.2	14	9	8.5	14.0	5.6	30	8	9.0	16.0	2.0	5	4.0	5.0	29	14	5	8.0	3.6	
15 16/3 5	4	8.0	14.0	133	6	4	6.5	13.0	11.0	10.5	12	10	8.5	13.0	6.0	29	11	8.0	15.5	2.0	2	5.0	6.0	21	11	6	7.0	
16 16/3 5	4	8.5	13.5	133	7	6	7.5	12.0	10.4	16	7	8.0	14.0	6.1	28	9	9.5	16.0	3.0	28	8	5.0	7.0	45	5	6	6.0	
17 16/3 5	4	8.5	14.0	133	9	6	7.5	12.5	10.6	14	13	8.0	12.0	6.6	26	13	7.0	13.0	4.0	14	7	4.5	7.0	49	8	7	4.0	
18 16/1 7	3	8.5	14.0	133	7	6	8.0	13.0	10.6	14	9	9.0	15.5	7.9	13	12	10	13.0	5.2	10	5	4.0	6.5	55	6	3	4.5	
19 15/9 7	4	9.5	15.5	133	9	6	9.0	14.5	11.2	10	6	7.5	13.5	9.0	9	9	6.5	12.0	6.4	6	8	4.5	8.0	59	6	4	4.5	
20 16/1 6	6	4	10.5	17.0	137	6	6	8.0	14.0	11.4	9	6	7.0	12.0	9.4	7	9	7.0	12.0	6.8	5	4	4.0	4.5	7.0	23	4	3.0
21 16/1 7	4	11.0	17.0	137	6	6	9.0	15.5	11.2	11	4	7.5	14.0	9.4	8	6	6.5	12.0	6.8	6	4	4.5	8.5	77	2	2	3.0	
22 16/1 6	4	11.0	17.0	135	9	4	8.5	15.0	11.4	7	7	7.5	14.0	9.4	8	6	6.5	12.0	6.8	7	3	5.0	9.0	21	4	0	3.0	
23 16/1 7	4	10.0	16.5	137	7	7	9.0	16.0	11.4	7	8	7.5	13.5	9.6	7	9	7.0	14.0	6.6	6	3.0	10.0	59	4	4	4.5		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>4</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**      Station Cook, Australia      Lat. 30.6 S Long. 130.4 E Month January 19 64

Month	Hour	Frequency (Mc)												Frequency (Mc)																											
		0.013				0.051				0.160				0.495				2.5				5				10															
150	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm	Fam	D <sub>U</sub>	Vdm	Ldm													
00	157	8	3	0.5	16.0	1.34	6	6	9.5	17.0	1.08	8	4	10.0	18.0	9.2	6	9	8.5	17.5	6.7	4	11	7.5	13.0	5.9	4	6	6.5	11.0	4.1	9	5	6.0	9.5	2.2	2	0	* 2.5	* 3.5	
01	157	6	3	9.5	16.0	1.33	6	4	10.0	18.0	1.10	8	6	10.0	18.5	9.1	7	10	9.5	17.0	6.5	6	10	8.0	15.0	5.8	3	8	5.5	10.0	3.9	8	5	6.0	8.0	2.2	2	0	+ 3.0	+ 3.5	
02	159	3	5	12.0	16.0	1.34	5	6	11.0	18.5	1.10	8	6	10.5	19.0	9.0	6	10	9.0	16.5	6.5	6	8	7.5	11.5	5.7	4	6	5.0	9.0	3.7	6	6	5.0	7.0	2.2	2	0	* 3.0	* 3.5	
03	157	5	2	12.0	16.5	1.34	6	6	12.0	19.5	1.08	10	4	11.0	20.0	9.0	6	12	9.5	18.5	6.5	7	8	6.0	12.0	5.9	5	8	4.5	8.0	3.6	11	5	4.0	6.0	2.2	2	0	* 2.5	* 3.5	
04	157	6	2	12.0	19.0	1.34	6	8	11.5	19.5	1.10	7	11	12.5	21.5	8.8	5	12	9.5	18.0	6.4	7	9	7.5	13.0	5.7	4	8	5.0	9.0	3.3	8	4	4.5	7.5	2.4	0	-	* 3.0	* 3.5	
05	157	5	4	11.0	19.0	1.27	6	5	* 12.0	* 19.0	9.6	11	10	* 13.0	* 20.5	5.8	16	12	* 13.5	* 23.0	6.1	8	8	7.5	* 13.0	5.5	7	6	5.0	9.0	3.3	7	2	* 3.0	* 5.0	2.4	0	0	* 2.5	* 3.5	
06	155	4	2	11.0	18.5	1.24	8	8	12.0	19.5	8.0	19	6	* 12.5	* 23.0	1.4	30	2	* 10.0	17.5	4.5	12	10	8.5	15.0	4.7	5	9	6.0	9.0	3.7	6	4	3.5	6.0	2.4	0	2			
07	155	3	5	13.0	20.0	1.20	8	7	13.0	21.5	7.8	20	9	* 14.5	* 23.5	4.5	26	3	* 10.0	* 16.0	3.3	10	8	7.5	* 13.0	3.4	15	9	7.0	11.5	3.4	11	3	3.5	6.0	2.2	2	0			
08	155	4	6	14.0	21.0	1.18	8	6	14.0	22.5	8.0	20	11	13.5	20.0	4.6	22	4	* 10.5	* 15.5	2.6	10	3	* 9.0	* 13.0	2.5	17	4	9.0	13.5	3.1	9	4	5.0	7.0	2.2	2	0	* 3.0	* 3.5	
09	153	6	5	14.0	22.0	1.18	10	8	* 15.0	* 24.0	8.0	26	10	* 15.0	* 21.5	5.0		* 8.5	* 13.5	* 2.5		3	* 3.0	* 5.0	2.3	9	6	* 6.5	10.0	2.9	6	4	4.5	6.5	2.2	2	0	* 2.5	* 4.0		
10	153	8	4	15.0	23.0	1.20	10	8	16.0	25.0	8.4	15	16	* 12.0	* 16.5	4.8	34	6	* 5.5	* 8.0	* 2.6		* 5.5	* 8.0	2.3	15	6	7.0	10.5	2.7	6	2	3.5	5.5	2.2	2	0	* 3.0	* 3.5		
11	154	7	5	15.0	23.0	2.21	11	5	15.0	24.5	8.4	22	10	* 10.0	* 13.0	5.3		* 6.5	* 9.5	* 2.6		7.5	* 11.5	2.3	16	6	5.0	7.0	2.7	7	2	4.0	5.5	2.2	2	0	* 3.0	* 4.0			
12	155	8	6	15.0	23.0	12.6	8	8	14.0	23.0	9.0	16	6	8.5	16.5	5.1	33	9	* 6.5	* 9.0	* 2.7		6.0	* 8.5	2.3	16	6	10.0	15.0	2.7	8	2	4.0	6.0	2.4	2	2	* 3.0	* 5.0		
13	157	6	6	13.5	21.0	1.26	6	6	11.0	19.5	9.3	9	7	6.5	13.0	5.3		* 4.5	* 8.0	* 2.7		6.5	* 10.0	* 2.4	11	6	* 5.0	* 28	7	3	3.5	* 6.5	2.4	4	0	* 3.0	* 5.0				
14	159	4	4	11.0	19.5	1.30	6	7	11.5	* 19.5	9.4	15	6	8.0	14.5	5.4	18	12	4.5	8.0	* 2.6		5.5	* 8.0	* 2.7	8	8	* 4.5	* 8.0	3.1	7	3	4.0	7.0	2.5	3	1	* 3.5	* 5.5		
15	159	4	4	10.0	15.5	1.30	4	4	10	11.5	10.0	11	12	9.0	15.0	5.6	14	12	4.5	8.0	* 2.5		1.9	2	1.30	* 1.80	3.1	11	7	6.5	10.0	3.5	5	6	4.0	7.0	2.6	4	2	* 3.0	* 5.0
16	161	3	5	8.0	14.0	1.30	4	5	8.0	13.5	10.0	9	13	9.0	14.0	5.8	20	14	6.0	10	9.0	27	12	4	* 3.5	* 6.0	3.7	8	6	5.5	9.0	3.9	5	3	4.5	7.5	2.6	4	2	* 4.0	* 6.5
17	160	4	4	8.5	15.0	1.30	4	7	7.5	13.0	10.1	9	12	8.0	15.5	5.9	21	10	6.0	10.0	3.7	12	9	5.5	8.0	4.5	6	6	6.0	10.5	4.3	4	4	4.0	7.5	2.4	5	2	* 3.0	* 5.0	
18	159	3	4	9.0	15.0	1.31	4	7	8.0	14.0	10.2	8	6	7.5	13.0	7.2	11	12	5.5	9	8	5.0	9.0	5.1	6	7	5.0	9.0	4.5	3	4	4.5	8.0	2.4	2	2	* 3.0	* 4.5			
19	158	6	4	9.0	15.5	1.32	5	7	9.0	13.5	11.0	4	6	7.0	14.5	8.6	7	12	6.0	12.5	6.1	5	9	5.0	9.0	5.8	5	7	5.0	9.5	4.5	3	3	5.0	8.0	2.4	2	2	* 3.0	* 5.0	
20	158	7	3	11.0	18.0	1.34	6	5	9.0	16.5	11.2	5	6	8.0	16.0	9.0	6	9	7.5	15.0	6.7	4	10	7.0	12.0	5.9	4	7	5.0	9.5	4.5	3	4	4.5	8.0	2.2	2	0	* 4.0	* 6.0	
21	159	6	4	11.0	17.5	1.34	6	5	10.0	17.0	11.0	6	4	7.5	15.0	9.2	4	9	7.0	15.0	6.7	6	10	6.0	12.0	5.9	8	7	6.0	11.5	4.3	7	3	5.0	9.0	2.2	0	0	* 2.5	* 4.0	
22	159	5	4	11.0	18.0	1.34	5	5	9.0	16.0	11.0	6	5	8.5	16.5	9.2	5	9	6.5	12.0	6.7	5	9	6.5	11.5	5.8	7	6.0	10.0	4.3	8	2	6.5	9.5	2.2	0	0	* 4.0	* 6.0		
23	158	6	5	10.5	16.5	1.34	6	6	9.0	15.5	11.0	7	4	9.5	18.0	9.2	6	10	9.0	17.0	6.6	7	9	7.5	13.0	5.6	6	5	6.5	11.0	4.3	5	4	5.5	10.0	2.2	2	0	* 4.0	* 6.0	

Fam = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month February 19 64

FS	Frequency (Mc)												0.3				0.51				0.160				0.495				2.5				5				10				20				
	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
00	159	2	4	11.0	17.0	1.33	2	4	10.0	18.0	1.11	4	5	9.0	17.0	1.94	5	5	8.0	16.5	1.65	6	6	5.0	11.0	1.57	4	4	6.0	10.0	1.42	4	4	5.0	8.5	2.2	0	0	0						
01	159	2	4	10.0	15.5	1.33	4	4	10.5	18.0	1.09	6	4	9.0	16.5	1.91	7	3	9.0	15.5	1.65	4	5	7.5	13.0	1.57	2	4	5.5	10.0	1.42	6	3	5.5	8.5	2.2	0	0	0						
02	158	3	3	9.5	15.5	1.34	4	5	11.0	18.0	1.09	6	3	9.0	18.0	1.91	6	3	9.0	17.5	1.65	3	6	6.0	12.0	1.55	4	2	5.5	9.5	1.42	3	4	4.5	7.5	2.2	0	0	0						
03	159	2	4	10.5	17.0	1.33	2	5	10.0	17.0	1.09	6	4	9.5	18.5	1.91	6	6	8.0	17.5	1.65	4	6	5.0	11.5	1.57	4	2	5.5	10.0	1.38	7	2	4.5	6.5	2.2	0	0	0						
04	157	4	2	11.0	18.0	1.31	5	4	10.5	19.0	1.06	8	3	10.0	18.0	1.87	7	7	10.0	19.0	1.63	7	4	7.0	13.0	1.56	3	1	5.5	10.5	3.6	6	3	3.5	5.0	2.2	1	0	0						
05	157	4	2	11.0	17.0	1.29	5	4	11.0	18.0	1.03	8	6	10.5	18.0	1.75	12	11	13.0	21.0	1.61	7	4	7.0	13.0	1.55	4	4	6.0	10.0	1.38	5	6	3.0	4.5	2.2	0	0	0						
06	157	2	2	10.5	16.5	1.23	7	5	11.0	17.0	1.65	6	10	11.0	18.0	1.45	5	33	4	8.5	12.5	1.53	6	7	8.0	14.0	1.49	5	4	4.0	8.0	4.2	5	4	3.0	5.5	2.2	0	0	0					
07	154	3	2	10.5	17.5	1.20	9	7	12.0	19.0	1.79	16	12	11.0	24.0	1.44	11	5	5.0	12.0	1.34	9	6	8.0	13.0	1.37	7	7	7.0	10.5	3.8	3	4	4.0	6.0	2.2	0	0	0						
08	153	4	2	13.0	21.0	1.17	10	7	14.0	21.0	1.77	12	8	11.5	21.5	1.43	16	4	6.0	27.5	2.3	10	4	6.0	9.5	2.29	10	10	7.5	10.0	3.4	6	2	3.5	5.0	2.2	0	0	0						
09	153	4	2	13.0	20.0	1.17	10	6	11.5	24.0	1.78	18	8	11.5	24.0	1.43	19	2	5.5	7.5	2.1	9	2	7.0	9.5	2.1	12	4	7.5	10.0	3.0	6	2	3.0	5.0	2.2	0	0	0						
10	153	4	4	14.0	21.5	1.19	11	10	15.0	23.5	1.81	31	11	14.5	21.0	1.43	18	4	10.0	21.0	21	6	2	5.0	6.5	21	11	6	6.5	9.0	28	6	1	3.0	5.0	2.2	3	0	0						
11	154	3	5	15.0	22.0	1.17	11	6	15.0	24.0	1.40	13	11	16	15.0	21.0	1.43	15	4	11.0	21.0	21	10	2	6.0	8.0	19	6	4	6.5	8.5	28	6	2	4.0	6.0	2.2	6	0	0					
12	155	2	6	14.0	22.0	1.21	6	8	13.0	22.0	1.95	16	8	10.5	19.5	1.43	42	4	6.5	9.0	19	9	0	4.5	6.0	17	12	4	5.5	7.5	28	8	2	4.0	6.0	2.4	16	2	0	0					
13	155	4	4	12.0	20.0	1.24	9	7	9.5	18.0	1.89	8	7	10.5	19.5	1.45	45	4	5.5	7.0	19	2	0	4.5	7.0	11.0	21	12	6	6.0	9.0	30	*5.0	8.5	*2.6	2.6	0	0							
14	157	4	4	10.0	16.5	1.29	7	5	11.0	14.0	1.93	16	11	12.0	13.0	1.45	23	4	5.5	9.0	19	27	1	5.0	7.5	34	4	5	5.0	7.0	24	2	2	3.0	4.0	2	0	0	0						
15	159	4	4	8.5	15.0	1.29	4	7	6.0	12.0	9.4	10	11	6.0	11.0	4.7	19	5	5.0	7.5	21	16	2	5.0	8.0	31	11	8	6.0	9.5	38	4	6	4.5	8.0	25	14	3	3.0	5.0	2	0	0	0	
16	159	4	5	8.0	14.0	12.0	4	6	6.0	11.5	9.5	10	10	6.0	10.0	5.1	18	9	5.0	8.0	15	6	6	6.0	8.0	36	10	7	6.0	9.0	41	5	5.0	8.0	26	10	4	3.0	5.5	2	0	0	0		
17	159	4	3	7.0	13.5	12.8	3	5	6.0	11.5	9.5	9	12	5.5	10.5	5.7	13	8	5.0	9.0	13.8	5	8	5.5	9.5	13	9	6	5.0	9.0	44	6	4	4.0	7.0	26	4	4	4.0	5.0	2	0	0	0	
18	157	4	2	8.0	15.0	12.9	4	4	7.0	12.5	10.3	4	10	5.5	10.5	7.9	6	8	4.5	10.5	5.1	6	6	7.0	12.5	5.1	6	4	5.5	9.5	46	5	5.0	8.0	26	14	4	3.0	5.0	2	0	0	0		
19	157	4	2	9.0	15.5	13.1	4	6	7.0	13.0	10.9	4	4	4.5	9.5	9.1	6	6	6.0	11.5	6.3	6	6	5.5	11.0	5.7	6	4	4.0	8.5	48	7	4	5.0	8.5	24	10	2	0	0	0				
20	160	3	5	10.0	16.5	13.3	4	6	8.0	15.5	11.1	5	3	6.0	12.5	9.5	4	6	6.5	15.0	6.7	6	4	5.5	11.5	5.9	5	3	6.0	10.5	46	15	4	4.5	9.0	62	4	4	1	5.0	8.5	0	0	0	0
21	159	5	4	11.0	19.0	13.3	4	9	6.0	16.0	11.0	5	7	7.5	15.5	9.4	7	5	6.5	14.0	6.7	5	4	6.0	12.5	6.1	6	6	4.5	9.0	46	13	4	5.0	8.5	22	0	0	0	0	0				
22	158	6	3	11.0	17.0	13.5	2	7	10.0	18.0	11.1	4	6	8.5	15.5	9.4	6	6	8.0	15.0	6.5	6	4	5.0	12.5	5.7	6	3	6.5	13.0	44	11	4	5.0	9.0	22	0	0	0	0	0				
23	157	6	2	11.5	18.0	13.3	4	4	9.5	19.0	11.1	3	5	8.5	17.0	9.3	4	5'	8.5	17.5	4	4	5.5	11.5	4.2	3	5	6.0	9.5	22	0	0	0	0	0										

F<sub>m</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>g</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station USNS Eltanin — Lat. 50-60S Long. 112.5-127.5W Month December 19 63

Month-Hour (LST)	Frequency (Mc)																			
	.013	.051	.160	.495	2.5	5	10	20												
F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 1/53	1.9		88		67					55	9.5	53	4.5	80	39	4.0	7.0	27		1.0 2.5
01 1/55	1.7		9.0		73					53	1.5	53	3.0	6.0	39	3.0	6.0	25		1.0 2.5
02 1/59	1.21		9.2		67					53	5.5	51	5.0	8.0	39	2.0	4.0	27		1.0 2.5
03 1/55	1.7		8.1		49					49	3.5	39	1.5	3.0	27	1.0	2.5			
04 1/55	1.3		6.1		33					41	3.5		3.0	5.5	29	2.0	3.0	20		
05 1/55	1.11		6.6		23					23	2.5	35		33	2.0	3.0	27	2.0	3.0	
06 1/53	1.07		6.6		49					21			31		2.5	4.5	27	1.0	2.5	
07 1/51	1.07		6.7		55					23			31	6.0	29	1.0	3.0	27		
08 1/45	1.08		6.9		27					31			29		1.0	2.0	27	1.5	3.0	
09 1/50	1.05		6.3		33					1.5	3.0	29	6.5	10.0	29	1.0	2.0	27		1.0 3.0
10 1/51	1.09		6.7		71					1.0	2.5	30	4.5	7.0	28			27		1.5 3.0
11 1/51	1.08		7.3		72					25	1.5	3.0	27	6.0	7.5	29	1.5	2.5	27	
12 1/53	1.11		7.3		72					29	2.0	3.5	29	5.0	7.0	29	1.0	2.5	27	
13 1/52	1.09		7.7		84					34	1.5	3.0	29	6.5	8.5	29	2.5	4.5	27	1.0 2.5
14 1/52	1.09		7.6		70					33	1.5	3.0	29	6.0	8.0	30	1.5	3.0	27	1.0 2.5
15 1/50	1.03		7.8		13					27			28	3.0	5.0	29	1.5	3.0	27	1.0 2.0
16 1/49	1.07		7.4		74					29	1.5	2.0	34	4.0	7.0	35	3.0	5.0	28	2.0 3.5
17 1/48	1.07		7.9		76					28			40	3.5	6.5	39	2.5	4.5	29	2.0 4.0
18 1/48	1.09		7.6		73					38	5.0	8.0	49	2.5	5.0	43	2.5	4.5	28	2.0 3.0
19 1/50	1.12		8.2		74					46	2.5	4.5	54	2.5	4.0	42	3.5	6.0	29	
20 1/50	1.17		9.2		81					54	4.0	8.0	52	3.5	7.0	44	4.0	7.0	29	
21 1/49	1.19		9.4		76					56	4.0	8.0	59		42		4.0	7.0	29	1.5 3.0
22 1/51	1.21		9.4		74					56			56	5.5	9.5	41	4.0	6.5	27	1.5 3.0
23 1/51	1.21		9.3		72					56			54	4.0	7.0	40	4.5	8.0	26	1.0 2.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Lat. 50-60°S Long. 275-225°W Month December 19 63

Date	Frequency (Mc)																									
	013			051			160			495			2.5			5			10			20				
	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *	F <sub>m</sub> *	D <sub>u</sub>	V <sub>m</sub> *		
00 151	12.0	17.0	12.3	8.0	13.0	9.6	6.5	12.0	7.3	5.0	8.5	5.9	5.5	9.0	4.1	5.5	9.0	6.1	5.5	9.0	6.1	5.5	9.0	6.1	27	
01 149	8.5	14.0	11.3	7.5	10.5	9.4	8.0	13.5	6.9	5.5	9.0	6.1	5.5	9.0	4.1	5.5	9.0	6.1	5.5	9.0	6.1	5.5	9.0	6.1	27	
02 147	11.0	17.0	11.7	9.5	14.0	8.8	9.5	16.0	6.3	8.0	14.0	5.9	5.3	9.0	4.1	5.3	9.0	6.1	5.3	9.0	6.1	5.3	9.0	6.1	25	
03 149	11.5	18.0	11.5	8.5	13.0	8.0	15.0	21.0	4.9	5.0	9.0	5.3	5.1	9.0	4.1	5.1	9.0	5.3	5.1	9.0	5.3	5.1	9.0	5.3	27	
04 141	11.0	17.0	10.5	10.0	14.0	6.8	10.0	14.0	5.7	2.0	5.5	4.5	4.7	5.0	4.1	4.7	5.0	4.5	4.7	5.0	4.5	4.7	5.0	4.5	27	
05 133	10.5	17.0	9.9	13.5	18.0	6.8	4.5	7.0	6.1	5.0	12.0	4.9	4.3	7.0	4.1	4.3	7.0	4.9	4.3	7.0	4.9	4.3	7.0	4.9	27	
06 141	11.5	17.0	10.5	12.0	18.5	6.4	12.0	18.5	6.4	4.5	12.0	4.9	4.3	12.0	4.1	4.3	12.0	4.9	4.3	12.0	4.9	4.3	12.0	4.9	26	
07 147	9.5	15.5	9.8	9.0	13.0	6.4	8.0	11.0	5.1	2.5	12.0	4.9	2.5	12.0	4.1	2.5	12.0	4.9	2.5	12.0	4.9	2.5	12.0	4.9	27	
08 145	11.5	18.0	10.4	11.0	17.0	6.6	6.5	11.0	5.0	2.5	12.0	4.9	2.5	12.0	4.1	2.5	12.0	4.9	2.5	12.0	4.9	2.5	12.0	4.9	27	
09 151	10.5	16.0	10.7	7.5	12.5	7.0	4.5	12.0	3.3	2.0	12.0	3.3	2.7	12.0	3.1	2.7	12.0	3.3	2.7	12.0	3.3	2.7	12.0	3.3	26	
10 149	9.0	15.0	11.0	6.0	10.5	7.0	6.5	12.0	3.0	3.5	12.0	3.3	2.8	12.0	3.1	2.8	12.0	3.3	2.8	12.0	3.3	2.8	12.0	3.3	26	
11 153	10.0	16.0	11.2	6.5	11.0	7.1	7.8	12.0	3.1	2.0	12.0	3.1	3.3	12.0	3.1	3.3	12.0	3.1	3.3	12.0	3.1	3.3	12.0	3.1	25	
12 147	9.0	14.0	11.0	6.5	10.5	6.7	7.3	12.0	2.5	3.5	12.0	2.5	2.9	12.0	2.7	2.9	12.0	2.5	2.9	12.0	2.5	2.9	12.0	2.5	26	
13 154	10.0	15.5	11.2	9.0	14.0	7.3	7.0	9.0	7.3	3.5	12.0	2.9	2.8	12.0	2.7	2.8	12.0	2.9	2.8	12.0	2.9	2.8	12.0	2.9	26	
14 152	9.0	14.0	11.0	7.8	11.0	14.5	6.9	11.0	14.5	6.9	2.0	12.0	3.1	2.8	12.0	3.1	2.8	12.0	3.1	2.8	12.0	3.1	2.8	12.0	3.1	27
15 151	10.0	15.0	11.1	10.0	17.0	7.8	6.9	12.0	2.8	3.0	12.0	2.8	3.4	12.0	2.7	3.4	12.0	2.8	3.4	12.0	2.8	3.4	12.0	2.8	27	
16 150	12.0	19.0	10.9	11.5	19.0	7.6	7.8	12.0	2.8	3.0	12.0	2.8	3.8	12.0	2.7	3.8	12.0	2.8	3.8	12.0	2.8	3.8	12.0	2.8	27	
17 150	14.0	20.5	10.9	10.5	17.0	7.6	7.5	14.0	2.9	4.0	12.0	2.9	3.5	12.0	2.7	3.5	12.0	2.9	3.5	12.0	2.9	3.5	12.0	2.9	27	
18 148	10.7	9.0	14.0	7.7	10.0	7.5	7.5	12.0	3.9	4.0	12.0	3.9	4.2	12.0	3.7	4.2	12.0	3.9	4.2	12.0	3.9	4.2	12.0	3.9	25	
19 149	12.0	19.0	10.8	7.7	12.5	7.5	3.5	12.0	2.5	3.0	12.0	2.4	51	12.0	2.3	51	12.0	2.4	51	12.0	2.4	51	12.0	2.4	26	
20 147	13.0	18.5	11.2	7.0	10.5	8.6	7.7	12.0	2.9	3.0	12.0	2.9	55	12.0	2.7	55	12.0	2.9	55	12.0	2.9	55	12.0	2.9	27	
21 149	10.0	16.0	12.1	7.5	12.5	9.4	8.0	14.5	7.4	5.5	12.0	5.3	55	12.0	4.2	55	12.0	5.3	55	12.0	5.3	55	12.0	5.3	27	
22 149	5.5	7.5	11.4	9.2	15.0	7.2	4.0	12.0	5.6	4.0	12.0	5.6	4.1	12.0	4.0	4.1	12.0	5.6	4.1	12.0	5.6	4.1	12.0	5.6	28	
23 150	11.0	16.0	11.6	8.0	13.0	9.0	7.0	13.0	7.0	5.5	12.0	5.7	54	12.0	4.0	54	12.0	5.7	54	12.0	5.7	54	12.0	5.7	27	

F<sub>m</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>m</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db above mean power

MONTH-HOUR VALUES OF RADIO NOISE      Station USNS Eltanin      Lat. 40-50S Long. 27.5-125W Month December 19 63

ES	Frequency (Mc)												.013			.051			.160			.495			2.5		
	.013			.051			.160			.495			Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm	Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm	Fam	D <sub>U</sub>	D <sub>L</sub>
	Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm	Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm	Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm	Fam	D <sub>U</sub>	D <sub>L</sub>	Vdm	Vdm	Ldm			
00	1.49	(3.0	19.5	127			8.5	15.0	9.6				8.0	17.0	6.5				6.5							25	
01	1.49	13.0	19.5	125			8.5	13.5	10.0				3.0	5.5	7.3				7.1							25	
02	1.45	12.5	20.0	113			8.2			6.1			15.0	21.0	5.7				5.3							27	
03	1.51	13.5	21.0	113			8.0			18.0	25.0	4.9				5.3			4.7							27	
04	1.51	14.0	22.0	109			6.8									4.1			4.3							31	
05	1.49		10.9							5.5	9.5	4.9				3.9			3.7							31	
06	1.41	11.0	18.0	109			11.0	18.5	6.2							4.1			2.9							27	
07	1.51	10.5	17.0	111			6.8			4.9			1.5	2.5	2.3				2.9							27	
08										6.5																27	
09	1.51	12.0	19.0	109			6.8						5.1			3.1			2.5							29	
10	1.53	13.0	20.0	115			11.5	18.5	6.4			6.7			2.7			2.5								27	
11	1.53	11.5	18.5	117			7.5	14.0	8.0			7.9			2.9			3.1								25	
12	1.47		11.6				4.0	6.0	7.9			6.8			2.7			2.8								26	
13	1.56	9.0	15.0	110			7.0	12.5	7.4			7.2			3.0	7.0	2.8	2.8		3.0						27	
14	1.55	9.5	15.0	108			6.0	11.5	7.2			6.3			2.7			3.7								33	
15	1.45	10.0	16.5	112			8.0	14.0	7.5			6.0	11.0	6.4			2.5	5.0	2.5							28	
16	1.53	11.0	17.5	113			6.0	11.0	7.9			3.5	5.0	7.9			2.0	5.0	2.6							30	
17	1.52	11.5	16.0	113			9.5	14.5	7.1			2.5	4.0	7.6			3.5	6.0	3.4							28	
18	1.48	11.0	17.5	110						8.2			3.5	6.0	7.4			2.5	5.5	4.6						28	
19	1.49	12.5	20.0	113			6.5	12.5	8.9			5.5	10.5	7.1			2.0	5.0	5.7							26	
20	1.45	12.5	19.0	123			8.0	14.0	9.6			6.5	12.0	7.5			3.0	5.0	6.1							27	
21	1.50	13.0	19.5	124			9.0	14.0	10.0			7.0	13.0	7.5			4.0	7.0	6.1							26	
22	1.52		12.5				7.0	11.0	10.1			8.0	18.0	7.1			7.5	14.5	6.2							27	
23	1.53	14.0	20.0	126			8.0	13.0	9.8			8.5	18.0	7.1			3.5	7.0	6.1							25	

Fam = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station USNS Eltanin Lat. 40-50°S Long. 82.5-97.5°W Month December 19 63

No.	Frequency (Mc)											
	.013	.051	.160	.495	2.5	5	10	20	.013	.051	.160	
F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 148	13.0	9.0	12.0	4.0	6.0	9.4		6.5	9.0	5.7		5.2
01 145	14.0	21.0	1.9			8.9	11.5	19.0	6.8	5.5	9.0	5.7
02 150	15.0	22.5	1.7	7.5	10.5	8.6	6.5	10.0	16.5	5.4		5.1
03 147	15.0	22.0	1.7			8.2	12.5	20.0	6.1	6.5	10.0	4.9
04 144	16.5	23.5	1.07	13.5	21.0	7.8	13.0	20.5	5.9	5.5	9.5	4.5
05 144	12.5	20.0	10.8	9.0	13.0	6.6	5.0	8.0	6.5	1.5	3.5	3.6
06 145	10.0	15.0	10.3	11.5	15.0	6.8		6.3	3.0	6.5	2.8	3.2
07 144	11.5	19.0	10.3	13.5	22.0			5.9	2.4		2.8	2.8
08 142	13.0	20.0	9.7	14.0	20.0	6.6	5.9		2.7		2.7	2.7
09 141	13.0	20.0	10.5	14.5	23.0				2.8		2.7	
10												
11 150	12.0	19.0	11.0	15.0	23.0	6.9	11.0	14.0	5.7	4.2		3.8
12 151	13.0	20.5	1.12	13.0	20.0	7.2				2.7		2.9
13 153	13.0	20.0	1.13	13.0	21.0	6.4	10.0	15.0	5.9	1.0	3.0	3.0
14 149	12.5	20.0	10.9	13.0	19.0	7.0	5.5	8.5	5.7	2.5	5.0	3.5
15 149	11.0	16.0	10.7	9.5	16.0	6.6	6.5	9.0	5.7	3.0	5.0	2.5
16 145	13.0	22.0	9.9	14.5	20.5	6.7	3.0	4.5	4.9	3.0	4.5	3.3
17 145	13.0	20.0	10.3	16.0	23.0	6.4	7.0	10.5	6.5	3.5	7.0	3.1
18 143	11.0	15.5	10.5	7.1						3.7		4.5
19 141	12.0	17.0	10.9			8.4	7.0	17.0	6.7	5.0	9.0	4.5
20 143	10.0	18.5	1.17	8.0	13.0	9.8	6.0	11.5	6.9		5.9	
21 145		11.1				8.8	10.0	19.0	6.7	9.5	19.0	5.3
22 141	10.5	16.0	11.5			9.2	8.0	14.5	6.3	5.5	5.7	
23 141	12.5	20.0	11.9	6.0	9.0	8.6	8.0	15.0	7.0	7.5	12.0	5.6

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Frequency (Mc)												
.051												
.051												
F <sub>m</sub> Du	D <sub>f</sub> V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub> Du	D <sub>f</sub> V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub> Du	D <sub>f</sub> V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub> Du	D <sub>f</sub> V <sub>dm</sub>	L <sub>dm</sub>	
156	.013		132	.07		90			.71			
00												
01	134			110		88			6.0	1.0		
02	133			85			73			4.0	7.0	
03	131			111			73			5.0	9.0	
04	126			100		77			6.5	1.0	4.5	
05	121			84		73			6.0	10.0	4.5	
06	116			81		74			6.0	1.0	5.2	
07	113			84		79			4.5	8.0	4.7	
08	103			85		78			6.0	10.0	3.9	
09	154			87		81			5.0	9.0	3.7	
10	153			89		81			6.0	10.0	4.3	
11	155			98		97			2.5	4.5	3.5	
12	125			102		99			2.0	3.5	3.1	
13	129			96		97			2.5	4.0	2.9	
14	129			94		97			2.5	4.0	3.3	
15	161			129		92			2.5	4.5	3.3	
16	159			127		88			2.0	3.0	3.7	
17	159			125		92			3.0	5.0	3.9	
18	155			84		87			2.5	4.0	3.5	
19	153			84		87			2.0	3.0	3.1	
20	155			84		87			2.5	4.0	3.1	
21	157			84		85			2.0	3.0	3.1	
22	157			121			59			3.0	5.0	3.1
23	159			121						2.0	3.0	3.1
24	135			112						2.5	3.0	3.1
25	133			93		91				2.0	3.0	3.1

$\sigma_{\text{noise}} = \text{median value of effective antenna noise in dB above kTB}$

$R_{10} = \text{ratio of higher decile to median to 10th decile}$

$R_p$  = ratio of median to lower decile in db

$\bar{V}_{dm}$  = median deviation of average voltage in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station USNS Eltanin — Lat. 30°40' S Long. 67°58' W Month December 19 63

E.S.T.	Frequency (Mc)												.013			.051			.160			.495			2.5			5			10			20										
	F <sub>om</sub>			D <sub>u</sub>			D <sub>f</sub>			V <sub>dm</sub>			L <sub>dm</sub>			F <sub>om</sub>			D <sub>u</sub>			D <sub>f</sub>			V <sub>dm</sub>			L <sub>dm</sub>			F <sub>om</sub>			D <sub>u</sub>			D <sub>f</sub>			V <sub>dm</sub>			L <sub>dm</sub>	
00 146	1/22			96			82			66			6.0	11.0	5.4		6.0	10.0	39		5.0	8.0	27		5.0	8.0	27		2.0	3.0														
01 147	1/20			93			80			64			4.5	9.0	5.5		5.5	10.0	40		5.0	8.0	28		3.5	5.0																		
02 144	1/9			90			81			63			5.5	10.0	5.6		5.0	9.0	41		5.0	8.0	28		3.0	4.0																		
03 146	1/9			90			76			61			6.0	11.0	5.6		6.5	11.0	43		5.0	8.0	27		1.5	3.0																		
04 146	1/8			84			57			60			6.0	11.0	5.3		4.5	8.5	41		3.5	5.5	27		1.0	2.0																		
05 146	1/0			76			64			45			5.0	8.0	47		6.0	9.0	39		4.5	7.0	28		1.5	3.5																		
06 145	1/4			74			67			35			5.5	8.5	41		4.0	6.0	35		4.0	6.0	27		3.5	3.0																		
07 146	1/2			73			70			33			3.0	5.0	36		3.0	4.5	33		3.0	4.0	29		2.0	3.0																		
08 146	1/3			81			62			34			2.0	3.0	33		2.9		2.9		3.0	4.0	28		2.0	3.0																		
09 149	1/1			74			64			35			2.9	5.0	2.0		3.0		3.3		6.0	9.0	27		1.0	2.0																		
10 151	1/5			75			63			37			1.5	3.0	2.9		7.5	10.0	27		2.5	4.0	27		1.5	3.0																		
11 151	1/7			80			65			37			1.0	2.0	2.9		10.5	13.0	27		3.0	5.0	29		1.5	3.0																		
12 155	1/22			90			63			37			2.0	4.0	3.0		4.0	6.0	27		4.0	7.5	28		2.5	4.0																		
13 157	1/22			80			65			35			1.0	3.0	2.9		5.0	8.0	31		5.0	8.0	30		2.5	4.0																		
14 156	1/22			80			67			39			3.5	5.5	33		4.0	8.5	31		4.0	7.0	29		1.5	3.0																		
15 157	1/23			90			77			39			3.5	6.0	34		6.0	8.5	33		4.0	8.0	29		2.0	3.0																		
16 159	1/21			90			73			37			3.0	7.0	35		6.5	9.5	39		4.0	7.5	30		2.5	4.0																		
17 157	1/14			80			70			39			3.5	6.0	42		5.0	8.5	39		3.5	5.5	30		2.0	3.5																		
18 153	1/3			84			75			51			4.0	8.0	57		3.5	6.5	43		3.5	6.0	30		2.0	4.0																		
19 152	1/3			96			79			61			5.0	9.5	62		2.5	5.0	43		5.0	7.5	29		3.5	5.0																		
20 150	1/23			96			82			63			4.5	9.5	63		3.5	6.0	40		5.0	8.0	28		2.0	3.5																		
21 149	1/3			97			66			45			4.5	8.0	63		4.0	7.0	43		4.0	7.0	28		2.0	3.5																		
22 149	1/24			100			63			35			5.5	10.5	62		3.5	6.0	45		4.5	8.0	29		2.0	3.0																		
23 149	1/23			94			78			63			5.5	9.5	55		4.5	8.5	42		5.5	8.5	28		3.0	4.0																		

F<sub>om</sub> = median value of effective antenna noise in db above kdb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station USNS Eltanin      Lat. 20-80S Long. 97.5-112.5W Month January 19 64

FS	Frequency (Mc)											
	.013	.051	.160	.495	.2.5	5	10	20	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 1/43	111		81	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup> D <sub>u</sub> V <sub>dm</sub> L <sub>dm</sub>	
01 1/46	108		73	64	66	45	50	55	47	40	65	36
02 1/47	105		71	63	36	50	80	43	11.0	10.0	35	4.0
03 1/47	106		71	59	30	4.0	7.0	40				5.0
04 1/47	106		70	62	28	6.0	8.5	39				3.0
05 1/47	104		77	63	27	3.0	5.0	34				3.0
06 1/47	104		85	64	29	3.5	6.0	31				3.0
07 1/46	103		75	66	27	2.5	5.0	29				3.0
08 1/46	104		77	74	29	4.0	7.0	31				3.0
09 1/45			83	80	36	0.5	2.0					3.0
10 1/44			79	81	38	1.0	2.0	31				3.0
11 1/45	105		75	74	34	3.5	6.0	31				3.0
12 1/45	103		73	70	34	2.5	4.5	30				3.0
13 1/45	104		71	72	37	1.0	2.5	32				3.0
14 1/45	103		69	66	36	2.0	3.5	31				3.0
15 1/45	107		73	64	31	2.0	4.0	31				3.0
16 1/45	103		75	66	27	3.0	4.0	29				3.0
17 1/41	105		75	68	35	1.0	2.5	33				3.0
18 1/43	107		83	74	33	6.5	9.5	39				3.0
19 1/43	109		77	76	35	45	1.5	2.5				3.0
20 1/43	109		75	70	41	5.5	8.5	47				3.0
21 1/43	109		77	62	45	1.5	2.5	45				3.0
22 1/43	107		79	62	49	4.0	8.0	45				3.0
23 1/43	107		83	64	49	7.0	10.0	47				3.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

$F_{\text{var}} = \text{Median value of effective antenna noise in dB above } k_{\text{th}}$

D<sub>1</sub> = ratio of winter decile to median ln db

D<sub>U</sub> = ratio of median to lower decile in DB

$D_f = 70\%$  of median 10 lower decile in 90

$V_{dm}$  = median deviation of average voltage in dB below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Lat. 60°-70°S Long. 82.5°-97.5°W Month January 1964

Hr	Frequency (Mc)													
	.013	.051	.160	.495	.2.5	.5	10	20						
F <sub>am</sub>	D <sub>u</sub>	D <sub>r</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>r</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>r</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00 148	10.0	15.5	11.7	6.5	12.0	9.1	6.5	11.5	7.2	5.0	9.5	6.0	5.5	3.6
01 147	10.5	16.5	11.4	7.0	13.0	8.5	7.5	12.5	7.3	3.0	5.5	6.1	5.8	3.6
02 149	10.5	16.0	11.1	9.5	14.5	8.0	8.0	13.5	6.6	2.0	3.0	5.5	5.5	3.4
03 149	12.0	18.0	11.0	7.5	11.5	7.5	8.5	11.5	6.5	1.5	3.0	4.3	5.1	3.4
04 147	11.0	17.0	10.5	8.0	11.0	6.5	4.0	7.0	6.4	1.5	3.0	3.3	3.7	3.1
05 149	11.0	17.0	10.3	9.0	13.0	6.5	4.0	5.0	6.6	1.5	3.0	2.5	3.3	3.0
06 147	10.5	16.0	11.2	12.0	15.0	6.7	5.5	8.0	6.4	2.0	3.0	2.6	3.6	2.9
07 149	11.5	16.5	10.4	9.5	13.0	6.7	3.0	5.5	6.4	2.0	3.5	2.4	2.7	2.6
08 147	10.0	15.5	10.5	7.5	12.0	6.9	7.0	9.0	6.4	2.0	3.5	2.9	2.9	2.6
09 146	9.5	14.0					6.6			1.0	2.5	3.8		2.9
10 147	11.0	15.5	10.9	9.0	13.0	6.9	4.5	7.0	6.6	2.0	3.5	3.7	2.8	2.6
11 149	8.5	14.0	10.9	6.5	10.5	7.3	4.0	6.5	6.6	1.5	3.5	3.9	2.9	2.7
12 149	8.0	12.0	10.7	7.5	9.5	7.0	3.5	5.0	6.7	1.5	3.5	3.7	2.9	2.6
13 149	7.5	12.0	10.7	5.0	8.0	7.0	3.0	6.5	7.0	1.0	2.5	3.9	2.9	2.8
14 149	8.0	13.0	10.9	5.5	8.0	7.0	4.0	7.0	6.8	2.5	4.5	3.7	3.2	2.8
15 149	7.0	12.0	10.9	5.0	8.0	6.7	5.0	6.0	6.8	1.5	3.0	3.7	3.1	3.0
16 147	8.0	13.0	10.7	6.5	10.0	7.7	3.0	4.0	7.2	1.5	3.0	3.7	2.9	3.0
17 147	9.5	15.0	10.8	7.0	11.0	8.3	4.0	6.0	7.0	2.5	6.5	3.7	3.3	3.2
18 145	9.0	14.0	10.9	7.0	10.5	8.5	7.0	9.5	7.8	4.0	7.0	3.9	3.9	3.4
19 147	7.0	11.5	11.3	6.0	10.0	8.3	1.0	1.5	7.0	1.0	3.0	4.7	4.5	3.4
20 143	8.0	13.0	11.1	6.5	10.0	9.7	4.0	7.5	7.4	1.0	2.5	5.3	5.3	3.2
21 145	8.5	13.5	10.9	7.5	12.0	8.7	4.0	7.0	7.6	2.0	3.0	5.5	5.5	3.4
22 147	9.5	15.0	11.7	7.0	11.0	8.9	4.0	8.5	7.2	2.5	5.0	5.7	5.5	3.6
23 147	10.0	16.0	12.1	6.5	11.0	9.3	5.0	9.0	7.6	3.0	6.0	6.1	5.7	3.8

F<sub>am</sub> = median value of effective antenna noise in db above ktbD<sub>u</sub> = ratio of upper decile to median in dbD<sub>r</sub> = ratio of median to lower decile in dbV<sub>dm</sub> = median deviation of average voltage in db below mean powerL<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Lat. 50°-60°S Long. 125-127.5W Month January 19 64

Hour	Date	Frequency (Mc)																					
		.013	.051	.160	.495	.2.5	5	10	20	$F_{am}^*$	$D_u$	$D_L$	$V_{dm}^*$	$L_{dm}^*$	$F_{am}^*$	$D_u$	$D_L$	$V_{dm}^*$	$L_{dm}^*$				
$F_{am}^*$	Date	$D_u$	$D_L$	$V_{dm}$	$L_{dm}$	$F_{am}^*$	$D_u$	$D_L$	$V_{dm}$	$L_{dm}$	$F_{am}^*$	$D_u$	$D_L$	$V_{dm}^*$	$L_{dm}^*$	$F_{am}^*$	$D_u$	$D_L$	$V_{dm}^*$	$L_{dm}^*$			
00 1/18		1/9		93		80		40	7.0	58	4.0	8.0	37		4.5	8.0	29		2.0	3.0			
01 1/19		1/9		94		77		54		55			38		3.0	4.5	39		1.5	3.0			
02 1/20		1/14		89		80		51		51		2.5	4.5	37		2.5	5.0	28		2.0	3.5		
03 1/21		1/2		83		74		44		35	7.0	46		33		3.0	5.0	29		1.5	3.0		
04 1/22		1/9		91		76		31		38		5.0	7.0	31		3.0	4.0	29		1.0	3.0		
05 1/23		1/1		91		73		25		34		5.5	7.0	29		1.0	3.0	29		1.0	2.5		
06 1/24		1/2		78		27		3.0	5.0	30		6.0	8.0	28		1.5	3.0	29		1.0	2.0		
07 1/25		1/11		83		79		27		35	4.0	30		8.0	10.0	28		2.0	3.0		1.0	2.0	
08 1/26		1/5		96		99				33		3.0	4.5	28		1.0	2.5	29		1.0	2.0		
09 1/27		1/9		98		94		37		1.5	3.0	35		6.5	8.5	28		1.5	2.5	29		1.0	3.0
10 1/28		1/5		95		94		37		1.5	3.0	33		5.0	7.0	28		1.5	3.0	29		1.0	2.0
11 1/29		1/5		98		27		1.5	2.5	31		2.8				1.0	3.0	29		1.0	2.0		
12 1/30		1/3		99		96		35		33		7.0	9.0	28		1.5	3.0	29		1.0	2.0		
13 1/31		1/7		97		94		29		5.0	7.0	33		7.5	9.0	28		1.0	2.0		1.0	3.0	
14 1/1		1/5		99		98		43		2.5	5.5	31		36		3.0	5.0	31		1.0	3.5		
15 1/2		67		74				33		31		6.0	8.0	28		1.5	2.5	29		2.0	3.0		
16 1/3		1/5		99		94		37		2.0	3.0	33		5.5	8.0	28		2.5	4.0	27		1.0	2.0
17 1/4		1/5		93		88		31		3.0	6.0	35		4.5	7.0	32		3.0	5.0	29			
18 1/5		-		67		90		33		47						4.8		3.0	5.0	37			
19 1/6		1/5		99		66		45		3.5	6.5	53		2.5	4.5	36		3.0	5.0	29		2.0	3.0
20 1/7		1/7		96		49		45		45		3.0	6.5	40		2.5	4.5	29					
21 1/8		1/7		98		55		35	7.5	57		5.0	8.5	40		2.5	4.5	29		1.5	2.5		
22 1/9		1/9		96		59		35	7.0	55		3.5	7.0	40		2.5	5.5	29		4.0	5.0		
23 1/10		1/9		97		59		3.0	6.0	55		3.0	6.5	38		4.0	7.0	27		1.5	3.0		

$F_{am}^*$  = median value of effective antenna noise in db above ktb

$D_u$  = ratio of upper decile to median in db

$D_L$  = ratio of median to lower decile in db

$V_{dm}$  = median deviation of average voltage in db below mean power

$L_{dm}$  = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE      Station USNS Eltanin      Lat. 60°-70° S Long. 82°-97° W Month February 19 64

ES	no	Frequency (Mc)												Frequency (Mc)												
		Fam	D <sub>u</sub>	D <sub>z</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>z</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>z</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>z</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	D <sub>z</sub>	Vdm	Ldm
00	153	9.0	14.0	12.5			4.0	8.0	9.8			4.5	7.5	8.2			4.0	8.0	6.3			5.0		4.3		3.7
01	151	11.0	16.5	12.4			5.0	9.0	9.8			4.5	8.0	7.9			4.0	6.5	6.4			5.9		4.0		3.4
02	150	9.0	14.0	12.1			6.7					6.4					3.0	5.5	6.1					4.0		3.5
03	150	9.0	14.5	11.6			8.1					14.0	20.5	5.4			2.0	4.5	5.2			5.0		3.9		3.5
04	149	9.0	15.0	11.0			7.5	12.0	7.0			5.0	14.0	6.2			3.9					4.7		3.6		3.4
05	149	9.0	14.5	10.5			10.0	14.5									3.0					4.1		3.3		3.3
06	147	11.0	16.5	10.3			8.0	12.0									2.8					3.7		3.1		3.4
07	147	10.0	15.0	10.7			10.0	16.0	7.8			10.5	17.0				3.2					2.7		3.0		3.5
08	148	10.0	15.0	10.5			9.5	13.5													2.8		3.0		3.4	
09	148	7.5	12.0	10.8																	2.7		2.9		3.6	
10	148	7.5	12.0	10.7			8.5	13.0	7.4			4.8					3.9					2.6		2.9		3.5
11	146	8.0	12.0	11.1			4.0	7.5	7.6			6.4					3.9					2.7		2.8		3.4
12	151	7.0	12.0	11.2			7.0	12.0	6.8			5.3					6.5	10.0	5.3			2.8		2.9		3.5
13	149	9.0	14.0	11.0			5.0	9.0	7.0			11.5	15.0	5.6			3.5	6.5	2.8			2.8		2.9		3.7
14	151	9.0	14.0	10.8			7.0					9.5	12.5	5.2			1.5	2.5	2.9			2.9		3.0		3.6
15	149	8.0	12.5	10.6			7.5	10.5				6.2					2.0	4.0	4.4			3.1		2.9		3.6
16	146	10.5	16.0	10.4			6.5	9.5	6.8			7.0	10.0	6.2			3.0	5.5	4.2			3.1		3.5		3.4
17	144		10.1				7.3					6.1					2.5	4.5	2.6			3.7		3.9		3.6
18	147	10.0	15.0	10.9			7.5	11.5	7.2			8.5	13.0	6.4			1.5	3.0	4.2			5.0		4.3		3.4
19	148	9.5	13.0	11.0								7.8					6.6					3.0	3.5	5.0		3.4
20	150	10.0	16.0	11.6			5.5	10.0	8.4			5.0	9.0	7.0			3.0	4.5	5.6			6.1		3.9		3.6
21	146	9.0	14.5	12.0			6.5	11.0	8.8			4.5	9.0	7.6							5.5		3.9		3.6	
22	148		12.0				7.0	12.0	8.6			7.4					3.5	7.5	6.0			5.5		3.9		3.4
23	148	10.0	15.0	12.0			6.5	11.0	9.2			5.0	10.0	7.8			5.0	10.0	6.0			5.3		3.9		3.6

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>z</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 50-60°S Long. 67.5-82.5°W Month February 19 64.

FS	Frequency (Mc)												.013			.051			.160			.495			2.5											
	F <sub>am</sub>			D <sub>u</sub>			D <sub>f</sub>			V <sub>dm</sub>			L <sub>dm</sub>			F <sub>am</sub>			D <sub>u</sub>			D <sub>f</sub>			V <sub>dm</sub>			L <sub>dm</sub>								
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>						
00 150						130					90					68						6.5	41				3.5	41			3.0	6.0	3.4		2.0	5.0
01 154						130					86					70						4.5	6.1				4.0	10.0	3.9		2.5	5.5				
02 152						128					86					68						7.5	6.1				3.0	6.0	4.1		2.5	5.0				
03 152						130					82					66						7.0	6.1				4.0	7.5	3.9		2.5	4.5				
04 154						124					66					60						5.5	5.9				4.0	5.0	3.6		2.0	4.0				
05 152						120					86					44						6.5	5.1				2.5	5.0	3.2		2.0	4.5				
06 154						116					78					66						6.0	10.0	4.1			4.0	7.0	3.4		2.0	4.5				
07 154						114					64					34						3.0	6.0	3.7			4.0	7.0	3.5		2.0	4.0				
08 152						99					80					67						2.0	3.0	2.7			2.0	3.5	2.9		2.0	4.5				
09 152						115					80					66						1.5	2.5	3.1			4.0	5.5	3.1		2.0	3.5				
10 152						116					64					38						1.5	3.5	2.9			2.0	3.0	3.0		2.0	4.0				
11 154						116					80					65						1.0	2.0	3.2			2.5	4.0	3.3		2.0	4.0				
12 154						120					88					72						1.5	2.5	3.3			4.0	6.0	3.2		2.0	3.5				
13 156						121					93					72						3.7					5.5	9.0	3.3		2.0	3.5				
14 155						120					88					72						1.0	2.0	3.3			5.0	7.0	3.3		2.0	4.5				
15 156						118					82					40						1.0	3.0	3.4			2.5	5.0	3.6		2.0	4.5				
16 155						115					79					63						2.5	4.5	3.9			5.0	9.0	3.5		2.5	5.0				
17 153						115					80					52						2.0	4.0	4.6			3.0	5.0	3.9		2.5	5.0				
18 151						114					86					63						3.0	6.0	5.1			4.0	7.0	3.9		2.0	4.0				
19 150						115					76					60						4.5	8.5	5.6			4.5	6.5	4.0		2.0	3.5				
20 152						122					98					78						4.2					5.0	9.0	3.5		2.5	4.5				
21 150						124					100					80						4.4					3.0	5.0	3.9		2.0	4.5				
22 152						126					92					84						6.2					5.0	9.0	6.1		2.5	5.0				
23 150						127					84					84						6.6					4.5	7.5	4.0		3.0	5.0				

F<sub>am</sub> = median value of effective antenna noise in db above ktbD<sub>u</sub> = ratio of upper decile to median in dbD<sub>f</sub> = ratio of median to lower decile in dbV<sub>dm</sub> = median deviation of average voltage in db below mean powerL<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**      Station USNS Eltanin      Lat. 50-60 S Long. 52.5-67.5 W Month February 19 64

[S]	Frequency (Mc)												
	.013			.051			.160			.495			
	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00	1/50	11.0	17.0	126	11.0	16.0	104	9.0	15.0	88	8.0	14.0	69
01	1/47	11.0	17.0	123	10.0	16.0	102	9.5	16.0	89	7.5	15.0	67
02	1/47	12.0	18.0	128	10.5	17.0	108	8.0	15.0	90	8.0	15.0	66
03	1/50	13.0	19.0	130	10.0	17.0	108	9.0	16.0	91	7.5	15.0	67
04	1/52	11.5	17.5	127	9.5	15.0	103	14.0	22.0	81	6.9	6.5	65
05	1/53	12.5	19.0	123	10.5	17.0	98	17.0	25.0	62	5.0	6.0	59
06	1/51	13.5	19.5	120	10.5	16.5	80	5.5	10.5	60	4.9	5.3	42
07	1/47	12.0	16.0	114	14.5	21.5	81	8.5	13.5	62	3.0	4.0	43
08	1/48	12.5	17.5	112	9.0	13.0	63	5.8	—	—	3.6	3.9	35
09	1/48	13.0	16.0	116	8.0	13.0	70	5.8	—	—	14.0	19.0	40
10	1/47	12.5	17.5	110	9.5	14.0	71	4.5	6.0	58	1.0	2.0	39
11	1/46	10.0	14.0	112	13.0	20.0	80	16.0	23.0	66	3.5	5.5	38
12	1/52	11.5	16.0	116	11.0	17.5	83	12.0	15.5	64	3.0	5.5	38
13	1/52	9.5	15.5	118	10.0	16.5	84	10.5	15.5	66	3.8	—	29
14	1/54	10.0	15.5	120	12.5	26.0	88	8.5	15.0	66	6.0	4.1	41
15	1/54	9.0	15.0	114	8.0	13.5	82	8.5	14.0	64	5.0	7.5	34
16	1/54	8.5	14.0	121	9.0	14.0	87	7.0	13.0	68	2.5	4.0	38
17	1/54	10.0	16.0	121	10.0	16.5	82	8.5	15.0	62	1.0	2.0	44
18	1/54	10.5	15.5	120	8.5	14.0	87	7.5	13.0	65	2.5	4.0	55
19	1/52	9.5	15.0	118	12.0	18.0	93	8.0	14.0	83	5.0	11.0	50
20	1/52	9.5	15.0	124	9.0	15.0	98	8.5	14.5	86	7.5	12.0	66
21	1/52	10.5	16.0	128	7.5	13.5	106	10.0	16.0	89	5.5	11.0	68
22	1/52	9.5	15.0	124	7.0	12.0	102	8.5	13.0	98	7.0	12.5	72
23	1/50	12.5	18.0	124	10.0	16.5	106	7.0	13.0	92	6.0	12.0	68

F<sub>am</sub> = median value of effective antenna noise in db above kit

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 40°50' S Long. 67°52.5' W Month February 1964

Month-Hour	Frequency (Mc)											
	.013			.051			.160			.495		
	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00 15/1	126		106		90		68		40	85	54	
01 15/1	126		105		89		69	55	40	75	35	3.7
02 15/2	125		105		92		66	35	57	30	60	3.7
03 15/2	124		105		86		64		59		39	3.0
04 15/2	121		97		78		62	55	57	50	90	3.9
05 15/3	116		81		66		53	65	11.0	49	2.5	3.5
06 15/3	112		70		84		37	50	8.0	45	4.5	3.4
07 15/2	110		78		96		34	40	75	13	4.5	8.0
08 15/1					54		40	1.5	3.0			3.0
09 15/0	112		80		75		40	1.5	3.5	2.7	2.9	1.0
10 15/1	113		81		62		39	2.0	4.0	2.8	4.0	2.5
11 15/1	114		72		64		36		2.9	4.0	6.0	3.0
12 15/4			77		71		41		2.7	10.0	2.7	1.5
13 15/7			81		69		31		2.8	6.0	2.7	2.5
14 15/9			85		69		38		2.8	5.5	2.9	3.0
15 15/9			72		72		34		3.3		3.1	2.0
16 15/7			85		83		38	1.5	3.5	3.6	3.4	3.0
17 15/4			79		63		37	3.5	5.5	4.3	4.5	3.5
18 15/1			82		77		52		3.5	6.5	3.8	4.0
19 15/0			99		85		65	4.0	7.0	5.4	4.0	7.0
20 14/9			98		86		65	3.5	7.0	6.0	4.0	6.0
21 14/9			102		87		64	3.5	7.0	5.5	4.2	2.9
22 14/8			103		87		65		3.0	5.5	3.7	3.0
23 14/9			105		89		66		3.3		3.7	1.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 30°40' S Long. 67°5-82°5 W Month February 1964

HST	Frequency (Mc)												.013			.051			.160			.495			2.5			5			10			20		
	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>								
00 148	120			102					86				66				3.0	5.5	5.1					3.5	5.0	2.6				1.0	2.5					
01 148	120			102					84				64				5.0	9.0	5.5					3.5	4.5	2.6										
02 150	122			98					82				64				5.0	9.0	5.9					3.9	4.5	2.6				1.5	3.0					
03 152	122			96					80				62				5.5	10.5	5.9					3.5	4.5	2.6				2.0	3.0					
04 150	118			98					78				58				5.5	12.0	6.1					5.0	9.0	3.7				3.0	4.5					
05 152	114			78					60				56				7.5	14.0	4.9					3.7	4.5	3.0				1.0	3.0					
06 150	108			66					62				40				1.5	3.0	4.5					3.5	4.5	2.0				1.5	2.5					
07 148	106			68					56				40				4.0	6.0	4.1					3.1	4.0	2.6				2.0	3.0					
08 148	64			55					41				41				1.5	2.5						2.9	4.5	2.6				2.5	4.0					
09 149	67			46					46				35				1.5	3.0	2.6					3.0	4.5	2.9				2.5	4.0					
10 151	77			50					34				34				1.0	2.5	2.7					3.5	6.0	2.9				2.0	3.0					
11 152	68			46					34				20				3.5	2.0	3.5	2.6				2.6	4.5	2.8				1.0	2.5					
12 153	116			71					52				35				2.5							2.9	4.5	2.8				1.5	3.0					
13 156	119			76					49				29				2.5							2.9	4.5	2.8				1.5	3.0					
14 157	119			77					52				29				2.5							2.6	3.5	2.8				2.0	4.0					
15 157	120			77					57				32				6.0	8.0	3.3					7.5	11.5	2.9				5.0	8.0					
16 157	119			84					58				39				3.7	4.5						3.6	8.0	3.0				2.0	4.0					
17 156	116			82					66				48				5.0	8.5						3.6	5.5	2.8										
18 152	119			93					85				59				5.5							3.5	5.5	2.8				2.0	4.0					
19 152	125			100					91				69				3.0	6.0	5.9					4.0	7.0	3.9				2.6						
20 149	127			106					93				70				4.0	8.0	6.1					2.0	4.5	3.4				4.5	6.5					
21 149	126			106					90				68				4.0	8.0	6.1					4.0	6.5	3.5				2.7						
22 148	125			104					88				65				4.0	8.0	5.4					3.6	5.5	2.6				2.6						
23 149	126			104					87				63				5.5	10.5	5.5					3.7	5.5	2.6				1.0	2.5					

F<sub>om</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to lower decile in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logit in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Month December 19 63

## Frequency (Mc)

[S]	.013				.051				.160				.495				2.5				5				10				20											
	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
00	149	4	2	10.0	18.0	1.15	4	4	8.0	14.5	9.4	5	4	4.0	10.5	8.1	8	8	2.5	4.0	57	4	7	7.0	14.0	50	5	4.0	7.0	31	5	2	2.0	40	17	2	0	1.5	2.5	
01	149	4	2	10.0	17.0	1.15	4	6	10.0	16.5	9.8	8	5	3.0	8.0	7.8	1.5	8	1.5	4.0	55	11	7	6.0	8.5	50	4	5	3.0	5.5	31	5	2	2.0	3.5	17	0	0	1.5	2.5
02	149	4	4	11.5	18.5	1.14	7	5	9.5	15.0	10.0	*	2.0	5.0	7.0	1.1	7	1.0	8.5	55	11	6	3.5	6.5	50	4	4	4.5	7.5	31	7	2	2.0	3.5	17	2	0	1.5	3.5	
03	149	4	2	12.5	19.0	1.15	4	6	9.0	15.5	10.0	8	10	7.4	1.1	7	3.0	5.5	4	3	5.0	9.0	50	2	6	4.0	7.0	31	3	2	2.0	3.5	17	2	0	2.0	3.0			
04	149	4	2	12.0	19.5	1.14	5	5	10.5	16.0	9.6	1.2	4	4.0	9.0	7.6	1.0	11	3.0	3.5	53	10	4	4.5	8.0	48	4	4	5.5	9.0	31	3	2	2.0	3.5	17	2	0	2.0	3.5
05	149	4	2	13.0	20.0	1.13	6	8	12.0	18.5	10.0	6	6	4.6	6.5	7.3	1.0	2.0	3.5	53	1.0	4	4.5	8.0	47	1	3	7	2.5	5.0	31	2	2	2.0	3.0	19	0	2	1.5	3.0
06	149	3	4	11.5	18.3	1.13	6	8	11.5	17.5	10.2	6	6	4.0	7.5	6.5	1.8	8	5.0	7.5	51	9	5	3.5	6.5	46	7	6	3.0	5.0	31	3	2	2.0	3.0	19	0	2	1.5	3.0
07	149	2	4	12.0	20.0	1.09	6	6	11.0	18.5	9.8	*	6.5	9	1.0	2.5	4.0	53	*	3.5	6.0	46	6	2	2.0	4.0	33	2	2	2.5	4.0	19	0	2	1.5	3.0				
08	149	1	5	13.5	19.5	1.03	6	4	11.0	18.5	8.6	3	8	3.5	8.0	6.5	7	5	2.5	4.5	56	*	6.0	10.0	46	5	4	2.5	5.0	35	2	2	2.5	4.0	19	0	2	1.5	3.0	
09	143	5	3	15.0	20.0	9.9	1.2	9	10.5	14.5	9.0	8	6.0	10.5	6.3	1.2	1.0	4.0	7.0	43	14	6	3.5	7.0	39	5	5	4.0	7.5	35	5	2	2.0	3.5	19	2	0	1.5	3.0	
10	143	4	6	13.0	20.0	9.7	8	10	12.5	13.0	9.4	8	10	2.5	6.5	6.0	4	3	3.0	5.0	45	34	10	6	2.5	4.0	35	4	2	2.5	4.5	19	2	0	1.5	3.0				
11	143	4	4	12.5	19.0	9.3	1.6	8	11.0	16.0	9.4	6	1.3	2.5	12.0	6.1	3.0	6.0	43	1.8	12	2.5	55	30	6	5	1.5	3.5	35	6	2	2.5	4.0	19	2	1	2.0	4.0		
12	144	5	4	10.0	16.5	9.5	1.14	8	13.0	17.0	9.4	6	8	4.0	9.0	6.0	*	6.0	3.0	6.0	50	*	3.0	6	4	6.5	10.0	35	5	2	3.5	5.0	19	2	0	2.0	3.0			
13	143	4	4	11.0	16.0	9.5	1.15	6	14.5	20.0	8.8	6	6	3.0	2.0	6.3	9	8	3.0	4.0	44	8.0	16.0	32	6	3	3.0	5.0	35	2	2	3.0	5.0	19	2	2	1.5	3.0		
14	143	2	4	8.5	13.5	9.7	1.2	8	9.0	15.5	9.2	7	8	6.5	10.0	6.1	8	2	4.5	*	5.0	7.0	38	10	4	2.0	4.5	37	3	4	3.0	5.0	19	0	2	1.5	3.0			
15	143	2	2	9.0	14.5	9.5	1.2	3	7.0	12.5	9.0	3	8	3.5	7.5	6.1	11	5	3.0	5.0	55	44	6	4	6.5	10.5	35	6	2	3.0	4.5	19	0	2	1.0	2.5				
16	143	4	2	9.0	14.0	10.3	6	6	9.0	15.0	9.4	6	6	5.0	8.0	6.5	1.0	4.0	51	47	6	7	2.5	5.0	36	4	5	2.5	4.0	19	0	2	1.5	3.0						
17	145	2	2	10.0	14.5	10.7	6	5	8.5	15.0	9.4	4	5	4.0	7.0	6.9	4	8	2.0	3.0	59	6.5	12.5	48	6	8	2.5	4.5	35	4	4	2.5	4.5	19	2	0	1.5	3.0		
18	147	2	4	9.5	15.0	11.1	4	6	8.0	11.5	9.4	6	4	3.5	8.0	6.7	7	6	4.5	7.0	51	3.5	7.0	50	7	3	3.0	5.0	31	6	0	2.0	3.5	17	2	0	2.0	3.5		
19	147	4	4	9.0	14.0	11.3	4	4	8.0	15.5	9.4	7	4	4.0	7.0	6.9	2.2	6	3.5	50	53	9	5	5.0	11.0	48	3	4	3.0	5.0	31	2	0	2.0	3.5	17	2	0	2.0	3.5
20	147	4	2	8.5	14.0	11.3	6	6	8.5	14.5	9.8	8	6	3.5	7.5	7.3	17	6	2.0	5.0	55	6.0	14.5	48	6	4	2.5	5.0	31	2	2	2.0	3.0	17	1	0	2.0	3.5		
21	149	2	4	9.5	15.0	11.3	6	4	8.0	14.5	10.0	4	6	7.7	14	9	3.0	3.5	57	7.0	13.5	48	5	3	3.5	5.5	31	2	1	2.0	3.5	17	1	0	2.0	3.5				
22	149	4	4	9.0	14.0	11.3	8	4	9.0	15.0	10.0	8	4	6.5	10.0	7.5	1.2	7	3.5	6.0	55	10	4	7.0	8.5	48	4	4	3.0	6.0	31	4	0	2.0	3.5	17	1	0	2.0	3.5
23	149	4	4	10.0	17.0	11.3	7	3	9.5	15.0	9.9	7	5	6.0	11.5	7.7	1.6	7	3.5	55	57	2.0	4.5	48	6	3	3.0	5.0	31	2	2	1.5	3.5	17	2	0	1.0	2.0		

F<sub>m</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>z</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Month January 19 64

$F_{\text{eff}} = \text{median value of effective antenna noise in dB above kTB}$

$D_u$  = ratio of upper decile to median in db  
 $D_l$  = ratio of median to lower decile in db

$U_2$  = ratio of median to lower decile in db  
 $V_m$  = median deviation of average voltage in db below mean power

$L_{dm}$  = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Enkoping, Sweden   Lat. 59.5 N Long. 17.3 E   Month February 1964

Month-Hour (EST)	Frequency (Mc)																													
	.013			.051			.160			.495			2.5			5			10			20								
	Fam	D <sub>u</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	Vdm	Ldm	Fam	D <sub>u</sub>	Vdm	Ldm						
00 151	2	4	10.5	11.5	9.0	3.5	9.6	2	6	1.5	7.5	7.7	1.4	6	* 1.5	3.5	5.7	1.3	8	6.0	8.5	5.0	4	4.0	6.5	3.2				
01 151	2	4	11.0	12.0	11.5	4	4	9.5	14.0	10.0	4	10	6.0	10.0	7.5	1.2	6	3.5	4.5	5.6	5	5	3.0	6.0	3.0	2	2.5			
02 151	2	4	12.0	12.5	11.5	4	4	10.0	15.0	9.6	6	5	9.0	12.5	7.5	1.2	6	* 3.5	5.5	5	6	6.0	6.5	5.0	4	4.0				
03 150	3	5	12.0	12.0	11.5	4	4	10.0	16.0	9.7	5	5	10.0	10.0	6.9	17	3	* 4.0	5.0	5.3	9	2	3.5	7.5	5.0	4	3.5			
04 149	4	2	12.0	17.5	11.3	6	4	10.0	14.0	9.8	7	7	6.0	9.5	6.7	4	4	* 8.0	10.5	5.3	7	4	3.5	6.0	4.8	2	5			
05 149	4	2	12.0	18.0	11.1	8	2	12.0	18.0	10.0	4	6	5.0	9.5	6.4	12	4	* 3.5	5.5	5	3	4	6	7.0	10.0	4.6	4			
06 149	4	2	12.0	16.5	11.1	4	4	11.5	16.5	10.0	8	12	7.5	11.0	6.1	12	6	4.0	5.0	5.3	20	4	4.0	6.5	4.6	7	5			
07 149	3	3	13.0	19.5	10.7	4	6	13.0	17.0	9.7	3	5	6.0	9.5	5.9	8	4	* 2.0	3.5	5.1	6.5	4	4	4.5	7.5	3.0	3			
08 143	6	2	13.0	18.0	10.1	5	5	11.0	15.0	9.6	6	9	6.0	11.0	5.9	9	6	3.0	5.5	4.9	16	14	5.0	7.0	4.2	4	3.5			
09 141	5	2	12.0	18.0	9.7	6	8	12.5	16.0	8.8	6	5	7.5	15.0	5.9	6	6	* 2.5	4.0	4.7	21	12	3.0	4.0	3.5	3	3			
10 143	2	4	11.5	17.5	9.7	4	11	* 12.5	* 20.0	9.0	7	6	6.5	13.0	5.6	11	3	* 3.5	5.0	4.9	* 4.0	4.5	3.2	7	4	* 3.0	* 4.5			
11 143	2	4	* 12.0	* 18.0	* 9.8		* 11.0	* 14.0	* 8.6				* 11.5	* 15.5	* 5.5	* 5.1		* 4.5	* 5.5	* 5.1		* 4.5	* 6.5	* 3.1		* 3.0	* 3.4			
12 143	4	2	10.0	15.0	* 9.9		* 9.0	* 11.0	* 8.8				4.0	8.5	* 5.5	10	6	* 3.0	* 4.5	* 4.9		* 7.5	* 9.0	* 4.8		* 3.0	* 3.3			
13 143	4	3	8.0	13.0	9.7	4	10	* 7.0	* 9.5	8.6	9	10	6.0	9.0	5.4	12	3	* 3.0	* 4.5	* 4.7		* 8.0	* 10.0	* 4.0		* 2.0	* 3.0			
14 145	2	5	8.0	12.0	9.2	12	5	* 8.0	* 10.5	8.8	7	6	6.5	* 12.5	* 5.8	11	5	* 2.5	* 4.0	* 4.9		* 3.5	* 4.0	* 3.0		* 2.5	* 3.5			
15 143	4	2	7.0	11.0	9.5	13	5	* 12.5	* 18.0	9.0	6	6	5.5	11.5	6.2	13	5	3.0	* 4.5	* 4.9	8	10	* 8.0	* 10.5	* 4.8	6	* 3.5			
16 143	2	2	7.0	10.5	9.7	12	5	* 10.5	* 14.0	8.9	9	5	4.0	7.0	7	14	10	* 5.2	* 5	* 5		41	3	4	* 4.5	6.0	4.0			
17 143	4	2	8.0	12.0	9.3	9	7	* 11.0	* 15.0	9.2	3	8	4.0	7.0	7.2			* 3.5	* 5.0	* 5.9	15	16	3.0	5.0	4.8	6	* 3.5			
18 147	2	5	7.0	11.0	10.9	6	6	9.0	13.0	9.4	5	5.0	8.0	7.5	8	6	* 2.0	* 2.5	* 4.7		* 5.0	4	4	* 4.5	6.0	3.6	9	* 3.5		
19 147	4	2	8.5	12.5	11.1	4	5	9.0	13.0	9.4	6	5	6.0	10.0	8.0	12	12	* 3.5	* 6.0	5.7	10	7	5.0	6.0	3.6	2	* 3.0			
20 147	4	0	9.0	13.5	11.1	4	4	9.0	13.0	9.6	6	4	6.0	8.0	7.1	18	2	3.0	4.0	5.8	8	7	5.0	10.0	5.0	4	* 3.0			
21 149	2	2	9.0	13.5	11.3	4	4	8.5	13.0	9.8	2	4	6.0	11.0	7.2	8	3	3.0	4.5	5.7	8	3	6.5	10.0	5.0	4	* 3.0			
22 151	2	4	10.0	14.5	11.3	4	4	9.0	13.0	10.0	8	6	4.0	8.0	7.5	12	4	4.5	6.5	* 5.6	7.0	10	5.0	2	4	6.0	10.0	5.0	2	* 3.0
23 151	3	4	10.0	15.5	11.5	4	4	8.5	12.5	9.6	8	3	4.0	8.0	7.3	11	5	* 3.0	* 4.0	* 5.7	8	6	5.5	9.0	5.0	2	3	3.0		

Fam = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>2</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia      Lat. 38.8 N Long. 78.2 W      Month December 19 63

Month-Hour (LST)	Frequency (Mc)																				
	.135			.500			2.5			5			10			20					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 103 6 5																					
01 103 7 4																					
02 102 6 4																					
03 101 7 4																					
04 99 8 4																					
05 100 7 6																					
06 97 5 5																					
07 93 4 4																					
08 87 3 2																					
09 86 3 2																					
10 86 2 2																					
11 86 4 2																					
12 86 3 2																					
13 86 5 2																					
14 86 5 2																					
15 85 5 1																					
16 88 4 2																					
17 89 8 1																					
18 96 5 4																					
19 96 6 2																					
20 98 7 3																					
21 100 6 4																					
22 101 6 4																					
23 101 7 4																					

F<sub>am</sub> = median value of effective antenna noise in db above kitb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month January 1964

EST	Frequency (Mc)																				
	135			500			2.5			5			10			20					
	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 19 5 4	74	10	4	62	5	7	52	3	8	37	5	1	25	1	1						
01 10 0 4	75	9	5	62	6	7	51	4	7	37	3	2	25	1	1						
02 10 0 7	75	10	5	62	8	6	50	6	4	37	3	1	25	1	1						
03 10 0 4	73	10	3	62	6	5	50	8	4	37	2	2	25	1	1						
04 98 6 5	69	11	4	61	6	4	51	6	4	37	4	2	25	1	1						
05 97 5 3	65	9	6	60	7	4	51	4	6	38	4	3	26	0	2						
06 96 6 3	63	8	6	57	6	4	50	4	5	38	9	2	26	0	1						
07 94 3 5	58	6	4	56	6	6	49	4	4	39	6	2	26	1	1						
08 89 6 2	56	6	4	45	7	10	42	4	5	40	4	3	26	1	1						
09 88 10 4	56	5	3	43	4	8	39	6	6	38	2	1	26	2	1						
10 88 9 4	56	6	3	41	4	7	37	6	8	37	3	2	26	2	1						
11 88 9 4	56	7	3	39	5	5	33	8	4	37	3	2	26	2	1						
12 87 10 3	57	7	3	38	6	3	33	8	7	36	3	1	26	2	1						
13 88 9 5	57	7	4	39	5	4	34	7	7	37	3	3	26	1	1						
14 89 9 5	58	6	5	40	5	5	35	6	8	38	3	2	26	2	1						
15 88 10 5	58	6	5	41	4	4	37	6	6	39	5	1	26	2	1						
16 87 11 4	57	7	3	44	5	6	42	8	5	41	3	3	26	2	1						
17 89 9 4	61	8	6	52	6	4	49	5	5	41	4	3	26	2	1						
18 95 7 5	66	8	7	56	8	4	52	6	6	40	4	3	26	2	2						
19 96 10 3	69	11	4	57	12	4	52	6	5	38	6	2	25	3	1						
20 99 7 5	73	11	3	59	12	3	52	4	6	37	5	1	25	2	1						
21 99 6 5	73	12	2	59	11	3	52	5	6	36	6	1	25	2	1						
22 99 7 4	74	11	3	60	9	4	52	7	7	37	4	1	25	3	1						
23 99 6 5	75	9	4	61	6	6	52	7	8	37	3	1	25	2	1						

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average lagarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Front Royal, Virginia at. 38.8 N Long. 78.2 W Month February 1964

Hour	Frequency (Mc)																				
	.135			.500			2.5			5			10			20					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 99	8	6		79	5	6	61	6	6	53	3	6	34	2	1	23	2	1			
01 99	7	6		78	6	5	61	6	5	53	4	6	34	3	1	23	2	1			
02 91	8	4		76	8	3	61	5	6	53	3	6	34	2	1	23	2	1			
03 98	8			77	4	6	61	8	7	52	5	5	34	1	1	24	1	2			
04 97	9	6		72	11	8	60	8	7	51	6	5	36	2	1	24	1	1			
05 97	7	6		67	9	7	59	7	6	50	8	3	36	1	1	24	1	1			
06 97	6	6		61	11	6	55	8	4	50	9	4	36	1	1	24	1	1			
07 92	6	3		52	6	3	48	5	3	48	6	3	37	3	1	24	1	1			
08 89	7	3		55	4	6	40	5	4	39	5	3	38	3	1	24	1	1			
09 88	9	3		54	5	3	39	3	3	36	5	4	37	2	1	24	1	1			
10 88	10	3		55	6	5	38	3	3	34	3	5	36	2	1	24	2	1			
11 89	9	3		54	8	3	36	4	2	32	3	4	35	2	1	24	2	1			
12 89	10	4		55	6	5	34	4	3	31	4	3	35	3	1	24	1	2			
13 89	11	3		58	4	6	35	3	3	30	5	2	36	2	2	24	1	2			
14 90	10	5		53	7	2	35	3	2	32	4	4	37	3	2	24	1	2			
15 92	8	6		55	7	2	36	3	3	35	3	3	39	3	3	23	2	1			
16 93	8	6		58	6	4	40	5	3	42	3	4	40	3	3	23	3	1			
17 92	9	3		59	6	6	46	7	3	46	5	4	41	3	3	23	2	1			
18 93	9	5		65	5	10	54	9	4	52	6	4	41	3	3	23	2	1			
19 97	6	5		69	9	7	57	8	6	54	5	6	38	6	2	23	1	1			
20 100	5	7		74	7	8	61	7	7	53	4	5	34	5	2	23	1	2			
21 100	5	6		77	6	10	62	7	7	53	4	6	35	3	3	23	2	2			
22 100	6	6		77	7	7	63	5	7	53	3	6	35	4	3	23	2	2			
23 98	7	5		78	6	7	63	3	7	53	3	6	34	3	1	23	2	2			

F<sub>am</sub> = median value of effective antenna noise in db above k1b

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Station	Kekaha, Hawaii	Lat.	22.0 N	Long.	159.7 W	Month	December	19 63
---------	----------------	------	--------	-------	---------	-------	----------	-------

Frequency (MHz)		[FS] 5												[FS] 20																												
		.013				.051				.160				.495				2.5				5				10.																
$\frac{f}{f_m}$	$\frac{f}{f_d}$	$f_{am}$	$D_u$	$D_f$	$V_{dm}$	$L_{dm}$	$F_{am}$	$D_u$	$D_f$	$V_{dm}$	$L_{dm}$	$F_{am}$	$D_u$	$D_f$	$V_{dm}$	$L_{dm}$	$F_{am}$	$D_u$	$D_f$	$V_{dm}$	$L_{dm}$	$F_{am}$	$D_u$	$D_f$	$V_{dm}$	$L_{dm}$																
00	152	.7	2	10.0	15.5	1	12.8	6	6	9.5	14.0	10.5	9	4	8.5	11	7	11.0	19.5	6.0	8	4	8.0	13.0	5.2	6	2	3.2	4	0	3.0	5.5	21	1	0	1.5	3.0					
01	152	3	2	10.5	16.5	1	12.9	5	5	10.5	16.0	10.5	9	4	8.4	10	7	9.5	15.5	6.0	5	4	7.5	12.5	5.2	6	2	3.2	4	2	3.5	5.5	21	1	0	1.5	3.0					
02	152	2	2	11.0	17.0	1	13.0	4	6	11.0	17.0	10.7	6	6	8.5	8	6	10.5	17.0	6.0	5	4	7.0	12.5	5.2	5	2	3.2	3	2	3.0	5.0	21	2	0	1.0	3.0					
03	152	2	2	10.5	16.5	1	13.0	4	5	10.0	15.0	10.7	5	5	8.5	8	6	11.0	16.0	6.0	7	4	8.0	13.0	5.2	4	2	3.2	2	4	3.0	4.5	21	2	0	1.0	2.5					
04	152	3	2	10.0	15.5	1	13.1	3	7	11.5	17.0	10.5	7	4	8.4	6	8	8.0	15.0	5.8	6	2	9.5	15.0	5.0	4	2	4.0	8.0	3	2	2.0	3.5	21	2	0	1.0	2.5				
05	152	4	2	10.0	16.0	1	13.1	3	5	11.0	17.0	10.3	8	2	8.4	4	9	9.5	14.0	5.9	6	5	10.0	15.0	4.8	4	4	5.0	8.5	3	2	2.0	3.5	23	0	2	2.0	3.5				
06	152	4	0	10.5	16.5	1	13.0	4	4	12.0	18.0	10.3	4	5	7.7	7	6	11.0	15.5	5.8	8	4	9.5	13.5	4.7	8	4	5.0	9.0	3	2	0	2.0	4.0	23	0	0	2.0	3.5			
07	154	2	3	11.5	18.5	1	12.4	5	2	12.0	19.0	8.5	14	9	5.8	9	4	5.5	14.5	5.5	5	3	8.0	12.5	4.8	7	4	5.0	8.0	3	3	5.0	7.5	23	1	0	2.0	4.0				
08	148	4	1	12.5	19.5	1	11.8	5	4	12.0	17.0	9.5	17	8	5.5	6	4	4.5	8.5	4.2	6	4	6.5	10.0	4.2	9	8	4.0	7.5	34	5	4	6.0	9.0	23	2	2	2.0	4.0			
09	146	4	2	11.5	18.6	1	10.8	8	5	12.0	16.0	7.1	22	8	5.3	14	2	5.0	8.0	3.4	5	4	5.5	7.5	3.1	10	3	5.0	8.0	36	6	2	8.0	11.0	23	2	2	2.5	4.5			
10	148	2	4	12.5	19.0	1	10.5	1.2	9	10.0	13.0	6.9	17	5	5.5	11	4	5.5	8.0	3.0	4	4	4.0	6.5	2.8	7	6	5.5	8.0	37	6	6	8.0	11.5	23	3	2	2.0	5.0			
11	148	4	2	13.0	19.0	1	10.6	1.3	7	11.5	14.0	7.1	20	6	5.4	10	2	5.0	8.0	3.0	4	4	4.0	5.5	2.3	6	3	6.5	9.5	25	7	5	4.5	6.5	21	4	0	2.5	4.5			
12	148	4	3	13.0	20.5	1	10.7	1.3	8	13.0	18.5	6.9	24	5	5.5	13	5	6.5	10.5	2.8	6	2	4.0	5.5	2.2	10	4	4.5	7.0	24	6	4	4.5	7.0	21	4	0	2.0	4.5			
13	148	3	2	14.5	22.0	1	10.8	1.0	6	13.5	16.5	6.9	22	5	5.3	12	2	4.5	9.0	3.0	6	5	4.5	6.5	2.2	10	4	6.0	8.0	26	7	6	7.0	9.0	23	2	2	2.5	4.5			
14	148	4	2	14.0	22.0	1	10.7	1.0	7	11.0	15.0	7.1	25	6	5.4	9	4	5.0	8.5	2.8	7	2	4.0	6.0	2.2	10	2	4.5	8.5	28	4	4	6.0	8.0	23	4	2	3.5	5.0			
15	148	4	2	15.0	22.5	1	10.6	9	8	12.0	17.5	6.5	21	3	5.5	7	6	5.0	8.5	3.0	4	2	5.0	7.0	2.6	8	5	6.0	9.5	30	7	4	6.5	8.5	23	2	2	2.0	4.0			
16	148	5	2	14.5	22.5	1	10.4	1.3	7	10.5	15.0	6.7	25	6	5.5	17	3	5.0	7.5	3.2	10	4	5.0	7.5	3.2	11	4	5.0	8.0	34	5	4	5.0	7.0	23	2	2	2.5	4.5			
17	148	4	4	13.5	22.0	1	10.8	1.3	11	11.0	15.5	7.5	24	10	6.2	17	8	6.5	10.5	3.8	11	4	8.0	10.0	4.2	7	6	5.0	7.5	36	3	5	4.0	6.0	23	2	2	2.0	4.0			
18	146	5	3	12.0	19.0	1	11.0	9	6	11.0	13.0	7.9	23	9	6.9	7	9	12.5	16.5	4.8	12	5	7.0	10.0	4.6	7	5	6.5	8.5	34	3	3	4.5	6.5	23	2	2	2.0	3.5			
19	148	4	3	10.0	16.0	1	11.4	1.2	6	11.0	16.0	9	27	10	9	7.5	16	9	11.0	18.5	5.2	14	8	9.5	13.0	4.8	4	5	6.0	9.0	34	2	4	3.5	5.0	23	1	2	1.5	3.0		
20	150	3	2	9.0	14.5	1	11.8	1.0	6	10.5	13.0	9.9	27	10	8.3	6	11.0	16.5	5.4	11	6	10.0	16.0	4.8	8	2	6.0	10.0	34	3	2	3.0	5.0	21	3	0	1.5	3.5				
21	152	2	4	8.5	14.0	1	12.2	6	8	11.0	15.5	10.1	27	10	8.2	12	10	12.0	20.0	5.6	8	5	10.5	16.5	5.0	7	4	7.0	10.0	34	4	3	3.0	5.5	21	2	0	1.5	3.0			
22	152	3	2	9.5	15.0	1	12.4	7	6	10.5	16.0	10.2	27	10	8.3	10	12.0	17.0	5.7	7	5	7.5	11.5	5.2	7	4	5.0	8.0	36	4	3	3.5	6.0	21	2	0	1.5	3.0				
23	152	4	2	9.0	15.0	1	12.6	6	4	9.5	13.5	10.5	27	10	8.5	13	11.0	17.0	7.0	6	0.5	15.0	10.2	4	4	6.5	11.0	5.2	5	4	5.0	8.0	34	6	2	3.5	6.0	21	2	0	1.5	3.0

$F_{\text{var}} = \text{median value of effective antenna noise in dB above } k_1$

D = ratio of water decline to median in db

$D_u = 80 \text{ at } \text{Upper decile of Median HI}$

$B_{\ell}$  = ratio of median to lower decile in db

$V_{dm}$  = median deviation of average voltage in db below mean power

$\text{Hd} = \text{median deviation of average logarithm in db below mean power}$

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Kekaha, Hawaii — Lat. 22.0 N Long. 159.7 W Month January 19 64

E.S.	Frequency (Mc)												.013			.051			.160			.495			2.5													
	.013			.051			.160			.495			F <sub>am</sub>			D <sub>u</sub>			D <sub>4</sub>			V <sub>am</sub>			L <sub>am</sub>													
	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>am</sub>	L <sub>am</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>am</sub>	L <sub>am</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>am</sub>	L <sub>am</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>am</sub>	L <sub>am</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>4</sub>	V <sub>am</sub>	L <sub>am</sub>													
00	152	2	4	125	19.0	126	5	4	120	17.0	10.2	9	2	83	7	8	*135	22.0	58	6	6	7.5	11.0	51	4	4	30	4	2	2.5	4.5	.22	2	0	1.5	3.0		
01	152	2	4	130	18.0	128	4	5	125	18.5	10.4	6	6	83	9	8	*10.0	18.0	58	3	4	120	51	5	3	30	2	2	2.0	3.5	.22	2	0	1.5	3.0			
02	150	4	2	130	20.0	128	4	4	130	20.0	10.4	8	4	79	13	2	10.0	17.0	60	4	6	8.0	11.5	51	6	3	30	4	2	2.0	4.0	.22	2	0	1.0	2.5		
03	152	2	4	125	19.0	128	4	4	132	19.0	10.4	6	4	83	8	7	11.0	18.0	58	7	2	12.5	12.0	51	4	4	30	4	2	2.0	3.5	.22	2	0	1.0	2.5		
04	152	2	4	120	18.0	128	4	4	120	18.5	10.4	7	5	83	10	6	10.0	18.5	58	7	2	7.5	12.5	49	5	2	30	4	3	2.0	4.0	.22	2	0	1.5	3.0		
05	152	2	4	125	19.0	128	4	4	130	20.0	10.2	9	3	79	12	6	10.0	20.0	58	8	4	7.5	12.0	47	6	2	45	7.5	30	1	3	2.0	3.5	.24	0	2	1.0	2.5
06	152	2	4	120	18.0	128	3	6	125	20.0	10.2	6	6	75	13	4	*12.0	18.0	56	9	2	7.5	11.0	45	6	4	40	6.0	30	0	2	1.5	3.5	.24	0	0	1.5	3.0
07	152	4	2	120	18.0	122	6	3	135	21.0	88	14	6	59	14	4	*5.0	8.0	55	9	3	7.5	12.5	47	6	4	40	7.0	32	0	4	4.5	40	.24	2	0	1.5	3.0
08	148	2	2	130	20.0	116	3	4	130	19.0	76	19	8	55	13	5	*45	7.0	44	6	5	4.0	6.5	41	7	4	45	7.0	31	4	4	4.5	6.5	.24	0	2	2.0	3.5
09	146	2	2	130	20.0	106	14	4	140	17.5	114	22	9	55	8	4	5.5	8.5	36	9	7	4.0	7.0	31	14	4	40	7.5	30	4	5	3.0	5.0	.24	0	2	1.5	3.0
10	146	2	2	145	20.5	102	12	5	125	16.0	76	10	12	55	9	4	5.5	9.0	30	7	4	3.0	4.5	25	14	3	20	4.0	25	7	5	4.0	6.0	.22	2	0	1.0	3.0
11	146	4	1	150	22.0	107	10	11	*130	19.5	116	17	7	53	16	2	*5.0	*8.0	28	6	2	3.0	4.5	23	9	4	3.5	6.0	22	6	4	4.5	4.5	.22	3	0	2.0	3.5
12	146	2	2	140	21.0	106	8	8	130	16.0	74	13	8	51	16	2	6.0	*16.0	28	7	2	3.0	5.0	23	8	4	2.5	5.0	22	8	4	3.0	5.0	.22	2	0	1.5	3.0
13	148	2	4	16.0	22.5	106	14	8	125	15.0	72	25	8	51	17	2	*5.5	*7.5	28	6	4	4.5	4.5	21	14	4	3.0	5.5	24	8	6	3.0	4.5	.22	2	1	1.5	3.5
14	148	2	4	155	24.0	110	10	12	160	21.5	70	28	6	51	21	2	*5.0	*8.0	28	8	4	2.0	4.5	25	8	6	2.5	6.0	25	12	5	3.0	5.0	.22	2	0	2.0	3.5
15	146	2	2	170	24.0	106	14	8	120	21.0	68	32	7	49	8	2	3.5	6.0	30	10	6	2.5	4.0	27	12	4	3.0	5.0	28	10	4	3.0	5.0	.24	2	2	1.5	3.5
16	146	4	2	16.0	24.0	103	16	5	125	19.5	66	34	6	51	14	2	5.5	9.5	32	10	6	2.0	4.0	31	11	6	3.0	5.0	32	7	5	3.0	5.0	.24	0	2	2.0	3.5
17	146	4	2	16.0	23.0	103	15	5	90	12.0	74	26	8	57	25	5	*4.0	6.5	36	15	4	3.0	5.0	43	4	6	2.0	4.5	32	10	4	4.0	5.5	.22	4	0	1.0	2.5
18	145	4	3	140	21.5	108	13	6	6.5	9.5	86	15	8	67	16	8	*9.0	*13.5	44	12	6	2.5	4.0	45	7	3	3.0	6.0	32	5	3	3.5	5.0	.22	2	0	1.0	2.5
19	146	4	4	130	20.0	112	12	5	125	17.0	92	12	12	73	14	9	*13.0	*21.0	50	6	5	7.0	47	6	4	3.5	6.0	32	4	4	3.0	4.5	.22	2	0	1.5	3.0	
20	148	2	4	120	19.0	116	10	7	140	18.5	96	9	15	75	14	8	140	22.0	52	9	4	6.0	9.0	47	5	4	3.5	5.5	32	4	4	3.0	5.0	.22	2	0	1.0	2.5
21	148	4	1	120	18.0	118	9	4	130	17.0	98	7	10	77	10	10	13.5	23.0	54	7	6	8.0	12.5	49	4	4	4.0	7.0	32	6	4	3.0	5.0	.22	2	2	2.0	3.5
22	152	2	2	120	16.0	122	4	6	11.5	17.5	100	5	8	77	12	8	10.5	21.0	54	7	6	7.5	11.0	51	4	5	3.5	6.0	34	3	4	3.0	5.0	.22	2	0	1.5	3.0
23	152	0	3	110	18.0	124	6	4	120	17.0	100	9	3	81	11	8	120	23.0	56	6	4	6.5	10.5	51	4	4	3.0	5.5	32	4	4	3.0	5.0	.22	2	0	1.5	3.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>4</sub> = ratio of median to lower decile in db

V<sub>am</sub> = median deviation of average voltage in db below mean power

b-dm = median deviation of average logarithm in db below mean power

## MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat.22.0 N Long.159.7 W Month February 1964

$E_{\text{FAR}} = \text{Median value of effective antenna noise in dB above } k \text{ dB}$

四

8

8

卷之三

in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India. Lat. 28.8 N Long. 77.3 E Month December 19 63

Month-Hour	Frequency (Mc)											
	.013			.051			.160			.495		
	F <sub>m</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>U</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00	1.53	2	4	8.5	11.0	12.8	5	2	100	140	105	8
01	1.52	3	3	7.0	10.0	13.0	4	6	10.5	15.0	11.0	15.0
02	1.53	2	4	8.0	11.0	13.0	4	6	10.0	14.5	10.5	6
03	1.51	4	2	8.0	11.0	12.8	4	6	11.0	15.5	10.3	9
04	1.53	3	5	8.0	11.0	12.8	4	6	10.0	14.0	10.3	7
05	1.53	2	2	8.0	11.0	12.8	7	14	100	140	109	109
06	1.53	4	2	9.0	11.0	12.6	4	4	9.5	14.0	13.0	9.5
07	1.49	4	2	5.0	8.0	11.8	8	4	7.0	9.0	8.9	6
08	1.47	6	2	5.0	7.5	11.5			3.0	6.0	8.7	3.0
09	1.47	5	2	5.0	7.0	11.4	5		4.0	6.0	8.9	1.0
10	1.47	6	2	5.5	7.0	11.6	6		6.0	8.5	9.3	1.7
11	1.49	3	3	5.0	7.5	11.6	7		4.0	6.0	8.5	1.7
12	1.47	4	2	5.0	7.0	11.6	9		5.0	7.0	8.5	1.2
13	1.49	3	2	5.0	7.0	11.5	9		4.0	6.0	8.5	1.0
14	1.49	2	2	5.0	8.0	11.4	5		4.0	6.0	8.5	1.0
15	1.49	2	2	4.5	6.5	11.4	4		4.0	6.0	8.5	1.0
16	1.51	2	4	4.5	6.0	11.4	28	6	6.0	9.0	33	7
17	1.49	6	3	5.0	7.0	11.7	10	3	6.0	9.0	9.7	18
18	1.51	4	4	6.0	8.5	12.0	16	6	9.0	14.0	10.0	51
19	1.51	4	4	6.0	9.0	12.4	5		10.0	13.0	10.3	5
20	1.53	2	4	6.5	9.0	12.1	4	5	8.0	11.0	10.5	53
21	1.53	2	2	7.0	9.5	12.8	5	4	12.5	14.5	11.5	83
22	1.53	4	2	8.0	11.0	12.8	6	4	8.5	12.5	11.3	8
23	1.53	2	4	8.0	11.0	12.8	8	4	8.5	12.0	11.1	9

F<sub>m</sub> = median value of effective antenna noise in db above kitb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>x</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India      Lat. 28.8 N Long. 77.3 E      Month January 1964

E.S.T.	Frequency (Mc)														
	.013	.051			.160			.495			2.5				
F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 153	2	4	7.5	10.5	128	4	3	7.5	10.5	10.3	8	2	7.0	11.0	*
01 151	4	2	8.0	11.0	128	4	4	8.0	11.5	10.4	5	5	8.0	12.5	*
02 153	2	4	8.5	11.0	126	5	2	8.0	11.0	10.2	5	3	9.0	12.0	79
03 151	4	2	8.5	11.0	126	6	4	7.0	10.5	10.1	6	4	10.5	13.0	13
04 153	2	4	9.0	12.0	126	4	5	8.0	11.0	9.0	3	9.0	12.0	13	
05 153	2	4	9.0	11.5	124	4	5	7.0	9.0	9.9	11	4	9.0	13.5	77
06 151	4	2	7.5	10.5	122	4	3	6.0	7.5	9.6	9	5	6.0	7.0	73
07 151	2	4	5.5	8.0	118	9	6	4.5	7.0	9.1	14	8	5.0	7.0	71
08 148	1	3	5.0	7.5	114	4	6	3.0	6.0	8.9	*	4.0	5.5	7.0	5
09 147	2	2	4.5	* 7.0	115	3	3	3.0	5.5	* 9.3	*	5.0	6.5	7.0	4
10 147	2	2	4.0	7.0	114	4	4	2.5	5.0	* 9.1	*	7.0	10.0	11	4
11 147	2	4	5.0	7.5	115	5	7	3.0	6.0	9.0	5	7	5	7	70
12 147	2	2	5.0	7.5	115	5	4	3.5	5.5	* 9.1	4	3.0	5.5	7	43
13 147	4	2	5.5	8.0	116	3	6	3.0	5.0	* 9.2	9	8	6.0	8.0	71
14 149	3	3	5.0	7.5	116	4	11	4.0	6.0	8.7	4	6	8.0	11	4
15 149	4	2	6.0	7.5	116	3	6	3.0	6.0	9.1	2	4.0	5.0	7.0	140
16 149	4	4	6.0	8.0	116	4	6	3.0	5.0	* 9.3	7	10	8.5	13.0	2
17 151	2	4	5.0	7.0	118	2	4	3.0	5.5	* 9.9	7	8	7.0	14.0	11
18 151	2	4	5.0	8.0	118	4	2	3.5	6.0	9.1	2	4.0	5.5	7	104
19 151	2	2	5.0	* 8.0	122	2	6	4.0	7.0	10.1	9	4	7.0	11.5	29
20 153	2	2	5.5	8.0	124	2	4	5.0	7.0	10.4	6	5	6.0	9.5	79
21 153	2	4	6.0	9.0	128	1	5	6.0	9.0	10.9	3	6	6.0	9.0	81
22 153	4	4	7.0	9.5	126	5	2	6.0	8.5	11.1	4	4.0	7.0	12.0	81
23 153	2	2	7.5	10.5	128	4	4	6.0	9.0	10.9	9	4	6.5	10.5	81

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station New Delhi, India — Lat. 28.8 N Long. 77.3 E Month February 1964

E.S.T.	Frequency (Mc)														
	.013			.051			.160			.495					
F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	I <sub>-dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	I <sub>-dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	I <sub>-dm</sub>	
00	154	4	2	8.0	11.0	128	5	2	8.0	11.5	109	4	6	11.0	17.0
01	154	2	2	8.5	12.0	128	4	2	7.5	10.0	107	6	3	11.0	16.0
02	154	2	2	9.0	12.0	128	5	2	8.0	11.0	107	6	4	11.0	16.0
03	154	2	2	9.0	12.0	128	4	2	8.0	11.0	106	7	3	10.0	14.5
04	154	2	2	9.0	12.0	128	6	4	7.0	9.5	105	6	6	10.0	14.0
05	154	2	2	9.0	13.0	126	4	2	8.0	11.0	108	9	11	10.0	13.0
06	154	2	2	9.0	12.5	124	5	2	6.0	8.0	105	10	4	10.0	13.5
07	150	4	2	7.0	9.5	120	8	2	3.5	6.5	91	10	8	6.0	10.0
08	148	4	2	7.0	10.0	120	11	4	3.5	7.0	91	10	9	6.0	13.0
09	148	2	2	7.0	9.5	118	9	2	3.5	6.5	95	20	10	6.0	10.5
10	149	2	2	8.0	11.5	118	2	2	3.0	6.0	89	14	7	6.0	10.5
11	149	2	2	8.0	10.0	118	3	3	3.5	6.0	89	10	8	6.0	10.0
12	148	2	2	8.0	9.5	120	7	3	5.0	6.5	72	10	5	6.0	10.5
13	148	3	2	8.0	10.5	119	6	3	4.5	7.0	93	11	1	4.0	10.5
14	150	2	4	8.5	11.5	120	8	5	5.0	8.0	92	10	10	5.0	10.0
15	150	2	3	9.5	12.0	120	10	3	5.0	7.0	91	11	8	5.0	10.0
16	152	2	4	10.0	13.0	118	10	2	5.5	7.5	94	14	10	7.0	10.0
17	152	0	4	7.5	10.0	122	10	6	6.5	10.0	101	13	8	10.0	15.5
18	152	2	2	7.0	12.0	124	8	6	7.0	11.0	107	7	8	11.0	16.0
19	152	4	4	8.0	11.0	124	5	4	8.5	11.0	107	6	8	11.0	16.5
20	154	2	4	8.5	11.0	124	7	2	8.0	12.0	107	10	6	9.0	14.0
21	154	2	4	8.0	12.0	128	6	4	7.0	11.5	107	8	6	8.0	14.0
22	154	4	4	8.0	10.5	128	6	3	6.0	9.0	113	6	11	8.0	13.5
23	154	2	0	8.0	11.0	129	5	3	6.5	9.5	111	6	6	8.0	13.0

F<sub>om</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>z</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

I<sub>-dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Month December 19 63

Frequency (Mc)	.051												.495												2.5												5											
	.013				.160				.495				2.5				5				10				20																							
	F <sub>dm</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>								
00	150	5	7	100	15.0	126	8	2	16.5	15.5	108	8	6	7.0	12.0	84	12	2	6.0	10.0	56	9	4	5.0	8.5	53	5	3	6.0	10.0	31	5	2	2.0	4.0	23	0	0	1.0	2.5								
01	151	4	9	10.0	15.5	128	6	4	11.0	11.0	110	6	10	8.0	13.0	86	9	4	8	7.5	54	2	4	4.0	7.5	31	4	2	2.5	4.0	23	2	2	* 1.0	* 2.5													
02	151	4	10	12.0	17.0	128	8	6	11.0	11.0	110	6	16	8.0	13.0	84	10	4	7.5	11.5	55	5	5	7.0	11.0	54	6	4	4.5	7.5	31	4	2	2.5	4.0	23	0	2	* 1.0	* 3.0								
03	153	4	12	135	19.5	129	9	*	120	115	108	8	14	8.5	13.5	86	10	6	8.5	11.0	54	14	4	6.0	10.0	50	11	2	5.0	8.0	29	4	0	* 2.0	* 3.5	23	1	0	* 1.0	* 2.5								
04	153	5	10	13.0	18.0	128	8	6	11.5	12.5	106	4	12	9.0	15.0	84	11	6	7.0	12.5	55	11	5	5.0	9.0	50	4	4	* 5.0	* 7.5	29	2	2	2.0	3.5	23	2	0	1.0	3.0								
05	151	6	8	12.0	17.5	126	10	4	12.5	20.0	102	6	8	12.0	18.0	80	11	10	10.0	16.0	54	18	6	9.0	14.0	50	10	8	* 4.0	* 7.0	29	3	0	1.5	3.0	23	2	0	1.5	3.5								
06	151	4	8	* 30	19.0	122	9	6	13.5	19.5	88	10	4	15.0	21.0	62	20	4	12	20	4	54	11	4	5.5	9.5	50	13	4	* 4.5	* 8.0	33	6	2	* 4.0	* 6.0	25	1	2	* 1.5	* 3.0							
07	147	5	4	11.0	17.0	124	10	4	12.5	18.0	78	22	6	6.0	20	4	15.0	25.0	47	11	5	7.0	11.5	48	6	8	* 6.0	* 9.5	39	6	4	* 4.0	* 6.0	25	0	2	* 1.5	* 3.0										
08	149	5	6	* 3.0	17.5	108	14	8	14.0	21.5	78	10	6	6.0	20	6	4	12	6	4	7.5	11.0	40	11	6	6.5	10.0	37	10	6	* 4.0	* 6.0	25	2	0	1.5	3.0											
09	150	5	7	* 3.0	19.0	108	12	9	13.0	19.5	80	17	8	6.0	10	3	1.5	3.0	40	3	2	8.0	11.5	38	12	4	* 6.0	* 9.0	37	8	4	* 4.0	* 6.0	25	4	2	* 1.5	* 3.0										
10	149	4	14.0	* 9.5	* 12	14	7	*	14.0	20.0	112	15	5	11.0	18.0	76	24	6	16.5	25.5	58	19	4	6.0	9.0	40	11	1	* 8.0	* 11.0	34	8	4	* 5.5	* 8.0	33	4	0	* 4.0	* 7.0	25	5	2	* 1.5	* 3.5			
11	151	7	4	14.0	20.0	112	15	5	11.0	18.0	76	24	6	16.5	24.0	58	32	4	12	20	4	38	8	2	6.5	9.0	34	14	2	* 5.0	* 7.5	31	8	2	* 3.0	* 5.5	25	2	2	* 2.0	* 3.5							
12	147	8	4	12.5	19.0	112	14	4	13.5	19.0	75	27	5	13.5	24.0	58	32	4	12	20	4	38	8	2	8.5	14.0	32	11	2	* 7.5	* 11.0	34	11	2	* 5.5	* 8.0	25	4	2	* 1.5	* 3.0							
13	150	5	7	* 10.5	* 17.0	112	18	4	10.0	14.5	74	32	4	1.5	3.0	60	17	6	40	2	2	7.5	11.0	34	11	2	* 8.5	* 11.0	34	5	3	* 5.0	* 8.0	25	6	0	* 2.0	* 4.0										
14	151	6	8	* 10.0	15.5	112	18	4	12.0	19.0	74	32	4	16.5	23.5	62	12	6	40	5	2	8.0	11.0	36	11	4	* 7.0	* 9.5	35	4	4	* 3.0	* 5.5	25	2	2	* 2.0	* 3.0										
15	151	6	9	* 9.0	* 13.5	110	12	8	80	16	8	10.5	19.5	62	19	6	7.0	12.5	40	8	4	4.5	8.0	40	8	6	* 6.0	* 9.5	37	4	4	* 2.5	* 4.5	25	2	2	* 1.5	* 3.0										
16	151	4	8	* 9.0	* 14.0	112	18	10	88	20	12	18.0	26.5	70	18	6	42	12	4	6.0	9.0	46	8	8	* 5.5	* 9.0	37	4	4	* 4.0	* 6.0	25	0	1	* 1.5	* 3.0												
17	153	2	8	* 9.0	* 14.0	117	16	5	94	18	6	9.0	14.0	78	15	6	8.0	13.0	52	13	8	* 6.5	* 10.0	50	8	8	* 5.0	* 8.5	37	4	4	* 3.0	* 5.5	25	0	3	* 1.5	* 3.0										
18	153	4	8	* 10.0	* 15.0	124	9	4	13.5	19.0	100	12	6	13.5	21.0	82	10	4	9.0	16.0	56	10	12	* 7.0	* 11.5	50	9	4	* 5.0	* 9.0	37	6	6	* 4.5	* 7.5	23	2	0	* 1.5	* 3.0								
19	154	3	11	* 10.5	* 16.5	124	8	4	10.5	16.0	100	13	5	7.5	12.0	82	11	5	4.0	7.5	54	16	6	* 6.5	* 10.0	52	7	2	* 3.0	* 6.0	37	4	4	* 3.5	* 6.0	23	1	0	* 1.5	* 3.0								
20	153	4	10	* 9.5	* 14.0	128	5	4	14.0	20.0	102	13	6	7.5	13.5	82	14	6	4.0	7.5	53	4	3	* 4.0	* 7.5	50	8	0	* 3.5	* 6.0	35	2	4	* 2.0	* 4.0	23	0	0	* 1.0	* 3.0								
21	153	4	10	* 10.5	* 17.0	128	4	4	10.5	16.0	106	11	6	5.5	10.5	84	12	6	6.5	11.0	56	13	4	* 6.0	* 10.0	52	6	4	* 4.0	* 7.0	31	3	2	* 3.0	* 5.0	23	1	0	* 1.0	* 2.5								
22	153	2	10	* 11.0	* 13.0	2	7	11.0	17.5	108	6	14	7.0	12.5	84	10	2	6.5	9.0	56	11	5	* 5.0	* 8.5	52	4	4	* 4.0	* 6.0	9.0	31	2	* 2.0	* 3.5	23	0	2	* 1.0	* 2.5									
23	153	2	10	* 12.0	* 17.0	127	7	5	11.0	10.8	108	4	10	13.5	14.0	84	10	2	6.0	10.0	56	7	4	* 6.0	* 9.0	52	2	5.0	* 4.0	* 7.0	23	0	2	* 1.0	* 2.5													

$F_{\text{am}} = \text{median value of effective antenna noise in dB above kit}$

D<sub>1</sub> = ratio of under decide to median in db

*D<sub>U</sub>* = tells of upper decile 10 March 18

$D_f$  = ratio of median to lower decile in db

$V_{d\bar{m}}$  = median deviation of average voltage in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan      Lat. 35.6 N Long. 140.5 E Month January 19 64

Frequency (Mc)												
0.13			0.51			1.60			.495			
F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00	151	3	2	11.0	15.0	1.26	5 <sup>-</sup>	3 <sup>+</sup>	15.5	22.5	10.2	4
01	151	4	4	10.5	16.5	1.27	5 <sup>-</sup>	4	15.0	22.0	10.8	6
02	151	4	3	11.5	16.5	1.27	6 <sup>-</sup>	5 <sup>+</sup>	12.0	19.5	8.7	4
03	151	5	3	12.0	17.5	1.28	5 <sup>-</sup>	6	10.0	23.0	10.4	9
04	151	5	3	12.5	16.5	1.27	7 <sup>-</sup>	5 <sup>+</sup>	10.0	16.5	10.4	8
05	153	4	7	13.0	14.0	1.25	10	6	10.5	18.0	10.0	12
06	151	5	6	12.0	18.5	11.9	9	4	17.0	22.0	9.2	15
07	147	4	2	10.0	15.0	11.5	12	4	14.5	20.0	7.7	24
08	149	3	8	11.0	16.0	10.5	15	4	12.0	18.5	7.6	15
09	149	4	6	13.0	18.5	10.3	17	4	10.0	15.0	7.5	23
10	147	6	4	14.5	19.0	10.7	10	7	15.5	21.0	7.7	17
11	147	6	2	13.0	18.0	10.9	4	6	15.0	21.0	7.2	17
12	149	5	5	14.5	19.0	10.9	7	4	14.0	21.0	7.4	18
13	149	4	4	12.5	18.5	10.9	17	2	12.0	19.5	7.4	35
14	157	2	5	13.0	18.0	10.9	14	4	12.5	17.5	7.2	34
15	151	4	3	12.0	17.5	10.7	19	4	11.0	16.0	7.1	26
16	151	3	4	11.5	17.0	10.9	16	8	14.0	17.5	8.2	27
17	150	4	3	10.0	15.5	11.3	12	4	14.0	18.0	8.8	23
18	151	4	3	9.5	15.0	12.2	5	5	10.0	13.5	9.6	27
19	153	4	5	9.0	14.5	12.5	7	6	9.5	16.0	9.8	18
20	153	4	4	12.5	18.0	12.6	5	5	10.0	17.0	10.0	5
21	153	3	5	11.0	16.5	12.5	5	5	10.5	17.5	9.4	25
22	151	5	2	9.5	15.0	12.7	5	4	10.0	16.0	11.2	12
23	151	4	4	10.0	15.0	12.7	5	4	13.5	21.0	10.6	9
												11
												6.0
												11.0
												3.0
												7.0
												1.0
												2.0
												1.5
												3.0

F<sub>am</sub> = median value of effective antenna noise in db above k<sub>b</sub>

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average lagarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan — Lat. 35.6 N Long. 140.5 E Month February 1964

Frequency (Mc)																																								
Month	Hour	.013						.051																																
		F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>																											
00	151	4	1	*10.0	145*	125	4	3	11.0	17.5	10.5	4	2	13.0	18.0	8.4	3	7.5	12.0	5.9	10	5	6.0	10.0	5.8	5	4	7.0	10.5	3.2	5	2	2.0	3.5						
01	152	2	3	*11.0	15.5	126	3	3	12.0	19.0	10.7	3	3	10.0	15.5	8.5	5	4	9.5	15.0	5.9	7	3	6.5	10.0	5.6	7	3	6.0	9.0	3.4	6	2	2.5	3.0					
02	153	2	3	*11.0	15.5	127	4	4	13.0	20.0	10.7	4	3	10.0	16.0	8.5	4	3	11.5	18.0	5.8	3	3	7.0	11.0	5.6	7	2	5.0	8.5	3.4	4	2	3.0	3.0					
03	153	1	2	*11.0	16.5	127	2	4	11.5	18.0	10.5	6	2	11.0	17.5	8.3	4	4	12.5	19.0	5.7	6	3	9.0	11.5	7.0	4	3	4.0	10.0	2.3	0	0	1.0	2.5					
04	153	2	4	*12.0	15.0	127	2	6	14.0	20.0	10.3	8	4	10.5	18.5	8.1	6	4	8.0	13.5	5.7	10	4	9.0	13.5	6.8	6	8	8.0	12.0	3.2	2	0	1.0	2.5					
05	153	2	3	*11.0	15.0	125	4	6	13.5	20.0	9.9	7	5	12.5	14.5	7.7	6	6	5.4	6	4.0	12.0	6.4	5	8	3.2	2	0	2.5	4.0	2	0	1.0	1.0	2.5					
06	151	4	2	11.5	16.0	119	4	6	12.0	18.0	8.9	4	6	10.5	16.5	6.3	3	4	5.5	4	4	7.0	10.5	5.8	8	4	3.4	5	2	2.5	5.0	2.3	0	0	1.5	3.0				
07	147	2	2	*11.0	15.5	111	5	4	13.5	21.0	7.5	7	4	5.0	7.0	5.9	7	2	4.5	5	2	5.0	8.5	5.1	7	5	6.0	9.5	3.8	2	3	4.5	6.5	2.3	2	0	1.0	3.0		
08	147	3	3	*11.0	15.5	101	12	4	8.0	12.0	7.3	11	3	5.0	6.5	5.9	8	2	4.3	4	2	6.0	9.5	4.3	6	4	8.0	10.0	3.6	16	3	4.0	6.0	2.3	2	0	1.5	3.0		
09	149	2	6	*13.0	18.0	101	16	8	17.0	23.0	7.3	14	2	6.1	6	4	9.5	11.5	4.3	2	2	7.0	10.5	3.8	6	2	7.0	9.5	3.4	6	2	5.0	7.5	2.1	2	1.5	*3.5			
10	149	3	4	*10.0	13.5	101	11	4	12.0	18.0	7.4	21	3	7.0	10.0	6.1	12	4	4.1	4	0	6.5	9.0	3.6	8.0	10.0	3.3	7	3	4.0	6.5	2.3	2	1.0	3.0					
11	147	4	4	*12.5	17.0	105	4	6	15.0	19.5	7.3	20	2	5.9	6	2	12.5	15.5	4.1	4	2	8.0	11.0	3.6	8	2	6.5	9.5	3.2	6	2	4.0	4.5	2.5	10	2	2.5	4.0		
12	147	4	4	*13.5	17.5	105	10	4	14.5	24.0	7.3	14	2	9.0	14.5	5.9	4	2	4.1	2	2	7.5	11.0	3.6	6	2	8.0	11.0	3.3	4	4	3.0	5.0	2.5	15	2	2.0	*4.0		
13	147	4	1	*14.5	18.5	107	3	4	13.0	20.0	7.3	12	2	2.0	3.0	6.1	6	4	9.0	11.0	4.2	3	1	7.5	11.0	3.6	4	2	6.0	9.0	3.4	4	2	3.5	5.0	2.3	2	2.0	3.0	
14	149	2	2	*11.5	16.0	107	2	4	14.0	19.0	7.2	8	1	10.5	18.5	6.1	3	4	4.1	2	0	7.5	10.5	3.8	6	2	6.0	9.5	3.6	6	2	4.5	7.5	2.4	4	1	*2.0	4.0		
15	149	2	2	*12.0	16.0	105	2	2	10.5	16.0	7.3	12	2	6.0	10	3	2.5	5.0	4.1	4	0	9.0	12.0	4.4	4	6	6.0	10.0	3.8	2	3	4.5	6.0	2.5	16	2	2.0	3.5		
16	151	1	4	*11.0	16.0	101	7	4	10.0	13.5	7.5	18	2	4.0	6.0	6.5	8	6	4.3	5	2	8.0	11.0	5.2	14	4	7.5	12.0	4.0	6	4	5.0	7.5	2.3	14	0	1.5	3.0		
17	149	4	2	11.0	16.5	107	8	6	10.5	14.5	8.3	18	6	7.5	7	4	8.0	13.5	5.0	6	4	7.5	11.5	6.5	5	8	4.0	4	4	4.0	6.0	2.3	3	0	2.0	3.0				
18	149	4	2	11.0	16.0	117	3	4	12.5	18.0	9.3	10	6	8.5	13.5	8.1	5	6	8.0	13.0	5.5	6	4	7.5	11.0	6.4	4	8	6.5	10.0	3.8	4	4	4.0	6.5	2.3	12	2	2.5	4.0
19	151	4	2	*11.0	16.5	121	3	4	12.0	18.0	9.7	5	5	11.0	17.5	8.3	6	4	7.0	11.0	5.3	9	3	4.5	7.5	6.4	4	4	6.5	12.0	3.6	6	4	3.0	5.0	2.3	9	2	2.0	*3.5
20	153	2	6	*12.0	17.5	123	4	4	12.5	19.0	10.1	6	4	8.5	14.0	8.5	3	6	5.5	10	3	10.0	13.0	6.6	6	5	9.5	15.5	3.6	10	4	3.0	4.0	2.3	0	2	2.0	3.5		
21	153	2	4	*12.0	16.5	123	6	2	10.5	17.0	10.3	5	4	11.5	19.0	8.5	6	4	5.7	7	4	6.0	9.5	2.0	6	8	2.0	4.5	3.3	10	3	4.0	5.0	2.3	0	2	2.0	3.5		
22	153	2	4	*10.0	15.0	125	4	4	12.0	19.0	10.3	6	2	9.5	15.5	8.5	6	4	10.0	15.5	5.9	6	4	6.0	8.5	5.4	4	3	6.0	10.0	3.2	6	1	3.0	5.0	2.3	0	2	2.0	3.5
23	151	2	2	*10.0	14.5	125	2	4	12.5	18.5	10.5	4	4	9.0	15.0	8.5	2	4	8.5	13.0	5.9	9	3	6.0	10.0	5.4	3	2	4.0	8.0	3.4	6	4	3.0	4.5	2.3	0	2	2.0	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Pretoria, S.Africa      Lat. 25.8S Long. 28.3E Month December 19 63

HST	Frequency (Mc)												.013			.051			.160			.495			2.5					
	.013			.051			.160			.495			F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
00 147 10 3	126	11	5	108	12	6	91	10	6	63	10	8	53	8	6	40	4	8	18	8	2	40	4	10	40	4	10			
01 147 7 2	126	12	4	108	11	6	90	23	7	63	8	12	55	8	8	40	4	10	18	8	2	40	4	10	40	4	10			
02 147 6 4	126	10	6	106	11	4	89	13	7	59	12	6	53	8	4	36	6	6	16	4	0	36	6	6	16	4	0			
03 147 6 5	126	10	7	108	10	19	87	10	18	61	6	7	53	8	8	36	4	4	16	3	0	36	4	4	16	3	0			
04 147 4 8	122	11	12	108	6	27	85	7	29	59	8	8	51	5	6	34	7	2	18	2	2	34	7	2	18	2	2			
05 145 6 4	119	10	12	88	12	12	59	22	6	53	8	12	51	5	6	38	6	8	18	1	2	38	6	8	18	1	2			
06 143 6 5	114	10	8	66	12	14	57	8	4	43	8	6	46	7	9	36	5	4	18	2	2	36	5	4	18	2	2			
07 141 8 4	109	12	9	82	8	8	59	9	6	41	5	2	41	10	6	34	6	6	18	2	2	34	6	6	18	2	2			
08 141 10 8	84	11	6	57	8	4	*1	36	11	8	30	6	4	30	6	4	18	4	2	30	6	4	30	6	4	18	4	2		
09 143 8 4	114	10	15	84	12	4	59	6	4	39	6	2	33	7	6	28	6	4	20	2	4	31	11	5	28	6	4	20	2	4
10 143 8 4	114	11	11	83	19	5	61	20	6	41	7	6	31	9	5	28	9	4	20	2	2	31	9	5	28	9	4	20	2	2
11 149 4 7	126	7	15	93	25	12	61	30	8	41	13	4	33	7	9	32	7	7	22	2	3	32	7	7	32	7	7	22	2	3
12 151 7 6	130	9	14	107	15	23	71	33	20	43	21	7	35	13	11	31	11	5	23	3	5	31	11	5	31	11	5	23	3	5
13 155 6 7	132	11	9	113	15	25	83	23	30	53	19	14	41	16	11	38	10	10	24	4	7	38	10	10	38	10	10	24	4	7
14 156 9 6	132	12	9	114	14	30	93	15	38	52	24	13	43	14	11	37	9	7	26	7	8	37	9	7	37	9	7	26	7	8
15 157 6 7	134	12	12	118	11	28	85	27	27	55	23	14	46	20	15	42	9	11	27	9	10	46	21	14	46	21	14	27	9	10
16 155 11 3	135	13	10	112	21	24	81	38	24	56	30	15	51	19	15	44	15	9	28	1	0	44	15	9	44	15	9	28	1	0
17 157 15 8	132	20	11	110	28	20	89	26	33	59	29	15	49	30	9	46	21	14	27	18	11	46	21	14	46	21	14	27	18	11
18 154 7 8	132	13	13	112	27	16	92	22	25	65	19	14	53	15	9	48	24	10	24	1	0	48	24	10	48	24	10	24	1	0
19 153 8 6	132	11	10	113	12	12	95	7	20	70	5	13	61	4	8	48	6	7	24	5	8	48	6	7	48	6	7	24	5	8
20 153 5 8	123	9	9	114	11	10	93	11	10	71	12	9	59	5	7	46	7	6	22	7	6	46	7	6	46	7	6	22	7	6
21 151 6 6	152	9	9	110	14	6	95	10	12	71	6	16	59	4	8	44	8	6	18	6	2	44	8	6	44	8	6	18	6	2
22 151 8 7	130	8	6	110	12	6	95	10	12	67	8	8	55	6	8	42	4	6	18	3	2	42	4	6	42	4	6	18	3	2
23 148 9 5	126	13	3	108	11	7	91	12	8	65	10	14	55	6	8	40	4	8	16	4	0	40	4	8	16	4	0	16	4	0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE      Station Pretoria, S. Africa      Lat. 25.8 S      Long. 28.3 E      Month January 1964

HST	Frequency (Mc)																														
	.013				.051				.160				.495				2.5				5				10				20		
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00	154	19	4	136	23	8	121	22	16	101	21	12	71	12	58	24	6	42	30	6	21	12	2	21	12	2	21	12	2		
01	158	14	8	134	20	6	118	13	11	102	21	12	69	19	11	58	16	6	42	16	6	21	16	2	21	16	2	21	16	2	
02	156	16	6	134	13	5	117	13	12	97	18	8	69	10	10	58	10	8	39	11	5	22	10	3	22	10	3	22	10	3	
03	156	6	8	132	14	5	117	11	12	97	12	11	69	10	9	56	8	4	36	6	4	23	8	4	23	8	4	23	8	4	
04	154	8	6	132	14	10	115	13	12	95	10	11	67	10	10	56	4	4	35	5	5	21	11	2	21	11	2	21	11	2	
05	152	10	6	130	10	9	107	18	16	85	19	22	61	10	10	54	4	4	35	5	5	21	6	2	21	6	2	21	6	2	
06	150	12	8	126	14	4	101	22	20	69	37	10	52	13	9	50	10	6	38	7	2	21	5	2	21	10	2	21	10	2	
07	149	8	7	122	16	10	103	11	22	68	35	11	47	20	6	46	10	10	36	8	4	21	10	2	21	10	2	21	10	2	
08	152	8	8	122	16	14	101	10	20	69	19	10	45			43	7	9	32	8	2	23	10	4	23	10	4	23	10	4	
09	149	11	9	122	14	12	98	17	19	65	28	6	45	24	6	37	13	5	34	9	5	23	6	3	23	6	3	23	6	3	
10	150	11	8	123	13	11	97	21	16	65	26	6	45	10	4	38	8	7	34	5	6	23	6	2	23	6	2	23	6	2	
11	152	10	8	126	14	12	104	20	23	78	21	19	49	6	7	40	10	6	36	6	8	24	4	4	24	4	4	24	4	4	
12	153	10	5	134	12	14	116	12	30	91	14	30	51	15	10	40	14	7	38	6	7	25	7	3	25	7	3	25	7	3	
13	161	5	7	138	10	14	121	12	25	95	14	18	59	13	15	45	10	9	40	6	4	29	4	4	29	4	4	29	4	4	
14	161	9	5	144	4	11	124	9	12	97	12	10	61	13	13	48	13	8	42	6	4	27	8	6	27	8	6	27	8	6	
15	165	5	6	146	4	15	127	7	13	103	13	13	63	18	10	54	7	13	46	4	6	29	9	6	29	9	6	29	9	6	
16	164	6	5	146	6	12	127	11	16	104	9	15	65	19	14	56	13	11	46	15	7	28	4	6	28	4	6	28	4	6	
17	164	8	5	148	6	15	127	10	17	105	8	15	69	17	14	60	11	11	48	9	7	27	9	8	27	9	8	27	9	8	
18	162	8	6	144	10	10	127	11	16	103	12	12	71	11	10	62	8	9	48	16	4	29	6	10	29	6	10	29	6	10	
19	162	8	8	144	8	10	128	9	10	103	16	14	77	8	14	64	7	13	46	15	4	23	6	4	23	6	4	23	6	4	
20	162	11	8	144	10	12	127	14	14	106	15	13	77	14	12	63	13	9	47	13	3	24	5	5	24	5	5	24	5	5	
21	162	14	10	142	14	14	127	16	18	105	19	10	77	13	14	62	14	8	47	17	7	23	8	4	23	8	4	23	8	4	
22	158	16	8	143	18	13	126	13	16	107	14	14	75	6	12	62	6	8	44	12	6	21	6	2	21	6	2	21	6	2	
23	159	15	6	139	19	11	123	20	16	105	20	15	75	12	12	60	8	8	44	18	8	23	17	4	23	17	4	23	17	4	

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8° S Long. 28.3° E Month February 19 64

Month-Hour	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
00 16/1 4	136	6	6	113	8	6	98	8	6	15	6	11	57	8	5	39	9	3			23	1	3		
01 16/1 4	136	8	6	112	9	8	100	8	7	74	6	10	57	4	7	41	3	5			23	1	2		
02 159 4	136	6	6	111	8	9	98	8	10	74	8	8	56	9	8	37	6	2			23	3	2		
03 160 4	136	6	6	110	9	9	98	4	10	74	5	8	56	6	6	37	7	5			23	2	2		
04 159 4	135	7	5	109	8	8	94	8	8	74	4	8	56	6	6	35	5	4			23	4	2		
05 159 6	130	6	4	103	10	15	88	10	14	70	8	10	54	6	6	35	6	4			23	2	2		
06 157 4	124	14	4	93	17	16	63	18	7	58	13	12	50	8	6	41	4	6			23	4	2		
07 155 6	123	15	7	87	12	14	64	17	7	46	16	6	42	23	8	37	6	4			23	2	2		
08 154 5	124	10	5	85	12	2	62	13	2	44	5	5	36			37					23	3	2		
09 153 10	120	13	7	87	16	14	67	7	7	44	4	4	34	26	6	33	10	4			25	2	2		
10 155 6	120	10	6	85	17	13	64	10	4	46	4	4	32	8	4	33	8	8			25	2	2		
11 155 8	124	10	8	87	20	12	65	14	7	46	6	4	32	4	5	32	8	7			27	9	2		
12 159 8	128	12	8	91	22	11	72	20	14	44	10	2	32	15	4	33	10	7			27	8	3		
13 162 7	132	15	8	109	13	21	89	19	27	49	15	7	36	14	9	35	10	7			27	11	2		
14 165 6	140	10	16	113	12	19	96	13	31	58	16	14	46	15	15	41	7	7			29	7	4		
15 167 2	141	11	3	117	12	24	98			60	25	14	50	14	19	47	4	14			31	2	4		
16 169 6	145	9	17	122			102	17	33	68	16	20	57	11	16	47					36	16	3		
17 166 13	142	12	11	117	14	21	100	28	34	78			60	14	12	48					*31				
18 167 11	143	13	9	117	16	20	102	22	22	76	16	12	64	10	10	51					*31				
19 165 10	143	12	10	119	15		100	20	15	80	14	12	62	11	6	51	12	6			27	17	4		
20 167 6	143	9	11	119	10	14	104	8	8	80	6	8	62	8	6	49	5	6			25	4	3		
21 165 5	142	7	8	119	10	13	106	7	10	78	7	5	60	7	6	47	4	6			23	8	2		
22 163 8	140	10	4	117	8	13	102	11	4	78	8	6	56	10	4	43	6	4			23	7	2		
23 163 4	136	9	5	131	18	11	101	12	4	76	10	4	56	6	6	39	12	4			23	10	2		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE      Station Rabat, Morocco      Lat. 33.9 N Long. 6.8 W      Month December 19 63

		Frequency (Mc)												Frequency (Mc)																				
		.013				.051				.160				.495				2.5				5				10								
Mo	Yr	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
00	-50	*12.2					1/3	8	10			*83	1/3	9			59	15	8			50	9	2			23	14	10			27	16	4
01	*50	*12.3					109	8	8			*81					57	8	7			52	6	4			22	19	7			27	17	4
02	*50	*12.3	4				109	6	6			*84	1/2	7			55	10	8			52	6	8			19	21	6			27	15	4
03	*50	*12.4					107	16	6			*84					55	11	4			52	6	7			22	13	6			28	12	5
04	*50	6	8				107	7	8			*81	1/0	8			57	13	6			52	22	6			18	17	5			27	12	4
05	*52	*12.1					108	9	11			*79					56	8	5			50	3	5			17	21	6			26	14	3
06	50	4	8				*105					*71					55	8	8			48	6	4			18	21	3			29	11	5
07	*48		9				*97					*67					50	9	4			46	12	6			23	23	8			29	10	5
08	*48		11				*88					*70					51	8	8			40	14	4			21	24	4			29		
09	*47		11				*95					*77					*45					*37					*23					53		
10	*48		10				*95					*71	28	16			*49					32	12	8			23	20	4			31	10	6
11	46	6	13				97	1/3	16			63	22	8			46	10	5			29	16	7			20	19	7			29	12	2
12	48	5					93	6	6			66	15	9			45	10	4			32	16	9			18	20	6			29	10	4
13	47	4	10				92	1/6	10			61	18	6			45	10	6			26	17	7			17	23	4			31	8	6
14	48	5	6				*91					61	10	6			43	14	3			36	9	4			21	19	7			31	9	6
15	*47		6				*61					*62	15	10			*51	4	6			38	16	10			25	19	10			27	15	3
16	46	4	2				*96					65	11	7			*76	8	5			35	8	3			23	16	6			29	12	4
17	*48	4	2				113	9	11			77	9	12			53	8	12			52	2	8			23	16	8			27	14	2
18	46	8	5				115	10	4			103	5	9			81	1/2	6			55	7	9			21	18	8			29	12	4
19	*48	4	4				117	10	21			103	7	9			87	7	11			59	6	3			50	4	3			21	16	6
20	*48	4	7				119	10	20			105	10	14			81	1/2	4			56	8	8			23	18	8			27	11	4
21	*49		12				121	10	20			109	5	12			83	8	4			59	9	12			21	16	8			27	10	4
22	50	4	7				122					107	1/2	16			85	1/3	10			56	12	8			22	21	9			27	10	3
23	50	4	4				*123					*106					*84					55	13	4			19	19	4			28	16	5

F<sub>om</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>z</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Rabat, Morocco      Lat. 33.9 N Long. 6.8 W      Month January 19 64

Month-Hour	Frequency (Mc)												Frequency (Mc)																			
	.013				.051				.116				.495				2.5				5				10				20			
±	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>		
00 1/46	1/2	28				1/5					1/9	1/4	36	*	82		65	1/4	1/2			26	9	7			42	32	14			
01 1/50	9	27				1/3					1/0	22	28	*	85		65	25	1/0			54	13	6			27	8	10	42	30	14
02 1/46						1/7					1/0	3	30	*	76		65	24	1/2			52	14	6			23	12	7	44	29	14
03 1/44						1/9					1/0	3		*	89		65	29	1/0			54	12	8			25	12	6	42	21	14
04 1/49						1/7					1/7	2		*	80		62	17	9			54	14	10			23	14	6	42	30	14
05 1/48						1/7					1/0	1		*	76		61	16	8			50	23	2			23	9	6	40	35	10
06 1/50						99					1/0	3		*	73		65	18	12			48	10	6			25	6	9	44	33	14
07 1/45						1/7					1/9	9		*	62		65	17	18			48	8	6			25	9	6	43	21	13
08 1/48						1/0					1/8			*	68		63	1/2	1/3			43	8	9			28	7	7	43	28	14
09 1/42						1/4					1/0	5		*	89		77	51				38			*		30			52		
10 1/50						1/5					1/5			*	91		65					49					27	13	10	46	26	15
11 1/48						1/6					1/1	10	18	*	64		64	1/5	14			30	9	8			25	12	9	44	21	8
12 1/51						1/2					1/1	20	12	*	67		67	17	11			35	10	4			28	10	4	25	8	8
13 1/50	4	34				1/0					1/5	12	12	*	66		66	11	10			35	10	6			28	12	6	23	9	6
14 1/50						1/5					1/1	14	18	*	62		62	25	10			35	14	6			26	16	4	25	6	8
15 1/49						1/0	11	13			89	20	19	*	64		64	24	11			35	16	4			32	18	8	27	12	8
16 1/48						1/0	2				87	22	12	*	70		70	14	16			49	13	9			39	17	11	27	13	4
17 1/49	9	13				1/7	22	14			99	18	29	*	78		78	12	18			51	23	10			46	12	8	27	9	6
18 1/48	15	15				1/5					1/5	18	22	*	74		74	23	25			57	25	8			48	13	10	48	13	20
19 1/48	18	18				1/9	12	18			1/0	2		*	70		85	19	10			52	14	8			29	13	8	44	21	16
20 1/50	8	18				1/0					1/5	20		*	83		63	20	10			52	13	6			29	12	9	42	39	14
21 1/50	10	22				1/9					1/0			*	63		63	10				52	14	6			26	14	5	42	35	14
22 1/46						1/1	11	18			95	11	18	*	77		63	21	9			54	11	7			25	10	8	44	31	16
23 1/49	9	31				1/0					1/0	3		*	70		63	16	9			53	12	11			33	15	13	46	22	27

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>z</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**      Station Rabat, Morocco      Lat. 33.9 N Long. 6.8 W      Month February 19 64

EST	Frequency (Mc)												Frequency (Mc)																			
	.013				.051				.160				.495				2.5				5				10				20			
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>d</sub> m	L <sub>d</sub> m		
00 149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149		
01 149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149		
02 148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148		
03 147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147		
04 148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148		
05 150	*150	150	150	150	150	*150	150	150	150	150	*150	150	150	150	150	*150	150	150	150	150	*150	150	150	150	150	*150	150	150	150	150		
06 149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149	*149	149	149	149	149		
07 148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148		
08 146	*146	146	146	146	146	*146	146	146	146	146	*146	146	146	146	146	*146	146	146	146	146	*146	146	146	146	146	*146	146	146	146	146		
09 144	*144	144	144	144	144	*144	144	144	144	144	*144	144	144	144	144	*144	144	144	144	144	*144	144	144	144	144	*144	144	144	144	144		
10 147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147	*147	147	147	147	147		
11 148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148	*148	148	148	148	148		
12 147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	147	3	
13 148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	148	2	
14 146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	
15 146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	
16 146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	
17 146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	146	7	
18 145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	145	5	
19 146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	146	4	
20 146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	146	2	
21 148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	148	119	
22 149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	149	3	
23 149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149	149

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>d</sub>m = median deviation of average voltage in db below mean power

L<sub>d</sub>m = median deviation of average logarithm in db below mean power

Lat. 33.9 N Long. 6.8 W

**MONTH-HOUR VALUES OF RADIO NOISE**

Station São José, Brazil    Lat. 23.3°S Long. 45.8°W Month December 19 63

E.S.T.	Frequency (Mc)																													
	051	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	I <sub>dm</sub>
00 134	7	8		110	15	8		103	14	10		87	20	7		71	10	8		55	10	8		43	9	7		24	22	2
01 132	10	10		108	16	8		102	14	11		87	19	8		71	6	9		57	5	20		41	8	6		24	23	2
02 132	8	10		107	14	7		101	13	10		87	17	8		71	8	10		55	6	17		39	10	7		24	15	2
03 132	8	12		108	14	12		99	14	6		84	15	6		71	7	10		53	8	6		39	8	9		24	16	2
04 132	6	16		106	14	12		95	16	6		81	16	6		69	8	10		53	10	16		39	11	8		24	8	2
05 124	10	18		95	11	7		81				75	7	5		65	8	14		50	17	13		37	8	4		24	21	2
06 121	11	5		93	10	11		86	15	7		85	9	11		55	10	8		46	19	9		35	11	6		24	18	2
07 116	11	7		92	12	8		79				83	8	10		47	11	9		41	15	5		32	9	5		24	4	2
08 118	12	6		91	13	4		81	8	8		86	7	9		39	13	4		43	7	8		32	9	7		24	4	2
09 120	7	14		94	11	10		80	8	3		85	4	12		39	8	4		39	8	5		31	8	8		24	4	2
10 119	9	11		94	8	12		83	7	8		85	5	8		38	7	5		38	7	7		27	10	6		24	2	2
11 122	8	16		94	16	5		83	15	10		87	7	14		39	4	6		37	4	6		29	10	4		24	6	2
12 128	13	12		100	22	10		91	31	12		87	23	14		41	25	6		37	20	5		35	14	10		24	13	2
13 131	24	17		105	30	19		103	26	22		91	28	12		53	27	16		43	18	10		39	22	11		28	15	6
14 133	10	16		112	28	24		106	24	23		87	24	6		57	28	22		45	20	19		41	13	12		29	17	5
15 136	17	17		113	21	22		109	22	28		89	25	8		59	24	22		51	16	16		46	13	14		32	17	8
16 144	10	22		113	23	23		109	23	27		91	17	13		59	28	23		53	15	17		45	12	11		34	14	8
17 136	16	20		118	14	26		111	14	34		89	22	10		61	20	17		59	6	19		39	7	8		32	18	4
18 135	12	18		118	12	26		112	8	26		92	12	14		66	13	10		60	10	16		47	12	6		34	19	9
19 136	10	14		114	11	17		106	12	15		89	14	6		73	9	11		63	9	16		47	14	6		28	27	4
20 135	8	14		114	11	12		103	14	12		91	13	8		74	7	14		63	11	16		47	13	7		28	26	6
21 136	7	14		114	12	10		105	14	10		91	12	8		72	9	11		61	8	20		45	12	4		30	19	8
22 135	8	12		114	14	7		105	13	10		91	12	8		73	6	12		61	10	21		45	10	4		26	28	4
23 134	8	6		114	10	12		105	14	12		89	17	6		73	6	12		61	11	24		44	10	3		24	26	2

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

Frequency (Mc)																											
.013		.051		.160		.495		2.5		5		10		20													
F <sub>m</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>d</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>d</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>d</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>d</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>d</sub>	L <sub>dm</sub>			
00	161	4	2	11.0	17.0	140	6	3	11.0	19.0	120	5	4	100	175	96	7	4	100	185	67	4	18	6.0	110	59	
01	162	4	5	11.0	17.5	141	4	2	11.0	17.5	121	3	6	100	180	98	6	5	90	180	69	3	8	7.5	145	57	
02	163	2	5	11.5	17.5	141	4	6	11.5	18.0	120	4	5	9.5	18.0	98	4	6	100	195	69	3	8	7.5	135	57	
03	161	3	4	12.0	17.5	141	2	5	11.0	18.0	120	4	5	10.5	18.0	96	7	4	100	195	69	3	6	8.5	130	55	
04	161	5	3	12.0	19.0	141	2	6	12.0	18.5	120	2	5	12.5	20.5	95	5	3	120	21.0	69	2	12	8.0	150	53	
05	161	4	4	11.5	19.0	137	5	6	11.6	14.0	220	116	4	10	14.0	24.0	87	10	11	*15.0	*24.5	69	2	14	16.0	170	54
06	161	3	4	13.0	20.0	133	6	5	15.0	22.0	106	10	9	16.0	26.0	80	12	12	17.0	280	57	4	11	18.0	70	55	
07	159	6	4	14.0	22.0	131	12	10	*15.0	*23.0	108	10	13	*17.0	*27.0	80	11	15	*10.0	*18.0	46	9	10	*11.5	49	6	
08	159	6	6	15.5	21.5	129	8	6	17.5	21.5	107	13	14	*13.0	*22.0	84	6	9	*19.0	*27.5	39	8	6	8.0	10.0	39	
09	159	3	10	15.0	21.0	129	8	4	16.0	23.5	105	8	10	17.5	27.0	84	5	8	*18.0	*27.0	35	6	6	33	8	7	
10	157	6	4	14.0	20.5	127	8	4	15.0	23.0	101	10	9	*18.0	*26.0	81	9	9	*17.0	*24.5	31	8	4	31	4	2	
11	157	8	4	13.0	20.0	129	9	6	14.5	21.0	104	16	11	*15.5	*23.0	84	10	14	*8.5	*15.5	2.9	8	2	6	10.0	34	
12	159	8	2	11.0	17.0	133	4	6	11.0	18.0	106	10	10	14.5	23.0	84	10	8	*12.5	*20.5	31	10	4	9.5	13.5	33	
13	161	4	4	10.0	16.0	135	6	6	11.0	19.0	113	9	13	*14.5	*23.5	90	10	13	*15.0	*25.0	38	7	7	10.0	16.0	35	
14	163	4	4	10.5	17.0	137	19	6	12.0	18.0	114	10	10	*13.5	*22.5	92	24	10	*12.0	*20.0	38	12	5	9.0	16.5	41	
15	163	6	4	*11.0	*17.5	139	16	6	13.0	20.0	114	8	6	*16.0	*25.0	90	14	10	13.5	21.5	43	8	10	4.5	16	7	
16	163	6	4	11.5	18.0	139	8	6	13.5	22.5	114	7	9	*13.5	*21.0	89	10	8	*10.0	*17.0	49	6	6	13.0	25	52	
17	161	5	3	12.0	19.5	138	5	5	12.0	19.0	114	7	6	11.0	17.0	92	9	5	9.5	16.0	53	8	7	6	11.0	57	
18	159	6	2	11.0	17.5	140	5	5	10.5	17.0	118	6	6	9.0	15.0	97	3	7	7.5	14.0	63	2	3	6.0	12.0	59	
19	161	5	4	10.5	15.5	139	6	3	10.0	16.0	119	5	5	9.0	16.5	96	7	3	8.0	15.5	67	3	6	5.5	9.0	44	
20	161	5	4	11.0	17.0	141	5	6	9.5	16.0	118	8	3	9.0	17.0	98	6	4	8.0	16.0	65	1	1	7.0	11.0	59	
21	161	7	4	10.0	15.0	141	6	4	11.0	17.5	119	7	3	9.5	17.0	98	6	6	9.0	16.5	66	5	3	7.0	13.0	60	
22	161	6	3	10.0	17.0	141	7	5	10.5	18.0	121	7	5	10.0	17.0	98	6	6	9.0	17.0	65	7	4	5.5	7.0	45	
23	162	6	5	10.5	17.0	141	5	5	10.0	16.5	122	6	8	10.0	18.0	98	6	7	10.0	18.0	67	4	4	6.5	8.0	50	

F<sub>m</sub> = median value of effective antenna noise in db above ktbD<sub>u</sub> = ratio of upper decile to median in dbD<sub>L</sub> = ratio of median to lower decile in dbV<sub>d</sub> = median deviation of average voltage in db below mean powerL<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month December 19 63

Month-Hour	Frequency (Mc)														
	103				160				495						
	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00 153	5	3				103	8	6			85	6	6		
01 153	5	3				102	9	7			83	10	4		
02 154	2	4				103	8	8			85	6	10		
03 154	2	4				100	7	9			83	6	12		
04 154	4	4				99	6	6			80	7	7		
05 154	2	4				95	8	8			75	12	4		
06 154	2	4				93	8	4			75	.	.		
07 152	2	2				+	85	-			69				
08 152	0	4				87					69				
09 *	150					+	87				74				
10 *149						+	87				69				
11 152	2	8				87					69				
12 152	2	6				+	87				70				
13 *152						88					71				
14 150	4	6				+	91				72				
15 150	4	6				+	89				75				
16 150	2	9				+	87				71				
17 149	3	7				+	90				71				
18 149	5	5				95	10	6			77	8	8		
19 152	6	4				97	12	8			79	12	6		
20 152	4	8				98	11	7			83	12	6		
21 152	4	6				103	10	12			87	10	10		
22 152	4	4				103	4	10			86	7	5		
23 153	5	5				103	8	6			85	8	4		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month January 1964

Hour (LS)	.013												.495													
	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>			
00 /48	6	4				96	20	7			80	19	6													
01 /48	6	4				94	20	5			80	16	7													
02 /48	5	2				96	18	8			80	12	7													
03 /50	4	4				91	21	3			80	11	9													
04 /49	4	3				95	14	9			*81															
05 /48	4	3				93	15	7			*78															
06 /48	5	3				89	17	4			*76															
07 /48	2	3				86	17				*73															
08 /46	2	4				89	11																			
09 /42						93																				
10 /40	7	2				85																				
11 /42	14	3				103																				
12 /42	14	3				102																				
13 /42	10	3				101																				
14 /42	8	2				105																				
15 /42	8	3				88																				
16 /40	10	2				87																				
17 /42	6	4				91																				
18 /42	10	2				91	22	6			74	20	4													
19 /42	11	2				92	22	7			76	23	5													
20 /44	11	4				93	21	8			78	17	6													
21 /44	10	4				97	20	12			80	23	6													
22 /46	10	5				95	22	10			80	22	8													
23 /46	8	4				97	23	9			78	22	6													

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**MONTH-HOUR VALUES OF RADIO NOISE**

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month February 19 64

		Frequency (Mc)																									
		.013						.160						.495													
ES	ST	Fam	Du	D <sub>L</sub>	Vdm	Ldm	Fam	Du	D <sub>L</sub>	Vdm	Ldm	Fam	Du	D <sub>L</sub>	Vdm	Ldm	Fam	Du	D <sub>L</sub>	Vdm	Ldm	Fam	Du	D <sub>L</sub>	Vdm	Ldm	
00	146	3	2				97	14	5			80	16	9													
01	146	3	2				97	12	6			80	15	7													
02	146	4	0				97	12	6			82	12	9													
03	148	2	2				95	13	8			82	10	10													
04	148	4	2				95	9	9			76	17	4													
05	148	3	2				89	18	4			76	18	6													
06	147	4	3				87	10	2			71															
07	148	2	2				89																				
08	144	2	2				88																				
09	142	3	3				87																				
10	142	4	4				87																				
11	142	4	2				85																				
12	144	4	4				86																				
13	146	2	6				87																				
14	146	2	4				87																				
15	146	2	6				87																				
16	144	2	5				87																				
17	142	4	5				89	6	2																		
18	144	3	5				91	10	6																		
19	144	2	4				92	12	4																		
20	144	4	5				93	12	6																		
21	144	4	3				95	10	9																		
22	144	2	2				97	5	6																		
23	146	2	4				91	11	7																		

Fam = median value of effective antenna noise in db above kitb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station Balboa, Canal Zone    Lat. 9.0 N    Long. 79.5 W    Season Winter ( Dec    Jan    Feb ) 1963-64

TIME BLOCKS (LST)															2000-2400					1600-2000										
0000-0400					0400-0800					0800-1200					1200-1600					1600-2000										
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>					
.013	1.50	6	4	12.0	17.5	1.50	8	2	11.0	16.5	1.48	6	4	11.5	16.5	1.54	6	4	11.0	15.5	1.52	4	6	12.0	17.0	14.8	6	5	12.5	17.5
.051	1.26	10	8	11.0	16.5	1.24	12	8	11.5	17.0	1.16	16	13	12.0	17.5	1.22	8	8	11.0	16.0	1.22	10	8	11.0	16.5	12.6	8	8	10.0	15.0
.160	1.08	10	8	10.0	16.0	1.02	14	20	11.5	19.0	8.4	28	12	9.0	15.5	9.0	18	8	9.5	14.5	1.06	12	12	9.5	15.0	10.8	8	8	9.0	15.0
.495	9.5	8	6	8.5	14.5	8.2	14	10	7.0	12.5	7.4	18	2	5.0	8.5	7.6	12	4	7.0	10.0	8.8	8	14	7.5	11.0	9.2	6	6	7.5	12.5
2.5	6.1	8	8	6.5	10.5	5.9	10	14	7.0	11.0	6.2	10	4	4.0	6.0	6.2	4	4	4.0	5.5	7.2	12	10	5.5	8.0	5.9	8	6	5.5	9.0
5	5.5	6	12	4.5	7.5	5.3	10	10	5.0	8.5	4.3	8	12	5.0	8.5	4.1	6	8	5.5	8.5	5.7	12	8	5.5	8.5	5.9	10	8	4.0	7.0
10	4.1	12	4	3.5	5.5	4.1	10	4	3.5	6.0	4.1	10	6	4.0	6.5	4.1	8	6	4.5	6.5	4.7	8	6	4.0	6.5	4.1	8	4	3.5	5.5
20	2.3	4	2	2.5	3.0	2.5	6	4	2.5	3.5	2.7	4	6	2.5	4.0	2.7	4	6	3.5	5.0	2.5	4	4	2.5	4.0	2.3	4	4	2.0	3.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill. Wyoming      Lat. 43.2 N Long. 105.2 W      Season Winter ( Dec    Jan    Feb ) 1963-64

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400																		
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>											
.013	1.50	4	2	1.05	1.65	1.50	4	2	1.15	1.75	1.46	4	4	1.00	1.60	1.44	4	10.0	15.0	14.4	6	4	1.20	17.0	14.8	6	4	1.15	17.0		
.051	1.28	4	4	2.5	5.0	1.28	4	8	2.0	5.0	1.18	6	8	2.0	4.5	1.17	5	7	2.0	5.0	1.22	6	8	2.0	5.0	1.28	2	5	2.5	5.0	
.160	9.2	8	8	8.5	14.5	8.2	1.2	1.2	8.0	12.0	7.0	1.4	6	1.5	3.0	1.2	1.2	8	1.5	3.0	8.2	1.4	8	1.5	9.5	9.2	10	10	7.5	13.0	
.495	1.6	8	10	6.5	11.0	6.2	1.4	1.0	4.5	7.5	5.2	6	2	2.0	3.5	5.2	6	2	2.0	3.5	6.6	12	12	4.0	7.0	7.6	8	8	8	6.0	10.5
2.5	4.9	8	4	3.0	5.5	4.7	6	6	2.5	4.5	2.3	8	4	1.5	3.0	2.1	4	2	1.5	3.0	4.3	8	16	2.0	4.0	5.1	4	6	2.5	5.0	
5	4.8	5	4	3.0	6.0	4.6	6	4	3.0	5.5	2.8	1.0	8	1.5	3.0	2.6	6	9	1.5	3.0	4.8	4	8	2.0	4.5	4.8	6	4	2.5	5.5	
10	3.5	14	4	1.5	3.5	3.5	8	4	1.15	3.5	3.3	4	4	1.5	3.5	3.5	1.2	6	1.5	4.0	3.8	13	7	1.5	4.0	3.3	12	4	1.5	3.0	
20	2.4	2	0	0.5	2.0	2.6	0	2	1.0	2.5	2.6	0	2	1.0	2.5	2.4	2	0	1.0	2.5	2.4	0	0	1.0	2.5	2.4	0	0	1.0	2.5	

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station Boulder, Colorado Lat. 40.1N Long. 105.1W Season Winter ( Dec Jan Feb ) 1963-64

TIME BLOCKS (LST)															2000-2400											
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000									
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
0.13	1.52	2	4	12.0	18.5	1.52	2	4	13.5	19.0	1.46	4	4	13.0	18.5	1.46	4	6	12.5	18.0	1.46	4	6	4	14.0	20.0
0.51	1.29	4	8	4.0	6.5	1.25	6	6	4.0	6.0	1.17	6	8	3.5	6.0	1.17	6	6	3.5	6.0	1.25	6	6	6	4.0	7.0
1.60	9.5	10	10	8.0	12.5	8.5	10	6	5.0	8.0	8.1	6	4	3.0	5.5	8.1	4	4	3.0	5.0	8.7	14	6	6.0	9.0	9.5
4.95	7.9	8	8	7.0	11.0	6.7	8	4	4.0	6.0	6.7	4	4	2.5	4.0	6.7	4	4	2.5	4.5	7.1	12	6	4.0	6.5	7.9
2.5	5.2	5	6	5.0	7.5	5.0	4	4	5.0	7.0	4.9	4	4	4.0	6.0	4.4	6	4	3.5	5.0	4.8	6	4	4.0	6.0	5.2
5	5.3	6	8	5.0	8.0	4.9	6	6	5.5	8.5	3.7	4	4	3.5	5.0	3.7	4	6	3.5	5.5	5.1	6	9	5.0	8.0	5.1
10	3.8	12	6	3.5	5.5	3.8	6	6	4.0	6.0	3.6	4	4	4.0	6.5	4.1	5	7	4.0	6.5	4.0	10	8	4.0	6.0	3.6
20	1.8	2	2	2.5	4.0	1.8	4	2	3.0	4.0	2.0	2	3	3.0	4.0	1.9	3	2	3.0	4.5	1.8	2	2	2.5	4.0	1

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia      Lat. 30.6 S      Long. 130.4 E      Season Summer ( Dec    Jan    Feb ) 1963-64

TIME BLOCKS (LST)															TIME BLOCKS (LST)														
0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400									
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>				
.013	159	4	4	10.5	16.5	151	4	4	11.5	18.5	155	4	6	14.0	21.5	159	4	8	11.5	18.5	159	6	4	8.5	14.5	159			
.051	133	6	4	10.5	18.0	129	6	1/2	11.5	19.0	121	8	10	14.5	22.5	129	6	10	9.5	16.5	121	4	6	7.5	13.5	4			
.160	110	7	4	9.5	17.5	94	18	20	12.5	20.5	84	16	14	13.0	20.0	96	13	12	8.0	14.5	104	10	10	7.0	12.5	114			
.495	92	6	8	9.0	16.5	58	32	16	8.5	15.0	46	24	4	7.0	11.0	52	26	10	6.5	10.5	74	18	24	6.0	11.5	94			
.2.5	64	6	6	6.5	12.0	54	1/2	24	7.5	13.0	20	14	2	5.5	8.0	20	17	2	6.0	8.5	38	26	12	5.0	8.5	66			
.5	57	4	4	5.5	9.0	51	8	18	6.0	10.0	23	14	6	7.0	10.0	27	10	10	5.5	9.0	49	12	12	5.0	9.0	59			
1.0	41	6	6	5.0	8.0	37	6	4	4.0	6.0	29	6	4	4.0	6.5	33	8	6	4.5	7.0	45	6	6	4.5	8.0	45			
2.0	22	2	0	3.0	4.0	22	2	0	2.5	3.5	22	2	0	2.5	4.0	26	6	4	3.0	5.0	26	6	4	3.0	5.0	22			

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station USNS Eltanin Lat. 70°-80° S Long. 97°-112°-5° W Season Summer ( \*\*\* Jan \*\*\* ) 1963-64

TIME BLOCKS (LST)																							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dml</sub>	L <sub>dml</sub>			
0.13	147	2	4			147	2	4			145	4	3			143	2	2			143	3	3
0.51	107	4	6			103	6	2			105	20	8			107	10	6			108	4	3
1.60	71	12	7			75	16	12			77	16	12			79	11	3			78	7	9
4.95	64	13	15			64	26	16			76	10	17			67	23	9			71	18	8
2.5	37	12	8	5.0	9.0	27	6	4	4.0	6.0	35	9	10	2.0	4.0	34	5	7	2.0	3.5	35	6	10
5	43	6	4	5.0	8.5	33	6	4	5.5	7.5	31	4	2	5.5	7.5	31	2	3	5.5	7.5	35	10	6
10	32	4	2	4.0	6.0	36	2	4	2.5	4.0	28	6	2	1.5	2.5	28	0	2	2.0	3.0	32	5	3
20	35	0	4	3.0	5.5	35	2	2	3.0	5.5	35	2	2	3.0	6.0	35	1	2	3.0	5.5	35	3	2

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dml</sub> = median deviation of average voltage in db below mean power

L<sub>dml</sub> = median deviation of average logarithm in db below mean power

\* \* \* No December or February data

## SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 112.5-117.5 W Season Summer (\*\*\*) Jan. \*\*\*) 9 63-64

TIME BLOCKS (LST)																														
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400														
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>										
1.13	149	4	4	12.0	18.0	149	2	2	11.5	17.0	147	4	4	8.5	13.0	147	4	2	8.0	12.0	147	2	4	12.0	17.5					
0.51	111	6	6	10.5	16.0	105	4	4	8.5	13.0	105	6	6	4.5	7.5	105	6	6	5.0	8.0	107	6	6	6.5	12.5					
1.60	81	8	10	11.0	17.0	75	22	10	3.0	6.0	83	14	18	2.0	3.0	87	11	22	1.5	2.5	83	12	18	2.0	3.5	85	10	12	5.5	10.0
4.95-	64	31	12	2.0	4.0	66	32	17	2.5	5.5	80	20	20	2.0	4.0	76	22	18	1.5	3.0	76	20	20	2.5	6.5	68	24	6	2.5	4.5
2.5-	45	8	10	5.5	10.0	29	6	6	3.5	5.5	37	2	6	2.0	4.0	37	4	8	1.5	3.0	37	8	6	8.5	15.0	53	4	12	4.0	7.5
5	49	7	4	5.5	9.0	31	10	6	5.0	7.5	31	9	6	3.0	5.5	31	8	8	4.5	6.5	39	16	10	4.0	7.5	55	2	12	4.0	8.0
1.0	36	4	4	3.5	6.0	29	4	1	1.5	3.0	28	3	1	1.5	2.5	28	4	2	1.0	3.0	36	4	6	3.0	6.0	40	3	6	3.0	6.0
2.0	29	8	2	2.0	3.5	31	4	2	1.5	3.5	31	6	2	2.0	4.0	31	4	2	2.5	4.0	33	4	4	2.0	3.5	31	6	2	2.0	4.0

**E** = median value of effective antenna noise in dB above 1 kHz

$\sigma_{\text{am}} = \text{standard deviation of amplitude}$

$D_u$  = ratio of upper decile to median in db

$D_f$  = ratio of median to lower decile in db

$V_{1/2}$  = median deviation of average voltage in dB below mean power

$L_{dm}$  = median deviation of average logarithm in db below mean power

\* \* \* № December or February data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin      Lat. 60°-70° S      Long. 82.5°-97.5° W   Season Summer ( \*\*\* ) Jan Feb ) 1963-64

TIME BLOCKS (LST)																														
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400														
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
0.13	150	2	7	60.0	155.5	148	4	3	105.5	16.0	148	2	2	9.0	14.0	150	6	4	8.0	12.5	146	7	2	9.0	14.0	147	9	6	9.5	14.5
0.51	114	13	6	6.5	11.5	104	6	4	9.5	13.5	108	6	6	7.5	11.5	110	8	6	6.0	9.5	110	7	8	7.0	10.5	116	16	9	6.5	11.0
1.60	86	18	11	7.5	12.0	69	16	4	5.5	9.0	72	14	6	5.0	7.5	70	31	4	6.0	8.5	82	12	14	5.0	7.5	88	15	12	4.5	8.5
4.95	68	19	7	3.0	5.5	64	4	2	2.0	3.0	66	15	2	3.0	6.0	67	20	14	2.5	4.5	70	19	11	2.5	4.5	76	9	11	2.5	5.0
2.5	56	14	12			28	11	4			38	2	12			38	12	13			46	10	11			58	6	11		
5	55	6	6			39	10	12			29	2	2			29	4	2			37	13	8			55	6	6		
10	36	6	4			30	6	4			28	2	2			28	2	2			32	9	3			36	4	6		
20	34	2	6			36	2	7			36	4	8			36	4	8			36	4	5			36	2	6		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No December data

## SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50°-60° S—Long. 97°-112° W Season, Summer (Dec—\*\*\*\*\*) | 1963-64

TIME BLOCKS (LST)

TIME BLOCKS (LST)																										
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400					
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>e</sub>	V <sub>dml</sub>	L <sub>dml</sub>	
0.13	149	6	17	11.0	16.5	141	9	13	10.5	16.5	151	2	9	10.0	16.0	152	9.5	14.5	149	.	14.5	9.5	14.5	9.5	14.5	
0.051	117	9	12	8.5	12.5	99	8	7	11.0	16.0	109			8.0	13.0	111	8.5	14.0	10.8		10.5	16.5	116	7.5	12.0	
0.160	91	7	19	10.0	15.5	66			6.0	9.0	68			6.5	11.0	73	9.0	12.0	76		3.5	5.5	9.2		8.0	14.0
0.495	66	7	18	8.5	10.0	57			3.5	9.0	58			2.5	5.0	71	3.0	6.0	75		3.5	7.0	73		4.5	7.5
2.5	59	2	6			29	7	6			31					28		27					54			
5	53	3	3			36	12	12			27					28							55			
10	38	4	2			31	5	2			29					27							41			
30	27	10	2			27	0	2			25					27							27			

卷之三

Fam = median value of effective dimensions

$D_u$  = ratio of upper decile to median in db

$D_f$  = ratio of median to lower decile in db

$\bar{V}_i$  = median deviation of average voltage in

Vam - medieval settlement of average village

$L_{dm}$  = median deviation of average logarithm

\* \* \* No January or February data

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station USNS Eltanin      Lat. 50°-60° S      Long. 67.5°-82.5° W      Season Summer ( \* \* \* )      \*\*\* ( \* \* \* )      Feb. ( \* \* \* )      19-63-64

TIME BLOCKS (LST)														2000-2400							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
0.013	152	4	5	154	6	16	152	4	10	155	3	7	154	4	6		150	6	6		
0.51	132	0	12	116	9	11	114	8	17	120	6	8	116	8	8		126	7	11		
1.60	106	4	17	82	8	10	80	20	6	88	16	18	86	10	14		100	10	18		
4.95	87	5	20	66	24	8	63	23	7	72	28	15	67	14	17		82	10	15		
2.5	68	6	17	6.5	12.0	4.0	21	12	5.0	9.5	3.8	2	8	1.5	3.0	4.0	18	14	1.0	2.5	4.8
5	61	2	6	3.5	7.5	4.5	14	11	5.5	9.0	29	6	2	4.0	6.0	34	9	3	4.0	7.0	4.8
10	39	4	3	3.0	6.0	3.7	5	6	3.0	5.5	29	5	2	2.5	4.0	36	3	7	2.5	4.0	39
20	36	2	10	2.5	5.0	3.2	4	4	2.0	4.0	32	6	5	2.0	4.0	32	4	2	2.0	4.5	33

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No December or January data

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station USNS Eltanin Lat. 50°-60° S Long. 52°-67° 5' W Season Summer (\*\*\* \*\*\* Feb.) 1963-64

TIME BLOCKS (LST)															2000-2400					2000-2400						
0000-0400					0400-0800					0800-1200					1200-1600					1600-2000						
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
.013	148	12	4	120	180	151	3	9	12.5	18.0	146	6	2	12.0	16.0	153	5	8	10.0	15.5	154	3	13	9.5	15.0	152
.051	127	11	11	105	165	119	14	18	11.0	17.5	113	3	17	10.5	15.5	117	9	8	10.5	17.0	119	5	15	10.0	15.5	124
.160	105	13	11	9.0	15.5	86	14	10	11.0	18.0	80	10	16	11.0	15.5	82	12	17	10.0	15.0	89	7	11	8.0	14.0	104
.495	89	15-	9	8.0	15.0	66	32	12	4.0	5.0	58	12	10	6.0	9.0	64	8	10	4.0	6.5	64	22	8	3.0	5.0	88
2.5	67	15	11			50	22	17			38	4	4			38	22	13			44	12	7			68
5	63	8	11			54	13	16			31	10	4			34	13	7			51	9	3			62
10	43	8	9			38	5				33	6	4			31	11	2			45	6	2			45
20	30	0	2			28	2	0			30	0	2			28	3	0			31	3	3			30

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No December or January data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin at 50-60 S Long. 112.5-127.5 W Season Summer ( Dec Jan \*\*\* ) 1963-64

TIME BLOCKS (LST)																							
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
0.13	1524	3	6			1522	2	3			1506	2	4			150	2	2			147	3	3
0.51	117	6	5			106	5	4			106	4	2			106	4	6			108	4	7
1.60	92	6	12			71	27	6			82	18	18			81	17	14			80	20	8
4.95	70	24	20			66	32	22			76	22	19			80	18	30			77	17	12
2.5	53	4	9	6.0	10.0	27	8	6	3.0	4.5	31	6	8	1.5	3.0	31	11	6	2.5	4.5	33	13	4
5	51	6	5	4.0	6.5	33	8	5	6.0	8.0	31	2	6	5.0	7.5	29	4	2	6.0	8.0	44	9	11
10	37	4	9	3.0	5.5	30	4	2	2.0	3.5	28	0	2	1.0	2.5	28	2	0	1.5	3.5	36	10	6
20	28	2	2	1.5	3.0	28	2	1	1.5	2.5	28	0	0	1.0	2.5	28	2	0	1.5	2.5	29	12	3

F<sub>am</sub> = median value of effective antenna noise in db above kitb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

\* \* \* No February data

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 40°50' S Long. 97°5' W Season Summer ( Dec \*\*\* ) 1963-64

TIME BLOCKS (LST)																							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
0.013	14.9			13.0	20.0	15.0			11.0	17.5	15.3			12.0	19.0	15.5	9.5	15.5	15.2		11.5	18.0	15.1
0.051	11.9			8.5	14.0	10.9			11.0	18.5	11.5			9.5	16.0	11.4	6.0	11.0	11.2		7.5	12.5	12.6
0.160	8.9			9.5	16.0	6.8			5.5	9.5	6.8			7.9			6.0	11.0	7.9		4.0	6.5	10.0
0.495	6.3			15.0	21.0	4.9			1.5	2.5	6.6			6.9			3.0	6.0	7.7		2.5	5.5	7.2
0.25	6.1					4.0											2.5		4.0			6.1	
5	5.6																2.9		4.4			6.0	
1.0	4.1																3.2		4.3			4.4	
2.0	2.7																2.7		2.7			2.7	

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No January or February data

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station USNS Eltanin      Lat. 40°50' S      Long. 82°59' W      Season Summer ( Dec      \*\*\*      \*\*\* ) 1963-64

TIME BLOCKS (LST)																												
0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400								
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>								
.013	448	9	5	14.0	21.0	11.5	12	6	12.5	19.5	141	125	195	150	5	125	19.0	145	1	120	18.0	143	6	11.0	18.0			
.051	118	7	7	6.0	8.0	6.5	10	10	8.0	10.5	105	145	22.0	109	4	3	11.5	19.0	103	7	5	150	22.0	117	7	6	7.0	11.0
.160	86	10	10	16	20	19.5	76	9.0	14.0	6.8	11.0	14.0	70	5	8	7.5	11.0	6.9	22	5	50	9.5	90	13	9	8.0	15.0	
.495	67	12	12	16	20	11.0	59	35	6.5	5.9	2.0	4.5	55	10	4	4.0	7.0	6.5	11	17		67	11	4	9.5	15.5		
.215	55	11	8	36	15	15	31				30	12	6				35	11	8			53	6	2				
.5	51	6	4	37	12	10	29				29	2	8				37	17	9			57	2	5				
.10	37	8	2	33	6	4	29				28	4	3				39	7	9			41	7	5				
.20	26	1	3	27	0	4	27				27	3	4				25	5	4			29	5	4				

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\*\*\* No January or February data

## SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 40-50 S Long. 67.5-82.5 W Season Summer (Dec - \*\*\* Feb) 1963-64

TIME BLOCKS (LST)																							
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
Frequency (MHz)	F <sub>am</sub>	D <sub>U</sub>	D <sub>E</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>E</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>E</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>E</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
0.13	153	5	3			153	5	3			152	6	2			158	6	2			154	5	5
0.51	128	8	6			116	10	10			115	11	4			120	9	2			117	7	7
1.60	108	7	9			64	8	17			89	16	14			91	19	18			87	14	8
4.95	88	6	10			81	5	18			80	18	34			89	9	35			86	5	13
2.55	69	9	5	5.0	10.0	44	18	10	5.0	9.0	38	2	4	2.0	4.0	35	7	5	2.5	49	18	15	
5	56	7	3	4.5	8.0	46	11	11	4.0	8.0	30	5	3	5.5	8.5	33	3	6	6.5	46	10	4.5	
10	38	6	4	4.0	7.0	36	4	6	3.5	6.0	28	4	2	2.0	4.0	30	4	4	4.5	36	4	4	
20	26	2	1	3.0	3.5	28	0	3	1.5	2.5	28	3	1	1.5	3.0	28	4	1	2.0	35	29	2	
																				20	35	29	2

$F_{\text{eff}} = \text{Median value of effective antenna noise in dB above } k_{\text{TB}}$

D<sub>10</sub> = ratio of upper decile to median in g/m<sup>3</sup>

$D_6$  = ratio of median to lower decile in db

Deviation of average voltage in db below mean power

$V_{\text{dpm}} = \text{mean deviation of average voltage in } \text{dB below mean power}$

\* \* \* No January data

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station USNS Eltanin Lat. 30°40' S Long. 67°5'-82°5' W Season Summer ( Dec \*\*\* Feb ) 1963-64

TIME BLOCKS (LST)																														
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
.013	148	8	17	148	6	16	148	4	4		156	7	4			152	7	5			148	4	20							
.051	120	10	12	109	11	15	112	7	10		120	12	6			117	13	13			122	8	14							
.160	97	10	12	175	10	10	74	13	11		81	14	10			91	8	16			99	8	14							
.495	81	9	15	61	21	11	60	26	14		64	29	13			72	22	11			82	10	15							
2.5	63	11	5	55	46	16	18	55	9.0	36	6	4	15	3.0	36	8	9	3.0	5.0	48	21	12	3.5	7.5	66	6	10	4.5	9.0	
5	55	8	2	6.0	10.0	45	15	12	4.5	7.0	29	5	5	6.5	9.0	31	9	7	5.5	8.5	51	3	18	4.0	7.0	61	5	7	4.0	6.5
10	40	6	6	40	6.0	36	6	4	3.5	5.5	28	8	2	3.0	5.0	30	6	5	4.0	7.0	41	11	7	4.5	7.5	42	7	8	4.5	7.0
20	27	10	1	20	3.5	28	4	3	2.0	3.0	28	2	1	1.5	3.0	29	4	2	2.0	3.5	29	16	2	2.5	4.0	27	13	1	2.0	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No January data

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Season Winter ( Dec Jan Feb ) 19 63-64

TIME BLOCKS (LST)																					
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
0.13	149	4	4	11.0	17.0	149	4	4	12.0	18.5	143	6	8	12.5	19.0	143	4	6	9.0	14.0	145
0.51	11.3	6	4	9.0	15.0	11.1	6	6	11.0	17.0	9.9	7	10	11.0	14.5	9.3	14	6	9.5	13.5	145
1.60	96	6	6	5.0	9.0	98	8	10	5.0	8.5	88	10	8	5.5	10.0	90	6	10	5.0	9.0	9.0
4.95	77	14	8	4.0	6.5	67	16	8	4.0	6.5	61	8	8	4.5	7.5	61	12	8	3.5	6.5	7.5
2.5	55	10	6	5.0	8.5	53	14	4	4.0	8.0	47	14	12	4.0	6.5	49	7	12	5.0	8.0	55
5	50	4	4	3.5	6.0	46	4	4	4.0	6.0	36	10	8	4.5	7.0	36	8	8	3.5	5.5	46
10	30	4	2	2.0	4.0	30	4	2	2.0	3.0	34	4	2	3.0	4.5	36	6	4	3.0	5.0	34
20	18	0	2	1.5	3.0	18	2	2	1.5	3.0	20	2	2	2.0	3.5	18	2	2	1.5	3.0	18

F<sub>am</sub> = median value of effective antenna noise in db above kitb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

## SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Winter ( Dec Jan Feb ) | 9 63-64

$\text{EE}_{\text{C}} = \text{median value of effective antenna noise in dB above kth}$

D<sub>1</sub> = ratio of upper decile to median in db

- ratios of median to lower doses in DB

$\geq$  75th or Median 18 lower decile in 98

$V_{dm}$  = median deviation of average voltage in db below mean power

RN-14

$L_{dm}$  = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha, Hawaii      Lat. 22.0 N      Long. 159.7 W      Season Winter ( Dec    Jan    Feb ) 1963-64

Frequency (Mc)	TIME BLOCKS (LST)												TIME BLOCKS (LST)																			
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400																
F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>													
0.13	1.52	2	4	1.15	1.80	1.52	2	1.10	1.75	1.48	2	1	1.30	1.95	1.48	2	1.50	2.25	1.44	4	1.40	2.15	1.50	4	2	11.0	17.0					
0.51	1.26	6	3	1.15	1.75	1.26	6	4	1.25	1.90	1.08	10	10	11.0	15.0	1.06	10	8	12.0	16.0	1.06	14	8	9.0	12.5	12.0	8	8	11.0	15.5		
* *	1.60	1.04	6	4	1.15	1.85	1.00	8	1.6	1.35	1.95	1.72	14	8	1.15	17.0	1.68	18	4	1.6	10.0	7.6	24	12	9.0	13.0	9.8	8	8	10	13.5	20.0
4.95	8.3	8	7	11.0	17.5	7.7	11	20	9.0	14.5	5.5	16	4	5.0	8.0	5.3	9	4	5.0	8.0	6.3	18	12	7.5	11.5	7.9	12	10	11.0	18.5		
2.5	5.8	6	4	1.5	12.0	5.8	6	7	8.0	12.5	3.4	10	6	4.0	6.0	2.8	8	2	3.0	5.0	4.2	12	12	5.0	7.0	5.4	8	6	7.5	11.5		
5	5.1	6	2			4.9	4.	6	4.5	7.5	2.9	16	8	4.0	6.5	2.3	8	4	3.5	6.0	4.1	10	12	4.0	6.0	5.1	6	6	4.0	7.0		
10	3.2	5	4	2.5	4.5	3.1	4	3	2.5	4.0	2.9	6	8	5.0	7.5	2.5	7	6	4.0	6.0	3.3	5	4	4.0	6.0	3.4	4	4	3.0	5.0		
20	2.2	2	0	1.0	3.0	2.4	0	2	1.5	3.0	2.4	2	2	2.0	4.0	2.2	4	0	2.0	4.0	2.4	2	2	1.5	3.0	2.2	2	0	1.5	3.0		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power  
L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* No December or January data for log and voltage

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Winter ( Dec Jan Feb ) 1963-64

TIME BLOCKS (LST)																									
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400									
Frequency (Mc)	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>U</sub>	D <sub>L</sub>	V <sub>dm</sub>	L <sub>dm</sub>					
0.13	1.53	2	4	8.0	11.0	1.51	4	2	8.0	11.0	1.47	4	2	6.0	8.0	1.49	2	4	6.0	8.5	1.51	2	4	7.5	10.0
0.51	1.28	4	4	8.5	12.0	1.24	6	6	7.0	10.0	1.16	6	6	3.5	6.5	1.18	4	6	4.5	6.5	1.20	10	6	6.0	9.0
1.60	1.05	8	6	10.0	15.0	1.01	9	12	8.5	13.0	9.5	2	14	7.0	11.5	9.1	8	10	9.0	12.5	10.1	8	12	9.5	15.0
4.95	8.3	9	6	8.0	11.0	7.5	14	6	4.5	6.5	6.9	5	4	3.0	4.5	6.9	8	4	4.0	5.5	7.7	14	8	6.0	9.0
2.5	5.7	8	6	6.0	8.5	5.3	12	8	5.0	7.5	4.3	10	6	3.0	4.5	4.3	10	5	3.0	4.5	5.1	14	10	4.5	6.5
5	5.4	6	6	5.0	7.5	5.0	6	6	4.5	6.5	3.6	12	6	4.5	6.5	3.6	14	8	4.0	6.5	5.0	8	8	5.5	7.5
1.0	3.3	5	5	3.5	5.0	3.2	7	4	3.0	4.5	3.2	6	4	3.5	5.0	3.0	8	4	4.0	6.0	3.6	10	4	5.0	6.5
2.0	2.6	0	4	2.0	3.5	2.6	2	2	2.0	3.0	2.6	3	4	2.0	3.5	2.6	4	4	3.0	4.0	2.4	4	2	2.5	3.5

F<sub>am</sub> = median value of effective antenna noise in db above kitb

D<sub>U</sub> = ratio of upper decile to median in db

D<sub>L</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Season Winter ( Dec Jan Feb ) 1963-64

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
F <sub>am</sub>	D <sub>u</sub>	D <sub>2</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>2</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>2</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>2</sub>	V <sub>dm</sub>	L <sub>dm</sub>						
0.13	1.51	4	8	11.0	16.0	1.51	4	6	12.0	17.0	1.49	4	6	12.0	17.0	1.51	4	6	10.0	15.5	1.53	2	7	11.0	16.0
0.51	1.27	6	4	12.5	19.0	1.23	8	10	13.0	19.5	1.05	14	6	13.0	19.0	1.07	14	4	12.5	18.5	1.19	8	16	11.5	18.0
1.60	1.06	8	4	10.0	16.0	9.6	12	22	10.0	15.0	7.4	28	4	8.0	13.0	7.4	22	4	8.0	12.0	9.4	14	18	10.0	15.5
4.95	0.95	8	4	9.0	14.5	7.3	14	14	10.0	16.0	6.1	14	4	8.0	11.0	6.1	14	4	5.0	7.5	7.9	12	14	7.0	12.5
2.5	0.57	1.0	4	7.0	11.0	5.3	1.2	8	6.5	11.0	4.3	2	4	7.5	11.0	4.1	4	2	8.0	11.5	5.1	10	8	7.0	10.0
5	0.56	1.2	6	5.0	8.5	5.2	16	6	6.0	9.0	3.8	12	4	6.0	8.5	3.8	10	6	6.0	9.0	5.6	12	10	6.0	9.5
10	0.33	5	4	4.5	4.0	3.3	8	4	3.0	4.5	3.5	8	4	4.0	6.0	3.5	6	4	3.5	6.0	3.8	5.	5	3.5	6.0
20	0.23	1	0	1.5	3.0	2.3	2	0	1.0	3.0	2.5	4	2	2.0	3.5	2.5	6	2	1.5	3.0	2.3	4	2	2.0	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>2</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, So. Africa    Lat. 25.8 S    Long. 28.3 E    Season Summer ( Dec Jan Feb ) 1963-64

TIME BLOCKS (LST)																					
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	
.013	1.56	8	11	1.52	9	11	1.51	9	10	1.60	9	9	1.62	9	11	1.59	12	12	1.59	12	12
.051	1.34	10	10	1.26	12	15	1.20	14	12	1.36	12	12	1.42	10	14	1.38	14	14	1.38	14	14
.160	1.13	12	10	99	18	20	91	20	14	115	14	28	123	12	24	119	14	14	119	14	14
.495	97	11	12	74	24	18	64	23	7	93	17	33	101	16	27	101	15	12	101	15	12
2.55	68	11	11	57	17	16	44	7	5	53	22	11	71	16	20	74	10	11	74	10	11
5-	56	8	6	50	10	8	36	10	8	44	14	12	60	12	14	58	10	6	58	10	6
10	38	8	6	36	6	4	32	8	6	40	8	11	48	12	8	44	8	6	44	8	6
20	21	6	5	21	4	4	23	4	4	27	6	8	27	12	9	22	12	6	22	12	6

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

**SEASONAL TIME-BLOCK VALUES OF RADIO NOISE**

Station Rabat, Morocco      Lat. 33.9 N Long. 6.8 W      Season Winter ( Dec Jan Feb ) 1963-64

TIME BLOCKS (LST)																									
0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400					
Frequency (Mc)	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>
.013	148	8	21			150	4	22			148	4	18			148	4	8			148	6	24		
.051	123	6	26			121	6	24			109	12	13			109	12	10			113	10	18		
.160	107	14	26			101	12	24			89	16	15			87	16	12			97	11	20		
.495	82	14	14			74	14	16			62	20	8			61	15	7			74	16	16		
2.5	59	18	8			58	13	9			47	10	8			45	10	4			51	18	10		
5	53	8	6			49	10	6			33	12	10			29	14	6			49	6	10		
10	26	10	8			24	12	8			26	14	8			24	15	7			28	10	10		
20	35	13	10			36	18	11			38	22	11			37	19	10			34	24	9		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

## SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Season Winter (Dec-Jan-Feb) | 9-63-64

$F$  = median value of effective antenna noise in dB above 10th

$F_{\text{am}} = \text{Inertia moment of the flywheel}$

$D_u$  = ratio of upper decile to median in db

$D_f$  = ratio of median to lower decile in db

$V_{d-}$  = median deviation of average voltage in db below mean power

V<sub>arm</sub> - measured deviation of average voltage in dB below mean power

$L_{dm}$  = median deviation of average logarithm in db below mean power

RN-14













