

NAT'L INST. OF STAND & TECH



A11107 208112



FB151377-9

Technical Note

No. 18-9

Boulder Laboratories

QUARTERLY RADIO NOISE DATA

DECEMBER, JANUARY, FEBRUARY 1960 - 1961

BY W.Q. CRICHLOW, R.T. DISNEY, AND M.A. JENKINS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

NATIONAL BUREAU OF STANDARDS

Technical Note

No. 18-9

April 18, 1961

QUARTERLY RADIO NOISE DATA
DECEMBER, JANUARY, FEBRUARY 1960-1961

BY

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature. They are for sale by the Office of Technical Services, U. S. Department of Commerce, Washington 25, D. C.

DISTRIBUTED BY

UNITED STATES DEPARTMENT OF COMMERCE

OFFICE OF TECHNICAL SERVICES

WASHINGTON 25, D. C.

Price \$ 1.75

National Bureau of Standards

OCT 29 1964

122,696

QC100

.U5753

cop 2



Radio Noise Recording Station



ARN-2 Atmospheric Radio Noise Recorder

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY



$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above $1 \mu v/meter$ for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Radio Noise Data for the Season
December, January, February 1960-1961

Radio noise measurements are being made at sixteen stations in a world-wide network supervised by the National Bureau of Standards (see map). The results of these measurements for the period December, January, February 1960-1961 are presented in the attached tables. These are based on three parameters of the noise: (1) the mean power, (2) the mean envelope voltage, and (3) the mean logarithm of the envelope voltage. The mean power averaged over a period of several minutes is the basic parameter and is expressed as an effective antenna noise figure, F_a . F_a is defined as the noise power available from an equivalent lossless antenna in db above kbt (the thermal noise power available from a passive resistance) where

k = Boltzman's constant (1.38×10^{-23} joules per degree Kelvin)

t = Absolute room temperature (taken as 288° K)

b = Bandwidth in cycles per second.

The mean voltage and mean logarithm are expressed as deviations, V_d and L_d , respectively, in db below the mean power.

Measurements of these parameters were made with the National Bureau of Standards Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 21.75' vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour. The month-hour medians, F_{am} , V_{dm} , and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day, and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power, or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

Time-block median values of noise are tabulated on a seasonal basis, and are obtained by averaging all month-hour medians for the season within a particular four-hour period of the day. The time-block values conform to the seasonal-time-block values used in C. C. I. R. Report No. 65 (see attached references).

F_a in db is related to the rms field strength at the antenna by the following equation:

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

where

- E_n = the equivalent vertically polarized ground wave rms noise field strength in db above $1 \mu\text{v}/\text{meter}$ for a 1 kc bandwidth.
 f_{Mc} = the frequency in megacycles/second.

The nomogram given may be used for this conversion.

The values presented in the tables reflect the actual measured radio noise; in some instances the atmospheric noise level may be contaminated by man-made noise or station interference. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been, had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [10], contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution by the method in reference 10, and

can therefore be used to determine whether the measured value or the most probable value of L_D for any value of V_D should be used.

Station clocks are set to a local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5).

These preliminary data values are presented in order to expedite dissemination of the data. Additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications.

Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii

Signal Corps, U. S. Army - Balboa, C. Z.; Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and University College Department of
Physics (Nigeria) - Ibadan

Ministry of Communications, Wireless Planning and
Co-ordination Organisation - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) -
Pretoria

Institut Scientifique Chérifien (Morocco) - Rabat

Instituto Tecnológico de Aeronautica (Brazil) - São José dos
Campos

Department of Scientific and Industrial Research (Great Britain)
- Singapore, Malaya

The assistance of the station operators and other personnel of these agencies in obtaining the data contained in this report is gratefully acknowledged.

The following publications contain additional information on radio noise:

1. W. Q. Crichlow, D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
2. "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956 (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
3. A. D. Watt and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45,1, 55 (1957).
4. W. Q. Crichlow, "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45,6, 778 (1957).
5. A. D. Watt and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45,6, 787 (1957).
6. F. F. Fulton, Jr., "The Effect of Receiver Bandwidth on Amplitude Distribution of V. L. F. Atmospheric Noise," National Bureau of Standards, VLF Symposium Paper 37, Boulder, Colorado, 1957.
7. H. E. Dinger, "Report on URSI Commission IV - Radio Noise of Terrestrial Origin," Proc. IRE, 46,7, 1366 (1958).
8. A. D. Watt, R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of Some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46,12, 1914 (1958).
9. W. L. Taylor and A. G. Jean, "Very-Low-Frequency Radiation Spectra of Lightning Discharges," NBS J. of Research-D. Radio Propagation, 63D,2, 199 (1959).
10. W. Q. Crichlow, C. J. Roubique, A. D. Spaulding, and W. M. Beery, "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," NBS J. Research-D. Radio Propagation, 64D,1, 49 (1960).
11. Tatsuzo Obayashi, "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," NBS J. of Research-D. Radio Propagation, 64D,1, 41 (1960).


Data included in this report and the standard time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	Dec. Jan. Feb. 1960-61	75 W	+05
Boulder	Dec. Jan. Feb. 1960-61	105 W	+07
Byrd Station	Dec. Jan. Feb. 1960-61	120 W	+08
Cook	Dec. Jan. Feb. 1960-61	135 E	-09
Enkoping	Dec. Jan. Feb. 1960-61	15 E	-01
Front Royal	Jan. Feb. 1961	75 W	+05
Ibadan	June, July, August 1960	GMT	0
Kekaha	Dec. Jan. Feb. 1960-61	150 W	+10
New Delhi	Nov. Dec. Jan. 1960-61	75 E	-05
Ohira	Dec. Jan. Feb. 1960-61	135 E	-09
Pretoria	Oct. Nov. 1960	30 E	-02
	Dec. Jan. Feb. 1960-61		
Rabat	Dec. Jan. Feb. 1960-61	GMT	0
São José dos Campos	Dec. Jan. 1960-61	45 W	+03
Singapore	Dec. Jan. Feb. 1960-61	105 E	-07

Previous data from the NBS World-Wide Network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957 - December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1951
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 June, July, August 1960

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

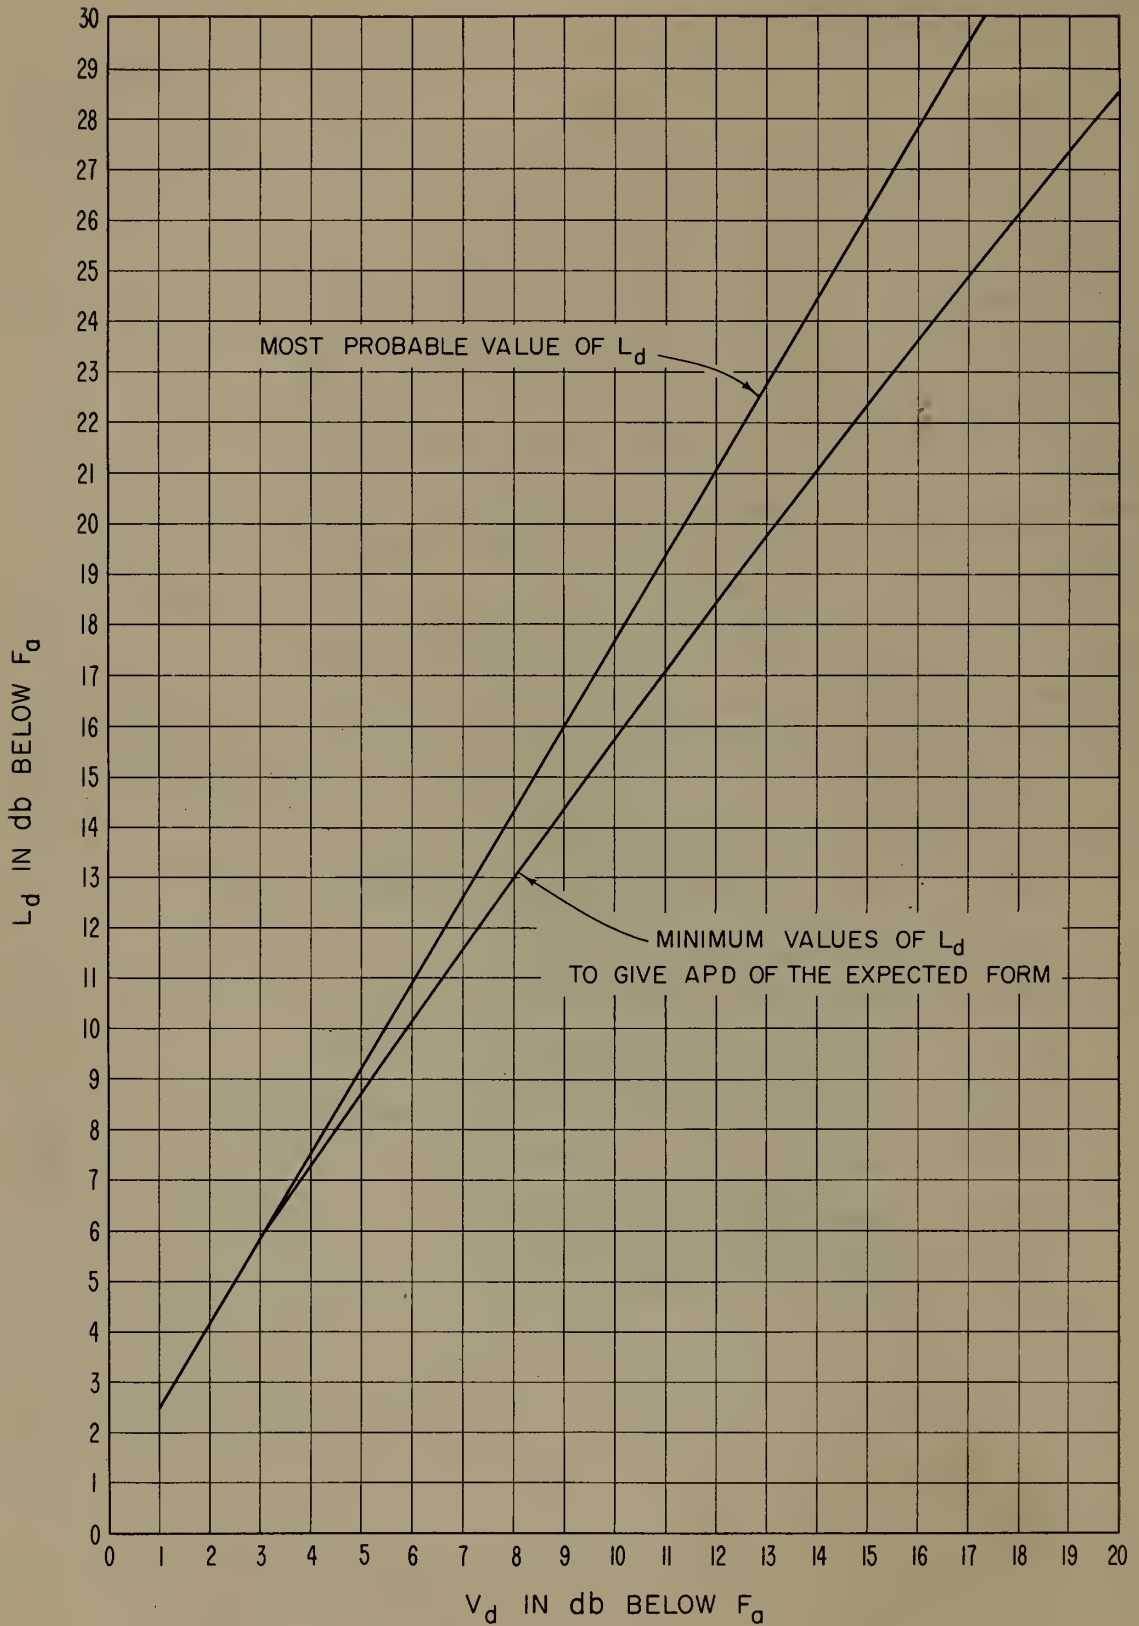

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W

Month December 19 60

Hour (ST)	Frequency (Mc)																																									
	.013				.051				.160				.495				2.5				5				10				20													
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm						
00	157	6	2	13.0	19.0	130	8	3	10.0	17.0	112	7	6	12.0	20.5	94	5	4	9.0	15.0	59	7	4	6.0	11.0	54	5	4	5.0	8.0	40	4	3	4.0	6.0	24	3	2	1.5	3.0		
01	159	6	4	13.0	19.0	130	10	3	10.5	17.5	114	6	8	12.0	18.0	94	4	5	8.0	16.0	59	8	5	6.0	10.0	54	5	4	5.5	9.0	40	4	4	4.0	7.0	24	2	2	2.5	4.0		
02	158	5	2	12.0	18.0	131	6	4	11.5	20.5	110	12	4	11.5	20.5	94	6	6	10.5	18.5	61	4	7	7.0	11.0	54	4	4	5.0	8.5	38	4	6	3.5	6.0	24	2	2	2.0	3.5		
03	159	4	2	11.5	16.5	131	6	4	13.0	20.0	110	11	6	12.0	19.0	93	6	7	10.5	19.0	61	8	8	7.0	11.0	52	4	3	6.0	9.5	36	5	4	3.0	5.0	24	2	2	2.0	3.5		
04	159	6	3	12.0	18.0	131	7	5	12.0	19.0	110	7	6	13.5	22.0	90	9	7	12.5	19.0	61	4	7	7.0	12.5	52	5	4	5.0	8.0	34	5	2	2.5	5.0	24	5	2	2.0	3.0		
05	159	3	2	12.0	18.0	131	5	5	13.0	19.0	108	10	8	14.0	24.0	80	12	11	14.0	24.5	57	7	7	8.0	14.5	52	4	3	5.0	9.0	36	4	2	3.0	5.5	24	4	2	2.0	3.0		
06	159	4	2	12.5	18.0	127	6	2	13.0	19.5	97	10	6	16.0	24.5	70	19	8	9.0	14.0	53	8	11	8.0	13.5	54	4	7	5.0	9.0	40	5	4	4.0	6.5	24	6	0	2.0	3.5		
07	155	6	2	11.5	16.5	121	9	4	13.5	19.0	88	17	10	14.0	21.0	68	22	8	*	*	*	*	43	9	7	5.0	8.5	44	8	8	6.0	11.0	38	6	2	4.5	7.5	25	1	1	2.5	4.0
08	155	4	2	11.0	16.5	119	10	12	14.0	23.5	88	18	14	15.0	24.5	68	18	8	8.0	13.5	35	12	4	3.0	5.0	34	8	10	3.5	6.0	32	6	4	3.5	8.0	26	2	4	3.0	5.0		
09	155	6	2	12.5	17.0	118	13	13	16.0	22.5	84	23	12	14.0	24.0	66	20	6	7.0	18.0	33	18	4	2.5	4.5	30	7	10	3.5	5.0	26	8	4	5.5	8.0	24	4	0	3.0	5.0		
10	155	5	4	12.5	17.0	119	8	11	13.5	20.5	88	14	16	15.5	25.0	64	18	8	8.0	15.0	33	9	4	2.5	5.0	26	7	7	3.0	5.5	22	9	2	4.0	6.0	24	4	2	3.5	5.0		
11	157	5	4	13.0	18.0	121	10	8	14.5	22.0	90	14	14	17.5	25.0	66	8	4	7.0	11.0	33	11	4	3.0	5.0	22	10	4	4.0	5.5	22	8	4	4.0	6.0	24	4	2	2.5	4.0		
12	159	4	4	11.0	16.5	125	6	8	13.0	19.0	94	6	18	13.0	21.0	66	8	4	13.5	24.0	33	11	6	2.5	4.0	26	8	6	3.5	6.5	24	6	4	6.0	10.0	24	6	2	3.0	5.0		
13	159	5	3	12.0	17.0	125	10	6	13.0	19.0	92	18	10	16.0	24.0	68	25	8	12.0	18.0	33	13	4	2.5	4.5	26	17	8	3.0	6.0	26	8	4	5.0	8.0	26	6	2	3.5	5.5		
14	161	8	4	10.5	16.0	127	9	8	11.5	18.0	97	17	9	12.5	19.0	70	24	8	11.5	20.0	33	20	6	2.5	4.0	28	14	4	2.5	4.5	32	4	6	5.5	8.0	26	4	2	3.5	5.5		
15	161	6	4	11.0	16.0	125	12	6	11.5	18.0	98	17	8	14.5	21.5	76	15	10	14.0	21.0	33	14	4	2.0	3.0	36	10	8	6.0	9.0	34	11	5	6.0	9.0	28	2	3	3.5	5.0		
16	161	3	4	12.0	18.0	125	10	7	14.0	20.5	100	12	10	13.0	19.5	74	16	8	11.5	19.0	37	10	7	3.0	5.0	46	5	9	5.5	9.0	40	3	4	6.0	9.0	28	2	2	3.0	5.0		
17	159	4	4	12.0	17.5	123	13	8	14.5	21.0	100	14	8	12.5	19.0	82	8	6	7.5	12.5	45	12	8	4.0	6.0	52	8	8	3.5	7.0	42	5	4	5.0	8.0	28	2	3	4.0	5.0		
18	157	7	4	12.0	17.5	127	11	6	12.0	19.0	108	14	6	10.0	17.0	90	11	6	9.0	16.0	53	14	5	6.0	9.5	54	8	2	4.0	6.0	42	11	3	6.0	9.0	26	4	2	3.0	4.0		
19	157	6	3	14.0	20.0	129	11	5	11.5	18.0	110	8	6	9.5	18.0	90	10	4	9.5	15.0	59	9	8	6.0	9.5	56	6	4	3.5	6.0	43	4	5	4.0	7.0	26	4	4	3.0	4.5		
20	157	7	3	14.0	20.0	130	8	7	12.0	19.0	110	7	6	9.0	16.5	92	7	3	8.5	16.0	59	9	6	6.0	10.5	58	3	5	4.5	7.0	42	2	4	4.0	7.0	26	4	4	3.0	5.0		
21	157	6	2	13.5	19.5	129	10	5	13.0	20.0	108	12	4	12.0	19.5	94	4	4	9.5	17.0	59	5	7	6.0	11.0	56	4	3	5.0	8.5	42	2	4	4.0	6.5	24	7	2	2.0	4.0		
22	157	7	3	14.0	19.5	129	10	4	12.0	20.0	110	9	6	11.5	18.0	94	5	6	6.5	12.5	59	8	5	6.5	10.5	56	5	5	5.0	9.0	42	2	2	4.0	6.5	24	3	2	3.0	4.0		
23	157	7	2	13.5	19.5	129	10	4	12.0	18.0	112	7	6	10.0	17.0	94	5	4	7.0	12.0	59	5	5	7.0	12.0	54	7	4	5.0	8.0	42	4	4	4.0	7.0	24	4	2	2.5	3.5		

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W

Month January 19 61

Time (LST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}																	
00	154	2	6	13.5	19.5	128	5	10	10.5	16.0	106	7	6	10.0	17.0	90	4	4	7.0	10.0	58	6	8	6.0	12.0	54	5	3	4.5	7.5	40	5	4	3.0	5.0	23	2	2	2.0	3.0	
01	154	2	6	13.0	19.0	127	6	7	9.5	15.0	107	8	6	11.0	17.0	89	6	4	7.5	14.0	58	6	6	8.0	12.0	55	4	4	5.0	9.0	40	4	5	2.5	4.0	23	5	2	2.0	3.0	
02	156	1	8	12.0	18.5	127	7	8	9.0	16.0	108	8	9	9.5	17.0	89	7	5	6.0	10.5	60	4	8	7.5	12.0	55	4	4	6.0	10.0	38	4	5	3.0	4.0	23	4	2	1.5	3.0	
03	154	5	4	13.0	18.5	127	7	5	10.0	16.0	107	8	8	8.0	13.5	89	7	6	9.5	16.0	58	7	7	7.0	12.0	53	4	3	6.0	10.0	34	6	4	3.0	5.0	23	4	2	1.5	3.0	
04	156	3	4	13.0	18.0	127	8	4	12.0	19.0	107	9	10	14.0	22.0	87	9	10	12.0	19.0	60	5	8	9.0	15.0	53	5	4	6.0	10.0	34	5	4	2.5	4.0	23	6	2	1.5	3.0	
05	156	3	4	13.0	19.0	128	7	5	11.5	18.0	108	5	15	10.5	19.0	85	9	9	11.0	19.0	60	7	12	10.0	16.0	53	5	4	6.5	11.0	34	6	4	3.0	4.0	25	5	3	1.5	2.5	
06	156	3	4	11.5	18.0	127	4	5	12.0	18.0	101	6	16	11.0	19.0	71	10	10	9.0	13.5	56	9	15	9.0	16.0	55	7	2	5.0	8.0	40	4	6	4.5	9.0	23	6	0	2.0	3.0	
07	152	4	2	11.5	17.0	120	9	5	10.5	16.5	90	14	24	13.0	21.0	69	18	6	*	*	*	46	8	10	8.0	13.0	45	7	5	7.0	11.0	40	4	6	5.0	8.5	17	4	4	3.0	4.0
08	152	4	4	11.0	16.5	115	9	10	11.5	18.0	85	20	23	6.5	12.5	65	19	4	7.0	10.5	36	10	5	3.5	6.0	40	6	7	7.5	13.5	34	4	6	5.5	9.0	26	6	5	3.0	5.0	
09	152	2	5	10.0	15.5	111	12	10	11.0	17.5	82	19	19	7.5	12.0	65	13	4	8.0	12.0	32	4	4	2.5	4.5	33	7	10	8.0	11.0	27	9	3	7.0	11.0	26	5	3	3.5	4.5	
10	152	4	4	10.0	15.0	111	12	6	12.0	18.5	85	12	20	9.0	14.0	63	6	4	5.0	8.0	32	6	4	3.0	4.5	27	6	2	7.0	9.0	24	7	4	5.0	8.0	25	6	2	3.0	4.5	
11	152	4	3	9.0	14.0	115	12	6	12.0	18.0	87	12	16	13.0	21.0	63	8	2	5.0	9.0	32	6	6	2.5	4.5	25	8	1	4.0	5.5	24	10	4	4.0	5.5	24	5	3	3.0	3.5	
12	156	2	4	10.5	16.0	121	6	6	13.0	19.0	92	8	11	12.0	20.0	65	10	2	6.5	10.5	30	7	4	3.0	5.0	25	9	4	6.0	8.0	24	6	4	5.5	8.0	25	2	4	3.0	4.0	
13	156	4	2	10.0	15.5	125	4	9	11.0	17.0	95	6	10	9.0	16.5	65	8	2	6.0	10.0	32	2	4	3.0	6.0	29	8	6	5.5	8.5	28	6	4	7.0	10.0	25	6	2	3.5	5.0	
14	158	2	4	10.5	16.0	125	4	4	11.0	16.5	96	5	11	11.0	18.5	68	8	5	5.0	8.5	30	3	4	3.0	5.0	29	8	4	6.0	9.0	32	4	6	7.0	9.5	27	2	4	3.0	6.0	
15	158	2	3	10.0	15.0	125	4	10	11.0	16.0	95	6	10	10.0	18.0	71	11	7	11.0	16.0	32	4	1	3.5	7.5	33	6	4	4.0	6.0	34	4	4	5.0	7.0	27	4	4	3.0	5.5	
16	158	2	4	11.0	16.5	123	6	8	11.0	17.0	97	6	9	9.5	17.5	73	9	8	7.0	15.0	34	4	4	4.0	6.0	41	4	6	6.0	10.0	38	4	4	6.0	10.0	27	4	2	3.5	5.0	
17	156	2	4	11.0	17.0	123	7	8	14.0	21.0	99	5	9	11.5	18.5	77	7	8	8.0	14.5	42	6	9	6.5	10.0	49	5	7	4.5	8.0	42	3	2	5.5	9.5	27	5	4	2.5	4.5	
18	154	3	4	13.0	19.0	125	6	10	12.5	19.0	104	7	8	10.0	16.5	86	7	7	8.5	14.0	50	5	8	5.5	10.0	55	2	4	5.0	8.5	42	4	2	7.0	11.0	25	6	3	2.0	3.0	
19	154	3	4	12.0	18.0	127	6	8	11.0	17.0	107	5	8	9.5	16.0	88	5	5	8.5	13.5	54	6	8	7.0	12.0	57	5	4	5.0	7.0	42	3	4	3.5	6.5	23	8	2	2.5	4.0	
20	154	4	4	13.0	19.5	127	5	8	10.0	16.0	107	4	9	10.0	16.5	89	6	6	8.5	13.5	55	5	7	6.0	11.0	59	4	5	4.0	7.5	40	2	4	4.0	7.0	23	8	2	2.0	3.5	
21	154	3	6	13.0	18.5	127	6	7	10.0	15.0	105	5	8	9.0	15.0	89	4	5	7.0	12.0	56	4	8	6.5	11.0	59	4	6	5.0	8.0	39	3	4	4.0	7.5	23	7	2	2.0	3.0	
22	154	2	6	13.0	19.0	129	4	10	9.0	15.5	107	4	10	9.0	15.5	89	4	5	6.0	11.0	57	5	8	6.0	10.5	55	5	2	4.5	7.5	40	3	4	4.0	7.0	23	5	2	2.0	3.0	
23	152	4	4	13.0	19.0	127	5	9	9.5	14.0	107	4	9	8.0	15.5	89	4	4	6.5	11.0	56	6	8	5.5	9.5	55	3	4	4.0	8.0	38	4	2	4.0	6.0	23	3	2	2.0	3.0	

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month February 19 61

Hour (LST)	Frequency (Mc)																																							
	.013			.051			.160			.495			2.5			5			10			20																		
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm												
00	155	6	2	12.0	18.0	129	6	4	11.0	17.0	110	6	6	9.5	16.0	91	8	6	6.5	11.0	61	8	4	7.5	13.0	58	2	4	4.0	8.0	39	8	2	6.0	8.5	22	2	0	2.0	3.5
01	157	2	4	11.0	14.5	131	4	6	11.0	17.0	110	8	8	9.0	15.5	93	6	8	7.5	12.5	62	7	5	7.0	12.0	58	2	4	5.5	10.0	39	6	2	3.5	6.0	22	2	0	2.0	3.0
02	157	2	4	10.0	16.0	133	2	8	11.0	17.0	112	6	8	10.5	17.5	93	6	12	8.0	12.0	63	6	6	6.5	12.5	56	4	2	5.5	10.0	38	3	5	5.0	8.5	22	2	0	2.0	3.0
03	158	3	3	10.0	15.0	131	4	8	11.0	16.0	111	5	7	10.0	17.0	93	6	10	8.0	13.0	65	4	6	8.0	13.0	54	4	2	6.0	10.5	33	10	2	3.5	5.0	22	2	0	2.0	3.0
04	159	2	4	9.5	15.5	131	4	6	9.0	15.0	110	8	8	11.5	19.5	92	7	11	9.0	16.0	64	5	9	6.5	13.0	54	4	4	5.0	8.0	33	6	2	3.0	4.5	22	2	0	1.5	3.0
05	159	2	4	11.0	16.0	131	4	10	11.0	17.0	112	6	12	9.5	17.0	89	10	10	10.5	17.5	64	5	7	7.0	13.0	54	4	4	5.0	8.0	32	5	3	3.0	4.0	22	2	0	1.5	2.5
06	159	2	4	11.5	17.0	127	6	4	11.0	16.0	102	12	18	10.5	19.0	78	15	9	6.5	9.0	61	6	8	9.0	14.5	58	2	4	5.0	8.5	37	9	4	4.0	6.0	22	2	0	2.0	3.0
07	157	2	4	11.5	17.0	123	6	10	13.0	19.0	99	11	23	13.0	20.5	75	16	4	5.0	7.5	47	12	8	8.0	12.5	45	7	3	7.5	11.0	40	7	5			24	2	2	4.0	5.0
08	156	3	5	10.0	15.5	119	6	15	15.0	20.0	96	14	21	15.5	23.0	73	15	3	3.0	4.5	41	10	6	6.0	8.5	36	6	8	13.0	18.0	34	5	3	5.0	7.5	24	2	2	2.5	3.5
09	155	4	4	12.0	17.0	119	4	11	13.5	20.0	92	13	18	12.5	21.0	71	14	4	3.0	5.0	35	9	4	2.0	4.0	30	7	4	6.5	10.0	29	5	6	6.0	10.0	24	3	2	3.0	4.0
10	155	4	2	11.0	16.0	117	8	8	13.0	19.0	92	12	12	11.5	19.0	71	12	4	3.5	5.5	33	6	3	2.5	5.0	22	6	4	4.0	6.5	23	6	2	5.0	8.0	24	2	2	3.0	4.5
11	155	4	4	10.5	16.0	119	8	6	11.0	16.0	93	12	7	11.0	18.0	73	8	8	3.0	5.0	33	2	2	2.5	5.0	22	6	4	6.5	10.0	23	8	4	5.5	9.0	24	2	2	3.0	4.5
12	157	4	2	11.0	15.5	125	4	8	10.0	15.0	96	8	8	9.5	17.0	73	4	8	2.5	5.0	33	2	2	3.0	5.5	24	4	4	4.0	6.5	23	10	4	5.5	7.0	24	4	2	2.5	4.0
13	159	2	2	10.0	14.0	125	6	4	10.0	15.5	98	4	8	8.0	13.5	73	6	4	3.0	4.5	33	2	4	3.0	5.0	24	5	4	4.5	7.0	25	6	4	5.0	8.0	26	2	4	3.0	4.5
14	161	2	2	9.0	13.0	127	4	4	9.0	14.0	98	7	6	8.0	14.5	75	7	2	4.0	7.0	33	2	2	2.0	4.0	28	2	4	5.0	7.5	29	6	6	6.0	9.0	26	2	2	4.0	6.0
15	161	2	2	9.5	14.5	127	4	4	10.0	14.0	100	6	6	9.5	15.5	77	12	4	4.0	6.0	33	6	4	2.5	4.5	32	2	4	5.0	8.5	33	4	4	5.5	9.0	27	1	1	4.0	6.0
16	159	4	2	10.0	15.5	127	6	4	11.0	17.5	102	8	8	9.0	16.5	81	10	6	8.0	11.0	35	4	2	4.0	6.0	37	3	5	5.0	9.0	37	4	4	5.0	8.5	28	2	2	4.0	6.0
17	159	4	2	11.0	17.0	127	6	6	12.0	18.0	100	10	6	10.0	17.0	81	10	6	7.0	10.5	33	8	4	5.0	8.5	46	6	6	5.5	9.0	43	2	2	5.0	8.0	28	2	2	4.0	6.5
18	157	4	2	11.5	18.0	127	4	4	11.0	17.5	108	4	8	9.0	16.0	93	4	4	6.0	10.5	57	6	4	5.5	9.0	56	6	6	4.5	8.0	45	2	4	5.0	7.0	26	4	4	3.0	4.5
19	157	4	4	12.5	18.0	129	6	4	10.5	17.0	110	4	6	9.0	15.0	93	6	6	7.0	12.0	57	6	2	6.0	10.0	60	2	4	4.0	7.0	43	6	4	4.0	6.0	24	4	2	3.0	4.0
20	157	4	4	13.5	19.5	131	2	4	10.5	16.0	110	4	4	9.0	16.0	91	6	6	7.0	12.0	57	5	2	6.5	11.0	60	4	4	3.0	6.5	41	4	4	5.0	7.5	22	2	2	2.5	3.5
21	155	4	4	13.0	19.0	129	6	4	10.0	16.0	110	4	4	10.0	17.0	93	4	8	7.5	12.5	59	4	4	7.0	12.0	60	4	4	5.0	7.5	39	4	4	4.5	7.0	22	2	2	2.5	3.0
22	155	6	4	13.0	18.5	130	5	7	10.0	16.0	111	3	7	9.0	16.5	91	6	2	6.0	11.0	59	4	4	6.0	9.0	58	4	4	5.5	8.0	39	4	4	5.5	7.5	22	2	2	2.5	3.5
23	155	3	2	12.0	18.0	129	6	6	9.0	16.0	110	4	6	9.0	15.5	91	6	4	6.5	13.0	59	6	6	7.0	12.0	56	4	4	5.0	9.0	41	8	4	5.0	7.0	22	2	2	2.5	3.5

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm					
00	149	2	2	110	160	115	9	5	110	160	93	11	9	100	150	77	8	11	75	110	53	2	6	45	70	48	6	6	50	80	36	6	6	25	40	23	2	2	20	35
01	151	2	3	110	160	115	9	6	80	135	92	6	5	100	160	75	6	10	80	110	53	2	4	50	70	48	4	4	50	75	32	8	2	25	35	23	2	2	15	35
02	151	0	4	115	160	115	6	4	90	160	90	15	11	90	140	75	6	9	75	735	51	4	2	45	70	49	3	7	50	80	34	10	4	40	55	23	2	0	15	35
03	151	0	4	110	160	113			85	150	88			110	175	71	7	8	70	130	51	4	4	45	70	50	2	6	50	80	32	4	2	30	50	23	2	0	15	35
04	149	2	2	120	170	115	6	6	105	165	84	10	8	90	170	69	6	6	50	100	51	4	4	50	70	48	6	2	40	70	32	6	4	30	45	23	2	0	20	40
05	149	2	4	110	150	114	7	3	110	170	78	14	3	110	140	64	7	6	60	70	51	4	4	65	95	48	4	6	50	80	32	4	2	40	50	23	2	0	20	40
06	149	2	6	110	140	112	7	9	100	160	76	9	8	75	100	60	4	5	35	80	48	5	3	40	50	46	4	4	45	75	34	4	2	45	60	25	2	0	20	40
07	147	4	2	110	145	107	7	8	100	160	70	7	4	40	45	57	6	2			47	2	4	30	50	42	4	4	40	55	36	2	2	40	60	27	2	2	30	45
08	145	2	2	120	155	101			85	140	71	5	6	95	140	61	6	6			43	4	0	25	40	36	2	4	30	50	34	2	4	30	40	27	2	2	35	50
09	143	4	2	110	140	97			75	80	70			60	80	60	5	5			43	4	2	30	70	36	4	4	25	40	31	5	3	30	50	27	2	2	25	45
10	145	2	4	110	150	99			75	110	71	13	4	40	50	60	5	3	25	40	43	8	2	20	35	35	7	3	30	50	30	2	6	30	40	27	2	2	35	45
11	145	5	3	115	150	100			85	130	74	10	8	30	40	61	6	4	30	50	45	2	2	20	40	36	5	3	35	55	28	2	4	40	35	29	2	3	30	50
12	145	4	2	105	150	103	14	4	100	145	74	13	6	75	25	61	3	4	30	40	45	4	4	20	40	36	4	3	30	50	28	2	4	40	35	29	2	3	30	50
13	145	6	3	95	135	103	16	4	70	105	74	10	6	30	40	59	6	3	20	45	45	2	2	25	40	36	4	4	35	55	30	4	4	35	50	29	2	4	30	45
14	143	6	2	115	150	103			80	110	76	7	7	60	70	59	8	4	30	50	45	0	2	25	40	36	2	4	30	50	32	4	4	30	50	29	2	2	20	40
15	143	4	4	125	175	101	12	4	90	115	78	9	8	40	65	61	6	4	30	70	45	2	2	25	40	38	0	6	25	50	34	4	2	35	55	29	2	2	20	35
16	143	4	4	120	170	103	11	3	95	140	79	15	5	60	85	63	8	6	35	75	45	2	2	25	45	40	6	6	35	50	38	4	2	40	60	29	2	4	30	45
17	145	2	6	120	175	111	4	8	100	150	84	14	8	100	140	66	15	7	50	65	47	4	4	35	50	45	5	7	40	50	40	2	4	50	70	25	4	2	30	45
18	145	2	2	130	190	113	4	10	105	170	85	14	7	110	140	71	6	6	110	160	47	8	2	35	50	46	4	8	40	60	38	4	2	40	65	23	2	0	20	40
19	147	2	2	135	180	113	5	9	100	160	88	9	9	100	140	71	8	6	50	100	49	4	2	30	50	47	5	5	40	65	38	4	4	45	55	23	2	0	20	35
20	147	2	2	125	185	113	8	8	110	170	90	7	12	100	160	75	6	8	75	140	51	4	2	35	60	48	2	4	45	70	37	3	7	35	50	23	2	0	15	35
21	149	0	4	125	185	113	6	4	85	160	88	11	8	85	140	75	6	10	70	105	51	2	2	45	65	48	4	6	50	80	36	8	6	30	40	23	0	2	15	35
22	148	3	3	130	185	115	6	6	100	170	91	10	7	100	160	75	10	7	55	120	51	2	4	40	60	50	2	8	50	80	36	6	6	30	45	23	0	2	20	40
23	149	2	4	120	170	115	2	4	110	170	92	10	12	85	155	77	6	7	85	100	51	2	4	45	60	48	6	6	50	80	34	10	4	30	50	23	0	2	20	40

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado

Lat. 40.1 N Long. 105.1 W

Month January

19 61

Fr (9)	Frequency (Mc)																																							
	.013			.051			.160			.495			2.5			5			10			20																		
	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}													
00	147	4	6	130	190	118	6	9	10.0	17.5	95	10	14	9.0	15.5	75	11	7	5.0	10.0	50	8	4	3.5	5.5	52	4	4	5.0	7.0	31	12	2	2.5	4.5	23	2	0	2.0	3.0
01	148	3	3	120	185	118	6	8	10.0	16.5	91	14	6	10.0	15.0	75	9	9	7.5	11.5	52	7	6	6.0	8.0	52	6	6	5.0	7.5	33	9	4	4.0	5.5	24	1	1	2.5	4.0
02	149	4	4	125	19.0	118	6	8	10.0	18.0	89	14	6	10.0	15.5	74	10	8	8.5	13.0	52	6	6	5.0	8.0	54	4	8	3.0	5.0	35	5	6	5.0	6.5	25	0	2	2.5	4.0
03	149	4	4	130	19.0	118	6	8	11.0	18.0	89	16	7	9.0	15.5	74	8	10	8.5	15.0	51	8	3	4.0	6.0	54	6	6	4.5	7.0	35	8	4	4.0	6.0	25	0	2	2.5	4.0
04	149	2	6	130	19.0	118	6	8	11.0	19.0	89	14	10	10.0	16.5	70	6	8	5.0	8.5	52	7	6	6.0	8.5	54	4	4	6.0	9.0	35	8	4	4.0	5.5	25	0	2	2.0	3.5
05	149	4	6	130	18.5	118	6	9	11.5	18.0	86	12	11	10.5	15.5	66	6	6	7.5	9.0	52	8	6	5.5	8.0	54	4	6	5.0	9.0	36	5	7	5.0	7.0	25	2	0	2.0	3.5
06	147	4	2	120	17.0	112	8	4	11.0	18.0	81	6	10	7.5	10.0	62	2	2	4.0	6.0	50	4	4	5.0	6.5	50	4	4	6.0	9.0	37	2	2	3.0	4.0	25	2	0	1.5	3.0
07	147	4	2	120	17.0	110	6	5	11.5	18.0	73	12	4	3.5	8.0	60	4	2	2.0	4.5	46	6	2	3.5	4.5	48	4	6	2.5	5.0	36	5	3	4.5	7.0	27	4	1	3.0	5.0
08	145	4	4	110	16.5	106	7	4	11.5	16.5	70	16	1	3.5	5.5	60	4	3	3.0	5.0	44	2	4	2.5	4.0	38	2	4	3.0	5.0	35	4	6	2.5	4.0	27	4	2	2.5	4.0
09	145	2	7	110	17.5	102			9.0	14.0	71	12	3	3.5	5.5	62	2	3	2.0	4.5	42	2	4	3.5	5.0	36	2	4	2.5	4.0	31	4	6	2.5	4.0	29	2	2	2.0	4.0
10	145	4	6	110	16.0	104	6	8	11.5	17.5	71	15	4	4.0	6.0	60	3	2	4.0	6.0	42	2	3	2.5	4.0	36	4	4	4.0	5.5	29	4	6	2.0	3.5	29	3	1	3.5	5.5
11	145	4	6	10.5	17.0	104	6	8	11.0	17.0	74	13	7	2.0	4.0	60	4	0	3.0	5.0	42	2	2	2.0	3.5	36	2	4	2.5	4.0	27	4	6	3.0	5.0	27	2	2	2.0	4.0
12	145	6	4	110	16.0	108	6	12	11.0	17.0	72	15	5	2.0	4.0	60	4	2	3.0	5.0	42	2	2	2.5	4.5	36	2	4	2.5	4.5	29	4	6	3.0	5.0	27	4	2	3.0	4.5
13	143	6	4	115	17.0	104	6	8	11.5	18.0	75	12	6	2.0	4.0	60	6	2	2.5	5.5	42	2	2	3.0	4.5	36	2	4	2.5	4.5	31	4	8	2.5	5.0	29	3	4	3.5	5.0
14	145	6	6	120	17.5	107	5	14	10.5	19.0	73	12	4	2.0	8.5	60	2	2	3.0	5.0	42	3	2	3.0	4.5	36	4	2	2.0	4.0	33	4	8	4.0	6.0	29	2	2	2.5	4.0
15	142	5	3	120	18.5	105	8	10	12.0	18.0	75	10	6	2.0	4.0	62	4	4	2.5	5.0	42	3	2	3.0	4.5	38	2	4	2.5	5.0	37	4	5			29	3	4	3.0	4.5
16	143	4	6	135	20.0	108	9	10	11.0	18.0	77	11	6	5.5	8.0	62	4	4	3.0	5.5	44	3	2	3.0	4.5	42	4	4	4.0	7.0	41	2	2	8.0	11.0	27	3	2	3.0	5.0
17	143	6	8	135	19.0	110	10	6	11.0	16.0	84	15	11	7.0	11.0	65	9	5	3.5	6.0	46	6	4	4.5	6.0	52	4	10	5.0	7.0	43	4	4	5.5	8.5	25	2	2	3.0	4.5
18	145	5	6	130	19.0	112	10	6	10.0	18.5	85	14	1	8.5	13.5	68	14	8	4.5	7.0	50	5	6	5.0	8.0	54	2	10	6.0	9.5	41	5	4	5.0	7.0	25	0	2	2.0	4.0
19	145	6	6	135	20.0	114	10	8	10.0	16.0	89	13	12	10.0	16.5	70	12	6	3.0	7.0	52	4	7	5.0	7.0	54	4	9	5.0	7.5	37	9	2	4.0	5.5	23	2	0	2.5	4.0
20	145	6	6	125	19.0	114	8	6	8.0	13.5	89	12	8	7.0	13.0	74	8	10	6.0	9.0	52	4	6	5.5	6.5	52	6	6	5.5	8.5	33	8	4	3.0	4.5	23	2	0	3.0	4.0
21	145	4	4	140	20.5	114	8	7	8.0	15.0	89	16	8	9.0	14.0	72	12	4	6.0	9.0	52	4	6	4.0	5.5	52	6	6	5.5	9.0	31	10	3	3.0	4.5	23	2	0	2.0	3.5
22	145	6	2	135	19.5	114	10	6	10.0	15.0	89	14	9	9.0	14.0	74	10	6	5.0	9.0	52	5	4	5.0	6.0	52	6	6	6.0	8.5	31	8	2	3.0	4.5	23	2	0	2.0	3.5
23	147	4	4	135	21.0	116	7	8	11.0	16.0	89	14	6	7.5	14.5	75	9	5	5.0	8.0	52	6	6	5.5	7.0	54	4	8	7.0	9.0	33	7	4	3.0	4.0	23	2	0	2.0	3.5

F_m = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																																	
	.013				.051				.160				.495				2.5				10				20									
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}		
00	157	2	6	10.0	16.0	121		9.8		11.0	17.0	18.5	79	10	6	9.0	13.0	56		4	3.5	5.0	5.6		2	2.5	4.0	26	3	2	2.0	4.0		
01	151	4	6	10.0	15.5	119		9.5	16.5	9.5	16.5	9.9	77	14	4	7.0	12.0	5.5		12	2	2.5	4.0	5.8		1	2.0	4.0	26	1	3	1.0	2.5	
02	151	2	6	11.0	17.0	123		9.5	16.5	9.5	16.5	9.5	77	12	4	7.0	12.5	5.5		10	2	3.0	4.0	5.7	4	4	3.5	5.0	27	1	3	3.0	5.5	
03	151	2	4	11.0	17.5	121		9.0	15.5	9.0	15.5	9.2	74	15	5	7.0	13.0	5.5		10	2	3.0	5.0	5.7	2	8	5.5	9.0	34	9	3	1.5	3.0	
04	150	3	3	11.0	17.0	121		11.0	17.5	11.0	18.0	72	15	3	7.0	12.0	5.4		12	3	4.0	5.5	5.5	6	4	4	5.0	8.0	34	5	2	3.0	4.5	
05	151	4	4	11.0	17.0	121		9.5	17.5	8.3	12	8	12	20	4	7.0	7.5	5.4		7	5	2.5	4.0	5.4	7	5	3.5	7.0	36	8	6	2.5	3.5	
06	149	4	2	11.0	18.0	119		10.0	16.5	7.7	16	8	16	9	2	3.0	5.0	5.1		5	2	4.0	5.0	5.1	6	4	4.0	7.0	38	5	3	6.0	10.0	
07	149	2	4	12.0	18.5	113		11.0	18.0	7.3	16	8	16	6	2	3.0	5.0	4.7		4	2	4.0	5.5	4.5	7	2	3.5	6.0	40	3	4	6.0	8.5	
08	145	4	4	12.0	18.0	107		11.0	18.0	6.9		4.5	7.5	81		2.0	4.5	4.5		4	2	4.0	5.0	3.9	2	5	3.0	5.0	36	4	4	6.5	11.0	
09	145			12.0	17.0	99		7.0	16.0	7.1		4.0	8.0	6.3		3.0	5.0	4.5					3.7				3.0	4.0	36					
10	145			10.5	17.0	100		9.0	13.0	7.4		5.5	8.5	6.1		3.0	5.0	4.3					3.0	4.5	3.7		2.0	4.0	34			3.5	5.0	
11	145			9.5	14.0	100		9.0	14.0	7.3		5.0	9.0	7.5		2.5	5.0	4.3					3.5			1.0	3.0	32			3.0	4.5		
12	148			10.5	16.0	102		10.0	15.0	7.7		6.0	8.0	6.3		2.0	4.0	4.5		4	2	1.0	2.5	3.5			2.0	3.5	30	6	0			
13	146			10.0	16.0	103		12.0	18.0	7.9		7.5	10.5	6.3		2.5	4.0	4.5		4	4	2.0	3.5	3.6	3	5	3.5	4.5	34	2	2	6.0	8.0	
14	145			11.0	17.0	104		11.0	17.0	8.0		8.5	14.0	6.3	6	2	3.5	5.5	4.5	6	2	3.0	4.0	3.7	4	6	3.0	5.0	38	2	6			
15	145	2	4	12.5	19.0	105		11.5	18.0	7.9	4	2	7.0	11.0	6.5	2	4	3.0	5.0	4.5	7	2	3.0	4.0	3.9	6	4	5.0	6.5	40	4	3	6.0	10.0
16	145	2	6	13.5	20.0	107		12.0	19.0	7.7	18	8	9.5	17.5	6.5	2	4	4.0	7.0	4.7	4	4	3.5	4.0	4.3	2	4	3.0	4.5	42	7	2		
17	145	4	6	12.0	18.5	111		12.0	19.0	8.3	16	6	9.0	15.5	6.5	12	2	5.0	9.0	4.9	5	4	3.5	4.5	5.3	4	5	3.0	6.0	46	5	4		
18	145	6	6	12.0	18.5	115		10.0	17.5	8.5	12	10	9.5	18.0	6.9	11	4	8.0	11.5	5.3	11	4	3.0	4.5	5.5	4	4	3.0	4.0	44	3	4		
19	146	3	5	12.0	19.0	113		10.0	17.5	8.8	13	12	9.0	18.0	7.1	14	4	8.0	13.0	5.3	10	4	3.0	4.0	5.6	1	3	1.5	4.0	44	3	8		
20	147	2	6	13.0	20.0	115		11.5	17.0	8.6		10.0	17.0	7.3	8	4	9.5	15.5	5.5	8	2	3.0	4.5	5.5	2	4	3.0	6.5	36	10	4	5.0	7.0	
21	147	4	4	12.0	19.0	115		11.0	18.0	8.8		10.0	18.0	7.5	12	4	9.0	16.0	5.5	8	4	3.0	5.0	5.5	4	2	4.5	8.0	36	8	6	1.0	2.0	
22	147	6	2	12.0	18.0	119		10.5	17.5	9.1	16	6	11.5	20.0	7.7	6	6	9.0	15.0	5.5	6	4	3.5	5.0	5.7	2	4	3.0	6.0	32	9	2	3.0	5.0
23	149	2	4	11.0	17.0	119		11.0	18.5	9.5	8	10	9.5	18.5	7.7	10	6	9.0	16.5	5.7	8	5	3.0	5.0	5.5	4	2	4.0	7.0	34	8	3	2.0	4.0

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month December 19 60

Hour (SR)	Frequency (Mc)																														
	.051			.113			.246			.545			2.5			5			10			20									
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}							
00	96	2	2		76	2	4		65	2	6		55	8	4		22	2	2		18	5	2		20	2	4		17	0	0
01	96	2	4		74	4	2		67	2	4		53	4	2		22	2	2		16	7	2		18	4	4		17	0	2
02	96	4	2		74	4	2		67	4	4		53	4	4		22	4	2		16	7	4		18	2	7		17	0	2
03	96	4	2		74	4	3		65	2	6		*53				22	4	2		15	7	3		14	7	6		17	0	2
04	96	4	2		*74				*67				*53				24	0	2		14	8	2		14	4	4		17	0	2
05	96	4	2		75	3	3		*65				55	2	4		22	4	0		14	7	2		14	5	7		17	0	4
06	96	2	4		75	2	3		69	6	5		53	7	3		22	4	2		16	2	4		14	5	5		17	0	2
07	96	2	2		74	4	2		67	2	6		55	2	4		22	2	2		14	8	2		14	6	6		17	0	2
08	96	2	4		74	2	2		67	4	8		55	4	4		22	2	2		14	7	2		14	4	4		17	0	2
09	96	2	4		74	4	2		67	4	6		55	4	4		22	4	2		14	4	2		14	4	3		17	0	2
10	96	2	4		74	4	2		67	4	6		55	4	4		22	2	2		15	5	3		16	2	5		17	0	2
11	94	4	2		74	3	2		65	2	8		54	5	4		22	4	2		14	6	2		16	2	4		17	0	2
12	94	4	2		74	4	2		67	4	8		55	6	4		22	2	2		14	5	2		16	3	4		17	0	0
13	94	2	2		74	3	3		67	4	6		55	6	4		22	2	2		14	6	2		16	4	4		17	2	0
14	94	2	3		74	6	2		65	2	5		53	8	2		22	2	2		14	8	2		16	4	6		17	2	0
15	94	4	3		*74				*66				*56				22	2	0		14	7	2		17	9	5		17	2	0
16	94	4	2		*74				*69				*51				24				14	6	2		18	2	4		17	2	0
17	94	2	2		74	4	2		67	4	6		55	2	4		24	2	2		16	4	4		18	3	3		17	2	0
18	94	5	2		74	3	2		66	3	6		53	6	4		22	2	2		14	8	2		20	2	4		18	1	1
19	96	4	4		74	4	2		67	4	4		57	5	7		23	3	1		16	6	2		20	4	4		17	2	6
20	96	6	4		74	4	2		67	4	4		55	4	4		22	2	2		18	4	4		20	4	8		17	2	1
21	96	4	2		76	0	4		66	3	5		53	9	2		22	2	0		18	4	4		20	4	6		17	2	0
22	96	4	4		74	4	2		69	4	2		55	6	4		23	3	1		18	6	4		20	2	4		17	2	0
23	96	2	2		75	3	3		67	4	4		55	8	4		22	2	2		18	6	4		20	4	4		17	1	0

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month January 19 61

Hour (ST)	Frequency (Mc)																																
	.051			.113			.246			.545			2.5			5			10			20											
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{om}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{om}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{om}	D _z	V _{dm}
00	101	5	6	78	8	4	66	2	4	54	4	4	22	2	2	18	9	4	21	5	10	18	1	2	17	2	0	17	2	0	17	2	0
01	101	6	4	78	6	4	68	2	4	54	4	4	22	2	2	17	7	5	21	4	6	17	1	2	19	1	2	17	2	0	17	2	0
02	99	8	6	77	7	3	66	4	0	52	8	2	22	0	2	18	7	4	21	4	5	19	1	2	17	2	0	17	2	0	17	2	0
03	99	6	4	76			69			54			22	2	2	16	7	3	19	4	9	17	2	0	17	2	0	17	2	0	17	2	0
04	97	8	4	76			66			54			22	2	0	16	8	4	19	5	9	17	2	0	17	2	0	17	2	0	17	2	0
05	97	8	2	77	7	3	66	4	0	54	4	4	22	2	2	16	7	4	17	4	7	17	2	2	17	2	2	17	2	2	17	2	2
06	99	8	6	78	7	4	66	4	4	54	4	6	22	2	2	14	6	2	17	4	7	17	2	1	17	2	1	17	2	1	17	2	1
07	101	4	6	78	8	4	66	4	2	54	6	4	22	2	2	14	4	2	17	4	4	17	2	0	17	2	0	17	2	0	17	2	0
08	101	6	6	80	5	6	66	4	2	52	6	2	22	2	2	14	4	2	17	2	3	17	2	0	17	2	0	17	2	0	17	2	0
09	100	5	5	78	9	4	66	4	4	52	4	4	22	2	2	14	2	2	17	2	3	17	2	0	17	2	0	17	2	0	17	2	0
10	101	6	6	78	9	4	66	4	2	54	6	4	22	2	2	14	2	2	17	2	3	17	2	0	17	2	0	17	2	0	17	2	0
11	99	8	4	78	6	4	66	2	4	54	4	4	22	2	2	14	4	2	17	2	4	19	0	2	19	0	2	19	0	2	19	0	2
12	99	6	6	80	6	6	67	3	5	54	4	4	22	2	2	14	2	2	16	4	3	19	0	2	19	0	2	19	0	2	19	0	2
13	99	8	4	77	11	3	66	4	2	54	4	4	22	2	2	14	6	2	17	2	4	19	0	2	19	0	2	19	0	2	19	0	2
14	99	6	6	80	2	6	66	4	2	52	4	3	22	2	2	14	3	2	17	4	4	19	2	2	19	2	2	19	2	2	19	2	2
15	101	6	8	76	10	2	66			50			22	2	2	14	2	2	19	2	4	19	0	2	19	0	2	19	0	2	19	0	2
16	101	4	8	76			66			50			22	2	2	14	4	2	21	4	6	19	2	1	19	2	1	19	2	1	19	2	1
17	101	4	9	82			68	2	4	52	6	2	22	2	0	14	5	2	21	4	8	19	0	2	19	0	2	19	0	2	19	0	2
18	101	8	6	80	6	6	66	4	4	54	4	4	22	0	2	16	7	4	23	4	4	19	1	2	19	1	2	19	1	2	19	1	2
19	101	8	6	80	5	6	66	4	2	54	4	4	22	2	2	20	6	6	23	5	11	19	2	2	19	2	2	19	2	2	19	2	2
20	101	8	6	80	5	6	66	2	2	54	4	4	22	2	2	18	8	5	23	6	8	19	1	2	19	1	2	19	1	2	19	1	2
21	103	4	6	76	10	2	66	2	2	54	4	4	22	2	2	22	8	8	23	6	6	19	0	2	19	0	2	19	0	2	19	0	2
22	103	6	6	78	6	4	66	4	4	52	6	4	22	0	2	20	9	5	23	4	9	19	0	2	19	0	2	19	0	2	19	0	2
23	103	4	8	78	4	4	66	2	4	50	2	6	22	2	2	22	7	6	22	6	4	19	0	2	19	0	2	19	0	2	19	0	2

F_{am} = median value of effective antenna noise in db above k1b
 D_z = ratio of upper decile to median in db
 D_z = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month February 19 61

Fr (hr)	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}
00	107	5	2	84	4	6	64	5	0	57	5	4	22	2	0	27	9	6	23	5	6	18	1	1			
01	107	3	5	82	6	3	64	2	0	57	3	3	24	1	2	27	6	8	22	5	8	17	2	0			
02	107	6	4	86	4	6	64	4	0	56	7	2	24	2	2	25	12	9	22	4	9	17	2	1			
03	105	5	1	*86			*64			22	2	0	22	2	0	20	15	5	19	4	5	17	2	0			
04	105	4	2				64	4	3	*26						21	12	11	19	9	11	17	2	2			
05	105	4	2	84	2	4	64	7	0	56	4	3	24	2	2	21	7	9	19	7	9	17	2	2			
06	104	4	1	84	4	4	64	7	0	56	3	2	22	2	1	19	4	6	17	6	9	17	2	2			
07	105	3	3	84	4	5	64	6	2	56	3	8	24	1	3	19	4	6	19	4	8	17	2	0			
08	105	3	3	84	4	4	64	7	0	56	7	4	24	1	2	17	4	4	17	5	10	17	2	1			
09	105	2	4	82	4	2	64	5	0	56	4	2	22	2	1	17	4	4	17	3	8	17	2	0			
10	105	3	4	82	4	4	64	5	2	56	4	4	24	0	3	15	4	2	17	3	3	18	1	1			
11	105	3	3	84	6	4	64	3	0	56	7	4	24	0	2	15	4	2	19	3	3	19	1	2			
12	105	3	3	82	4	2	66	2	0	56	5	2	24	2	1	15	3	2	17	5	2	19	0	2			
13	105	5	4	82	3	2	64	6	0	56	6	4	22	3	3	15	4	2	17	2	2	19	0	2			
14	105	2	4	89	5	2	64	6	0	56	8	4	22	2	2	17	6	3	19	2	4	19	2	2			
15	103	5	2	*81			*65			*59			22	2	2	22	3	6	19	3	6	19	2	0			
16	*103			*81			*69			*81			26		0	19	4	4	23	4	2	19	1	0			
17	105	4	4	*84			*64			*56			24	2	9	22	3	6	26	3	5	19	0	0			
18	105	5	2	83	1	3	64	6	0	56	6	2	24	2	0	24	7	7	25	6	3	18	1	0			
19	106	4	5	84	4	4	64	4	0	56	4	2	24	0		27	10	8	26	7	2	19	2	0			
20	107	4	4	82	6	2	64	6	1	56	2	4	22	2	2	28	9	10	27	6	4	19	1	2			
21	105	8	2	82	4	2	64	4	0	54	4	2	22	2	2	33	6	11	28	6	8	19	0	2			
22	107	4	4	84	5	5	65	3			4	2	22	2	2	33	3	16	27	6	9	19	0	1			
23	107	6	4	84	6	4	64	4			10	0	22	2	0	31	8	12	25	4	7	19	0	2			

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia

Lat. 30.6 S Long. 130.4 E

Month December 19 60

Hour (ST)	Frequency (Mc)																																							
	.013				.160				.545				2.5				5				10				20															
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm								
00	158	6	2	8.5	14.0	133	5	7.5	13.0	112	6	4.5	7.5	88	7	5	5.5	11.0	66	8	7	7.0	14.5	57	7	5	5.0	10.0	46	5	9	3.0	6.0	25	4	2	2.5	4.0		
01	158	6	1			134	4	7.0	13.5	112	8	6.5	12.5	88	5	5	8.0	17.0	64	9	5	8.0	15.0	56	6	4	5.0	9.5	46	4	6	3.0	6.0	24	4	2	2.0	3.5		
02	160	3	4	8.0	13.0	134	2	4	9.0	15.5	112	4	7.0	17.5	86	7	6	7.5	16.0	62	8	4	7.0	12.5	56	6	4	5.5	9.0	46	4	7	2.5	5.0	22	4	0	2.0	3.0	
03	158	4	2	9.0	14.5	132	6	2	9.0	15.5	110	8	9.5	17.0	84	8	8	7.0	14.0	62	6	7	6.0	12.5	56	6	6	3.5	6.0	46	2	7	6.0	10.0	22	2	0	2.0	3.5	
04	158	4	2	9.0	12.5	132	6	6	9.5	17.0	108	8	10	11.0	20.0	80	6	15		60	9	8	8.5	16.0	54	6	4	5.0	9.0	44	3	4	4.5	7.5	22	2	0	2.5	4.0	
05	156	4	2	10.0	17.0	126	6	6	12.5	20.0	96	14	12	16.5	24.0	56	17	13	7.0	17.0	54	10	7	7.5	14.0	52	4	4	6.0	9.0	42	3	3	2.0	4.5	24	0	2	2.5	4.0
06	154	4	2	10.0	15.5	124	6	8	11.0	18.0	87	23	13	11.0	21.5	52	19	12	17.0	24.5	38	14	9	9.0	15.5	46	9	9	7.5	12.0	38	6	6	4.5	7.0	24	2	2	7.5	3.5
07	154	4	2	13.0	19.0	120	10	7	11.5	20.0	92	16	20	12.0	21.0	52	14	12	10.0	15.0	38	14	12	7.5	14.5	34	12	10	7.0	11.5	34	8	6	3.5	6.0	24	2	2	3.0	4.5
08	154	4	4	12.0	19.0	118	10	6	7.0	10.5	93	15	18			52	14	12	5.0	7.0	22	14	4	7.0	10.5	27	14	6	4.5	6.0	32	6	9	3.5	5.5	24	2	2	1.0	2.0
09	154	6	3	13.0	20.0	120	10	6	13.0	21.5	94	14	18	11.5	21.0	54	13	10			22	10	4			29	10	8	7.5	13.0	31	7	7	3.0	5.0	23	3	1	2.0	4.0
10	155	5	5	13.5	21.0	122	8	10	12.0	20.5	88	9	16	8.5	16.5	57	11	9	3.0	5.0	26	8	8	2.0	3.5	30	10	6	2.5	4.5	32	5	15	3.0	5.5	22	3	3	2.0	3.5
11	156	4	6	5.5	14.0	124	8	8	8.5	9.5	95	14	16	10.0	18.5	56	18	8	6.0	10.0	24	12	6			28	11	7			34	4	11	5.0	8.0	22	4	0	2.5	4.0
12	156	6	6	14.5	23.0	126	10	6	11.0	19.0	96	18	16	11.5	18.5	56	22	6	3.0	5.5	26	12	8	2.0	4.0	30	8	10	2.0	4.0	35	4	9	3.0	5.0	24	4	2	2.5	4.5
13	158	4	4	10.5	17.5	130	10	8	6.0	12.0	102	20	12	7.0	13.5	60	28	8	4.0	7.0	27	13	9	4.0	7.0	32	12	11	3.5	5.5	38	2	16	4.0	7.0	26	2	4	2.0	4.0
14	160	6	6	8.5	15.0	132	10	6	9.5	16.5	109	13	17	7.5	14.0	74	17	22			28	42	8			35	8	15	5.0	8.5	38	8	14	4.0	7.5	26	8	4	1.0	3.5
15	162	5	8	7.0	11.5	134	9	10			113	11	26	5.0	9.5	70	26	18	5.0	8.5	32	30	10	4.0	13.0	38	20	18	3.0	6.5	42	2	8	4.0	8.0	26	4	2	3.0	5.0
16	164	4	4	6.5	11.5	134	8	11	5.0	10.0	112	10	24	4.0	8.5	70	24	16	5.0	9.0	36	20	16	11.0	16.0	40	10	3	4.0	8.0	42	6	9	3.0	5.5	28	5	3		
17	162	4	6	6.5	12.5	132	13	9	5.0	9.0	112	12	20	6.5	12.0	74	20	22	7.0	12.0	37	15	11	3.5	7.0	48	8	14	4.5	7.5	46	6	8	3.5	6.5	26	6	2	3.0	5.0
18	162	4	6	6.5	11.5	132	14	8	6.5	12.0	110	11	17	2.5	5.0	74	13	18	3.0	5.5	52	10	14	4.0	9.0	53	9	11	4.0	8.0	48	6	8	3.5	5.0	28	6	4	3.0	4.5
19	160	6	4	7.0	14.0	136	8	10	5.0	9.5	114	7	9	3.0	6.5	86	10	15	3.5	7.0	62	6	16	4.0	9.0	60	8	7	3.5	8.0	50	5	8	3.0	5.0	27	5	3	2.0	4.5
20	162	5	6	8.0	13.5	138	8	6	5.5	10.0	118	4	8	3.5	8.0	91	7	7	3.0	7.5	68	8	10	5.0	10.0	62	6	8	4.0	7.5	48	6	8	3.0	6.0	26	6	2	3.5	5.5
21	160	8	4	7.5	13.5	138	6	6	5.5	11.0	116	6	8	4.5	9.5	93	6	8	4.0	9.0	68	6	14	5.5	10.5	61	6	8	4.5	8.0	49	3	8	4.0	6.5	26	6	4	3.0	4.0
22	160	7	4	8.0	13.5	138	6	6	9.5	16.0	114	6	6	5.5	9.5	93	6	10	5.0	11.0	67	8	12	5.0	10.0	60	6	4	5.0	8.0	48	4	8	3.5	7.5	26	4	4	3.0	4.5
23	158	8	2	8.5	13.5	136	5	6	8.0	14.0	113	7	7	5.0	10.0	92	8	10	6.5	13.5	66	9	8	6.5	12.5	59	6	6	5.5	9.0	47	5	9	3.5	6.5	26	4	2	2.0	4.0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station

Cook, Australia

Lat. 30.6 S

Long. 130.4 E

Month

February 19 61

Hour (LST)	Frequency (Mc)																																			
	.013				.051				.160				.545				2.5				5				10				20							
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}				
00	160	5	3	9.0	14.0	134	8	4	10.5	17.0	114	5	7	7.0	15.0	66	10	4	5.5	13.0	57	4	2	5.0	10.0	45	4	4	4.5	8.0	24	2	2	3.0	4.5	
01	160	3	2	8.5	13.5	134	5	2	10.0	17.0	112	6	4	9.0	15.5	83	5	6	8.0	19.0	66	9	8	7.0	14.0	46	3	4	4.0	7.0	24	2	2	3.0	4.0	
02	160	2	2	7.5	13.5	134	4	2	9.5	15.0	112	4	3	8.5	16.0	89	8	6	8.5	17.5	66	4	5	7.0	14.5	47	4	5	6.0	9.0	24	3	2	3.0	4.0	
03	160	2	4	9.5	15.5	134	4	2	10.0	17.0	111	6	5	8.0	16.0	87	8	4	7.5	17.0	64	6	4	6.0	13.0	43	6	4	4.5	7.0	24	2	2	2.0	3.0	
04	158	4	2	10.0	16.0	134	4	4	10.0	16.0	110	5	3	10.0	18.0	85	9	7	9.0	18.0	64	6	6	6.0	14.0	41	6	6	3.5	7.0	24	2	2			
05	159	3	5	10.0	16.5	132	4	4	10.5	18.0	106	9	8	9.0	24.0	75	10	10	8.0	14.0	64	6	8	7.0	15.0	39	6	6	4.0	6.5	24	2	2			
06	158	4	2	10.0	17.0	126	8	4	11.0	18.0	87	23	8	7.5	19.0	45	36	6	7.5	21.5	50	12	2	4	6.5	11.0	40	5	3	5.5	9.0	24	0	2		
07	156	4	2	11.0	17.5	124	8	4	12.0	19.5	88	16	10	11.0	19.0	43	26	4	10.0	17.0	38	16	10	7.5	15.0	36	11	7	5.0	8.5	24	2	0	3.0	4.5	
08	158	2	6	12.5	18.5	121	8	7	12.5	21.0	91	12	11	12.5	22.0	43	22	4	15.0	25.5	22	14	4	4	6.5	9.0	31	12	10	6.0	8.0	24	2	2	2.0	3.0
09	156	6	4	12.0	19.0	122	8	8	13.5	22.0	91	16	15	14.0	23.0	47	33	8	15.0	27.5	20	18	2	2	3.5	8.0	24	13	5	3.0	7.5	24	3	2	2.5	4.0
10	156	5	6	13.0	20.0	122	15	7	14.0	22.0	90	13	14	11.0	19.0	48	7	8	6.0	11.0	18	22	0	4	4.5	7.5	31	15	7	4.0	6.0	24	2	2	2.0	4.5
11	156	5	6	13.0	20.0	126	8	10	12.0	21.5	93	12	12	12.0	18.0	51	8	8	3.0	5.0	22	11	4	4	5.5	11.0	27	13	8	3.0	7.5	23	4	2	2.0	4.0
12	158	5	7	12.5	19.5	128	6	6	12.0	21.0	97	15	12	7.5	14.5	53	35	6	3.0	6.0	26	21	8	3.5	7.0	27	15	4	2.5	5.0	24	6	2	2.0	4.5	
13	158	7	5	10.0	17.0	132	6	6	6.5	12.0	100	12	8	5.5	11.5	56	28	7	3.5	6.0	26	21	6	2.0	3.5	27	11	8	2.5	8.0	32	8	6	3.0	5.5	
14	160	6	3	8.5	14.5	132	8	3	7.5	13.5	100	19	2	6.0	12.0	55	67		4.0	7.0	35					34	11	12	5.5	8.0	35	6	4	4.0	6.5	
15	164			7.5	14.0	135			5.5	12.5	104			7.5	14.5	67			*	7.0	35					35			4.5	8.5	39			3.0	4.0	
16	162			8.0	14.0	132			5.0	9.0	102			7.5	12.5	53	30	5	7.0	11.0	31					41			4.0	7.0	43	4	3	5.0	8.0	
17	162	5	3	8.0	14.5	130	11	3	6.5	11.0	100	21	6	7.0	12.0	59	27	8	5.0	8.0	39	19	8	4.0	7.5	45	13	7	3.0	6.5	46	3	4	3.5	6.0	
18	160	5	2	7.5	14.5	130	13	2	7.0	12.5	106	16	6	5.0	11.0	78	28	7	5.0	8.0	54	11	8	4.5	8.5	53	7	6	5.0	9.5	47	4	2	2.5	5.0	
19	160	6	2	8.0	14.5	134	11	3	7.0	12.0	113	14	3	5.0	10.0	91	15	6	5.0	7.5	64	12	5	5.0	7.5	61	5	6	3.5	7.0	49	2	4	4.0	6.0	
20	162	5	5	7.5	14.5	136	7	4	6.0	12.0	114	12	4	5.5	11.5	94	10	5	5.0	7.0	69				4.0	8.0	61	3	2	4.5	8.5	49	2	3	3.0	6.0
21	161	5	3	7.5	15.5	138	6	6	8.0	15.0	114	4	6	5.5	11.5	95	8	4	5.0	9.5	67	8	3	5.0	10.5	61	2	2	5.5	9.5	48	5	3	3.0	6.0	
22	160	3	4	10.0	15.5	136	4	4	9.5	16.0	114	7	6	7.0	14.5	93	10	3	5.5	13.0	68	4	4	6.0	12.0	59	4	2	4.0	7.0	47	2	4	4.0	6.5	
23	160	6	2	10.0	15.0	136	8	6	9.5	17.5	112	10	6	8.5	16.5	95	6	8	7.5	15.0	66	8	4	6.0	12.5	59	4	4	5.0	8.0	46	3	3	4.5	8.0	

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden

Lat. 59.5 N Long. 17.3 E

Month December 19 60

Hour (ST)	Frequency (Mc)																																							
	.013				.160				.495				2.5				5				10				20															
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm								
00	152	2	4	8.0	12.5	99	7	6	9.0	130	73	17	9	3.5	6.5	49	8	4	4.5	7.0	*	7.0	*	6.5	*	32	6	3	2.0	4.0	17	3	2	0.5	2.0					
01	150	3	2	10.5	16.0	118	3	5	9.0	145	103	8	8	3.0	7.5	74	17	11	4.0	9.0	50	7	5	6.5	11.0	32	11	4	1.5	3.0	17	2	1	0.5	2.0					
02	150	4	2	10.0	16.5	118	4	5	10.5	16.5	101	6	8	4.5	8.5	72	20	8	4.0	6.5	45	8	4	5.5	9.0	32	6	4	2.0	3.5	17	3	0	0.5	2.0					
03	150	4	2	11.5	18.5	116	6	4	8.5	14.0	103	5	13	5.5	9.5	72	18	12	1.5	3.0	47	8	5	6.0	9.5	32	4	4	2.0	3.5	17	3	0	2.0	3.5					
04	150	4	2	10.5	17.0	116	7	4	11.0	17.0	101	6	12	4.5	8.5	72	11	14	2.5	4.0	47	8	6	5.5	8.0	32	8	3	6.5	10.0	32	8	3	1.5	3.0					
05	150	3	2	11.0	18.0	118	4	9	13.0	19.0	101	6	8	4.0	8.0	71	14	12	2.5	4.5	47	6	7	7.5	10.5	31	11	1	3.0	5.0	19	1	2	1.0	2.5					
06	150	4	2	11.5	19.0	114	6	6	10.5	16.5	103	6	11	3.0	6.5	60	10	4	2.0	3.0	47	6	8	9.0	13.0	34	7	4	5.0	6.0	19	1	2	1.5	3.0					
07	148	4	0	12.0	19.5	112	2	5	10.0	12.0	97	10	14	5.0	11.0	60	5	4	2.5	4.5	45	6	7	3.5	6.5	49	7	5	6.0	7.5	40	9	7	4.0	6.0	21	2	4	3.0	4.5
08	148	2	2	12.0	19.0	106	4	4	6.0	9.0	85	8	7	4.0	7.0	56	12	3	1.0	2.0	37	8	5	6.0	8.5	42	6	4	7.0	9.5	38	10	4	8.5	13.0	19	5	0	1.5	3.5
09	146			12.0	19.0	102			7.5	7.5	80					58		1.0	2.5	31			6.0	9.0	*					4.5	7.5	42			9.0	13.5	*	3.0	4.5	
10	143			11.0	17.0	98			7.5	7.5	89					59		1.0	3.0	33			3.0	5.0	*					3.5	5.5	34			3.5	5.5	*	7.0	3.0	
11	144	2	4	9.5	16.5	98			10.5	13.5	85	12	8	5.0	6.5	54	14	4	2.0	3.0	31	4	2	2.5	5.5	22	9	4	3.0	3.0	36	8	12	7.0	8.5	21	4	2	2.0	3.5
12	144	4	2	9.0	15.0	98	10	6	12.0	14.0	87	6	6	5.5	8.0	58	8	8	2.0	4.0	34	6	6	4.5	6.0	23	6	7	4.0	5.5	38	14	10	5.0	6.5	22	4	2	2.0	4.0
13	144	4	0	7.5	12.5	98	8	6	9.0	12.0	87	8	9	10.5	15.5	59	6	7	2.0	4.0	36	4	4	4.5	6.5	25	10	7	3.0	5.0	44	18	12	*	*	23	2	3	7.0	3.0
14	146	2	2	7.5	12.0	100	7	6	8.0	11.0	87	7	8	6.0	10.0	60	8	7	1.0	2.0	36	3	3	2.0	4.0	32	8	8	4.0	4.0	47	11	6	9.0	14.0	23	2	4	3.0	4.0
15	146	3	2	7.0	11.0	100	7	4	12.5	13.0	85	7	6	7.0	11.0	64	7	8	1.5	3.5	37	4	6	3.0	5.5	46	6	5	5.0	7.5	44	18	6	3.0	5.0	21	4	2	2.0	3.5
16	146	2	2	8.0	13.0	104	9	5	10.0	14.5	91	4	8	4.5	9.0	66	14	8	2.0	4.0	38	7	3	4.0	7.0	46	11	10	*	*	47	9	9	*	*	19	4	2	2.0	3.5
17	148	2	2	8.0	12.0	112	4	4	7.5	11.0	95	3	9	5.5	9.0	70	13	13	2.0	5.0	41	6	4	4.0	7.5	48	7	8	5.0	7.5	42	18	4	7.0	9.5	19	4	2	1.5	3.0
18	148	4	0	7.5	12.5	114	6	4	6.5	10.0	97	5	7	2.5	7.5	76	6	14	3.0	5.0	44	7	5	4.0	7.0	50	18	8	3.0	6.0	44	22	10	6.0	8.0	17	4	2	1.0	2.5
19	150	2	2	8.0	12.5	116	4	4	8.0	11.5	99	6	7	3.5	8.0	66	18	8	3.0	5.0	47	6	6	5.5	8.5	57	26	8	4.0	7.0	42	24	10	6.5	8.0	18	2	3	0.5	2.0
20	150	3	2	8.5	13.0	116	5	4	7.0	10.0	97	9	6	4.5	8.5	70	20	9	4.0	6.0	47	5	4	6.0	9.0	50	15	5	3.0	6.0	35	15	5	2.0	4.0	17	4	2	0.5	2.0
21	150	4	2	8.5	14.0	116	6	3	7.5	12.0	101	6	7	4.5	9.5	72	15	11	4.0	6.0	49	5	5	4.5	8.0	50	8	6	4.5	7.0	32	6	2	3.0	4.0	17	2	2	0.5	2.0
22	150	4	1	7.5	13.0	116	5	4	8.5	11.5	101	6	6	4.5	8.5	70	22	8	5.0	8.5	49	10	4	5.5	9.5	50	9	5	4.0	7.0	32	5	2	3.0	5.0	17	3	2	0.5	2.0
23	152	3	2	9.0	15.0	118	5	4	8.0	11.0	99	11	6	4.0	7.0	69	19	7	3.5	6.0	50	10	2	5.5	9.0	50	6	6	4.5	7.0	32	6	2	7.5	3.0	17	3	2	0.5	2.0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm											
00	150	2	2	9.0	15.0	11.5	4	4	8.0	10.5	10.0	6	8	2.5	6.0	7.4	17	10	3.0	5.5	4.9	5	9	5.0	7.0	4.6	27	4	4	5.0	7.5	3.1	4	2	2.0	4.0	17	0	0	0.5	2.0
01	150	2	4	9.0	14.0	11.5	5	4	6.5	10.5	10.5	6	8	2.0	12.0	7.1	21	9	3.0	4.0	4.8	4	10	5.0	9.5	4.6	7	5	4.5	7.0	3.1	4	2	3.0	5.0	17	0	0	0.5	2.0	
02	150	2	4	10.5	17.0	11.5	4	4	6.5	10.0	10.3	8	12	4.0	9.5	7.5	16	15	3.0	6.0	4.6	4	8	5.5	8.0	4.4	4	2	5.5	8.5	3.1	6	2	2.0	3.5	17	0	0	1.5	2.5	
03	150	2	3	11.0	18.0	11.3	4	2	7.0	10.5	10.3	6	4	4.5	8.0	7.1	15	12	2.0	3.5	4.8	5	8	8.0	12.0	4.4	4	3	5.0	7.5	3.2	5	1	2.0	4.0	17	0	0	3.5	5.0	
04	150	2	3	11.0	17.0	11.3	4	4	7.0	13.0	10.3	6	11	4.5	8.0	6.8	19	10	1.0	3.0	4.5	3	8	6.5	9.0	4.5	5	3	5.5	8.5	3.1	6	2	1.5	3.5	17	1	0	2.0	3.0	
05	150	2	5	11.0	18.0	11.1	7	2	10.0	17.5	10.6	7	5	3.0	6.5	6.6	18	6	6.0	10.0	4.4	5	4	4.5	7.0	4.4	4	2	4.0	9.0	3.1	2	2	1.5	3.0	17	0	0	3.5	4.5	
06	150	2	4	11.0	18.5	11.1	5	4	8.0	13.0	10.7	4	7	3.5	9.0	6.2	10	7	7.5	3.5	4.6	6	6	3.0	6.0	4.6	4	4	4.5	7.0	3.7	0	4	7.5	10.0	17	2	1	3.0	4.5	
07	150	2	6	12.0	19.0	10.9	5	6	7.0	9.5	9.7	8	10	5.0	10.0	6.0	6	4	2.0	5.0	4.4	4	6	5.5	9.0	4.6	17	4	4.0	7.0	3.9	9	6	5.5	8.0	17	2	0	2.0	3.0	
08	148	2	6	11.0	18.0	10.3	5	5	5.5	7.0	8.5	6	4	2.5	7.0	5.8	8	2	1.0	3.5	3.6	8	6	3.0	5.5	4.4	4	4	4.5	6.5	4.1	12	5	5.5	8.0	19	4	2	2.0	3.5	
09	142	8	2	14.0	21.0	10.1	8	6	10.0	12.0	8.7			7.0	11.5	5.9			0.5	2.0	3.1			2.5	8.5	3.0	8	4	4.0	6.5	4.3						2.1		4.0	6.0	
10	143			14.0	21.0	9.7	10	8	14.0	15.5	8.5	16	10	4.0	7.5	6.0	7	8	3.0	4.0	3.0			5.0	8.5	2.4			3.0	5.5	4.0	6	10					2.1		4.0	6.0
11	143	3	3	12.5	19.0	9.9	10	5	4.0	7.5	8.5	16	9	6.0	10.0	5.8	12	5	1.5	4.5	3.2	7	6	7.5	3.0	2.4	4	6	2.5	6.0	3.5	15	8					2.1		2.0	4.0
12	144	3	4	10.0	17.0	10.0	8	16	7.5	11.0	8.6	13	13	7.0	10.5	6.0	8	9	7.5	2.5	3.2	6	6	4.0	6.0	2.4	6	7	3.5	5.5	3.7	6	12					2.1		2.0	4.0
13	144	4	3	11.0	17.0	9.9	8	7	7.0	12.0	9.0	11	16	5.0	9.5	6.2	5	10	5.0	3.0	3.4	6	6	3.5	5.0	2.6	8	6	7.0	15.0	4.3	10	10	4.0	7.0	2.1	2	2	2.0	4.0	
14	144	4	2	8.5	15.0	9.8	9	5	6.0	9.0	9.1	8	12	5.0	9.0	6.0	16	8	7.5	3.0	3.4	4	4	3.0	5.0	3.0	7	6	5.0	6.0	4.7	8	7	5.0	7.0	2.1	2	2	3.0	4.5	
15	144	2	2	8.0	13.0	10.1	6	8	6.5	10.0	8.7	6	8	4.5	7.5	6.4	18	8	7.5	3.5	3.6	6	6	4.5	4.5	3.8	6	7	3.0	5.0	5.3	11	12	4.0	5.5	1.9	4	4	2	2.5	4.0
16	144	2	2	8.0	13.0	10.3	10	6	6.0	8.5	8.9	6	4	5.5	8.5	6.4	18	6	7.0	3.0	3.8	6	6	4.0	7.5	4.4	5	5	5.0	7.0	4.3	18	6	7.5	3.5	1.7	4	0	1.5	3.0	
17	146	2	4	7.0	12.0	10.8	7	5	6.0	10.0	9.5	6	8	2.5	4.0	6.6	16	9	7.5	3.5	4.0	9	2	7.0	9.5	4.7	5	7	5.0	10.0	4.2	2.3	5	4.5	8.0	1.7	2	0	1.0	2.5	
18	148	2	3	6.5	11.0	11.1	5	4	5.0	8.5	9.9	4	6	2.5	5.5	6.8	16	8	7.5	2.5	4.6	4	8	4.0	6.5	5.0	7	6	5.0	8.5	4.7	16	14					1.7	0	1.0	2.5
19	148	2	2	7.5	11.5	11.1	8	2	4.5	8.0	9.9	6	3	6.0	9.0	6.8	16	8	7.5	3.0	4.6	4	8	6.0	7.5	4.7	18	3	5.0	7.5	3.7	19	6	2.5	4.5	1.7	0	0	1.0	2.5	
20	148	3	2	6.0	10.5	11.3	5	4	5.5	8.5	10.0	6	7	4.0	9.0	7.1	17	11	2.5	5.0	4.8	6	9	6.0	9.5	4.8	2.8	4	6.0	9.0	3.3	2.1	4	2.0	3.5	1.7	0	0	1.0	2.0	
21	148	4	2	7.5	12.0	11.3	5	5	4.0	7.0	10.1	5	10	5.5	10.0	7.2	20	12	2.0	3.5	4.8	7	10	7.0	10.0	4.6	9	2	5.0	8.0	3.1	1.3	2	2.0	3.5	1.7	0	0	1.0	2.5	
22	150	2	2	7.0	11.5	11.5	4	6	5.0	8.5	10.1	6	8	6.5	12.5	7.2	18	8	7.0	3.5	4.8	6	10	4.0	6.0	4.6	7	3	5.0	7.5	3.2	3	3	2.0	4.0	1.7	0	0	1.0	2.5	
23	150	2	2	8.5	14.0	11.5	4	4	5.5	8.0	10.1	6	10			7.6	19	12	3.5	5.0	4.8	6	7	3.5	6.0	4.6	4	4	4.0	7.0	3.1	2	0	2.0	3.0	1.7	0	1	1.0	2.5	

Fam = median value of effective antenna noise in db above k1b
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	152	2	4	10.0	15.5	112	7	1	7.5	12.0	98	4	6		66	28	6	3.0	6.0	53	5	6	5.5	9.5	48	6	5	4.5	7.5	32	4	2	2.0	4.0	19	0	2	1.5	2.5	
01	152	2	4	10.5	17.0	115	5	5	7.5	12.5	101	7	9	8.5	150	64	28	6	4.5	7.0	53	6	5	6.0	9.0	48	6	6	7.0	9.0	32	10	2	4.0	5.5	19	0	2	1.0	2.5
02	150	4	3	9.0	15.5	114	7	4	8.0	13.0	102	6	10	5.0		66	24	9	4.0	7.0	51	7	7	5.5	7.5	48	6	5	4.5	8.0	32	6	2	2.5	4.5	19	0	0	0.5	2.0
03	150	2	4	10.0	16.5	114	7	5	9.0	14.0	98	9	5		62	21	6	4.0	7.0	51	7	5	4.0	8.0	48	5	6	5.0	8.0	32	6	2	2.5	4.5	19	0	0	0.5	2.0	
04	152	2	4	10.0	16.5	115	5	7	8.0	14.0	102	6	14	4.0	8.5	62	12	8	3.0	5.5	51	5	4	6.0	10.0	48	6	8	5.0	8.0	32	2	2	2.5	4.0	19	0	0	0.5	2.0
05	152	2	4	10.5	17.0	115	3	8	9.0	14.5	102	6	10	3.5	6.5	62	9	10	3.5	6.0	51	6	6	6.0	9.0	47	5	7	6.0	10.0	36	4	5	2.5	3.5	19	0	2	1.0	2.0
06	151	3	5	10.5	17.0	112	5	6	10.5	17.0	103	3	16	4.5	9.0	60	12	9	3.5	6.0	49	6	7			50	4	7	5.0	8.0	38	4	5	11.0	14.5	19	0	2	1.0	2.5
07	150	4	4	11.5	18.0	109	5	14	13.0	17.5	86	5	8	2.0	6.0	60	4	6	2.5	4.5	45	5	7	7.0	6.0	47	6	4	6.5	9.0	39					21	2	2	1.5	3.0
08	148	2	7	12.0	19.0	102	6	13	11.5	16.5	88	9	8	5.5	9.5	56	8	6	3.0	5.0	33	13	4	5.0	7.5	41	7	9	3.0	5.5	38	8	6	10.5	14.5	21	4	2	2.0	4.0
09	145			12.0	19.0	96			14.5	18.5	92					52			6.0	9.0	33			4.0	6.0	30			4.0	6.5	31			2.5	4.5	21			2.0	3.5
10	144			10.0	16.0	101			14.5	22.0	91					51	9	3	4.0	7.0	31			4.0	6.0	24			4.0	6.0	24			2.1			4.5	5.0		
11	142	5	5	10.0	16.0	98	7	12	11.5	24.0	88	5	7	4.5	8.5	52	14	4	3.0	7.0	31	5	6	3.5	5.5	24	8	3	4.0	6.0	36	2.0	4	8.5	11.0	21			2.5	4.5
12	146	2	6	10.0	15.5	95	11	9	12.0	16.0	90	4	8	2.5	7.0	52	14	4	2.0	5.0	31	8	2	4.5	7.5	22	8	1	5.5	7.0	36	1.0	6	5.5	7.0	21			4.5	6.5
13	146	3	6	9.0	14.0	94	8	8	10.5	14.0	92	8	14			52	8	3	2.0	4.5	32	7	4	3.5	5.5	26	6	7	3.5	6.0	38	6	3			23	0	4	7.5	3.5
14	144	6	4	9.5	14.0	95	7	9	11.0	16.0	96	5	11	5.0	10.5	54	7	5	1.5	3.5	35	6	8	3.0	5.5	26	8	4	4.0	6.0	48	7	13	11.5	18.5	21	2	4	1.5	3.0
15	145	4	3	8.0	13.0	99	8	11	9.0	11.5	90	8	3			57	9	5	2.5	4.5	35	4	8	2.5	5.0	34	10	6	5.0	7.0	48	6	11	2.0	5.0	21	4	2	3.5	5.0
16	144	6	2	7.5	12.5	99	15	12	12.0	17.0	94	6	8	3.5	8.0	64	9	5	3.5	5.5	36	5	5	3.5	5.0	42	12	7	5.5	8.5	46	5	6			19	4	0	2.0	3.5
17	146	5	4	8.0	13.0	105	9	13	6.5	10.5	87	9	6	5.5	10.0	66	5	9	4.0	6.0	41	6	3	5.5	7.0	47	6	4	2.5	5.5	43	9	7	7.0	3.0	19	2	2	3.5	5.0
18	146	4	2	7.5	13.0	108	8	4	6.0	10.5	94	4	6	6.5	11.0	68	5	7	4.0	6.5	47	6	6	7.0	9.5	54	2	4	6.0	8.5	40			3.5	6.5	19	0	2	2.0	3.5
19	148	2	4	8.0	13.0	112	4	6	6.5	12.5	94	3	9	4.0	9.0	66	18	7	0.5	2.5	49	6	6	3.5	6.0	52	6	6	7.5	3.5	42			6.5	9.5	17	2	0	3.0	4.5
20	148	4	2	9.0	14.0	112	7	5	6.5	12.0	96	5	8	5.5	11.0	66	20	4	4.0	6.0	49	7	2	5.5	9.5	52	6	6	4.5	7.5	38	5	6	4.0	6.0	17	2	0	2.0	3.5
21	150	4	2	8.0	13.0	113	6	6	7.0	12.5	94	11	5			66	22	4	3.5	5.5	53	7	5	5.0	9.0	52	4	6	4.0	6.5	34	4	3	3.0	5.0	17	2	0	3.0	4.5
22	152	3	4	8.5	14.5	113	6	5	7.0	12.0	96	10	9	5.0	10.0	66	27	4	2.5	5.0	52	5	7	6.0	9.0	52	4	9	4.5	7.0	34	4	4	2.0	4.0	19	0	2	2.0	3.5
23	150	5	2	9.0	15.0	114	4	4	7.5	13.5	96	6	5			66	24	5	3.0	6.0	51	10	2	6.5	10.5	50	4	7	3.5	7.5	34	4	4	2.5	4.0	19	0	2	1.5	3.0

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station

Front Royal, Virginia

38.8 N Lat. 78.2 W Long. Month February 19 61

Hour (EST)	Frequency (Mc)																	
	.135			.500			2.5			5			10			20		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}
00	99	7	5	80	8	5	58	9	3	56	5	3	35	4	2	24	1	1
01	99	11	5	81	9	7	60	8	6	56	3	4	35	2	2	24	1	1
02	100	8	7	80	7	7	59	10	5	54	6	2	34	3	1	24	1	1
03	100	8	8	80	7	10	59	9	5	53	6	4	34	2	1	24	1	1
04	98	11	10	76	11	11	61	9	7	53	4	4	39	2	2	24	1	0
05	96	15	6	72	15	7	58	13	4	52	7	4	39	2	1	23	1	1
06	93	17	7	66	23	8	56	14	5	52	6	4	39	3	1	23	1	1
07	88	11	4	62	3	7	50	7	7	50	6	4	41	5	3	23	1	1
08	86	11	3	56	4	4	40	8	5	36	7	4	41	8	2	25	1	1
09	87	7	5	55	6	3	36	7	2	32	5	3	42	4	4	26	2	2
10	87	7	5	54	5	2	34	9	4	30	5	3	40	3	3	26	2	2
11	87	6	5	54	5	3	34	7	5	28	3	3	39	3	3	26	1	2
12	87	5	2	56	4	3	30	4	4	32	1	4	41	4	3	24	2	1
13	88	10	3	57	8	4	30	5	5	32	5	4	42	4	3	24	2	1
14	88	7	3	56	6	3	30	7	4	33	5	3	43	4	3	25	1	2
15	88	7	4	57	5	5	31	6	3	34	9	3	45	4	3	24	3	1
16	88	9	4	56	5	3	36	4	5	36	6	5	47	5	3	26	3	1
17	89	8	4	57	5	5	44	7	6	44	9	3	48	5	2	26	2	2
18	93	7	7	62	7	7	54	7	5	52	6	4	49	4	1	26	2	3
19	94	11	4	67	9	7	56	10	4	54	6	4	49	2	2	24	2	1
20	96	11	5	73	10	4	56	11	3	58	6	3	41	3	4	22	0	1
21	97	10	6	77	8	6	57	10	3	58	5	3	38	3	3	22	0	2
22	99	9	7	78	9	6	58	10	4	58	5	4	36	3	2	22	0	1
23	99	9	6	79	7	5	59	9	5	57	5	4	36	3	2	22	0	1

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station **Ibadan, Nigeria**

Lat. **7.4 N** Long. **3.9 E**

Month **June**

19 **59**

Hour (IST)	Frequency (Mc)																																									
	.051				.113				.246				.545				2.5				5				10				20													
	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm						
00	142	6	8	7.0	110	129	7	7.0	140	115	13	7	7.0	115	95	10	11	7.0	120	70	4	6	5.0	85	54	5	7	3.5	65	40	8	8	2.0	50	30	0	6	4.0	80			
01	140	6	8	7.0	125	128	8	10	6.0	120	115	8	10	6.5	140	93	10	10	6.5	140	68	6	11	6.0	120	54	4	9	5.5	80	38	6	7	5.0	75	28	9	2	5.5	110		
02	138	8	5	8.5	150	126	7	6	7.0	130	113	8	10	6.0	105	93	11	10	8.0	150	66	6	10	6.5	115	55	8	6	4.0	80	40	4	9	3.5	65	28	2	2	2.0	30		
03	138	7	4	10.0	145	126	5	11	9.0	150	111	10	9	8.5	160	91	11	10	8.5	155	65	7	11	3.5	75	56	5	8	6.0	100	40	3	8	4.0	70	26	4	0	1.5	30		
04	138	6	8	9.5	170	126	5	12	9.0	180	113	6	13	9.0	170	90	9	10	8.0	200	64	7	12	6.5	110	57	3	10	5.0	90	40	4	5	4.0	75	26	6	0				
05	132	11	6	13.5	200	118	12	11	13.5	240	99	14	7	12.0	185	76	17	18	12.5	240	60	6	16	6.0	70	55	4	7	5.0	85	40	4	7	5.0	85	27	5	3	2.0	40		
06	132	12	14	10.0	190	118	14	22	10.5	250	105	10	24	12.0	195	73	27	19	12.5	250	50	18	16	10.0	160	51	8	9	5.0	95	40	3	7	4.5	90	30	2	4				
07	126	18	12	13.0	230	114	17	18	10.0	220	99	17	20	12.0	225	68	29	15	10.0	135	48	8	15	10.0	140	36	9	10	6.0	100	36	9	10	6.0	100	28	4	2				
08	128	16	15			112	20	18	12.0	225	96	13	19	11.0	215	71	20	14	6.5	105	37	8	14	10.0	160	33	5	14	6.0	80	26	6	2			6.0	65					
09	131	13	17	7.0	145	109	23	15	7.5	265	92	22	20	10.0	200	63	29	12	7.5	115	35	6	18	4.5	100	28	8	11	4.5	100	28	8	11	4.5	100	28	8	11	4.5	100		
10	128	12	10	12.0	200	108	16	16	15.0	250	82					67	14	12				38	10	6	6.5	85	54			5.5	70	30	10	10	7.0	30	10	10	7.0	30		
11	130	8	11	11.0	170	112	10	19	15.0	220	87				145	250	73	13	18	11.0	200	41	15	5	8.5	130	31			8.5	130	31										
12	132	6	10	12.0	180	116	9	11	13.0	200	95	12	6	14.0	240	71	18	10	7.0	160	38	16	4	10.0	225	31	12	2	8.5	195	30	6	5	8.0	120	28	2	2				
13	134	4	8	10.0	150	117	10	11	9.5	170	99	17	7	9.0	145	79	23	15	9.0	170	37	13	8	9.5	170	40	31	8	9.5	170	40	31	8	9.5	170	40	31	8	9.5	170		
14	136	8	8	8.0	130	120	14	7	11.0	155	101	24	6	9.5	165	79	20	8	10.0	175	40	31	8	9.5	170	37	13	6	10.0	150	40	6	5	6.0	100	32	4	2	5.5	110		
15	138	10	4	9.0	135	124	12	8	9.0	140	109	13	9	10.0	175	89	21	11	11.5	205	48	14	14	12.5	200	46	13	10	8.0	125	44	5	6	3.5	75	32	4	1	8.5	110		
16	140	9	4	7.5	120	126	12	6	8.0	140	112	12	13	8.5	140	91	20	17	11.0	185	54	18	14	8.0	135	53	9	5	6.0	95	48	4	2	3.5	65	34	2	2				
17	140	10	4	7.0	105	126	10	6	8.0	120	111	11	11	7.5	135	89	11	10	7.0	120	61	13	13	3.5	85	59	5	10	4.0	65	48	4	2	3.5	65	32	4	0	3.0	55		
18	142	4	6	7.0	115	128	5	6	7.0	115	109	10	3	6.0	100	95	6	6	7.0	120	70	2	10	3.0	50	63	5	8	4.5	75	48	2	4	3.5	65	26	4	0	2.5	50		
19	142	4	4	7.0	120	128	5	4	6.0	120	111	8	3	6.0	105	97	5	8	6.0	110	72	4	6	3.5	65	63	4	4	3.5	70	46	4	4	4.0	70	26	2	2	2.0	40		
20	142	4	4	7.0	115	128	4	5	5.5	100	115	6	6	4.5	80	99	6	10	5.0	85	72	2	6	3.0	65	63	4	11	2.0	65	44	5	4	3.0	60	26			2.0	30		
21	142	5	7	6.0	105	130	4	6	4.5	80	117	1	10	4.0	80	99	4	12	4.5	90	72	4	8	3.5	65	63	4	6	3.0	55	42	7	4	3.0	60	28	4	2	2.0	30		
22	142	8	6	7.0	115	130	6	9	6.0	115	115	7	6	4.0	80	97	7	9	6.0	100	70	6	6	3.0	60	61	4	7	3.5	65	42	4	5	4.0	60	28	4	4	2.0	35		
23	142	6	4	7.0	130	130	5	6	6.0	125	117	6	10	5.5	100	97	7	10	6.5	120	72	2	8	3.5	70	59	6	4	3.5	75	40	7	5	2.5	50	28			2.0	35		

Fom = median value of effective omnidirectional noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Power only published in Technical Note No. 18-3.

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4 N Long. 3.9 E

Month July 19 59

Hour (LST)	Frequency (Mc)																																			
	.051				.113				.246				.545																							
	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}																				
00	140	4	8.0	140	6	6.5	125	113	8	8	6.0	115	97	8	12	45	100	71	0	12	4.0	85	60	2	10	4.0	75	39	4	6	25	6.0	30	2	4	
01	140	4	7.5	145	2	6.5	125	111	8	4	7.0	140	97	6	8	6.0	120	68	5	9	5.0	9.0	58	4	10	4.5	8.0	39	6	8	3.5	7.0	30	10	2	
02	140	2	8.0	140	4	8.0	145	113	6	6	7.0	135	97	6	10	7.0	140	67	8	8	5.0	9.5	58	4	10	4.5	8.5	41	4	8	4.0	7.0	28	8	2	
03	140	2	7.0	155	2	8.0	140	113	4	10	7.0	150	95	6	10	7.0	16.0	65	6	10	5.0	10.0	56	4	8	4.0	8.5	41	4	8	4.0	7.5	28	6	0	
04	138	4	8.5	160	2	8.0	160	111	6	8	8.0	175	93	8	16	7.0	190	64	5	7	6.0	12.0	56	4	10	5.5	10.0	41	4	8	4.5	7.5	28	4	2	
05	136	4	7.0	165	117	9	7.0	175	94	15	7.0	175	177	12	16	12.5	110	59	8	12	6.0	130	56	4	8	6.0	11.0	41	4	8	3.5	7.0	32	6	4	
06	128	8	11.0	175	111	11	13	12.0	200	93	10	14	10.5	190	65	18	14	10.0	175	52	8	10	8.5	14.0	41	2	10	5.0	9.0	32	8	4	4	4		
07	126	10	13.0	195	108	18	8	11.0	180	89	18	16	8.0	200	67	14	12	10	22.5	49	8	14	6.5	11.0	35	6	8	7.5	12.0	34	6	6	6	6		
08	128	8	10	13.0	195	106	15	6	13.0	190	89	8	20	130	65	12	4	33	14	8	10	6.0	8.5	46	6	10	6.5	11.0	35	6	8	7.5	12.0	31	11	5
09	124	10	8	14.0	230	108	13	8	12.5	190	85	8	10	110	67	8	6	37	8	9	4.0	6.5	34	5	8	12	10.5	29	7	8	7.0	16.0	30	9	7	
10	124	10	6	13.5	210	106	12	6	11.0	155	84	22	13	6	65	23	5	39	5	9	11.5	17.5	31	12	7	16.0	220	29	4	9	8.5	15.0	26	4	2	
11	126	11	9	11.0	180	109	12	10	8	13	87	13	12	6	69	16	6	35	8	4	130	180	30	11	6	6	13.5	21.5	33	0	9	7.0	10.5	30	3	4
12	130	8	8	10.5	160	112	10	12	9.0	130	91	17	16	7	79	26	7	45	18	12	12	12	34	12	9	14.5	20.0	33	4	5	8.5	12.0	29	10	5	
13	134	8	8	11.0	145	122	8	18	8.0	125	103	15	11	15.5	270	83	16	41	19	6	11.0	20.0	38	14	10	8.0	13.5	39	2	6	7.0	12.0	30	9	4	
14	138	7	10	9.5	145	124	8	16	13.0	185	109	4	24	11.0	180	91	18	49	14	16	12.5	18.5	40	21	8	14.0	20.0	41	6	10	5.5	9.5	32	10	2	
15	140	6	12	7.0	120	128	6	16	10.0	150	113	14	28	15.0	220	93	18	53	22	16	10.0	16.0	50	14	10	5.5	10.0	45	4	12	5.5	9.0	34	6	6	
16	142	6	12	6.0	110	128	6	15	9.5	150	111	12	24	11.0	190	91	19	57	16	20	8.5	15.0	54	8	8	8	7.0	11.0	49	4	8	4.0	7.0	34	6	6
17	141	8	10	9.0	140	130	9	18	9.5	165	111	15	22	9.0	160	91	19	59	14	16	4.5	9.0	60	2	6	3.5	7.0	49	4	4	3.5	7.0	32	6	2	
18	141	6	10	6.0	105	127	9	11	7.0	130	111	12	10	5.0	100	97	6	69	2	10	3.0	6.0	64	2	6	5.0	8.0	49	4	4	4.0	7.0	30	10	4	
19	142	4	7	5.0	105	128	6	6	5.0	110	111	8	6	4.5	90	97	6	71	2	8	3.5	6.5	64	4	8	3.5	7.0	45	4	4	3.0	6.5	28	4	4	
20	142	4	5	7.0	130	128	6	6	5.5	110	111	8	6	6.0	110	99	3	73	0	10	2.5	6.0	64	2	8	3.5	6.5	43	8	6	3.0	7.0	28	4	2	
21	140	4	3	6.5	120	128	4	6	5.0	105	113	6	8	5.0	105	97	6	73	0	14	3.5	7.0	66	2	8	4.0	9.5	43	6	10	3.5	6.0	30	4	4	
22	140	2	3	6.5	120	128	4	6	5.5	110	114	5	11	4.5	85	97	10	71	4	14	3.5	6.5	62	4	14	3.5	7.0	45	9	12	3.0	6.5	30	2	4	
23	140	2	4	6.0	115	128	4	6	6.5	125	113	8	6	4.0	90	97	8	70	3	7	4.0	7.5	60	2	8	4.0	7.5	41	6	8	3.0	6.0	30	4	4	

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Power only published in Technical Note, No. 18-3.

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), I. H. Lat. 22.0 N Long. 159.7 W Month December 19 60

Hour (EST)	Frequency (Mc)																																												
	.013			.051			.160			.495			2.5			5			10			20																							
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}																		
00	154	3	2	100	170	128	6	3	100	165	103	8	7	105	180	84	10	11	115	225	60	7	4	45	95	52	6	4	45	80	38	6	3	30	50	24	3	2	15	30					
01	154	3	3	95	160	130	4	3	105	180	105	8	8	100	190	84	10	8	105	195	58	8	2	55	100	54	2	6	35	65	38	6	4	30	60	24	2	2	15	30					
02	154	2	2	90	150	130	5	3	110	185	103	10	6	105	180	82	12	6	100	200	60	6	5	55	110	54	5	6	55	100	36	6	3	35	60	24	3	2	15	30					
03	154	4	4	85	140	132	4	4	110	190	105	10	8	100	180	82	13	6	85	175	60	6	4	60	100	52	5	4	40	80	36	5	4	35	55	24	0	0	15	30					
04	154	4	2	95	150	132	4	4	120	200	103	11	5	100	205	82	14	8	130	210	58	9	4	75	120	48	5	2	50	90	32	4	2	35	50	24	0	0	10	25					
05	154	3	2	90	135	132	4	2	120	190	103	11	4	115	210	80	13	8	115	205	60	6	7	55	95	48	2	4	60	95	34	2	5	30	50	24	0	0	10	25					
06	154	3	2	95	160	132	3	4	115	185	103	7	8	110	200	72	14	7	95	180	56	11	4	55	100	46	7	4	45	80	34	4	4	30	55	24	1	0	10	25					
07	156	1	2	90	160	126	3	4	120	190	88	15	10	135	215	58	16	8	100	170	52	10	6	60	95	48	6	4	35	65	40	2	4	40	80	24	2	0	20	30					
08	150	2	2	100	165	118	7	4	120	195	76	22	15	145	250	52	20	7	90	185	44	8	9	60	95	36	8	8	50	80	34	7	5	45	70	24	2	2	40	55					
09	150	4	4	105	170	111	13	12	135	210	74	28	13	90	130	50	17	2	70	90	34	11	3	30	50	24	8	4	35	55	28	9	7	30	50	24	2	2	45	65					
10	150	3	4	115	175	110	16	11	145	245	73	24	12	120	180	52	17	2	50	110	32	3	3	25	40	20	7	4	30	55	22	10	8	60	80	22	2	2	40	50					
11	150	4	4	120	190	110	10	10	140	210	72	30	10	145	280	50	24	4	80	165	32	2	4	30	50	20	6	4	35	70	18	6	6			22	0	2	50	65					
12	150	4	4	130	200	111	12	13	160	245	76	22	19	125	245	50	17	4	105	140	30	2	2	25	45	20	4	4	60	80	16	8	5			22	0	3	40	60					
13	150	3	6	135	210	110	16	11	145	220	73	23	17	50	170	50	20	6	40	60	30	3	2	40	65	18	6	2	80	100	17	11	7			22	2	2	40	60					
14	150	4	6	145	225	110	14	8	150	225	75	22	18	110	185	51	19	7	30	50	30	4	4	25	50	20	4	4	25	50	20	4	4			18	12	4	55	85	24	2	2	25	45
15	148	4	2	145	230	106	14	8	130	205	69	31	12	90	155	48	20	4	65	85	30	6	2	25	40	22	6	6			22	12	4	70	120	26	2	2	30	50					
16	150	2	6	135	215	106	15	9	150	240	73	22	14	120	200	50	14	6	80	105	32	2	4	30	50	22	9	2			30	4	4	25	45	26	4	4	25	40					
17	148	6	4	140	205	106	18	12	130	220	78	23	13	135	220	56	26	8	95	210	36	12	6	40	60	34	13	6			36	5	6	25	50	26	4	2	30	50					
18	148	4	5	115	195	114	15	12	120	240	87	22	14	130	230	70	22	17	145	230	47	16	8	75	100	44	9	8	50	100	36	4	4	40	70	26	2	2	20	40					
19	150	5	6	120	190	114	20	8	115	185	91	20	18	140	230	75	22	14	115	225	54	12	12	85	150	47	19	6	40	70	36	4	2	30	50	24	4	0	20	40					
20	152	4	6	110	175	120	14	12	130	220	95	18	14	120	210	79	17	14	130	220	58	8	13	80	140	48	9	8	35	95	36	5	3	40	65	26	1	2	20	35					
21	152	4	4	105	170	122	13	10	125	200	98	15	14	115	220	79	21	12	110	205	56	11	9	80	130	50	4	8	50	80	38	5	4	25	50	26	3	2	15	35					
22	154	4	4	100	165	124	9	6	130	210	101	12	10	110	220	80	13	9	85	190	58	10	8	75	130	50	6	5	50	80	40	5	6	25	50	24	3	1	15	30					
23	154	4	4	100	170	128	5	6	110	185	101	14	8	105	190	84	13	12	100	190	58	7	4	60	100	50	6	4	40	75	38	6	2	30	60	24	3	2	20	35					

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), I. H. Lat. 22.0 N Long. 159.7 W Month January 19 61

Hour (LST)	Frequency (Mc)																																							
	.013				.160				.495				2.5				5				10				20															
	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}								
00	152	3	10.0	16.5	128	6	4	12.0	19.5	104	10	12	15.0	24.0	83	15	10	11.5	24.0	55	10	4	7.0	13.0	52	4	5	6.5	10.5	34	4	4	3.0	15.5	23	2	0	1.0	2.0	
01	153	4	11.0	18.0	128	6	5	12.0	20.0	104	8	10	11.5	24.5	84	12	12	11.0	23.0	55	11	4	6.0	10.0	54	4	6	5.0	9.0	34	4	4	3.0	15.0	23	2	0	1.5	3.0	
02	151	6	11.5	18.0	130	5	5	13.0	22.0	104	9	8	12.5	20.0	81	16	8	12.0	23.0	57	9	6	7.0	11.5	54	5	7	5.0	8.5	34	5	5	2.0	4.0	23	4	0	1.5	3.0	
03	153	4	11.0	17.5	130	6	5	11.5	21.0	104	10	9	12.0	20.0	83	16	12	10.5	21.0	59	8	8	7.0	12.5	52	7	4	5.0	10.0	32	6	4	2.5	5.0	25	2	2	1.5	3.0	
04	153	4	11.0	17.0	130	6	6	12.5	21.0	104	9	10	11.0	21.0	81	15	10	11.0	21.0	57	9	7	7.0	10.5	48	6	4	6.0	9.5	30	4	2	2.0	3.0	25	1	2	1.5	3.0	
05	153	4	10.5	17.0	130	5	6	12.5	20.5	105	7	11	12.0	21.5	79	14	10	12.5	23.5	59	8	9	8.0	12.5	48	5	6	6.5	10.5	30	3	2	1.5	3.0	25	2	0	1.0	2.5	
06	153	4	11.5	18.0	130	4	5	13.0	21.0	102	8	9	13.0	22.5	75	15	13	12.5	21.5	57	6	8	8.0	13.0	47	5	6	5.5	8.0	30	4	2	2.0	3.0	25	2	0	1.0	2.5	
07	155	3	11.0	18.0	124	6	2	12.5	20.5	92	9	10	12.5	22.5	61	16	9	11.5	18.0	53	9	7	6.0	10.0	50	5	8	3.5	7.0	36	9	7	6.0	10.0	25	2	1	1.0	2.5	
08	151	2	12.0	18.0	120	9	6	12.5	19.0	83	13	15	13.5	23.5	55	15	6	8.5	22.5	43	8	6	4.5	7.0	40	9	6	4.5	7.5	32	9	4	5.0	7.0	25	2	2	2.0	3.5	
09	149	5	12.5	19.0	114	3	8	15.0	24.0	75	27	13	14.0	28.0	53	15	5	6.0	9.5	37	10	6	3.0	4.5	24	11	4	4.5	7.0	27	9	4	4.0	7.0	25	2	2	3.0	5.0	
10	149	5	13.0	19.0	112	13	12	16.5	25.0	80	23	20	13.5	26.0	53	16	4	5.5	8.0	32	6	3	2.0	3.5	26	9	6	7.5	7.0	24	9	6	7.5	3.0	23	1	2	3.0	5.0	
11	149	4	12.0	19.0	110	10	12	17.0	26.0	73	23	13	15.0	26.0	57	12	4	3.0	5.0	31	2	2	2.0	4.0	22	7	4	*	*	20	12	6	5.0	7.0	21	2	0	*	3.0	4.0
12	148	5	13.5	20.0	110	15	10	17.0	27.0	74	24	12	13.5	24.5	57	11	6	6.0	8.5	29	5	0	2.5	4.0	22	6	4	2.5	4.0	22	6	4	2.5	4.0	21	2	2	2.5	4.0	
13	148	5	14.0	21.0	111	12	11	18.0	27.5	71	22	11	16.0	24.5	57	19	4	7.0	12.0	31	9	4	3.0	5.0	23	9	5	4.0	6.0	21	13	9	7.5	3.0	23	4	2	7.0	3.0	
14	147	6	14.0	21.0	108	10	8	19.0	26.5	68	24	9	16.0	26.0	50	24	4	10.0	12.0	31	3	4	2.5	4.0	22	8	4	*	*	22	10	6	7.5	3.0	23	4	2	3.0	5.0	
15	147	4	16.0	22.5	108	12	10	18.5	27.0	70	22	10	15.5	17.5	51	12	4	8.0	10.0	31	10	2	3.0	4.0	26	10	8	3.0	6.5	26	9	4	4.0	7.0	25	1	2	2.0	4.0	
16	147	4	16.5	23.0	106	14	8	16.5	24.0	71	24	9	14.5	23.5	51	13	4	8.0	10.5	31	8	2	3.5	5.0	28	11	7	*	*	32	6	8	4.5	7.0	25	2	2	3.0	4.0	
17	145	4	15.0	22.0	104	14	6	14.0	22.5	82	13	17	13.5	25.0	55	22	5	5.0	8.0	38	8	5	5.0	8.0	38	8	9	3.0	6.0	38	4	7	2.5	5.0	25	2	2	2.0	3.5	
18	145	4	13.5	21.0	112	13	6	14.0	21.0	88	16	12	13.5	25.0	69	16	11	13.5	22.5	43	9	6	6.0	10.0	47	7	12	2.5	4.5	36	6	6	3.0	5.0	25	2	2	2.0	4.0	
19	147	3	12.5	18.5	116	10	6	16.0	25.0	92	12	12	13.5	26.5	75	13	12	13.5	23.5	57	8	6	6.0	8.0	48	8	6	6.5	6.0	34	6	3	3.0	6.0	23	4	0	0.5	2.0	
20	149	3	10.5	16.5	120	6	10	15.0	23.0	94	8	14	14.0	25.0	77	9	10	12.0	24.5	57	9	4	6.0	9.5	48	6	4	4.5	8.5	34	5	4	3.0	4.5	23	4	0	1.5	2.5	
21	149	4	9.5	16.0	120	8	6	14.0	22.0	98	8	12	12.5	24.5	83	8	15	12.0	24.0	57	9	4	8.0	11.0	49	7	6	5.5	9.0	36	5	4	3.0	5.0	23	4	0	1.0	2.5	
22	151	3	9.5	14.5	124	6	8	13.0	21.0	102	8	12	15.5	26.0	81	8	11	11.0	22.0	53	9	3	7.5	14.5	50	6	5	5.0	8.5	36	4	6	2.5	4.5	23	2	0	1.0	2.5	
23	151	4	10.5	17.0	126	6	4	12.0	19.5	101	8	9	12.0	24.0	85	8	13	16.0	27.5	56	6	5	7.5	12.0	50	5	4	4.5	7.5	36	4	6	3.0	5.5	23	4	0	0.5	2.0	

F_{om} = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T. H. Lat. 22.0 N Long. 159.7 W Month February 19 61

Hour (ST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}								
00	153	2	4	9.5	16.5	129	3	7	11.0	18.5	103	10	7	11.0	18.5	84	9	6	13.0	24.0	58	9	4	4.0	7.0	56	7	7	7.5	12.5	38	5	4	3.5	6.5	24	2	0	1.5	3.0
01	153	2	4	10.0	17.0	130	4	8	11.5	20.0	106	9	6	11.5	20.0	85	10	5	12.5	20.0	58	9	4	5.0	9.0	56	6	3	7.0	12.0	36	6	2	3.5	6.0	24	2	0	1.5	3.0
02	153	2	4	10.0	17.0	130	4	8	10.5	18.5	105	11	4	12.0	21.0	85	10	6	12.0	21.0	60	9	5	6.5	10.0	57	6	3	5.0	9.0	36	5	2	2.5	4.5	24	3	0	1.5	3.0
03	153	2	2	10.5	17.0	130	6	4	12.0	19.5	106	8	6	11.5	20.5	85	9	7	12.0	21.5	60	9	5	7.0	12.0	56	8	4	3.5	7.0	34	6	2	2.5	5.0	26	0	2	1.0	2.5
04	153	4	4	10.5	17.0	130	4	4	12.0	20.0	106	4	8	11.0	20.0	85	12	6	11.5	23.0	62	6	8	9.5	15.0	51	5	3	6.5	10.5	32	5	3	2.5	4.5	26	0	0	1.0	2.5
05	153	4	2	10.0	17.0	130	4	6	11.5	19.0	104	14	6	11.5	21.0	84	12	7	11.5	22.0	60	8	6	9.0	15.0	50	4	2	5.5	9.5	31	2	3	2.0	4.0	26	1	0	1.0	2.0
06	155	2	4	10.5	18.0	130	4	7	11.0	18.0	102	10	8	11.0	21.0	79	12	10	11.5	20.0	60	8	6	5.0	8.5	49	7	3	5.5	9.0	30	4	0	2.0	3.5	26	0	0	1.0	2.5
07	155	2	4	11.5	18.5	124	4	8	13.0	20.5	90	14	10	14.0	24.5	65	26	10	11.0	22.5	58	7	10	5.0	8.0	52	5	7	4.0	8.0	38	6	4	4.0	7.0	26	2	0	1.0	2.5
08	151	4	2	11.0	18.0	120	7	10	12.0	20.5	83	23	13	15.0	27.5	61	27	10	6.0	8.0	48	11	8	3.5	7.0	40	10	6	5.0	8.5	34	5	2	3.5	6.0	26	2	2	2.0	3.5
09	151	4	4	12.0	19.5	114	10	10	14.5	21.0	88	16	20	15.0	25.5	56	22	6	10.0	13.5	38	16	2	2.0	4.5	31	11	9	2.0	4.0	30	4	6	3.0	5.0	26	4	2	3.0	4.5
10	144	4	2	12.0	19.0	112	8	8	14.5	25.5	82	18	16	15.0	26.0	53	21	4	8.0	10.0	34	8	2	2.0	4.0	26	8	6			24	8	8	3.0	5.0	24	4	2	2.5	4.0
11	149	6	2	12.5	20.0	114	8	8	16.5	25.5	80	26	14	15.0	25.0	53	18	4	9.0	13.0	34	4	4	2.0	3.5	22	4	2	3.5	5.0	20	12	4	3.5	7.0	24	0	2	2.0	4.0
12	149	6	2	13.0	21.0	113	3	5	14.5	24.0	83	18	17	15.5	26.0	53	26	4	5.0	7.5	34	9	4	2.5	4.5	22	7	4	3.0	5.5	18	10	7	7.5	13.0	22	2	2	3.0	5.0
13	149	6	4	14.5	21.5	112	13	5	15.5	25.0	76	22	10	15.0	24.0	51	19	4	9.0	11.5	33	5	3	2.0	3.0	22	6	6	2.5	3.5	16	10	4			24	4	2	2.5	7.5
14	148	7	3	14.0	23.0	112	13	7	16.5	25.0	76	20	10	18.5	27.0	53	14	4	8.5	12.0	33	7	3	2.0	4.0	22	6	6	2.0	3.5	19	7	5			24	2	2	3.5	5.5
15	147	8	2	16.5	25.0	112	8	7	15.0	26.0	82	25	15	18.0	29.0	54	24	6	12.0	20.0	32	13	2	3.0	4.0	22	10	4			24	12	4	3.0	6.0	26	2	2	4.0	5.5
16	147	8	2	17.0	25.0	110	16	7	18.0	27.0	74	26	9	17.0	28.0	54	19	7	12.5	17.5	33	11	3	1.5	3.0	26	8	8			30	6	8	2.5	5.0	26	2	2	3.0	5.0
17	147	6	4	15.0	22.0	108	16	8	16.5	23.5	71	24	6	12.5	17.5	55	11	7	3.5	9.0	36	10	6	2.5	4.0	30	12	4			36	4	4	3.5	6.0	26	2	2	2.5	4.0
18	147	6	4	13.5	21.0	106	16	11	15.0	21.5	82	20	14	15.5	25.0	65	21	6	14.5	26.5	42	10	8	5.0	7.0	40	6	4	5.0	8.0	38	6	6	4.5	8.0	26	2	2	2.5	4.0
19	149	4	4	11.5	18.5	112	16	8	15.5	22.5	88	13	6	15.0	24.0	75	13	8	13.5	23.0	50	12	4	4.0	6.0	46	8	4	5.0	7.5	36	7	2	4.0	6.5	24	2	0	1.5	3.0
20	151	2	4	10.5	18.5	118	8	8	16.0	22.0	96	12	8	14.0	26.0	81	9	11	13.5	21.0	54	8	6	7.0	10.0	48	4	6	4.5	8.0	36	6	4	3.0	5.5	26	2	2	2.0	3.5
21	151	4	2	10.0	17.0	120	10	6	16.5	25.5	98	10	8	15.0	25.0	81	14	8	12.0	22.0	58	8	6	6.0	9.5	50	6	6	4.5	7.0	38	2	4	3.0	6.0	25	3	1	1.5	3.0
22	151	4	2	10.0	16.5	122	8	6	12.0	21.0	100	10	8	13.0	24.0	84	7	10	15.0	23.0	56	11	4	6.5	12.5	52	2	6	6.0	9.0	38	4	2	2.5	4.5	25	1	1	1.5	3.0
23	153	2	2	9.5	16.5	127	5	9	12.0	19.5	102	11	6	10.5	14.0	83	10	6	11.5	20.0	58	7	6	5.5	10.0	52	4	4	5.0	8.0	38	4	4	4.0	6.0	24	3	0	1.5	3.0

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LT)	Frequency (Mc)																																		
	.013			.051			.160			.545			2.5			5			10			20													
	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm	Fam	Du	Dz	Vdm	Ldm					
00	156	2	2	7.5	10.5	128	4	4	8.0	13.5	104	6	8	5.5	11.0	53	8	4	5.0	8.0	51	6	2	5.0	8.5	36	4	2	5.5	8.0	26	0	2	2.0	3.0
01	154	4	1	7.0	10.5	126	6	3	9.0	13.5	104	6	11	8.0	11.0	53	6	2	5.0	7.5	53	6	4	5.5	8.5	38	3	5	4.5	7.0	26	2	2	2.0	3.0
02	154	3	2	7.5	10.5	126	6	4	9.0	13.5	104	6	14	10.0	14.0	80	6	4	5.0	7.0	51	6	6	7.0	10.0	36	8	2	5.5	8.0	26	0	2	2.0	3.0
03	154	4	2	7.0	10.0	126	5	4	8.5	14.0	102	6	18	10.0	17.0	78	4	4	6.0	9.0	55	8	4	5.0	8.0	38	2	4	4.5	7.0	26	2	2	1.5	2.5
04	154	4	2	7.0	11.0	126	4	4	8.0	12.5	100	4	12	13.0	18.0	78	7	4	4.0	7.0	51	2	4	5.0	8.0	34	8	3	2.5	5.0	26	0	2	1.5	3.0
05	154	4	2	8.0	12.0	126	2	4	8.5	13.5	102	8	12	8.5	12.0	76	8	4	6.0	7.5	49	4	4	6.0	9.0	34	7	4	6.0	9.0	26	2	2	3.0	3.5
06	154	2	2	9.0	11.5	121	6	4	9.0	14.0	92	8	17	5.5	8.5	70	4	3	2.0	3.5	53	4	6	5.0	6.0	51	2	6	5.5	9.5	40	4	6	2.5	3.5
07	150	4	0	6.5	10.0	112	10	1	10.0	16.0	88	6	16	6.0	7.0	68	3	3	2.0	3.5	49	2	6	3.0	4.5	39	6	6	4.5	7.0	26	2	2	2.0	4.0
08	150	4	2	7.0	10.0	112	4	6	14.0	14.5	88	8	12	7.5	10.5	68	6	2	2.0	3.5	47	3	7	2.0	3.0	33	7	3	3.0	3.5	37			2.0	6.0
09	150	2	2	8.0	10.5	110	8	10	14.0	20.0	88	6	8	6.5	11.0	68	4	4	2.0	3.5	47	4	4	2.0	3.0	31	5	2	3.0	4.0	26	4	3	4.0	7.5
10	150	2	2	9.0	12.5	112	6	8	14.0	19.0	88	5	15	7.0	11.0	66	4	2	2.5	3.5	47	2	4	2.0	3.0	31	2	3	2.0	3.0	27			4.0	5.0
11	150	4	2	7.0	10.0	112	8	6	12.0	18.5	85	9	9	6.5	11.5	68	2	2	1.5	2.5	45	4	4	2.0	3.0	31	2	3	2.5	4.0	35			5.0	4.0
12	150	2	2	8.0	11.0	114	4	8	14.0	19.5	85	9	9	8.0	11.5	68	2	2	2.0	3.5	45	4	4	2.0	2.5	33	5	4	1.5	2.5	30			8.0	5.0
13	150	2	2	9.0	12.0	116	3	7	13.0	19.0	88	5	14	9.0	12.0	68	3	4	2.0	3.5	47	1	5	2.0	3.0	31	7	2	2.0	3.5	30	4	4	3.0	4.0
14	152	2	4	8.5	12.0	114	6	8	14.0	20.0	86	6	9	6.0	9.0	67	3	3	2.0	3.5	45	2	5	2.0	3.0	31	4	4	2.0	3.0	29	3	2	4.0	4.0
15	152	2	2	8.5	12.0	114	4	8	12.0	19.0	84	6	9	6.0	10.5	67	4	3	2.0	3.0	43	4	2	1.0	2.5	31	6	2	2.0	3.5	34	7	2	4.0	5.0
16	152	2	2	7.5	10.5	112	4	4	12.0	18.0	86	8	4	6.5	11.0	70	8	2	2.5	4.5	44	3	3	2.0	3.0	37	8	6	3.0	5.0	40	6	2	4.0	6.5
17	154	2	2	7.0	10.0	116	5	5	11.5	18.0	98	4	4	8.0	13.5	78	5	5	5.0	7.0	49	4	4	3.0	4.0	47	4	6	4.0	6.0	44	11	4	4.5	7.0
18	154	2	2	6.5	10.0	120	7	4	11.0	10.0	100	7	13	8.0	13.0	82	3	6	6.0	9.5	53	4	4	6.0	7.0	51	4	6	4.5	6.5	46	5	5	5.0	8.0
19	154	2	2	6.0	9.0	124	4	4	9.0	14.0	102	6	18	12.0	18.0	82	4	6	8.0	11.5	53	4	2	5.0	7.0	51	4	4	4.0	6.5	44	8	4	2.5	4.5
20	156	1	2	6.5	9.5	126	2	5	10.0	13.0	104	6	15	7.5	13.0	82	4	3	6.5	7.5	55	4	4	3.5	5.5	51	4	4	4.0	7.0	46	7	4	4.5	7.0
21	156	2	2	5.5	9.0	126	4	2	7.5	11.0	104	5	7	7.0	10.0	84	6	3	5.0	7.0	55	2	4	3.5	6.0	51	4	2	4.5	8.5	41	7	3	4.0	6.5
22	156	2	2	6.0	10.0	126	4	2	7.0	10.0	106	4	6	7.5	12.0	80	6	5	6.0	8.0	55	4	4	4.5	7.5	51	2	2	5.0	7.0	39	5	3	4.5	7.0
23	156	2	2	6.5	10.0	126	4	2	8.0	12.5	104	4	10	6.5	9.5	82	6	4	6.0	9.0	57	4	4	4.0	6.5	51	4	4	5.0	8.0	39	7	5	4.0	6.5

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Dz = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India

Lat. 28.8 N Long. 77.3 E

Month December 19 60

Hour (ST)	Frequency (Mc)																																					
	.013				.051				.160				.545				2.5				5				10				20									
	F _{om}	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}
00	154	5	4	7.0	9.5	129	9	2	6.0	10.0	101	18	9	1.0	8.0	83	18	4	5.0	7.5	57	12	3	5.0	8.0	39	6	4	4.0	6.0	25	4	0	2.0	3.5			
01	154	4	5	6.5	10.0	131	6	4	7.0	10.5	103	15	11	7.0	9.0	83	15	6	4.5	6.5	57	10	4	4.5	9.0	39	4	5	4.0	7.0	25	2	0	2.0	3.5			
02	154	5	5	7.0	10.5	131	8	4	7.0	11.0	101	17	6	6.0	8.5	83	16	5	6.0	8.0	55	10	4	4.5	6.5	53	7	2	8.0	10.0	25	2	0	2.0	3.5			
03	154	4	5	7.0	11.0	129	10	2	7.5	12.0	100	19	8	8.0	11.0	81	21	5	3.5	6.5	55	11	2	4.0	5.0	55	7	4	5.5	10.0	25	4	0	2.5	3.5			
04	154	5	5	7.0	10.0	130	9	2	7.5	11.5	99	23	6	7.5	12.5	81	20	7	6.0	7.5	55	8	2	3.0	5.5	53	8	5	3.5	9.0	25	2	0	2.5	3.5			
05	155	5	6	8.5	12.0	129	11	2	8.5	13.0	102	9	15	7.0	10.0	79	23	6	2.5	3.5	55	12	4	4.0	6.0	53	9	4	6.0	9.0	27	6	2	3.0	3.5			
06	156	4	7	8.0	11.5	129	9	5	8.5	13.0	93	22	8	11.0	14.0	76	21	5	3.5	3.0	53	18	4	4.0	6.0	53	16	6	7.0	8.0	28	9	3	4.0	7.0			
07	152	5	4	7.5	11.0	121	12	5	9.0	12.5	88	25	7	5.5	11.0	73	10	7	2.5	3.5	49	16	2	3.0	4.5	42	19	5	7.0	8.5	27	12	2	3.0	5.5			
08	150	6	4	7.5	11.5	115	20	11	10.0	14.0	92					73	23	4	1.5	3.5	49	13	4	3.5	4.5	34			7.0	12.0	33	10	4	4.0	7.5			
09	148	6	6	8.0	11.5	112	21	8	10.0	12.5	93					72	16	3	2.0	4.0	49	5	4	2.0	4.0	33	12	2	2.0	4.0	29			8.0	11.5			
10	149	5	5	7.5	11.0	113	20	8	10.0	13.0	89	19	8	4.5	6.0	71			7.5	3.0	48	4	3	2.0	3.5	31	14	4	1.5	2.5	27	7	2	3.0	5.0			
11	148	6	4	8.5	12.0	111	19	5	10.5	13.5	87	6	12	5.0	6.5	71	10	4	1.5	3.0	47	2	4	1.5	3.0	33	5	6	3.0	4.0	31	8	6	4.5	7.0			
12	150	5	6	7.5	10.0	115	12	8	12.0	16.0	87					71	14	4	2.0	3.0	47	2	4	3.0	6.5	33	14	6	4.0	6.5	30			2.0	5.0			
13	148	7	4	7.5	10.5	111	15	6	11.5	16.0	82					71	16	4	7.0	3.5	47	3	4	2.5	4.0	33	15	7	2.0	3.5	31	5	3	4.0	6.0			
14	146	9	2	7.0	9.5	112	13	5	8.5	13.0	87					71	2	4	2.5	6.0	45	2	4	2.5	6.0	32	5	3	1.5	3.0	31	6	3	2.5	5.0			
15	150	5	4	6.0	9.0	109	11	5	9.5	15.0	87					71	2	4	2.5	4.0	47	3	8	2.5	4.0	33	4	2	2.0	4.0	35	6	2	3.0	4.5			
16	150	7	3	6.0	9.0	110	13	8	10.0	13.0	89	21	8	8.0	10.0	73	15	2	2.0	3.5	46	3	3	2.0	3.0	41	8	5	2.5	5.5	42	5	4	4.5	6.0			
17	152	6	4	5.0	8.5	115	11	6	10.0	13.5	93	17	12	8.0	11.0	81	8	6	4.0	5.0	49	3	4	1.5	3.5	52	4	3	4.0	5.5	43	6	4	4.0	6.0			
18	152	6	2	5.0	7.5	117	8	6	10.0	13.0	97	8	11	8.0	12.5	83	9	7	6.0	8.5	51	3	2	2.0	4.0	53	6	6	3.0	4.0	46	4	4	4.0	6.5			
19	154	6	4	5.5	8.0	121	9	6	9.0	13.0	101	9	15	8.0	10.0	80	12	5	4.5	6.0	53	3	4	5.0	6.5	53	6	4	3.0	5.0	45	3	8	4.0	5.0			
20	154	6	4	4.0	6.5	125	10	4	6.5	10.0	101	6	10	8.0	10.0	81	12	3	7.5	9.0	53	10	2	4.5	6.5	51	8	6	3.0	7.5	43	6	2	4.0	7.0			
21	156	5	4	5.0	7.5	129	6	4	5.5	7.5	101	8	8	5.0	7.5	85	6	4	4.0	5.5	53	10	2	3.0	5.0	51	5	3	5.0	8.0	41	10	2	4.5	7.0			
22	155	6	3	5.0	8.0	129	9	3	5.0	7.5	101	16	4	6.5	9.0	83	17	4	5.0	8.0	53	10	2	3.0	5.5	51	10	6	3.5	5.5	41	5	2	4.5	7.5			
23	155	4	4	5.5	8.0	130	12	5	6.0	9.5	103	15	9	6.0	9.0	82	18	3	4.0	6.5	53	12	2	3.0	6.0	51	12	4	4.0	7.0	40	5	3	6.0	9.0			

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_z = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India

Lat. 28.8 N Long. 77.3 E

Month January

1961

Hour (IST)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}	Fam	D _z	V _{dm}										
00	157	6	2	85	125	130	4	4	85	130	103	7	10	5.0	7.5	83	16	6	5.0	8.0	53	6	4	4.5	8.0	37	9	4	4.5	7.5	25	6	0	1.5	3.0					
01	155	6	0	9.0	130	129	7	5	9.0	145	102	11	8	8.0	8.0	83	17	10	6.5	11.0	56	10	5	4.5	8.0	36	11	2	4.5	7.0	25	3	0	2.0	3.0					
02	157	4	2	8.5	12.0	128	7	4	8.5	135	101	8	10	9.0	12.5	79	18	6	7.0	10.0	53	11	5	5.0	7.5	37	11	5	5.0	8.5	25	8	0	2.0	3.0					
03	157	3	4	9.0	13.0	128	6	4	8.5	12.5	98	13	8	8.0	12.0	79	14	6	6.5	9.5	54	16	8	7.0	12.0	55	11	6	6.0	8.5	27	6	2	2.0	3.0					
04	157	4	4	9.5	13.5	128	7	4	11.0	15.0	102	8	10	10.5	15.0	80	6	9	5.0	8.0	54	16	4	8.0	12.5	53	11	5	3.5	7.5	27	2	2	2.0	3.0					
05	157	4	4	9.5	14.0	128	8	4	9.5	15.0	102	5	4	6.0	8.5	79	16	8	4.0	6.5	52	18	8	9.0	14.0	57	6	4	4.5	8.0	27	2	2	2.0	3.0					
06	157	4	5	9.5	14.0	128	5	6	9.0	13.0	98	9	8	6.0	9.0	77	8	7	3.0	5.0	52	16	7	5.5	7.5	33	4	2	5.5	8.0	27	6	0	1.5	3.0					
07	155	4	4	9.5	13.0	122	7	6	9.0	13.0	88	11	11	3.0	5.0	71	12	6	2.5	5.0	51	8	7	9.5	12.5	50	7	9	4.0	5.5	29	9	3	2.5	3.5					
08	152	4	3	8.0	11.0	116	8	7	9.0	13.5	84	8	8	5.0	8.0	67	6	2	2.0	3.5	43	16	8	9.0	13.0	39	7	9	4.0	5.5	29	6	0	1.5	4.0					
09	157	6	2	8.5	11.5	108	16	6	13.0	17.0	84	11	6	10.5	15.0	67	4	2	7.0	2.5	42	16	8	10.0	14.0	32	11	5	9.0	14.5	27	6	0	3.0	5.0					
10	157	5	2	9.0	12.5	108	12	7	14.0	18.0	86	10	4	7.5	11.5	67	3	3	2.0	3.5	40	20	6	6.5	10.0	33	12	6	9.0	15.5	47	4	2	3.5	5.5					
11	153	5	4	9.0	13.0	108	17	4	13.5	18.0	85	9	5	5.0	10.5	67	11	5	2.0	3.5	43	20	4	4.5	7.0	33	12	6	9.0	15.5	47	9	5	3.0	5.0					
12	157	5	3	10.0	14.0	110	14	8	12.0	17.5	88	8	8	4.0	9.0	66	9	4	2.0	3.5	41	16	6	4.5	7.0	31	12	6	9.0	14.0	37	5	4	5.5	9.0					
13	157	5	4	10.0	14.5	112	8	6	13.5	19.0	90	4	10	3.0	5.5	67	6	5	1.5	2.5	43	17	8	9.5	12.0	32	20	6	5.5	11.5	33	13	4	6.0	9.5	29	6	4	4.5	6.5
14	157	2	2	9.0	13.0	113	12	9	9.0	14.0	86	6	6	4.0	9.0	67	6	6	2.0	3.5	42	34	4	4.5	7.5	29	13	4	6.0	9.5	29	6	4	4.5	6.5					
15	153	4	2	10.0	14.0	112	12	12	15.0	21.0	87	6	6	5.0	10.0	68	34	5	1.5	2.5	42	25	4	4.0	10.0	31	12	6	7.0	10.5	29	6	2	3.5	5.0					
16	155	4	2	8.0	12.0	112	28	10	12.0	16.0	88	6	6	10.5	14.5	70	26	4	2.0	3.5	44	24	5	6.5	10.5	41	20	8	6.5	11.0	41	7	3	3.0	5.0					
17	155	3	3	7.5	12.0	114	21	8	12.0	16.5	94	19	18	9.0	12.0	77	24	6	5.0	8.5	48	23	7	6.0	7.5	53	17	12	5.5	9.5	44	8	7	8.0	12.5	29	6	3	5.0	6.0
18	157	0	4	7.0	11.0	118	13	7	10.5	16.5	98	14	6	11.0	17.0	81	18	7	6.0	8.5	50	26	8	7.5	13.0	57	9	12	6.0	7.0	44	8	5	4.0	4.5	31	7	4	5.0	7.5
19	157	3	2	7.0	12.0	118	10	3	10.5	15.5	98	7	7	7.0	15.0	79	17	6	6.0	8.5	52	18	11	5.5	10.0	55	10	5	5.5	8.5	43	8	5	5.0	7.0	29	6	2	3.5	5.0
20	159	2	3	7.5	11.0	124	6	4	9.5	13.5	100	6	6	7.5	11.0	81	7	5	6.5	10.0	52	24	6	7.0	12.0	50	19	11	6.5	9.5	43	6	4	3.5	5.0	29	4	2	3.5	4.0
21	157	4	0	8.0	12.0	126	5	3	7.0	12.0	100	5	6	9.5	13.5	83	9	8	5.5	8.5	54	18	6	6.0	9.5	51	9	6	4.0	6.0	40	5	4	3.0	5.5	27	3	2	2.0	3.5
22	157	4	2	7.0	10.5	128	3	2	6.0	11.5	102	3	8	6.0	9.0	83	12	10	2.5	4.0	54	17	5	6.5	11.0	54	11	5	5.0	8.0	39	7	5	5.0	6.5	25	4	0	2.0	3.0
23	158	3	3	7.0	11.0	130	3	4	7.5	12.0	100	11	6	7.0	12.0	83	14	10	4.5	7.5	55	15	6	6.5	11.0	53	8	6	6.0	9.0	39	8	4	4.0	6.5	25	6	2	2.0	3.0

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Dz = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6 N Long. 140.5 E

Month December 19 60

Time (LS)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}																
00	157	4	2	7.0	10.0	128	4	4	13.0	21.0	105	8	4	11.0	17.5	83	7	4	10.0	19.0	53	11	6	4.5	7.5	49	8	5	4.5	7.5	40	12	8	3.0	5.0	24	0	2	1.5	3.0
01	157	4	0	7.0	11.5	128	5	5	11.5	19.0	105	5	4	10.0	17.5	81	8	3	8.5	16.0	53	8	6	7.5	11.0	49	4	5	4.5	8.5	41	7	11	3.0	6.5	24	0	2	1.5	3.0
02	157	4	2	8.0	12.5	128	3	4	12.5	19.0	105	7	5	12.0	20.0	83	6	6	10.0	18.0	53	6	5	5.0	9.5	48	7	4	5.0	9.0	36	14	6	3.0	5.0	24	0	2	1.5	3.0
03	157	4	2	8.0	12.0	128	4	4	11.5	19.5	105	6	4	11.5	19.5	81	7	4	9.0	12.0	52	8	5	6.0	10.0	50	6	4	4.5	7.5	34	10	4	3.0	5.5	24	0	0	1.0	2.5
04	157	4	3	10.0	15.0	126	6	2	13.0	21.0	105	4	6	11.5	20.0	77	10	3	10.5	17.0	53	9	6	11.0	18.0	50	8	5	5.0	9.5	34	10	4	1.5	3.5	24	0	0	1.0	2.5
05	157	4	2	9.0	14.5	124	7	2	15.0	22.0	101	8	9	13.0	21.5	77	10	6	6.0	10.5	52	12	6	11.0	16.5	64	11	7	7.0	13.0	34	13	4	3.0	5.0	24	0	0	1.5	3.0
06	157	2	6	10.0	15.0	118	4	5	13.0	19.0	87	12	6	12.0	19.0	73	10	6	10.0	18.0	49	8	8	3.0	6.0	62	6	8	8.0	15.0	40	2	6	5.0	8.0	24	4	0	2.0	3.5
07	149	2	4	9.0	14.5	112	6	5	12.0	17.0	83	11	9	9.0	15.0	69	7	3	8.0	13.5	41	7	7			48	7	12	6.0	10.5	38	7	4	4.0	7.0	26	2	2	2.5	4.0
08	149	2	2	11.0	16.0	104	12	4	10.0	16.0	81	14	8	10.5	15.5	67	8	4	7.0	12.5	33	4	2	5.0	7.5	36	8	8	6.5	10.5	36	8	8	5.0	7.5	32	20	8	2.0	4.5
09	148	5	5	10.0	14.5	108	6	4	16.0	21.5	79			16.0	21.0	67			7.0	12.0	33	9	2	4.0	7.0	32	9	6	7.0	10.0	34			12.0	14.5	27			5.0	6.0
10	157			13.0	18.0	714			14.5	20.0	88	9	2	10.0	14.0	69	6	2	10.0	14.0	32			5.0	7.0	30	6	6	7.5	10.5	32	6	8	5.0	8.0	38	12	15	3.5	5.5
11	148	3	3	13.0	18.5	112	7	6	16.0	22.5	87	14	16	10.0	14.5	67	10	4	2.0	4.5	33	8	4	6.0	8.0	30	5	2	6.0	10.0	30	12	4	6.0	8.0	30	24	8	2.5	5.0
12	149	2	4	12.0	17.0	112	8	6	14.0	22.0	78	17	5	10.0	13.0	71	4	4	5.0	10.0	33	7	4	8.0	11.0	29	8	3	7.5	11.0	28	12	6	4.0	6.5	30	16	7	3.5	5.0
13	149	2	4	11.5	16.0	112	8	6	13.0	20.0	78	10	9	6.5	9.0	71	6	4	7.0	12.5	33	10	2	6.0	8.5	30	9	3	6.0	9.0	30	10	8	3.5	5.0	34	10	10	2.5	4.5
14	149	2	2	12.0	16.5	112	7	6	11.5	17.0	79	13	7	9.0	14.0	71	6	6	8.0	13.0	32	10	2	5.5	8.5	34	4	6	6.0	8.0	34	7	5	5.0	7.0	28	18	2	3.0	4.5
15	149	4	2	11.0	17.0	110	7	7	11.5	16.0	83	10	10	5.5	10.0	70	5	5	2.5	5.0	33	6	3	6.0	9.0	36	10	6	6.0	10.0	40	6	6	3.0	6.0	32	16	6	2.0	4.5
16	149	4	1	10.0	14.0	108	8	6	13.0	18.0	85	16	10	9.0	14.0	71	13	4	6.0	10.0	40	9	4	8.0	10.0	54	8	12	5.5	12.0	44	9	4	4.0	6.0	30	18	4	2.0	4.0
17	157	2	4	10.0	15.0	114	10	2	14.0	20.5	91	14	6	8.0	12.0	85	7	8	7.5	14.0	45	6	4	5.0	8.0	54	10	4	7.0	13.5	50	8	10	4.5	7.0	28	18	2	3.0	5.0
18	157	3	2	10.5	16.0	124	3	4	11.0	18.0	98	12	7	13.0	21.5	87	9	8	8.0	13.5	47	9	6	5.0	8.5	56	6	5	8.0	13.0	47	10	5	3.5	4.5	29	18	5	2.5	5.0
19	152	3	5	10.5	16.5	126	6	4	12.5	20.0	99	12	4	13.0	19.0	85	9	5	5.5	10.0	49	11	4	4.0	9.0	60	6	8	7.0	11.5	46	8	6	3.0	6.0	26	15	2	2.0	4.0
20	153	2	3	10.5	16.0	126	8	4	11.0	19.0	103	10	10	13.0	22.0	89	4	8	11.0	17.5	51	11	5	5.0	7.5	62	9	7	8.0	14.0	46	7	6	3.0	5.5	26	9	2	1.5	3.0
21	152	3	3	9.0	14.0	126	7	2	12.0	20.5	103	9	8	12.5	20.0	89	6	6	6.0	12.0	53	9	8	4.0	8.5	62	12	7	7.0	13.5	42	10	6	4.0	6.5	24	11	2	1.5	3.0
22	157	4	2	8.0	12.0	126	8	3	12.0	19.0	104	12	5	10.5	19.0	89	10	5	6.5	11.5	53	10	6	8.0	14.0	61	11	7	6.0	11.0	42	12	9	2.0	5.0	24	9	2	1.5	3.0
23	157	4	2	8.0	12.0	126	6	2	12.0	20.5	107	8	8	12.0	20.0	91	8	8	7.0	12.5	53	10	6	6.5	10.5	54	10	8	4.0	7.0	42	12	9	3.0	6.0	24	10	2	1.5	3.5

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																																									
	.051			.160			.545			2.5			5			10			20																							
	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}	F _{dm}	D _l	V _{dm}																					
00	148	5	7	11.5	16.0	128	4	6	12.0	22.0	103	8	4	20.5	21.0	80	10	6	13.0	22.0	49	10	6	8.0	12.0	49	6	4	6.0	9.0	37	10	4	1.5	2.0	24	2	2	1.5	3.0		
01	149	4	6	10.5	16.0	126	6	4	14.0	21.0	103	8	8	12.5	21.0	78	11	4	12.0	20.0	49	10	8	7.0	10.5	49	6	5	3.5	5.5	36	12	5	3.5	5.5	24	2	2	1.0	3.0		
02	147	8	6	12.0	18.0	126	6	5	17.0	24.0	103	11	10	15.0	21.0	78	10	6	12.0	20.0	50	7	9	6.0	11.0	49	5	7	5.0	6.5	35	14	7	5.0	6.5	24	0	1	2.0	3.0		
03	151	4	8	9.0	14.0	126	6	4	12.5	20.0	103	6	10	12.5	21.0	78	10	8	15.0	22.0	49	10	8	5.5	10.0	47	6	3	7.0	10.5	33	9	4	6.0	7.5	24	1	1	1.0	2.5		
04	149	5	8	9.5	14.5	124	6	4	11.0	17.5	100	12	7	11.0	19.0	76	14	8	11.5	23.0	50	7	8	7.0	11.5	47	4	4	5.5	9.0	31	6	2	3.5	4.0	24	2	0	1.5	2.5		
05	149	6	6	13.5	18.0	124	8	4	15.0	22.0	97	14	4	10.5	19.0	78	10	8	12.0	18.0	49	16	8	7.5	10.5	63	5	6	7.5	12.5	31	4	2	3.5	4.0	24	2	0	1.0	3.0		
06	149	4	8	7.0	15.0	120	10	8	7.5	12.5	87	12	4	17.5	22.5	76	10	8	15.5	19.5	45	8	4	5.0	7.5	59	10	6	11.0	16.5	33	7	2	1.5	3.0	24	2	0	2.0	3.5		
07	145	6	4	9.5	14.5	115	5	9	13.0	20.0	77	15	6	7.0	11.0	68	6	2	13.5	14.5	42	8	5	6.5	9.5	52	9	7	9.5	14.5	39	10	6	4.5	10.0	24	2	0	2.5	3.5		
08	147	4	6	11.0	16.0	108	8	6	12.0	17.0	79	18	8	19.5	26.0	70	2	4	9.0	15.5	34	7	3	8.5	14.0	37	6	6	6.0	8.5	35	6	4	6.0	8.0	26	2	2	5.5	8.5		
09	149	5	8	14.5	20.0	105	20	5	22.0	30.0	74					67					34	7	3	6.0	10.0	31	11	2	7.0	10.0	32					32						
10	141					703					73			5.0	8.5	68	6	2	3.5	5.5	35																					
11	145	7	4	12.5	17.0	108	8	6	15.0	24.0	75	13	8	18.0	20.0	66	9	3	13.0	18.0	33	5	2	4.0	6.0	29	8	2	5.0	8.0	29	6	2	4.0	7.0	34	10	10	6.0	9.0		
12	145	4	4	15.0	21.0	108	9	6	16.0	22.0	75	12	8	18.0	22.5	72	2	6	7.0	11.5	35	8	6	7.0	10.0	29	12	2	4.0	7.5	29	6	4	3.5	7.5	29	16	5	5.5	7.5		
13	145	6	4	15.0	21.0	108	7	6	15.0	22.0	77	13	10	9.0	16.0	68	6	2	5.0	9.0	35	8	6	5.0	7.5	31	10	4	5.0	7.5	30	5	3	9.0	11.5	28	16	4	2.0	5.0		
14	145	6	4	13.5	19.0	108	10	6	18.5	23.5	71	20	4	12.0	20.0	72	6	4	8.5	13.5	34	7	3	5.5	7.5	31	8	2	5.5	8.5	35	6	8	4.0	6.5	28	16	4	3.0	5.5		
15	147	4	4	9.5	15.0	106	10	4	18.0	22.0	80	13	13	8.5	15.0	72	6	6	4.5	8.5	35	10	6	5.5	8.0	35	8	4	4.0	6.5	39	8	6	5.0	9.0	28	12	4	5.0	8.0		
16	145	8	2	12.0	17.5	106	13	4	13.0	17.0	79	20	8	14.0	22.5	72	10	6	16.0	23.0	37	10	2	9.5	13.5	47	10	6	8.5	14.0	43	6	8	6.0	10.0	28	14	4	3.0	5.0		
17	147	6	4	9.0	14.0	112	10	3	15.0	21.0	85	10	6	10.5	15.5	86	7	9	10.0	18.0	42	9	5	7.0	10.0	55	4	8	6.0	9.0	43	13	5	7.0	10.0	26	6	2	1.5	3.0		
18	151	6	8	11.0	16.0	120	11	6	15.0	21.5	93	16	10	18.0	24.0	85	12	8	8.0	11.0	47	10	6	7.0	9.5	59	6	6	9.0	14.0	47	8	8	6.0	9.5	26	10	4	1.5	3.5		
19	151	4	7	10.5	17.0	122	8	4	13.5	20.0	95	14	6	15.0	21.5	86	9	6	10.0	14.0	49	11	9	7.5	9.5	62	6	11	7.5	12.0	46	7	9	7.5	11.0	24	10	1	3.0	5.5		
20	151	4	6	11.0	17.0	122	7	0	14.5	22.0	97	8	4	14.5	21.0	86	8	5	14.0	22.5	57	9	4	8.0	12.0	61	13	6	8.0	14.0	45	6	11	4.5	7.5	24	7	2	2.0	4.0		
21	149	7	6	12.0	17.0	124	8	2	12.0	20.5	101	8	8	14.5	22.0	88	9	8	13.0	16.0	57	10	10	6.0	8.5	65	10	10	8.5	14.0	41	9	6	5.5	9.0	24	2	2	1.5	3.0		
22	149	5	7	9.5	14.0	124	8	2	13.0	21.0	103	6	8	9.5	18.5	90	7	6	7.5	16.5	57	10	6	6.0	7.0	61	7	6	10.5	14.0	39	10	4	4.0	8.0	24	2	2	1.5	2.5		
23	151	4	8	11.0	16.0	127	5	5	14.5	22.0	103	10	8	11.5	22.0	92	7	8	12.0	19.0	57	8	8	6.0	10.0	57	13	4	6.0	10.0	37	10	5	9.0	16.5	24	2	2	2.0	3.0		

F_{dm} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25. 8 S Long. 28. 3 E

Month October 19 60

Time (hr)	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l	F _{om}	D _u	D _l
00	128	8	12	116	8	16	105	9	11	95	8	13	64			57			40			21			21		
01	128	8	11	112	12	12	104	10	14	93	10	13	62			59			42			21			21		
02	127	11	9	112	12	13	102	10	12	89	12	8	60			56			39			21			21		
03	126	11	8	112	12	13	102	8	14	91	10	12	60			51			39			19			19		
04	128	9	11	110	11	13	98	15	12	87	12	12	60			50			35			19			19		
05	120	10	6	102	11	9	84	17	13	67	13	13	56			51			40			19			19		
06	116	14	10	96	17	22	72	24	10	55	24	4	43			38			37			23			23		
07	110	18	6	98	15	29	74	24	12	55	20	4	36			33			33			21			21		
08	114			85	30	12	74	27	12	55			36			27			27			23			23		
09	112			86	26	12	69			53	14	2	38			27			27			20			20		
10	116			92	23	18	69	35	7	53			38			25			25			19			19		
11	116			89	28	15	74	31	12	53	31	2	37			25			25			19			19		
12	116	18	10	95	28	17	74	32	12	56	32	5	40			25			25			19			19		
13	119			99	24	16	75	32	13	71	17	20	38			23	17	6	31	10	10	22	5	3	22	5	3
14	126			114	9	31	98	10	36	81	11	30	38			28	13	5	28			25	0	4	25	0	4
15	134			117	9	34	101	14	38	83	16	32	46			38			38			27			27		
16	135			118	13	36	102	17	39	83	20	32	48			46			43			27			27		
17	136			120	10	34	102	20	39	87	20	33	48			46			43			29	4	6	29	4	6
18	136	13	24	120	14	29	106	15	26	87	16	16	58			54	9	26	47	6	12	29	2	4	29	2	4
19	135			118	15	22	104	22	19	93	17	11	61			58	9	18	47			29			29		
20	132	14	13	118	16	17	105	14	16	97	11	16	68			59	10	20	47	8	14	29	2	4	29	2	4
21	132			120	10	20	108	13	17	99	8	16	67			61			47			29			29		
22	133	9	13	120	10	21	108	12	12	97	11	11	66			59			43			25			25		
23	128			120	8	19	106	8	11	93	10	11	65			58			39			23			23		

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.85 Long. 28.3 E

Month November

1960

Frequency (Mc)

Time (hr)	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}	F _{dm}	D _f	V _{dm}
00	130	8	4	116	9	3	101	10	5	91	10	5	67	4	6	57	2	4	39	0	4	19	4	4
01	130	7	3	116	9	5	99	10	4	91	7	4	65	4	6	52	6	2	38	3	5	19	4	4
02	131	7	6	114	10	4	99	11	4	89	10	3	65	5	8	52	6	4	37	8	4	19	5	4
03	130	8	6	116	7	6	99	10	4	89	10	6	63	4	6	52	4	4	37	4	8	17	4	2
04	128	10	6	115	5	7	98	7	5	83	8	6	61	6	10	52	4	6	33	6	4	17	2	2
05	121	11	7	104	14	10	81	21	10	57	21	4	53	6	18	50	2	4	35	4	4	17	2	2
06	116	16	6	96	19	17	69	30	4	53	27	0	35	14	4	36	10	13	33	4	8	19	2	4
07	112			88	26	14	65	33	0	53	24	0	31	12	2	26	18	6	25	8	7	18	3	3
08	116			*90			*65			*53			29	10	2	*24			*19			*		
09	114			*100			*66			*53			*31			*52			*19			*17		
10	118	8	14	96	8	16	*73			*54			31	2	2	*24			*21			*19		
11	124	12	12	*105			83	30	14	56	41	3	33	8	4	*24			*23			*17		
12	128	11	10	109	18	13	95	19	24	71	28	18	33	29	4	24	14	4	27	8	10	19	11	2
13	134	6	9	119	15	17	101	20	23	81	28	25	38	28	9	29	34	7	31	18	8	23	13	5
14	140	7	13	119	20	10	104	23	23	87	26	29	47	27	18	36	30	14	33	20	7	25	12	4
15	138	19	11	120	17	13	108	16	27	87	24	28	57	34	22	42	22	18	37	12	12	25	13	10
16	140	9	11	122	20	15	107	24	25	93	25	34	57	25	26	44	26	17	39	24	10	27	9	4
17	140	8	13	113	15	16	109	17	31	89	22	30	55	30	25	48	18	14	43	8	5	27	2	3
18	140	7	12	121	14	16	106	15	24	87	19	14	61	15	20	54	8	6	43	6	4	25	4	5
19	139	4	10	121	7	8	108	10	10	93	11	6	67	7	10	58	3	8	45	4	4	25	4	7
20	138	4	8	121	7	10	105	11	7	93	9	6	69	7	5	58	5	7	43	4	7	25	4	9
21	136	8	7	118	13	7	104	13	10	93	8	5	67	9	7	56	6	5	41	3	5	21	4	5
22	135	8	6	116	16	5	103	13	9	93	11	4	67	7	8	56	5	10	56	5	10	21	2	5
23	132	7	4	115	12	4	101	15	6	93	9	7	65	7	8	54	4	8	54	4	4	18	5	2

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 F_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month December 19 60

Time (SI)	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}	F _{am}	D _g	L _{dm}
00	140	11	11	123	16	11	109	19	12	95	21	10	70	8	10	56	15	8	42	14	5	20	14	2			
01	136	15	5	123	13	13	107	13	11	97	9	12	68	14	11	55	9	5	39	8	2	18	10	2			
02	136	13	8	123	9	13	107	13	12	93	10	8	68	4	14	55	5	7	39	4	4	18	6	2			
03	136	8	10	121	10	14	107	11	11	91	11	10	68	2	13	54	4	6	37	4	6	18	4	2			
04	132	11	8	117	11	10	101	15	10	85	15	10	66	6	11	51			35	6	8	18	2	2			
05	126	15	8	107	18	11	83	24	10	57	34	4	62	4	16	50	8	8	35			18	2	2			
06	124	11	7	105	15	18	79	21	14	55	28	2	46	10	10	42	6	10	36			19	11	1			
07	122	18	12	103	22	18	77	28	12	55	35	2	37	20	7	30	12	8	33	2	6	20	4	2			
08	120	26	6	100	33	13	75	42	10	55	44	2	36	10	6	36	10	6	31			19	4	1			
09	122	16	10	101	32	15	74	44	8	55	30	2	38			23			27			20					
10	122	16	7	101	26	10	77	40	11	55	43	2	36	8	4	23	10	5	27	2	6	19	4	1			
11	125	15	6	105	25	10	87	31	19	69	32	16	34	10	3	24	7	6	25	10	4	20	4	2			
12	130	14	6	117	12	17	99	17	21	83	17	27	39	22	6	26	16	7	31	4	9	22	8	2			
13	136	10	8	124	7	16	111	10	29	93	11	28	48	11	14	32	10	10	31	8	6	22	6	2			
14	141	5	10	125	11	10	115	10	23	96	16	30	57	12	23	36	14	14	37	6	6	24	3	3			
15	141	7	13	133	9	16	113	10	20	95	15	19	56	14	23	41	19	1	37	6	2	24	4	2			
16	142	9	10	129	10	13	115	12	22	97	16	24	52	16	14	41			41			26	2	5			
17	142	9	12	128	13	14	115	14	22	97	17	31	54	17	13	41			43	4	2	26	4	5			
18	142	11	12	127	16	15	111	18	20	93	19	22	62	16	8	56	2	9	45	3	4	26	5	6			
19	142	10	13	129	8	14	117	10	17	99	13	18	70	7	7	59	3	8	47			24	13	4			
20	140	9	8	127	11	11	115	10	14	96	9	12	72	6	6	58	4	6	45	2	2	25	13	5			
21	142	7	10	129	8	14	113	10	12	98	9	10	74	2	8	54	4	4	43	2	2	22	6	4			
22	140	9	10	127	9	11	112	11	11	97	12	5	72	4	8	56	4	5	43	4	4	20	10	2			
23	139	9	8	127	9	13	111	12	14	98	12	5	72	4	8	56	6	7	41	11	3	20	12	4			

F_{am} = median value of effective antenna noise in db above k1b
 D_g = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month January 19 61

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}
00	133	13	7	115	11	11	101	14	8	93	13	10	62	8	8	52	6	6	41	9	6	18	4	0
01	133	12	6	114	13	9	103	12	8	95	9	11	62	8	8	53	5	7	41	4	8	18	9	0
02	134	7	8	115	10	8	103	9	8	91	14	8	62	6	8	52	4	8	39	4	8	18	3	0
03	133	7	8	115	6	10	105	6	9	91	13	9	60	10	6	52	6	10	37	4	8	18	2	1
04	132	9	10	113	8	8	91	12	6	87	13	11	60	8	6	52	6	10	37	4	11	18	2	2
05	129	11	11	105	18	8	85	26	13	65	29	8	57	7	5	52	4	12	37	6	12	18	5	2
06	123	14	5	93	27	14	71	36	4	59	26	2	44	14	10	38	13	4	37	4	6	18	4	1
07	121	17	12	94	25	18	69	36	2	59	26	2	36	17	4	30	17	6	33	6	4	20	4	2
08	120	16	9	92	26	18	69	32	2	59	20	2	34	10	4	26	18	4	29	6	4	20	2	2
09	116	16	6	84	30	9	69	31	2	57	28	0	34	4	4	24	12	4	27	7	8	20	2	2
10	117	18	8	89	29	11	79	27	12	64	25	7	34	13	4	24	13	4	25	10	4	20	5	2
11	127	12	10	107	17	21	91	24	24	67	31	10	37	23	7	24	12	5	27	8	8	20	2	2
12	132	11	9	112	15	19	99	19	32	71	33	14	37	30	7	27	21	7	31	8	8	20	5	2
13	136	9	7	115	11	18	98	22	25	79	25	22	40	24	8	26	24	6	35	6	10	22	5	2
14	135	11	7	117	14	18	103	16	28	85	20	28	40	26	8	25	25	3	36	7	7	22	6	0
15	138	9	11	119	11	20	105	15	27	85	20	28	48	20	16	36	18	14	39	4	8	24	5	2
16	137	10	12	119	12	19	107	15	30	88	19	31	51	27	19	44	10	18	41	6	6	24	6	2
17	140	10	15	121	11	20	105	18	30	87	22	30	51	19	17	46	14	18	45	4	10	24	9	2
18	137	14	10	119	14	19	106	15	22	89	20	21	56	16	8	57	7	13	45	2	8	24	5	2
19	138	12	11	118	15	12	105	15	11	93	13	15	63	9	11	53	9	9	47	3	6	23	3	2
20	136	11	7	119	10	11	107	10	10	94	9	10	66	8	14	55	7	7	45	4	6	22	3	2
21	135	10	6	116	12	17	103	12	6	93	12	6	64	8	12	54	6	6	43	8	6	20	4	2
22	135	6	8	114	12	6	101	17	5	93	12	8	64	8	10	54	6	6	42	7	5	20	5	2
23	134	11	7	113	13	8	105	10	11	97	8	14	63	7	9	53	7	7	41	4	6	18	4	0

F_{am} = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

F_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E

Month February 1961

Hour (S)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{om}	D _u	L _{dm}
00	133	4	8	116	8	10	103	6	12	91	8	10	53	4	4	46	8	6	32	6	4	17	4	0
01	131	6	8	114	10	8	101	8	12	91	6	11	51	8	4	44	6	4	32	2	2	17	2	0
02	131	6	8	113	9	8	99	10	10	87	10	8	53	4	6	44	6	3	32	4	6	17	2	0
03	131	4	9	114	6	10	97	8	6	87	8	8	53	2	6	44	4	2	30	6	4	17	4	0
04	129	6	8	112	8	8	97	8	9	87	6	12	51	4	4	44	4	4	30	6	6	17	6	0
05	127	4	8	108	6	8	85	10	8	67	14	10	51	4	6	42	2	2	30	4	4	17	2	0
06	119	10	7	92	20	8	65	24	0	55	10	0	41	6	6	38	4	6	30	4	2	19	2	2
07	117	8	8	90	18	12	65	20	0	55	6	0	33	4	4	28	8	6	28	6	4	19	4	2
08	113	7	6	85	18	9	65	16	0	57	2	2	31	6	4	22	10	2	23	3	3	19	8	2
09	114			84	20	6	66	17	1	55	3	0	31			20	5	2	20	9	2	19	4	2
10	113	8	8	89	17	9	67	8	2	59	6	2	33	4	6	20	5	2	22	4	6	19	4	2
11	119	8	12	94	18	6	73	22	8	59	18	4	31	4	2	20	8	2	22	6	4	19	4	2
12	123	12	6	108	12	16	82	23	15	60	33	5	34	15	5	22	16	4	26	6	6	21	4	4
13	131	8	9	112	16	16	93	21	26	79	20	24	36	19	7	26	18	8	28	8	6	23	2	4
14	135	8	10	116	16	14	99	18	24	87	14	32	39	20	10	30	14	10	30	6	4	23	4	2
15	138	7	13	120	10	16	104	11	30	88	15	31	48	13	21	38	8	16	33	5	3	24	3	3
16	139	10	12	119	17	12	103	16	24	89	10	30	49	14	20	39	5	11	34	4	2	25	5	3
17	135	13	8	125	11	19	106	15	29	91	20	32	49	17	14	42	12	8	36	6	2	25	8	4
18	138	8	9	122	10	15	104	13	17	89	15	12	53	10	8	46	5	5	38	4	2	25	6	4
19	135	10	8	120	12	10	103	12	8	93	10	8	56	9	4	47	9	4	38	2	2	23	4	4
20	135	6	8	120	8	10	103	10	10	95	8	8	57	6	4	46	4	3	36	4	0	23	2	4
21	133	6	6	118	8	8	101	10	10	93	10	6	55	6	4	46	6	4	35	3	2	20	4	3
22	134	5	8	117	7	9	102	9	9	95	4	10	55	4	6	46	6	4	34	2	2	19	2	2
23	133	4	8	118	6	12	103	6	12	95	4	10	55	4	6	44	6	4	34	2	4	19	0	2

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9'N Long. 6.8'W

Month December 19 60

L (59)	Frequency (Mc)																																			
	.013			.051			.160			.495			2.5			5			.10			20														
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm											
00	152	5	4			127	4	4			110	10	8			86	6	6			53	6	18			38	6	6			24	2	1			
01	152	4	5			127	5	4			*	114	4	6			84	6	6			53	3	16			38	5	7			23	3	2		
02	152	3	5			127	5	4			*	117					82	4	8			54	4	13			36	6	6			25	0	4		
03	152	2	2			127	4	4			*	114	6	12			82	7	4			53	7	6			36	5	8			24	1	1		
04	154	2	4			129	3	5			*	106					80	10	4			53	6	5			34	8	6			23	2	0		
05	154	0	3			127	3	3			*	113					80	5	8			54	3	16			33	4	4			25	0	2		
06	154	0	4			125	4	6			111	8	10			76	4	10			53	5	8			36	7	7			25	5	2			
07	152	2	7			119	4	3			*	96					66	9	3			51	4	16			38	4	5			27	2	2		
08	150	2	2			113	8	4			*	90					66	11	4			43	8	11			38	4	6			31	5	5		
09	148					*	111				*	99					66					37					40					28				
10	148					*	111				*	92					68					29					32					27				
11	150					*	113				*	94					64	5	4			29					32	4	6			29				
12	150	3	6			114	8	3			96	4	6			70	5	9			31	7	7			29	5	4			27	4	4			
13	150	4	3			114	6	4			96	6	6			68	6	10			29	6	9			30	6	6			29					
14	150	4	4			113	7	3			90	17	6			65	7	7			29	3	5			34	4	6			29	12	4			
15	150	4	4			113	12	6			92	8	6			64	11	6			35	10	6			39	11	7			29	8	4			
16	150	4	2			113	7	6			96	8	6			60	10	5			42	9	8			44	8	4			29	10	4			
17	150	4	4			117	13	4			102	8	6			78	10	6			49	7	14			46	10	8			29	7	4			
18	151	3	5			121	6	5			104	8	8			80	10	8			55	6	10			46	6	7			27	2	4			
19	152	4	4			123	6	4			*	111					82	8	6			55	7	6			46	4	10			25	4	4		
20	152	3	5			125	4	6			109	7	13			83	8	5			57	5	8			43	11	6			24	4	3			
21	154	2	4			125	4	5			108	8	6			85	8	9			55	4	6			42	5	9			25	3	4			
22	152	3	6			127	5	4			108	10	4			82	11	4			54	5	5			38	6	6			25	0	4			
23	154	2	2			127	5	4			110	8	8			84	6	6			53	10	6			38	8	5			23	2	2			

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9 N Long. 6.8 W

Month January

19 61

Hour (ST)	Frequency (Mc)																														
	.013			.051			.160			.495			2.5			5			10			20									
	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}							
00	152	2	4		124	3	15		112	5	6		80	8	4		54	6	6		52	6	6		38	2	4		24	0	0
01	152	2	4		124	4	14		112	6	8		80	6	4		54	4	8		50	6	4		37	5	5		24	0	0
02	151	3	3		125	2	19		108	6	34		80	8	20		52	6	6		52	5	4		36	4	4		24	0	0
03	150	4	2		124	2	11		110	6	36		80	6	21		52	7	6		54	4	6		36	4	5		24	0	0
04	152	4	6		124	4	18		110	8	36		78	8	18		54	6	8		52	6	4		36	6	7		24	2	0
05	152	4	4		124	5	18		110	7	22		76	8	16		54	4	6		55	7	6		35	8	5		24	2	0
06	154	2	4		120	5	14		107	9	19		66	14	4		52	7	6		54	6	12		35	10	5		26	0	2
07	150	4	4		116	8	10		88	6	14		60	7	6		48	8	3		50	6	3		38	6	3		28	2	2
08	148	4	4		108	8	7		87	7	12		63	5	5		40	9	7		42	6	5		38	4	6		28	6	2
09	148	4	2		*108				92	5	8		62	4	4		36	10	4		*36				36	13	8		28	4	2
10	148	4	4		106	6	4		92	8	4		60	4	7		34	13	2		31	5	5		34	16	8		28	6	2
11	148	4	4		110	5	7		90	10	13		60	5	6		35	6	4		31	5	8		32	10	8		28	5	2
12	150	3	7		110	6	6		92	9	7		62	6	7		32	10	0		30	7	7		32	8	8		26	4	0
13	148	5	3		108	8	4		92	10	8		60	6	4		32	14	2		30	8	8		30	8	6		28	2	4
14	150	2	4		112	4	8		90	8	7		56	5	2		32	11	4		32	4	10		30	10	6		30	4	4
15	150	2	6		108	7	4		90	7	7		59	3	6		34	10	4		32	4	8		38	22	12		30	0	2
16	149	3	7		106	7	4		92	4	9		64	6	4		38	9	5		38	4	12		42	20	10		30	2	4
17	148	4	2		112	7	9		100	4	8		72	4	7		42	4	6		48	9	8		42	28	6		26	6	2
18	149	3	3		118	6	9		102	8	8		76	6	2		49	7	5		53	9	8		40	20	2		26	2	2
19	150	4	2		120	4	10		104	6	8		80	4	7		52	8	6		52	7	4		40	14	4		24	2	0
20	152	3	4		118	5	9		105	9	11		80	4	4		53	9	5		52	8	6		40	6	6		24	2	0
21	152	2	2		120	5	10		106	8	6		80	4	4		54	6	5		51	13	5		39	9	5		24	2	2
22	152	3	3		122	4	5		108	7	10		80	6	4		56	8	8		52	6	6		40	3	4		24	0	0
23	152	2	4		122	8	10		110	4	13		82	4	10		56	8	8		52	5	6		38	6	2		24	0	0

F_{om} = median value of effective omnio noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																												
	.013			.051			.160			.495			2.5			5			m			10			20				
	Fom	Du	L-dm	Fom	Du	L-dm	Fom	Du	L-dm	Fom	Du	L-dm	Fam	Du	L-dm	Fom	Du	L-dm	Fom	Du	L-dm	Fam	Du	L-dm	Fom	Du	L-dm	Fom	Du
00	154	2	4	*122			*114					*85																	
01	154	2	5	*116			*114					*85																	
02	154	2	5	*116			*111					*84																	
03	154	3	4	*122			*114					*84																	
04	154	2	4	*120			*112					*80																	
05	154	4	4	*123			*108					*77																	
06	154	4	2	*116			*98					*68																	
07	152	5	3	*111			93	7	23			62	10	9															
08	148	4	2	*111	6	8	*95					*60																	
09	149	7	5	*105			98	4	14			62	7	4															
10	150	4	4	*110	9	7	95	7	9			58	1	6															
11	150	4	4	*112	6	10	100					56	12	4															
12	150	4	4	*112			100	4	6			62	8	9															
13	152	2	6	*112	6	10	112	6	10			60	12	5															
14	150	4	4	*110	6	4	94	6	10			55	9	3															
15	150	3	4	*108	6	6	*95					56	6	4															
16	150	4	4	*106	13	4	92	10	10			62	12	6															
17	150	4	2	*108	9	6	98	8	12			*70																	
18	152	2	4	*115			*106					76	8	7															
19	152	4	3	*118			104	11	9			*80																	
20	154	3	5	*114	14	8	*104					80	4	6															
21	154	3	4	*116			*106					*84																	
22	154	4	2	*120			*108					*84																	
23	154	2	2	*125			*110					*83																	

Fom = median value of effective antenna noise in db above k1b
 Du = ratio of upper decile to median in db
 D_L = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																																							
	.051				.113				.246				.545				2.5				5				10				20											
	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}				
00	134	8	10.0	16.0	119	10	8	8.0	13.0	101	14	6	11.0	12.0	90	10	6	9.5	12.5	63	10	10	12.0	17.5	62	4	8	7.0	9.5	49	6	4	10.5	20	33	8	4	5.0	7.0	
01	134	6	10.5	14.0	119	8	6	7.0	11.5	102	9	9	9.0	15.0	90	8	10	8.0	13.0	63	8	12	7.0	12.5	58	6	12	9.5	12.5	47	6	2	8.5	11.0	33	8	4	7.0	9.0	
02	134	6	11.0	17.0	117	8	6	10.0	17.0	99	9	5	9.5	13.5	90	6	10	7.5	11.5	63	10	14	10.5	13.0	58	4	12	8.5	12.0	47	6	6	8.5	12.5	31	6	2	4.0	5.0	
03	132	6	10.0	17.5	117	8	6	11.0	17.5	97	11	6	8.0	13.5	90	6	12	8.5	14.0	63	6	14	12.0	14.0	56	6	12	9.5	10.5	45	10	6	11.5	12.0	31	4	2	5.0	6.0	
04	130	8	11.5	18.0	115	12	10	10.5	17.0	95	9	5	8.5	18.0	84	8	10	8.5	19.5	61	18	14	13.0	19.0	56	6	12	10.5	18.5	45	8	6	9.0	11.0	31	4	4	3.0	5.0	
05	126	6	10.25	20.5	102	13	9	11.0	14.5	81	12	11	6.0	9.5	80	8	12	3.5	10.0	55	8	12	12.0	15.5	57	9	11	12.5	16.5	43	10	2	7.5	11.0	31	2	4	3.0	5.0	
06	118	10	13.0	18.5	99	14	8	7.0	9.0	82	17	5	6.5	9.5	87	11	8	3.0	9.5	43	14	4	6.0	11.0	48	6	10	7.0	13.0	39	10	2	8.0	11.0	30	4	3	3.0	5.0	
07	118	10	13.0	17.0	97	14	10	6.0	9.0	83	12	12	8.0	12.0	88	12	12	6.0	9.0	37	6	8	7.5	9.0	42	6	8	14.0	17.0	37	10	6	8.5	10.0	29	4	2	1.5	3.0	
08	116	12	8	12.5	20.0	97	14	8	5.0	8.5	82	15	10	6.5	15.0	92	8	14	8.0	10.0	35	9	9	8.0	10.0	38	6	5	10.0	12.0	35	8	4	2.5	10.0	29	2	4	3.0	4.0
09	120	8	10.8	14.0	99	15	10	7.5	14.5	86	14	8	9.0	16.0	90	7	14	6.0	9.5	33	6	4	8.0	9.5	34	6	8	9.5	10.0	35	6	8	8.5	11.5	27	4	2	5.0	3.5	
10	120	10	10.0	17.5	101	14	8	7.0	16.5	87	14	8	9.5	18.0	88	10	12	9.5	14.0	33	4	6	7.0	9.5	32	4	8	10.0	11.0	33	8	10	10.0	11.0	27	2	4	3.5	5.0	
11	126	8	10.25	19.0	103	20	10	10.0	15.5	89	25	12	11.5	20.0	88	12	12	6.0	7.0	34	10	7	4.0	9.0	30	20	10	15.5	17.5	35	12	12	6.0	8.0	27	6	2	3.5	5.0	
12	128	14	6	11.0	16.5	110	17	13	9.0	96	16	19	12.5	20.0	93	9	11	5.5	9.0	39	22	10	6.5	8.5	34	18	14	11.0	16.5	37	9	8	7.0	10.0	29	4	4	4.5	6.0	
13	133	13	11	10.0	17.0	117	12	16	10.5	98	15	17	13.0	20.0	98	10	10	6.5	7.0	38	27	7	13.5	21.0	38	14	18	7.0	21.0	39	8	10	7.0	8.5	31	10	4	4.0	6.0	
14	139	6	15	10.0	15.0	121	16	16	13.0	104	19	21	13.0	23.5	96	12	8	6.5	7.0	54	4	18	11.0	18.5	46	11	12	7.0	20.0	41	14	6	7.5	12.0	31	12	2	4.0	5.5	
15	140	10	16	10.0	16.0	123	13	24	12.5	107	16	26	12.0	26.5	96	18	8	7.0	12.0	55	19	20	12.5	18.0	48	13	12	8.5	10.0	43	10	5	9.5	11.5	33	6	4	5.5	7.5	
16	136	16	12	10.0	15.5	121	16	22	10.0	103	23	22	11.0	19.5	95	19	12	7.0	12.0	54	21	18	16.0	21.0	50	9	10	9.0	12.0	47	12	7	7.5	12.0	33	11	2	5.5	8.0	
17	138	12	14	8.5	14.0	115	27	16	10.5	101	24	22	14.0	20.0	95	21	13	6.0	14.5	57	26	8	9.5	15.0	52	16	8	6.0	9.0	48	21	5	10.0	10.5	35	12	4	5.0	5.0	
18	136	14	16	11.0	17.5	115	24	13	12.0	100	25	13	8.5	13.5	91	23	9	6.0	7.0	57	20	10	8.5	8.0	60	8	10	8.0	12.0	57	12	8	5.0	7.5	33	14	2	3.5	6.0	
19	136	14	12	10.0	18.0	119	16	12	8.5	101	18	8	7.5	13.5	94	16	8	6.0	10.0	63	16	6	7.5	7.5	60	12	10	8.0	8.0	49	10	4	7.5	7.5	31	9	3	2.0	4.0	
20	136	12	10	11.0	18.0	121	14	12	6.5	103	18	12	7.5	12.5	98	10	10	4.0	7.0	67	12	10	6.0	9.0	62	4	6	9.5	7.5	49	10	4	6.0	9.0	33	13	4	3.0	5.0	
21	136	8	10	9.5	15.0	119	14	10	8.5	105	10	12	11.0	16.5	98	4	8	9.5	12.5	67	6	12	9.0	13.0	62	4	10	8.5	8.5	49	6	4	7.5	8.5	33	8	4	4.0	6.0	
22	133	11	9	10.0	16.0	120	9	9	9.0	101	14	6	8.0	13.0	96	8	8	6.0	9.0	63	10	6	8.5	13.0	62	4	8	8.5	8.5	49	4	6	7.0	10.0	34	7	5	5.0	7.0	
23	132	10	4	10.2	15.5	119	8	8	9.5	103	14	6	11.0	16.0	96	6	8	10.0	15.0	63	8	10	10.0	15.0	62	4	8	9.0	11.0	49	4	6	7.0	9.0	33	6	2	6.5	9.0	

F_{am} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station São José, Brazil

Lat. 23.3 S Long. 45.8 W

Month January 19 61

Hour (EST)	Frequency (Mc)																																						
	.051				.113				.246				.545				2.5				5				10				20										
	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm
00	111	12	9	71.0	17.0	95	12	8	10.5	14.0	79	8	9	13.5	14.5	71	9	7	9.0	14.5	60	10	7	4.0	8.5	66	66	5.5	7.0	49	9	4	9.5	13.0	35	4	6	4.0	6.0
01	112	10	6	11.5	17.0	96	11	8	11.0	13.5	79	8	11	15.0	12.5	70	10	7	8.5	12.5	58	12	7	2.0	7.0	61	61	13.5	18.5	50	7	5	2.5	6.0	35	2	7	4.0	5.0
02	111	11	6	13.0	18.0	94	10	6	10.0	16.5	77	11	13	5.0	7.5	70	10	6	9.0	14.0	57	11	8	7.5	10.0	57	57	6.0	10.0	49	6	6	6.0	9.5	33	2	4	4.0	5.0
03	111	13	6	13.5	18.0	95	11	16	15.0	9.5	68	12	8	8.5	12.0	58	10	9	8.5	12.0	58	10	9	8.5	12.0	58	58	8.0	12.0	49	6	8	2.0	5.5	33	4	6	1.5	3.0
04	111	11	6	14.5	20.0	92	12	12	15.0	7.5	66	12	10	8.5	12.5	61	7	13	8.0	13.0	57	7	13	8.0	13.0	57	57	5.0	8.0	47	6	8	5.5	9.0	33	2	4	2.0	3.5
05	109	13	13	16.0	20.5	83	11	8	11.0	14.5	71	8	12	8.5	8.5	58	5	8	7.5	10.0	57	9	11	9.0	12.5	61	61	7.0	9.5	47	6	10	6.0	9.0	34	1	5	5.0	7.0
06	101	14	6	13.5	19.0	81	10	4	4.0	4.0	71	6	8	6.0	8.0	74	6	8	11.0	15.0	46	8	12	7.5	12.5	52	52	9.5	13.0	45	8	6	7.5	10.0	34	1	6	4.5	6.5
07	97	16	6	15.0	19.5	82	9	10	9.0	12.0	71	6	6	3.0	3.0	78	6	6	5.0	8.0	34	10	8	8.5	10.0	48	48	8.0	11.5	41	8	4	3.5	8.5	33	2	4	2.0	4.0
08	96	14	5	13.0	18.0	81	9	10	9.5	10.0	69	12	8	3.0	5.5	78	4	10	9.5	15.0	32	6	4	7.5	6.5	41	41	4.5	7.0	42	3	5	1.5	5.0	33	2	4	2.0	3.5
09	99			13.5	17.5	81	10	5	10.5	11.5	72	4	4	7.5	8.0	76	4	4	8.0	11.0	30			5.0	4.5	37	37	7.0	10.0	37	4	6	5.0	8.5	33			2.0	3.0
10	99	10	10	11.0	18.5	81	8	8	4.0	6.0	74	7	5	3.5	7.5	30			3.5	7.5	30			7.0	5.0	37	37	12.0	15.0	38	2	6	4.0	8.0	33	2	5	2.5	4.0
11	99	12	5	11.5	17.0	83	8	8	5.0	7.5	71	9	11	5.5	7.0	74	4	8	9.5	11.5	30	13	4	7.0	9.5	33	33	6.5	10.0	37	7	5	16.0	18.5	33	3	6	3.0	5.0
12	103	12	5	12.5	16.5	85	13	9	11.5	13.0	72	11	12	5.0	7.0	70	14	4	7.5	11.0	34	20	8	7.0	10.5	35	35	5.5	8.5	39	6	4	7.5	10.0	33	3	5	4.0	6.0
13	107	11	8	12.5	18.0	88	12	5	9.0	12.5	76	18	17	8.0	7.5	76	9	5	8.5	11.5	34	24	5	13.5	17.5	39	39	6.0	11.0	41	9	4	6.0	8.5	35	4	9	4.0	5.0
14	111	9	15	13.0	17.0	93	15	17	8.0	10.0	80	21	21	11.0	11.5	77	13	7	11.0	13.0	41	26	12	7.5	12.0	44	44	6.5	11.5	45	7	5	7.0	10.0	33	11	4	5.0	7.0
15	115	13	13	13.0	15.5	95			7.0	10.0	77	25	16	7.0	9.0	74	19	4	8.0	9.0	44	29	15	14.5	14.0	49	49	11.0	14.0	49	9	7	8.0	11.5	35	13	6	4.5	5.5
16	115	14	12	11.0	16.0	96	19	14	10.0	16.5	78	19	16	10.0	13.5	78	15	9	10.0	12.5	48	26	14	8.0	11.5	52	52	6.0	11.5	51	13	4	8.5	13.0	35	6	6	4.5	5.5
17	115	14	10	11.0	15.0	97	16	10	6.0	11.5	81	15	17	9.5	13.5	78	11	10	9.0	15.0	52	21	11	5.0	8.5	58	58	6.5	11.0	51	6	5	10.0	13.0	37	4	6	4.0	6.0
18	115	8	8	12.0	17.0	99	13	15	10.0	17.0	76	19	12	10.0	10.0	76	11	8	8.0	12.0	58	11	8	6.5	10.5	63	63	7.0	11.0	52	4	3	5.5	8.5	36	4	8	3.0	5.0
19	115	8	8	12.0	18.5	95	18	4	3.0	7.5	79	14	10	10.0	12.5	76	12	6	7.0	9.5	64	4	8	2.5	7.0	63	63	4.0	7.5	53	4	6	3.0	6.0	33	6	6	2.0	4.0
20	113	10	4	11.0	12.5	97	9	7	8.0	11.0	79	11	8	7.0	8.5	79	9	5	5.0	9.0	66	2	8	4.5	10.0	65	65	1.0	4.0	53	4	6	7.0	10.5	35	4	8	2.0	3.0
21	113	10	7	10.0	13.5	99	13	8	8.0	11.0	79	10	6	8.0	10.0	78	10	5	7.5	9.0	66	4	8	3.0	6.5	65	65	3.0	5.5	53	5	6	5.5	9.0	35	4	8	3.0	4.0
22	113	10	6	8.5	12.0	97	10	8	9.0	13.5	81	5	8	6.5	8.5	79	10	5	8.0	12.0	64	5	8	7.0	14.0	65	65	7.5	11.5	53	6	7	7.0	11.0	35	3	6	3.0	5.0
23	113	9	9	13.0	16.0	99	6	12	8.0	12.5	81	6	9	8.0	10.0	80	6	7	8.0	11.0	62	8	8	4.5	8.0	65	65	1.5	4.0	51	6	7	8.5	11.0	35	4	4	3.0	5.0

Fam = median value of effective antenna noise in db above ktb

D_g = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia

Lat. 1.3 N Long. 103.8 E

Month December 19 60

Hour (ST)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}	F _m	D _g	L _{dm}													
00	159	2	2	8.0	12.5	136	4	2	10.0	15.0	116	4	4	10.5	18.0	91	5	5	10.0	21.0	63	4	5	8.5	15.0	57	3	3	6.0	9.0	49	4	4	4.5	7.0	25	4	4	3.0	4.5
01	159	2	4	9.0	13.5	136	4	4	10.0	16.0	116	5	7	11.5	20.0	89	7	8	11.0	20.0	63	4	4	7.0	14.0	58	2	5	5.0	8.0	47	9	5	4.5	7.0	23	4	2	3.0	4.0
02	159	1	5	8.0	12.5	136	4	3	10.0	15.5	116	4	4	12.5	20.5	89	4	6	13.0	21.0	63	4	5	9.0	16.0	58	2	4	5.5	9.0	45	7	5	5.5	9.0	23	2	2	3.0	4.0
03	157	4	2	9.0	11.5	136	3	5	10.5	16.5	114	5	5	11.0	19.0	87	6	6	11.0	19.0	63	3	5	9.0	16.5	58	4	4	6.0	9.0	43	4	5	5.5	8.5	23	4	2	2.5	3.5
04	157	4	2	9.0	15.0	136	3	4	10.0	19.0	112	8	3	13.0	22.0	85	8	6	13.0	21.0	61	5	5	10.0	17.0	56	4	2	6.0	10.0	43	4	6	4.5	7.5	23	3	0	2.0	3.0
05	157	2	0	9.0	15.0	134	3	2	11.0	18.0	108	5	5	14.0	22.5	75	10	4	9.0	12.5	59	6	7	10.5	17.0	56	4	3	4.5	7.5	43	3	1	5.5	8.5	23	3	0	2.0	3.0
06	157	2	3	10.0	16.0	130	4	4	14.0	20.0	98	12	10	16.5	23.5	69	8	3	4.0	10.0	49	6	5	9.5	15.0	50	6	2	5.5	9.0	43	3	3	5.0	7.0	25	2	2	3.0	5.0
07	153	4	2	11.0	17.5	134	7	6	16.5	24.0	96	7	14	17.0	24.0	69	8	3	5.0	10.0	41	7	4	7.0	10.0	40	7	3	10.5	17.0	39	2	4	1.5	9.5	25	2	2	3.5	5.0
08	155	2	4	12.5	19.5	124	4	10	17.5	24.0	96	11	12	16.0	27.0	71	5	6	5.0	9.0	37	5	4	4.0	6.0	32	10	6	10.0	15.0	33	5	7	8.5	12.0	25	2	2	3.0	4.0
09	153	4	2	12.0	19.0	120	9	4	16.5	22.5	96	7	13	17.0	29.0	69	4	6	6.5	12.5	35	4	6	6.0	10.0	28	7	6	8.0	11.0	29	6	8	9.0	13.0	23	2	2	3.0	4.0
10	153	4	2	13.0	19.5	122	6	4	16.0	24.5	92	10	10	16.0	24.5	67	4	6	4.0	8.5	35	6	4	7.0	11.0	26	8	2	6.5	11.0	27	4	8	9.5	12.0	23	3	2	3.0	4.0
11	153	4	2	12.0	17.0	126	3	8	16.0	26.0	95	11	6	12.0	18.0	68	12	8	12.0	18.0	33	5	7	4.0	6.5	24	5	2	7.5	11.5	27	4	3	9.0	13.0	23	4	2	2.5	4.0
12	155	2	4	11.0	17.0	126	6	4	12.5	21.0	98	12	6	19.5	29.0	73	12	13	12.5	18.0	33	8	8	4.0	6.0	26	9	3	11.5	13.0	27	5	4	7.0	11.0	23	5	2	3.0	5.0
13	156	5	3	12.0	19.0	130	10	5	14.0	22.0	104	19	6	19.0	29.5	79	19	11	14.0	22.0	33	9	6	6.5	9.5	30	5	5	8.5	13.5	33	8	6	9.0	14.0	29	6	5	3.5	6.0
14	157	4	2	11.0	18.5	132	10	4	13.0	21.5	108	13	7	16.0	25.5	83	16	12	12.0	21.5	37	18	8	5.5	9.5	34	13	4	9.0	13.0	35	7	4	8.5	13.0	29	5	3	4.0	6.0
15	159	2	3	11.0	18.5	134	6	4	13.0	22.0	110	11	6	15.0	24.0	82	17	7	12.0	21.0	39	14	7	9.5	12.5	42	4	7	10.0	17.0	41	2	5	6.0	10.0	27	6	2	3.5	5.0
16	159	3	4	11.5	19.5	136	5	6	14.0	24.0	109	12	5	13.0	22.0	83	11	10	10.5	19.0	49	7	9	7.5	12.0	48	4	6	9.0	15.5	43	4	3	4.5	6.5	27	9	1	4.0	6.0
17	157	6	4	11.0	18.0	136	8	5	13.0	22.5	112	9	10	11.0	20.0	87	10	10	8.0	17.0	55	8	6	6.5	11.0	54	4	6	6.0	10.0	46	2	2	3.5	6.0	27	4	2	4.0	6.0
18	157	4	4	10.0	16.5	138	2	6	12.0	21.0	115	6	6	11.0	20.0	93	8	10	8.0	18.0	63	5	6	6.0	10.5	60	0	4	3.0	5.5	47	3	4	3.5	6.0	27	4	2	3.5	5.5
19	157	6	4	12.0	17.0	138	4	7	11.5	21.0	116	6	5	10.0	20.0	93	6	10	8.0	18.0	65	3	6	6.0	10.0	60	4	3	3.5	6.0	45	4	2	4.0	7.0	25	5	0	3.5	5.5
20	157	4	2	8.0	13.0	136	6	4	13.0	22.5	116	6	4	12.0	22.0	91	8	5	8.0	16.0	63	5	4	6.5	10.0	60	3	2	4.0	5.0	45	6	2	4.0	6.0	27	6	2	3.0	5.0
21	157	4	2	7.5	12.0	136	6	4	11.5	20.0	116	7	6	11.0	21.5	91	8	4	9.0	17.0	63	4	4	7.0	12.0	60	2	2	3.5	6.0	47	3	2	4.0	6.0	29	2	4	2.5	4.5
22	157	4	2	8.0	13.0	136	5	4	11.5	19.0	116	4	3	12.0	21.5	93	5	7	4.5	20.0	63	5	6	7.5	12.5	56	4	2	5.0	8.0	47	2	2	3.5	6.0	27	3	2	2.5	4.5
23	159	2	3	7.5	12.0	136	4	4	9.5	15.0	116	4	4	10.5	19.5	91	6	3	10.0	20.0	63	4	5	7.5	13.5	56	4	2	5.0	8.5	47	5	2	3.5	6.0	27	4	5	3.0	5.0

F_m = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Time	Frequency (Mc)																																							
	.013				.051				.160				.545				2.5				5				.10				20											
	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}	F _{om}	D _g	V _{dm}	L _{dm}				
00	159	4	2	7.5	12.0	13.4	6	2	10.0	16.0	11.4	7	4	10.5	20.0	9.0	7	4	7.5	14.5	6.3	4	6	9.0	15.0	5.9	3	4	6.0	9.5	4.7	6	7	4.5	7.0	2.2	4	2	2.5	4.0
01	159	4	2	7.5	12.5	13.6	6	6	8.5	14.5	11.4	7	4	11.0	19.5	9.2	2	6	10.0	18.0	6.3	6	6	8.0	15.0	5.9	2	5	6.5	11.0	4.3	8	8	5.0	8.0	2.2	2	1	2.0	3.0
02	159	3	2	8.0	14.0	13.6	4	4	9.5	16.0	11.4	5	4	9.5	16.0	9.0	6	8	9.0	17.5	6.3	4	4	9.0	16.0	5.7	4	4	5.5	10.0	4.1	5	9	4.5	7.0	2.2	2	0	1.5	2.5
03	159	4	2	9.5	15.0	13.6	3	4	10.0	16.5	11.4	4	5	12.0	22.0	9.0	4	8	10.5	19.0	6.3	4	4	8.5	15.0	5.9	2	5	6.0	10.0	3.9	7	7	5.0	1.5	2.2	2	0	1.5	3.0
04	159	2	4	9.5	15.0	13.6	2	4	10.0	16.5	11.2	7	3	11.0	19.0	8.6	6	6	11.0	18.5	6.3	5	6	9.5	16.5	5.7	4	4	7.5	11.0	4.1	4	10	5.5	8.0	2.2	3	0	2.5	3.5
05	159	2	4	11.0	16.0	13.2	5	2	10.0	17.0	10.6	10	6	14.0	21.5	7.6	9	6	8.0	19.0	6.0	6	5	7.5	16.5	5.7	5	7	6.0	9.5	3.9	6	8	4.5	7.0	2.4	3	2	2.0	3.5
06	159	2	2	10.5	17.0	13.0	4	3	12.0	18.5	9.6	12	4	12.0	20.0	6.8	9	5	7.5	20.0	5.3	12	6	9.0	14.5	5.3	5	5	6.0	10.0	4.1	3	2	5.0	8.0	2.4	2	2	2.5	4.0
07	155	4	2	11.5	19.0	12.3	5	4	11.0	17.0	9.2	10	4	12.0	20.0	6.6	3	2	4.0	8.0	4.1	19	5	6.0	12.0	4.1	8	4	8.0	12.5	3.9	5	2	5.5	9.0	2.4	6	2	2.5	4.0
08	153	5	1	12.5	19.5	11.9			12.5	19.0	9.4	8	5	14.0	22.0	6.6	7	7	9.0	15.5	3.5	2.4	2	4.0	7.0	3.5	6	4	9.5	14.0	3.3	4	2	8.0	11.0	2.3	4	3	2.0	4.0
09	155	3	3	14.0	20.0	12.2	8	4	14.0	22.5	9.5	11	5	13.0	22.0	6.2	8	4	4.0	8.5	3.5	1.9	8	7.5	12.0	3.5	4	9	12.0	16.5	2.9	7	4	7.5	11.5	2.2	2	2	3.5	5.0
10	155	2	2	14.0	20.5	12.2			14.5	23.0	9.2	9	7	12.0	19.0	6.3	8	6	6.0	12.0	3.5	1.6	10	11.0	15.5	2.7	8	4	10.0	13.0	2.5	6	2	8.0	10.0	2.2	2	2	3.0	4.5
11	155	2	4	14.5	20.5	12.3			16.0	23.0	9.2	10	8	13.0	19.0	6.5	4	7	7.5	12.0	3.3	1.6	6	7.0	12.5	2.5	4	2	7.5	9.0	2.5	6	2	6.5	9.0	2.2	4	2	3.5	5.0
12	155	4	4	12.5	19.0	12.5	5	5	15.0	23.5	9.4	14	6	12.0	20.0	6.4	11	6	11.0	17.0	3.3	1.4	6	6.0	9.5	2.7	2	6	7.0	10.5	2.8	3	5	8.0	11.5	2.2	2	0	4.0	6.0
13	155	5	2	12.0	19.5	12.8	4	6	11.5	19.5	9.6	10	6	10.0	18.0	7.0	8	12	13.0	20.0	3.2	1.7	6	6.5	10.0	2.1	4	2	8.0	10.0	2.9	6	4	7.5	13.0	2.4	4	2	3.0	4.0
14	157	4	3	11.5	18.0	13.0	7	6	13.0	21.0	10.1	13	7	12.0	20.5	7.2	2.0	12	12.0	20.0	3.3	1.6	4	9.0	13.0	3.1	1.3	4	9.0	12.5	3.5	6	4	7.5	12.0	2.6	6	2	2.5	5.0
15	159	7	4	11.0	17.0	13.2	9	5	13.0	20.5	10.4	14	7	12.0	20.5	7.4	3.3	9	10.5	16.0	3.5	2.6	6	6.5	11.0	3.7	1.1	8	9.0	15.0	3.9	6	4	6.0	9.5	2.6	8	2	4.0	6.0
16	159	5	4	11.0	18.5	13.2	8	8	14.0	21.0	10.4	11	10	12.5	21.0	7.5	2.1	9	11.5	21.5	3.9	1.4	6	10.0	16.0	4.3	8	6	9.0	16.0	4.3	2	3	5.0	8.0	2.6	5	2	4.5	6.5
17	157	8	2	11.0	18.0	13.4	5	8	13.5	23.0	10.5	9	10	10.5	20.0	8.1	1.3	10	6.5	10.5	5.1	5	8	7.0	12.5	5.1	4	4	7.0	12.0	4.5	2	2	3.5	6.5	2.6	2	3	3.5	5.0
18	155	7	2	11.0	17.0	13.2	8	4	12.5	22.0	11.0	10	4	10.5	19.0	8.7	7	7	10.0	16.0	5.7	4	3	7.5	12.0	5.9	1	4	5.0	9.0	4.5	2	2	4.0	6.0	2.4	3	2	2.5	3.5
19	157	6	2	10.0	15.5	13.4	8	4	11.5	21.0	11.2	8	4	10.0	20.0	8.8	8	6	9.5	16.0	6.1	4	4	8.0	13.0	6.1	2	2	3.5	6.0	4.5	3	2	5.0	7.5	2.4	2	2	3.0	4.5
20	157	4	2	8.5	13.0	13.4	6	4	12.0	21.0	11.4	5	5	10.0	20.0	9.2	4	6	9.5	17.5	6.1	5	4	7.5	13.0	6.1	3	3	3.5	5.5	4.5	3	2	5.0	7.5	2.4	4	1	2.0	4.0
21	157	5	0	8.5	13.5	13.4	6	3	11.0	20.0	11.4	5	5	11.0	20.0	9.2	4	6	10.0	18.5	6.3	4	5	8.0	13.5	6.1	4	4	3.0	5.0	4.7	2	4	4.5	7.5	2.6	2	2	3.0	5.0
22	159	4	2	8.0	13.0	13.4	6	4	10.0	18.0	11.4	6	4	10.5	20.0	9.2	8	4	10.0	18.0	6.3	4	4	7.5	13.5	5.9	3	4	6.0	10.0	4.7	3	3	5.0	7.0	2.6	2	4	3.0	5.0
23	159	5	2	8.0	13.0	13.6	6	4	10.5	16.5	11.4	5	2	11.0	20.5	9.0	7	4	9.0	17.0	6.3	6	4	9.0	16.0	5.9	3	4	6.5	11.0	4.7	5	4	5.0	9.0	2.4	4	2	3.0	4.0

F_{om} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E Month February 19 61

Hour (ST)	Frequency (Mc)																																								
	0.13				0.51				1.60				5.45				2.5				5				10				20												
	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}	Fam	D _g	Vdm	L _{dm}					
00	16.2	3	4	10.0	14.5	14.0	5	8	10.0	16.0	11.6	7	7	11.5	17.5	9.4	3	6	9.5	19.5	6.4	4	8	6.5	10.0	5.9	1.5	6	5.0	8.0	4.9	8	6	5.5	8.0	2.2	2	0	2.0	3.0	
01	16.2	2	5	11.0	15.5	14.0	6	6	10.0	16.0	11.7	6	6	12.0	19.0	9.1			9.0	14.5	16.4	6	6	8.0	13.0	5.9	1.2	4	4.5	9.0	4.9	4	8	5.5	8.0	2.2	6	0	1.0	1.5	
02	16.2	4	4	11.0	15.0	14.1	5	6	11.0	16.5	11.7	6	4	12.0	20.0	9.3	6	5	7.5	16.0	16.4	8	6	7.0	12.0	5.9	1.0	6	5.0	8.5	4.5	6	7	5.0	7.5	2.2	2	0	1.5	2.0	
03	16.2	4	8	11.5	16.0	14.1			11.0	17.0	11.7	6	9	12.0	20.0	9.3			8.0	14.0	16.4	7	6	7.5	12.5	5.9	1.1	4	5.5	9.0	4	4	5.0	7.5	2.2	2	0	2.0	2.5		
04	16.1	5	5	11.5	17.0	14.0			10.0	16.0	11.7	4	10	12.0	21.0	9.1	6	6	10.0	18.0	16.4	6	6	8.0	14.0	5.9	1.3	4	5.0	8.5	4.1	4	8	4.5	7.0	2.4	0	2	2.0	2.5	
05	16.0	5	5	11.0	17.5	14.0	4	4	12.0	18.5	11.5	7	8	12.0	21.0	8.5			7.5	11.5	16.4	6	6	10	7.0	13.5	5.7	1.0	6	5.5	9.0	4.0	5	7	4.5	7.0	2.4	0	2	1.5	2.5
06	16.0	4	4	12.0	17.0	13.4	6	11	12.0	17.5	10.3	8	14	13.0	22.0	7.3			10.0	17.0	15.8	6	6	7	8.5	12.5	5.5	4	8	5.0	8.0	4.1	8	4	5.0	6.5	2.4	2	2	2.0	2.5
07	15.8	4	6	12.0	18.0	13.5			14.0	20.0	10.1	6	21	15.0	23.0	7.3			16.5	22.0	14.8	12	12	4	9.0	14.0	4.4	11	7	8.0	13.0	3.9	6	4	6.5	9.0	2.4	0	2	3.0	3.5
08	15.5	8	4	13.5	20.0	12.6			15.0	19.5	9.3	14	8	15.0	22.5	7.1			17.5	22.5	14.6	3	14	14	13.0	15.0	3.7	10	11	9.0	14.0	3.3	8	4	6.0	9.0	2.4	0	2	2.0	3.0
09	15.6			14.5	20.5	13.4			16.0	23.0	7.1			16.0	23.0	7.1			16.0	22.5	14.3	8	16	16	13.0	17.5	3.3	5	8	7.0	13.0	3.2	5	6	8.5	7.0	2.2	1	0	2.5	2.5
10	15.4			14.5	21.0	12.2			17.5	25.0	9.1			13.0	19.0	6.9			18.5	23.5	14.4				14.0	18.0	2.7			6.5	11.0	2.7			11.0	14.0	2.2			2.0	3.0
11	15.4	8	2	14.0	20.0	13.0			15.0	22.0	9.3			15.0	21.0	7.3			13.5	20.0	14.4	6	20	20	14.0	16.5	2.5			7.5	9.5	2.7	8	6	8.5	12.0	2.2	2	2	1.5	5.0
12	15.6	6	4	13.0	20.0	12.3			12.5	20.5	9.4	11	7	13.5	21.5	7.3	7	12	13.0	20.0	14.5	6	20	20	13.5	17.0	2.5	9	4	7.5	9.0	3.0	3	8	7.0	10.0	2.2	5	1	3.0	4.0
13	15.8	4	4	12.5	18.5	13.2			13.5	20.0	10.3	10	12	14.0	22.0	7.5			15.0	23.5	14.8	2	24	24	10.0	14.0	2.5	8	4	5.0	8.0	3.1	6	8	8.5	12.0	2.4	2	2	3.0	4.5
14	15.9	3	6	12.0	17.5	13.2	8	7	12.0	19.5	10.5	14	5	12.0	20.0	8.1	13	11	11.0	20.0	14.4	11	15	15	10.0	13.5	2.9	18	3	9.5	13.5	3.5	4	7	8.5	10.5	2.6	4	2	4.0	5.5
15	16.0	4	4	11.5	17.5	13.6	6	4	12.0	19.5	10.7	8	4	10.5	18.5	8.1			10.0	17.5	14.8	7	16	16	12.0	15.0	3.5	10	2	9.5	13.0	3.9	2	6	6.5	9.5	2.6	2	2	3.0	4.0
16	16.0	2	5	11.5	17.5	13.6	5	10	11.5	19.0	10.5	11	7	10.0	16.5	8.3	11	9	8.0	16.0	14.8	4.8	7	13	12.5	16.0	4.3	4	7	8.0	13.5	4.3	3	5	5.5	7.5	2.7	3	3	4.0	5.5
17	16.0	4	4	12.0	17.5	13.8	2	6	11.5	19.0	10.9	3	6	10.5	17.5	8.7	8	10	7.5	14.5	15.0	5.0	6	6	8.0	12.5	4.7	6	4	5.5	9.5	4.5	2	2	4.0	6.0	2.6	4	2	3.0	4.0
18	16.0	0	7	12.0	18.0	13.6	5	10	11.0	17.5	11.5	2	6	10.5	17.5	9.3	4	10	7.5	13.0	15.6	4	5	6.5	11.0	5.7	4	3	4.5	7.0	4.7	2	2	4.0	6.5	2.6	2	4	4.0	4.5	
19	16.0	2	5	10.5	15.0	14.0			11.0	18.5	11.7	3	6	10.0	18.0	9.0	5	7	10.0	19.0	16.1	5	5	5.5	8.5	6.1	4	4	2.5	4.0	4.5	4	2	4.5	7.0	2.4	4	0	3.0	4.5	
20	16.0	2	5	10.0	14.0	14.0	2	7	12.0	19.0	11.7	4	6	10.5	18.5	9.1	6	6	8.0	15.5	16.2	4	4	4	5.5	8.5	6.1	2	4	5.5	4.0	4.7	5	2	5.0	7.0	2.6	2	3	3.5	4.5
21	16.0	4	4	9.5	13.0	14.0	2	4	12.0	18.0	11.7	4	9	11.0	20.0	9.1			8.0	15.5	16.2	4	4	6.5	10.0	6.1	2	6	3.0	4.5	4.8	5	3	4.0	6.0	2.8	2	2	3.0	4.0	
22	16.0	2	4	9.0	13.0	13.8	6	7	10.0	16.5	11.5	7	9	11.0	19.5	9.1	9	8	8.0	17.5	16.4	4	4	6.0	10.5	5.8	5	5	5.0	6.0	4.7	5	2	4.0	6.0	2.6	3	1	3.0	4.5	
23	16.0	4	3	9.5	14.5	13.8	6	4	11.0	16.0	11.5	6	9	10.5	16.5	9.1			9.5	17.5	16.4	4	4	6.0	10.0	5.9	4	6	6.0	9.0	4.7	6	2	5.0	8.5	2.4	4	2	2.0	3.5	

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 D_g = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Winter (Dec. Jan. Feb.) 19 60-61

Frequency (Mc)	TIME BLOCKS (LST)																						
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}					
0.31	156	4	12.0 18.0	157	3	11.5 17.5	154	4	3	11.0 16.0	159	4	3	10.5 15.5	157	4	3	12.0 17.5	155	6	4	13.0 19.0	
0.51	120	6	11.5 17.0	127	6	12.0 18.0	117	10	10	13.0 19.5	125	6	6	11.0 16.5	126	8	6	12.0 18.5	129	6	6	10.5 17.0	
1.60	110	8	10.5 16.5	103	10	12.5 20.5	88	15	16	12.5 20.0	96	9	10	11.0 18.0	104	8	8	10.0 17.0	109	6	7	9.5 16.5	
4.95	92	6	8.0 14.0	79	13	9.0 13.0	67	13	5	6.0 9.5	71	12	5	7.5 12.5	84	9	6	8.5 13.5	91	5	5	7.0 13.0	
2.5	60	6	1.0 12.0	60	7	9	8.0 13.5	34	9	4	3.0 5.0	32	7	4	2.5 4.5	45	8	6	5.0 8.5	58	6	6	6.5 11.0
5	55	4	5.5 9.0	51	5	4	5.5 9.5	29	7	6	6.0 9.0	28	8	5	4.5 7.0	51	5	5	4.5 8.0	57	4	4	4.5 8.0
10	38	5	3.5 6.0	36	6	4	3.5 6.0	27	7	4	5.0 8.0	29	6	5	5.5 8.5	42	4	4	5.0 8.5	40	4	4	4.5 7.0
20	23	3	2.0 3.0	24	4	1	2.0 3.5	25	4	2	3.0 4.5	26	3	3	3.5 5.0	26	4	3	3.0 4.5	23	4	2	2.5 3.5

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Winter (Dec. Jan. Feb.) 19 60-61

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _l	V _{dm} L _{dm}	F _{am}	D _l	V _{dm} L _{dm}	F _{am}	D _l	V _{dm} L _{dm}	F _{am}	D _l	V _{dm} L _{dm}	F _{am}	D _l	V _{dm} L _{dm}	F _{am}	D _l	V _{dm} L _{dm}							
.013	150	2	4	11.5	17.0	148	3	4	11.0	16.0	144	5	4	11.0	16.5	145	4	5	13.0	19.0	147	3	4	12.5	19.0
.051	118	7	7	9.5	16.0	115	6	6	10.5	17.5	102	6	7	9.5	14.5	104	10	8	10.5	17.0	111	8	6	10.0	16.5
.160	92	12	8	10.0	16.0	80	12	7	8.5	13.0	72	12	5	4.5	7.0	76	10	6	4.5	7.0	84	14	8	9.0	14.0
.495	75	10	8	7.5	12.5	64	8	4	5.0	7.5	61	4	3	3.0	5.0	61	5	3	3.0	5.0	67	10	5	5.5	9.0
2.5	53	7	4	4.0	6.0	50	6	4	4.5	6.5	43	3	2	3.0	4.5	44	3	2	2.5	4.0	48	6	4	3.5	5.0
5	53	4	6	4.5	7.5	50	5	4	4.5	7.5	36	3	4	3.0	4.5	36	3	4	3.0	5.0	49	4	6	3.5	6.0
10	34	7	3	3.0	4.5	36	5	3	4.0	6.0	32	3	5	3.5	5.0	33	4	4	3.5	6.0	41	4	4	5.0	7.0
20	24	1	2	2.0	4.0	26	2	1	2.0	4.0	28	2	2	3.0	4.5	29	3	3	2.5	4.0	26	2	2	3.0	4.5

F_{am} = median value of effective antenna noise in db above ktb
 D_l = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Season Summer (Dec. Jan. Feb.) 1960-61

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.051	101	5	4			100	4	4			99	4	4			100	4	4			102	4	4
.113	79	5	4			78	5	3			78	5	3			79	4	4			78	5	3
.246	66	3	3			65	4	4			66	4	3			66	4	4			66	4	3
.545	50	5	3			54	4	5			55	6	3			54	5	4			54	5	3
2.5	22	2	2			23	2	2			22	2	2			23	2	2			22	2	2
5	19	8	5			16	7	4			15	5	2			18	6	4			23	6	7
10	19	5	5			16	6	6			16	4	3			20	4	3			22	6	6
20	17	1	1			17	1	2			18	1	1			18	1	1			18	1	1

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Summer (Dec. Jan. Feb.) 19 60-61

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}										
.013	158	4	3	8.5	14.0	156	4	2	10.5	17.0	155	4	5	12.5	19.5	158	5	5	8.0	14.5	159	5	4	9.5	17.0					
.051	133	5	4	9.5	16.5	126	7	5	11.0	18.5	121	8	8	12.5	20.5	129	8	6	8.0	14.5	130	10	6	6.5	12.5	135	6	5	8.5	15.5
.160	111	7	6	9.0	16.5	95	13	10	12.5	21.0	89	12	13	12.0	20.5	100	14	13	7.0	13.0	105	12	10	6.0	10.0	113	7	6	6.5	14.0
.545	85	7	6	8.0	17.0	61	15	10	11.0	18.5	53	16	9	7.5	12.0	61	21	12	5.0	8.5	71	18	12	6.0	11.0	91	8	7	6.0	12.0
2.5	63	7	6	6.5	13.5	50	10	8	7.0	13.5	24	13	5	4.0	7.0	30	23	10	3.5	6.0	46	13	11	5.0	9.0	66	7	7	5.5	11.5
5	56	5	4	4.5	9.0	46	6	6	6.0	10.0	28	12	7	4.5	7.5	32	11	10	3.0	6.0	48	8	8	3.5	7.5	59	5	4	4.5	8.0
10	45	4	5	4.0	7.0	39	5	5	3.5	6.5	31	6	6	3.0	5.5	34	6	8	3.5	6.5	41	4	5	3.0	6.0	47	4	5	3.5	6.5
20	24	3	2	2.5	4.0	24	2	2	2.5	4.0	24	3	3	2.0	4.0	26	5	3	2.5	4.5	27	6	4	3.0	5.0	25	4	3	3.5	5.0

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Season Winter (Dec. Jan. Feb.) 19 60-61

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400											
	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}							
.013	150	3	10.0	16.0	150	3	11.0	18.0	145	3	8.5	14.0	150	3	7.5	12.5	150	3	2	8.0	13.5						
.051	115	5	8.0	12.5	113	5	9.5	15.0	98	8	6.0	12.5	109	7	7.0	11.0	114	5	4	6.5	10.5						
.160	101	6	8.5	10.0	101	6	4.0	8.0	89	8	10	10.0	94	5	4.5	8.0	98	7	7	5.0	9.5						
.495	70	20	9	3.0	64	11	8	2.5	56	10	4	4.5	58	10	7	1.5	3.5	67	13	8	2.5	4.5	70	20	8	3.0	5.5
2.5	49	7	6	5.5	47	6	6	5.5	32	8	5	4.5	34	5	5	3.5	5.5	43	6	5	5.0	7.5	49	7	6	5.5	8.5
5	48	8	5	4.5	47	6	5	5.5	30	7	5	4.0	29	7	6	4.5	7.0	48	10	6	4.5	7.0	49	9	5	4.5	7.0
10	32	6	2	2.0	35	6	4	4.0	37	11	6	7.5	44	10	9	5.5	8.5	43	16	8	4.5	6.5	33	7	3	2.5	4.0
20	18	1	1	1.0	19	1	1	2.0	21	3	3	2.5	21	3	3	2.5	4.0	18	2	1	1.5	3.0	17	1	1	1.0	2.5

F_{am} = median value of effective antenna noise in db above ktb

D_l = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

L_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Winter (***) Jan. Feb.) 19 60-61

Frequency (Mc)	TIME BLOCKS (LST)																						
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.135	100	8	7			95	10	6			88	6	3			92	9	5			97	9	6
.500	78	9	7			66	12	7			56	4	3			59	8	5			75	9	8
2.5	58	10	4			56	10	5			32	5	2			47	8	6			57	10	4
5	56	6	4			54	6	8			30	5	3			49	7	5			58	5	5
10	37	3	2			40	4	2			40	4	4			47	4	2			39	3	3
20	23	1	1			23	1	1			25	2	2			25	2	2			22	0	2

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

***No December Data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Summer (June July Aug.) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400		
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}
.051	138	6	8.0 14.5	131	8	9 10.0 17.5	126	9	11 11.0 18.5	134	7	7 9.0 14.0	139	7	6 6.5 12.0	140	6	4 6.5 12.5
.113	126	6	7.5 14.0	115	10	13 10.0 18.0	106	13	11 11.5 18.0	117	10	10 9.0 14.0	124	8	8 7.0 13.0	118	5	6 6.0 11.5
.246	111	8	7.0 14.5	95	12	14 10.0 18.5	85	14	13 9.0 17.0	96	16	12 10.0 17.5	107	11	11 7.0 13.0	112	6	8 5.0 10.5
.545	93	9	7.0 14.5	73	14	13 11.5 21.0	65	13	9 9.5 14.0	77	19	14 11.5 20.0	84	10	11 6.5 12.0	96	6	8 5.0 11.0
2.5	66	6	5.0 9.5	52	10	12 8.0 12.5	36	12	8 9.0 12.5	41	17	9 10.0 17.0	62	9	12 5.0 8.5	70	4	10 4.0 7.0
5	57	5	4.5 8.0	52	6	10 6.5 11.0	32	10	11 10.5 15.5	37	13	8 10.5 15.0	58	5	7 4.5 7.5	62	4	9 3.5 7.0
10	41	5	3.5 7.0	39	5	8 5.5 9.0	29	7	10 8.0 12.5	37	5	7 6.5 10.5	47	4	5 3.5 6.5	43	6	7 3.5 6.0
** 20	31	5	2 3.0 6.0	31	5	4 2.0 4.0	29	6	5 6.0 6.5	32	6	3 7.0 10.5	33	5	3 2.5 5.0	31	4	3 2.0 3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

Quarterly summary in Technical Note No. 18-3 based on June and July power only.

**No data for July and August for voltage and log.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha (Kauai), T. H. Lat. 22.0 N Long. 159.7 W Season Winter (Dec. Jan. Feb.) 19 60-61

Frequency (Mc)	0000 - 0400						0400 - 0800						0800 - 1200						1200 - 1600						1600 - 2000						2000 - 2400					
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}
.013	153	3	3	10.0	16.5	154	3	3	10.5	16.5	150	4	3	11.5	18.5	148	5	4	14.0	22.0	147	5	4	14.0	21.0	157	4	3	10.0	14.5	157	4	3	10.0	14.5	
.051	130	5	5	11.5	19.0	129	4	5	12.0	19.5	114	10	9	14.5	22.5	110	12	9	16.0	25.0	109	15	8	14.5	23.0	122	8	8	13.5	21.0	122	8	8	13.5	21.0	
.160	104	9	8	11.5	18.0	100	10	8	12.0	21.5	78	23	14	14.0	24.5	74	23	13	14.0	22.0	81	20	12	17.5	23.5	99	11	10	12.5	23.0	99	11	10	12.5	23.0	
.495	83	12	8	11.0	21.5	75	15	9	11.5	20.5	53	19	5	7.0	12.0	51	19	5	7.5	10.5	62	18	9	11.0	19.0	81	11	11	12.0	22.5	81	11	11	12.0	22.5	
2.5	58	8	5	6.0	10.5	58	8	7	7.0	11.0	36	7	4	3.0	5.5	31	6	3	2.5	4.5	41	10	6	4.5	7.0	56	9	6	7.0	11.5	56	9	6	7.0	11.5	
5	54	5	5	5.0	9.0	49	5	4	5.0	8.5	28	8	5	4.0	6.0	22	7	5	4.0	5.0	37	10	6	4.5	7.5	50	5	6	5.0	8.0	50	5	6	5.0	8.0	
10	35	5	3	3.0	5.5	33	4	3	3.0	5.0	26	8	6	4.5	6.5	20	10	6	6.0	7.5	35	5	5	3.5	6.0	37	5	4	3.0	5.5	37	5	4	3.0	5.5	
20	24	2	1	1.5	3.0	25	1	0	1.0	2.5	24	2	2	3.0	5.0	23	2	2	3.0	5.0	25	3	2	2.0	4.0	24	3	1	1.5	3.0	24	3	1	1.5	3.0	

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Fall (Sept. Oct. Nov.) 19 60

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}					
.013	152	4	7.0	10.0	150	4	7.5	11.0	146	3	8.5	12.5	150	4	8.5	12.5	152	3	7.0	10.5	153	2	6.0	9.5	
.051	128	5	8.0	12.5	122	7	9.0	13.5	115	8	12.5	18.5	120	8	11.0	17.0	123	8	9.5	14.0	127	4	8.0	11.0	
.160	106	6	7.5	12.0	96	9	9.5	11.0	87	9	10	12.5	96	8	8.5	12.0	102	8	8.5	13.0	106	4	7.0	11.0	
.545	83	7	6.5	10.0	72	10	6	3.5	66	11	4	3.0	73	11	9	8.0	7.0	81	9	6.0	9.0	85	7	6.0	10.0
2.5	57	7	5.5	8.0	50	7	7	5.0	41	6	6	3.0	42	11	5	5.0	7.5	52	8	5.5	7.5	57	6	5.0	8.0
5	52	6	6.0	8.0	45	7	7	5.5	28	8	4	3.5	32	12	5	4.0	6.0	49	7	4.0	7.0	52	6	5.0	8.0
10	34	6	4.5	7.0	32	6	6	4.5	26	12	6	5.0	29	7	5	4.5	7.0	41	7	5.0	6.0	40	7	4.0	6.5
20	23	2	2.0	3.0	24	4	2	2.5	24	6	3	3.5	27	5	3	4.0	5.5	29	5	3.0	4.5	26	3	3.0	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Season Winter (Dec. Jan. Feb.) | 9 60-61

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400									
	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}
.013	150	4	4	9.5	14.5	150	4	4	12.5	17.5	148	4	3	12.5	18.0	150	4	3	10.5	16.0	151	4	4	10.0	15.0
.051	127	5	4	12.5	20.0	121	6	5	12.5	19.0	110	7	5	14.0	19.5	116	9	4	13.5	19.0	126	6	3	12.0	19.5
.160	104	7	6	12.0	19.5	92	10	7	14.5	18.5	78	13	8	10.5	15.0	91	14	7	12.5	17.0	102	9	7	12.0	19.5
.545	80	9	5	10.5	18.0	75	8	6	11.0	16.5	68	7	4	6.5	10.5	82	9	7	8.5	13.5	90	7	7	9.0	13.5
2.5	51	9	6	6.5	10.5	38	9	6	7.5	12.0	34	6	2	5.5	8.5	45	10	5	7.0	10.0	52	10	6	6.5	10.5
5	51	6	5	5.5	9.0	56	8	7	7.0	11.5	32	8	4	6.0	9.0	33	9	4	5.5	8.0	55	8	6	6.5	11.0
10	38	10	6	3.5	6.5	35	8	4	3.0	5.5	34	7	5	6.5	10.0	46	7	6	4.5	7.0	42	9	7	3.5	6.5
20	24	1	1	1.0	3.0	25	2	1	1.5	3.0	28	11	4	3.0	5.0	26	10	2	2.0	4.0	24	4	2	1.5	3.0

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25. 8 S Long. 28. 3 E Season Spring (Sept. Oct. Nov.) 1960

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.051	128	9	7	120	13	7	115	13	12	126	15	10	132	14	11	132	9	8			
.113	113	12	10	100	19	14	90	28	14	104	23	16	113	19	20	116	12	18			
.246	100	10	9	79	21	7	69	29	7	87	27	20	97	23	21	103	13	11			
.545	90	10	9	65	20	6	54	23	2	69	26	16	83	22	17	93	10	9			
2.5	63	4	6	50	10	8	36	7	2	43	25	8	58	20	16	67	8	7			
5	52	4	4	43	8	7	24	20	6	29	21	8	50	13	15	56	8	10			
10	38	4	5	35	6	6	24	10	7	31	13	9	50	9	9	41	5	6			
20	22	4	4	23	2	3	21	10	5	24	9	4	29	8	6	26	7	6			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S Africa Lat. 25.8 S Long. 28.3 E Season Summer (Dec. Jan. Feb.) 19 60-61

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400						0400-0800						0800-1200						1200-1600						1600-2000						2000-2400																	
	F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}													
0.51	134	9	8				125	11	9				119	14	8				135	9	9				139	10	11				136	8	8															
1.13	117	10	10				103	16	12				94	24	11				118	12	16				123	12	15				120	9	11															
2.46	103	11	10				79	22	7				74	28	8				102	16	25				108	14	21				106	11	10															
5.45	92	11	10				65	20	5				59	24	4				82	20	25				92	16	23				95	9	9															
2.5	61	6	8				49	9	7				34	9	4				44	27	12				55	15	12				64	5	8															
5	51	6	6				41	8	7				23	10	4				30	17	8				48	7	10				52	6	5															
10	37	6	5				33	5	6				25	6	5				33	6	6				42	4	4				40	4	4															
20	18	5	1				18	4	1				20	4	2				22	5	2				25	6	4				21	5	3															

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Winter (Dec. Jan. Feb.) 1960-61

Frequency (Mc)	TIME BLOCKS (LST)																			
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400				
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}
.013	152	3	4			149	4	3			150	4	4			153	3	4		
.051	123	4	9			110	7	7			111	7	5			122	6	7		
.160	112	6	16			94	6	10			94	8	7			108	8	9		
.495	83	6	9			62	7	5			61	7	6			82	6	6		
2.5	55	7	7			36	10	5			33	9	3			46	8	7		
5	54	5	8			35	6	6			31	6	7			48	7	8		
10	38	5	6			36	9	6			32	10	6			43	16	6		
20	24	1	1			28	5	3			29	5	3			27	4	3		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Season Winter (Dec. Jan. Feb.) 19 60-61

Frequency (Mc)	TIME BLOCKS (LST)																							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400								
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}						
.013	160	3	4	158	3	3	154	4	3	157	4	4	158	4	4	158	4	3	158	4	3			
.051	137	5	5	134	4	4	124	6	6	130	7	5	136	5	7	136	5	4	136	5	4	136	5	4
.160	115	6	5	105	8	8	94	10	8	102	12	7	111	8	7	111	8	7	115	5	6	115	5	6
.545	91	5	7	76	7	5	68	6	6	76	16	10	87	9	9	87	9	9	91	6	5	91	6	5
2.5	63	5	5	55	8	6	38	10	9	38	12	10	55	6	6	55	6	6	63	4	5	63	4	5
5	58	6	4	52	7	5	29	7	5	30	9	4	54	4	4	54	4	4	59	3	4	59	3	4
10	45	6	6	41	4	5	29	6	5	33	5	5	45	3	3	45	3	3	47	4	2	47	4	2
20	22	3	1	24	2	2	23	2	2	26	5	2	26	4	2	26	4	2	26	3	2	26	3	2

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power



THE NATIONAL BUREAU OF STANDARDS

The title of sections in the National Bureau of Standards is major laboratories in Washington, D.C., and Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, the section is able to provide technical assistance, measurements, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications appear on the inside of the front cover.

WASHINGTON, D.C.

- Acoustics, Precision and Reference:** Electroacoustics, Electrical Instruments, Magnetic Measurements, Metrology.
 - Atmospheric, Environmental and Environmental:** Resistivity, Photographic Research, Length, Engineering Metrology, Material Tests, Microscopy and Humidity.
 - Heat, Temperature Physics:** Heat Measurements, Cryogenic Physics, Equation of State, Statistical Physics.
 - Radiation Physics:** X-rays, Radioactivity, Neutron Theory, High Energy Radiation, Radiological Equipment, Neutron Instrumentation, Neutron Physics.
 - Inorganic and Organic Chemistry:** Pure Substances, Spectrochemistry, Solution Chemistry, Analytical Chemistry, Organic Chemistry.
 - Electronics:** Fluid Pressure and Vacuum, Fluid Mechanics, Engineering Mechanics, Rheology, Combustion, Catalysis.
 - Organic and Polymer Materials:** Rubber, Textiles, Paper, Leather, Testing and Specifications, Polymer Synthesis, Plastics, Dental Research.
 - Metallurgy:** General Metallurgy, Chemical Metallurgy, Mechanical Metallurgy, Corrosion, Metal Physics, Physical Properties, Engineering Ceramics, Glass, Refractories, Enamels, Metals, Crystal Growth.
 - Physics:** Properties, Constants, and Measurements.
 - Building Research:** Structural Engineering, Fire Research, Mechanical Systems, Organic Building Materials, Concrete Safety Standards, Heat Transfer, Inorganic Building Materials.
 - Applied Mathematics:** Numerical Analysis, Computation, Statistical Engineering, Mathematical Physics.
 - Electronic Systems:** Components and Techniques, Digital Circuitry, Digital Systems, Analog Systems, Cryogenic Electronics.
 - Atomic Physics:** Spectroscopy, Radiometry, Solid State Physics, Electron Physics, Atomic Physics.
 - Instrumentation:** Electronic Electronics, Electron Devices, Electronic Instrumentation, Mechanical Electronics, Non-Instrumentation.
 - Physical Chemistry:** Thermodynamics, Surface Chemistry, Organic Chemistry, Molecular Spectroscopy, Molecular Kinetics, Mass Spectrometry, Molecular Structure and Reaction Chemistry.
- Office of Weights and Measures

BOULDER, COLO.

- Cryogenic Engineering:** Cryogenic Equipment, Cryogenic Processes, Properties of Materials, Gas liquefaction.
- Engineering Research and Development:** Low Frequency and Very Low Frequency Research, Ionosphere Research, Prediction Service, Sun Earth Relationships, Field Engineering, Radio Warning Services.
- Radio Propagation Engineering:** Data Reduction Instrumentation, Radio Noise, Tropospheric Measurements, Tropospheric Analysis, Propagation-Ferran Effects, Radio-Meteorology, Lower Atmosphere Physics.
- Radio Standards:** High Frequency Electrical Standards, Radio Broadcast Service, Radio and Microwave Reference, Atomic Frequency and Time Interval Standards, Electronic Calibration Center, Millimeter-Wave Research, Microwave Circuit Standards.
- Radio Systems:** High Frequency and Very High Frequency Research, Modulation Research, Antenna Research, Propagation Systems, Inter-Communication Links.
- Upper Atmosphere and Space Physics:** Upper Atmosphere and Plasma Physics, Ionosphere and Exosphere Physics, Auroral and Arctic, Ionospheric Radio Astronomy.

