

**BASIC RADIO PROPAGATION PREDICTIONS
FOR MARCH 1945
THREE MONTHS IN ADVANCE**

**ISSUED
DECEMBER 1944**

**PREPARED BY INTERSERVICE RADIO PROPAGATION LABORATORY
National Bureau of Standards
Washington, D. C.**

"This document contains information affecting the national defense of the United States within the meaning of the Espionage Act, 50 U. S. C., 31 and 32. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law."

INTERSERVICE RADIO PROPAGATION LABORATORY
NATIONAL BUREAU OF STANDARDS
WASHINGTON, D. C.

Issued
1 Dec. 1944

Organized Under Joint U. S. Communications Board

BASIC RADIO PROPAGATION PREDICTIONS FOR MARCH 1945 THREE MONTHS IN ADVANCE

This monthly report (IRPL-D series) is one of the three successors to "Radio Propagation Conditions," prepared by the Interservice Radio Propagation Laboratory, which was previously distributed to requesting Army personnel by the Chief Signal Officer, and to Navy personnel by the Director of Naval Communications under the short title DNC-13-1().

The monthly reports of the IRPL-D series are now distributed to the Army as the TB 11-499 series, by the

Adjutant General; to the Navy as the DNC-13-1 series, by the Registered Publications Section, Division of Naval Communications; and to others by the IRPL.

This IRPL-D series is a monthly supplement to the IRPL Radio Propagation Handbook, Part 1, issued by the Army as TM 11-499 and by the Navy as DNC-13-1, and is required in order to make practical application of the basic Handbook.

CONTENTS

I. Terminology.....	Page 2	III. Determination, etc.—Continued.	
II. World-wide prediction charts and their uses.....	Page 2	Diagram of transmission path auxiliary to explanation of use of distance-bearing nomogram, figure 4.....	Fig. 3
World map showing zones covered by predicted charts, and auroral zones.....	Fig. 1	Nomogram for obtaining great-circle distances, bearings, latitude and longitude of transmission control points, solar zenith angles. Conversion scale for various distance units.....	Fig. 4
F_2 -zero-muf, in Mc, W zone, predicted for March 1945.....	Fig. 5	IV. Calculation of maximum usable frequencies and optimum working frequencies.....	Page 3
F_2 -4000-muf, in Mc, W zone, predicted for March 1945.....	Fig. 6	Nomograms for transforming F_2 -zero muf and F_2 -4000-muf to equivalent maximum usable frequencies at intermediate transmission distances; conversion scale for obtaining optimum working frequencies.....	Fig. 13
F_2 -zero-muf, in Mc, I zone, predicted for March 1945.....	Fig. 7	Nomogram for transforming E -layer 2000-muf to equivalent maximum usable frequencies and optimum working frequencies due to combined effect of E layer and F_1 layer at other transmission distances.....	Fig. 14
F_2 -4000-muf, in Mc, I zone, predicted for March 1945.....	Fig. 8	V. Absorption, distance range, and lowest useful high frequency.....	Page 4
F_2 -zero-muf, in Mc, E zone, predicted for March 1945.....	Fig. 9	Absorption index chart (excluding auroral absorption) for March.....	Fig. 16
F_2 -4000-muf, in Mc, E zone, predicted for March 1945.....	Fig. 10	VI. Sample muf and owf calculations.....	Page 5
E layer 2000-muf, in Mc, predicted for March 1945.....	Fig. 11	For short path (under 4000 km) page 5, table 1, page 6, and Fig. 17	
Median E_s , in Mc, predicted for March 1945.....	Fig. 12	For long path (over 4000 km) page 5, table 2, page 6, and Fig. 18	
Percentage of time occurrence for E_s in excess of 15 Mc, predicted for March 1945.....	Fig. 15		
III. Determination of great-circle distances, bearings, location of transmission control points, solar zenith angles.....	Page 2		
Great-circle chart, centered on equator, with small circles indicating distances in kilometers.....	Fig. 2		

I. TERMINOLOGY

The following symbols are used, as recommended by the International Radio Propagation Conference held in Washington, D. C., 17 April to 5 May 1944.

$f^{\circ}F2$ =ordinary-wave critical frequency for the $F2$ layer. The term night F layer will no longer be used. The term $F2$ layer is now used for the night F as well as the daytime $F2$ layer.

$f^x F2$ =extraordinary-wave critical frequency for the $F2$ layer.

Es =sporadic, or abnormal E .

fEs =highest frequency of Es reflections.

muf or MUF=maximum usable frequency.

owf or OWF=optimum working frequency.

4000-muf chart=contour chart of muf for 4000-kilometer paths.

2000-muf chart=contour chart of muf for 2000-kilometer paths.

Zero-muf chart=contour chart of vertical-incidence critical frequency, extraordinary wave.

K =absorption index (ratio of actual absorption to absorption at the subsolar point).

NOTE.—The designation FF_2 has been replaced by F_2 .

II. WORLD-WIDE PREDICTION CHARTS AND THEIR USES

The charts, figures 5 to 11, present world-wide predictions of monthly average maximum usable frequencies for March 1945. Conditions may be markedly different on disturbed days, especially in or near the auroral zones, shown on the map of figure 1. The method of prediction is discussed in the IRPL Radio Propagation Handbook, Part 1, War Dept. TM 11-499, Navy Dept. DNC-13-1, p. 52, 53.

Ionosphere characteristics are roughly similar for locations of equal latitude, but there is also a considerable variation with longitude, especially in the case of the $F2$ layer. This "longitude effect" seems to be related to geomagnetic latitude. Attention was first called to this effect in the report "Radio Propagation Conditions" issued 10 Sept. 1943; it was brought into general operational use in the next issue (14 Oct. 1943).

The longitude effect in the $F2$ layer is taken care of by providing world charts for three zones, in each of which the ionosphere characteristics are independent of longitude, for practical purposes. These zones are indicated on the world map, figure 1.

Two $F2$ charts are provided for each zone, one of which, the "zero-muf chart," shows the vertical-incidence muf, or the critical frequency for the extraordinary wave, and the other, the "4000-muf chart," shows the muf for a transmission distance of 4000 km. Do not confuse the zero-muf charts with the $f^{\circ}F2$ charts appearing in the previous IRPL reports "Radio Propagation Conditions." (Values of $F2$ zero-muf exceed those of $f^{\circ}F2$ for the same location and local time by an amount approximately equal to half the gyrofrequency for the location. See IRPL Radio Propagation Handbook, Part 1 (War Dept. TM 11-499 and Navy Dept. DNC-13-1), p. 18, 19, 28, and fig. 9).

The longitude variation is operationally negligible in the case of the normal E layer and therefore only one E -layer chart is provided.

The variation of fEs with geomagnetic latitude seems to be well-marked and important, but there are, as yet, insufficient correlated data to permit an estimate of this variation; the fEs charts furnished here are therefore of a far lower degree of precision than the other charts.

III. DETERMINATION OF GREAT-CIRCLE DISTANCES, BEARINGS, LOCATION OF TRANSMISSION CONTROL POINTS, SOLAR ZENITH ANGLES

1. The first step in any radio propagation calculation is the determination of the transmission path, which is the great-circle distance between transmitting and receiving stations. Use the world map, figure 1, and the great-circle chart, figure 2, for this purpose, as follows:

a. Place a piece of transparent paper over the map, figure 1, and draw upon it a convenient reference latitude line, the locations of the transmitting and receiving stations, and the meridian whose local times are to be used as the times for calculation.

b. Place this transparency over the chart, figure 2, and, keeping the reference line at the proper latitude, slide the transparency horizontally until the terminal points marked on it either fall on the same great-circle curve, or fall the same proportional distance between adjacent great-circle curves. Draw in the path.

c. Locate the midpoint of the path, for paths under 4000 km, or the "control points," 2000 km from either end of the path, for paths greater than 4000 km, and use for this purpose the small circles of figure 2.

d. Place the transparency over the predicted chart at the proper latitude and local time, and read the values of muf off the chart, as directed in section IV.

2. Great-circle distances, bearings, location of midpoints, or other "control points" 2000 km in from the ends of the transmission path, as well as solar zenith angles, may be readily obtained from the nomogram, figure 4.

Referring to the auxiliary diagram, figure 3, let Z and S be the locations of transmitting and receiving stations; then, use the nomogram, figure 4, as follows:

a. To obtain the great-circle distance ZS :

(1) Draw slant line from (lat. of Z - lat. of S), measured up from bottom of left scale, to (lat. of Z + lat. of S), measured down from top of right scale.

(2) From (long. of S - long. of Z) on bottom scale, measured from left to right, draw vertical line to the slant line obtained in (1).

(3) From the intersection, draw a horizontal line to the left scale. This gives ZS in degrees.

(4) Convert the distance ZS to kilometers, statute miles, or nautical miles, by using the scale at the bottom of figure 4.

b. To obtain the bearing angle PZS :

(1) Subtract the distance ZS (in degrees) from 90° to get h .

(2) Draw slant line from (lat. $Z - h$), measured up from bottom on left scale, to (lat. $Z + h$), measured down from top on right scale.

(3) From (90° - lat. S) on left, measured up from bottom on left scale, draw horizontal line until it intersects previous slant line.

(4) From the intersection, draw a vertical line to the bottom scale, which gives the bearing angle PZS , in degrees.

c. To obtain the bearing angle PSZ :

(1) Repeat steps (1), (2), (3) and (4) in b , interchanging Z and S in all computations. The

result obtained is the interior angle PSZ , in degrees.

(2) The bearing angle PSZ is 360° minus the result obtained in (1) (since bearings are customarily given clockwise from due north).

d. To obtain latitude of Q (mid, or other, point of path):

(1) Obtain ZQ in degrees. If Q is the midpoint of the path, ZQ will be equal to one-half ZS . If Q is one of the 2000-km "control points," ZQ will be approximately 18° , or $ZS - 18^\circ$.

(2) Subtract ZQ from 90° to get h' .

(3) Draw slant line from (lat. $Z - h'$), measured up from bottom of left scale, to (lat. $Z + h'$), measured down from top on right scale.

(4) From bearing angle PZS , measured to right on bottom scale, draw vertical line to the above slant line.

(5) From this intersection, draw horizontal line to left scale.

(6) Subtract the reading given from 90° to give latitude of Q in degrees.

e. To obtain longitude difference, t' , between Z and Q :

(1) Draw straight line (lat. Z - lat. Q), measured up from bottom on left-hand scale, to (lat. Z + lat. Q), measured down from top on right-hand scale.

(2) From the left side, at ZQ , in degrees, draw a horizontal line to the above slant line.

(3) From the intersection, drop a vertical line to bottom scale to get t' in degrees.

f. To obtain solar zenith angle, ψ , at a given place:

(1) Let the declination of the sun be d , and let Z be the place under consideration.

(2) Draw straight line from (lat. $Z - d$), measured up from bottom on left scale, to (lat. $Z + d$), measured down on right scale.

(3) From $[(12 - \text{local time of } Z, \text{ in hours}) \times 15]$ degrees, on bottom scale, measured from left to right, draw a vertical line to the slant line above.

(4) From this intersection, draw a horizontal line to the left scale. This gives ψ , in degrees.

IV. CALCULATION OF MAXIMUM USABLE FREQUENCIES AND OPTIMUM WORKING FREQUENCIES

1. PROCEDURE FOR DETERMINATION OF MUF OR OW F FOR TRANSMISSION DISTANCES UNDER 4000 KM

Radio propagation over distances up to 4000 km is usually determined by ionospheric conditions at the midpoint of the great-circle path between transmitting and receiving station.

For a path 4000 km in length, read the predicted monthly average $F2$ muf directly off the 4000-muf charts furnished, at the latitude and local time of the midpoint of the path. For a path 2000 km in length read the predicted monthly average E -layer muf directly off the E -layer 2000-muf chart. Use the following procedure for other distances:

a. Locate the midpoint of the transmission path. (Methods for doing this are given in the preceding section of this report.)

b. Read the values of $F2$ -zero-muf, $F2$ -4000-muf, and E -layer 2000-muf for the midpoint of the path at the local time for this midpoint. Be sure to choose the $F2$ charts for the geographical zone in which the midpoint lies.

c. Place a straightedge between the values of $F2$ -zero-muf and $F2$ -4000-muf at the left- and right-hand sides, respectively, of the grid nomo-

gram, figure 13, and read the value of the muf for the actual path length at the intersection point of the straightedge with the appropriate vertical distance line.

d. The optimum working frequency (owf) is 85 percent of the muf, to allow a margin of safety for day-to-day variations; to determine the owf, use the auxiliary scale at the right of the grid nomogram of figure 13.

e. Place a straightedge between the value of the *E*-layer 2000-muf located on the left-hand scale of

the nomogram, figure 14, and the value of the path length on the right-hand scale, and read the combined *E*- and *F*1-layer muf or owf for that path length, off the central scale. (The characteristics of the *E* layer and of the *F*1 layer are sufficiently related that, for most practical purposes, they may be combined in this manner.)

f. Compare the values of muf or owf obtained by operations c to e. The higher of the two values thus determined is the muf or owf for the path.

2. PROCEDURE FOR DETERMINATION OF MUF OR OWF FOR TRANSMISSION DISTANCES GREATER THAN 4000 KM

The complexities of long-distance radio propagation are such that the simple multihop *E* or *F*2 layer calculations do not give accurate results. The following procedure will give results which are operationally satisfactory; the theory involved is outside the scope of this report.

a. Locate the two "control points" 2000 km from the ends of the great-circle distance between transmitting and receiving stations. For very long paths both the "short route" (minor arc of the great-circle path) and the "long route" (major arc) need to be considered.

b. Read the value of the *F*2-4000-muf, at the

local time for each point, at these points, being sure to choose the appropriate zone for each point.

c. Compare these two muf values. The lower of the two is the muf for the transmission path under consideration. Calculate the owf (85% of the muf) for the path, by means of the auxiliary muf-owf scale of figure 13.

d. When one of the control points lies in a region where the *E*-2000-muf is greater than the *F*2-4000-muf, read the *E*-2000-muf at an *E*-layer control point 1000 km from the end of the path, instead of the *F*2-4000-muf, as in step b. Use the *E*-2000-muf in step c, instead of the *F*2-4000-muf.

3. PROCEDURE FOR DETERMINATION OF *E*_s TRANSMISSION

Sporadic-*E* (*E*_s) propagation plays an important part in transmission over paths in some parts of the world and at certain times; it may often produce regular transmission at times when regular *F*2-layer propagation would not. *E*_s data are not yet sufficient to permit accurate calculations of such propagation, but the charts of figures 12 and 15 are given as a guide to *E*_s occurrence. Until such time as more definite information is available, the following procedure should be used, to find the prevalence of *E*_s propagation over long paths.

a. For paths over 4000 km long:

(1) Place the great-circle path transpar-

ency, prepared in section III, 1, over the median *f**E*_s chart, figure 12.

(2) Scale *f**E*_s at each *E*-layer control point (1000 km from each end of the path), multiply by 5 and subtract 4 Mc. The result is *E*_s-owf.

(3) Plot as the owf for each control point the *higher* of the two values, the *F*2-4000-owf and the *E*_s-owf.

b. For use over paths of lengths up to 4000 km scale the *E*_s at the midpoint of the path, multiply by 5 and subtract 4 Mc, and use the resultant frequency instead of the *E*-2000-muf in the nomogram of figure 14.

V. ABSORPTION, DISTANCE RANGE, AND LOWEST USEFUL HIGH FREQUENCY

The determination of absorption, distance range, and lowest useful high frequency is discussed at length in IRPL Radio Propagation Handbook, Part 1, p. 69-97 (War Dept. TM 11-499, Navy Dept. DNC-13-1), and formulas, graphs, and nomograms for calculation are given there. For convenience in estimating absorption (exclusive of auroral absorption) over a path, the absorption index (or *K*) chart, figure 16, is presented. By superposing the transparency with the great-circle

path, prepared as in section III, 1, the relation of the path to the sun's zenith angle is readily seen (the sunrise-sunset line corresponds to an absorption index=0.14).

The absorption is erratic and considerably greater in and near the auroral zones, shown on the map of figure 1; paths passing through or near these zones are subject at times to severe disturbances.

VI. SAMPLE MUF AND OWF CALCULATIONS

1. FOR SHORT PATHS

Required: The muf and owf for transmission between Washington, D. C. (39.0° N, 77.5° W) and Miami, Fla. (25.7° N, 80.5° W) for average conditions during the month of March 1945.

Solution:

Let the local time used for this problem be GCT (Z time or that of 0° longitude).

The midpoint of the path is at approximately 32.5° N, 79.0° W, and the transmission path length is approximately 1500 km.

The values of E - and F_2 -layer muf and owf and also E_s -owf for alternate hours, GCT, as determined by using the procedure given in section IV, are given in table 1. The final values are presented graphically in figure 17.

Figure 17 shows that skip will occur, on the average, during the night hours if a frequency as high as 7.0 Mc is used. A frequency as high as 4.9 Mc will not skip, on the average, at any time of day, but its use is not advisable because of (a)

the day-to-day variability, causing some probability of skip during the night hours, and (b) ionospheric absorption during the daytime, which is more pronounced at low frequencies.

A satisfactory frequency plan to insure continuous transmission at all times, on a circuit like this, involves the use of two frequencies, one for night and one for day. Figure 17 shows that a night frequency of 4.2 Mc used between the hours of 2230 and 1300 GCT, and a day frequency of 10.5 Mc to be used from 1300 to 2230, would be satisfactory. The periods of usefulness of these frequencies are shown by the heavy dashed line on figure 17.

Periods of time during which transmission is controlled by either the E layer or F_2 layer may be easily recognized by noting the relative proximity of the muf and owf curves of figure 17. At no time is the transmission here controlled by sporadic- E reflection. Relatively low values of fE_s and infrequent occurrence are characteristic of the month of March in temperate latitudes.

2. FOR LONG PATHS

Required: The muf and owf for transmission between Manila, P. I. (14.6° N, 121.0° E) and San Francisco, Calif. (37.8° N, 122.4° W), for average conditions during the month of March 1945.

Solution:

Let the local time used for this problem be GCT, or that of 0° longitude.

The path length is approximately 11 200 km and the two F_2 -layer control points are at approximately 27° N, 136° E and 45° N, 144° W. These are respectively in the E zone and the I zone, as shown on the map, figure 1. The two E -layer and E_s -control points are located at 21° N, 132° E and 41° N, 132° W. The bearing of San Francisco from Manila, determined by means of the nomogram of figure 4, is approximately 46° .

The values of muf and owf over this transmission path, as determined by using the procedure for alternate hours, GCT, are given in table 2. The final values are shown graphically in figure 18.

Figure 18 shows that skip will occur, on the average, during the night hours if a frequency as high as 11 Mc is used, although much higher frequencies may be used during a limited portion of the day.

A good practical arrangement to insure continuous transmission at all times is to select three frequencies, in a manner similar to that suggested for the preceding problem. A frequency of 6.9 Mc may be used from 0715 to 2010 GCT; a frequency of 15.0 Mc may be used from 2200 to 0215, while a transition frequency of 8.5 Mc may be used from 0215 to 0715 and again from 2010 to 2200.

As in the previous problem, relative proximity of the muf and owf curves of figure 18 indicates that the regular E layer does not control transmission at any time. Coincidence of the curves indicates control by sporadic- E reflections.

By inspection of the absorption chart, figure 16, and the noise map (fig. 120 of the IRPL Radio Propagation Handbook, Part 1, War Dept. TM 11-499, Navy Dept. DNC-13-1) it may be seen that considerations of the lowest useful high frequency over this path may be of considerable importance in selecting frequencies for use, and that in cases of transmission failure on the frequencies here recommended, particularly in the case of the transition frequency, raising the frequency to a value slightly under the muf for the path may be advisable.

TABLE 1.—*Solution of short-path transmission problem*

[Washington, D. C. to Miami, Fla., March 1945]


Time, GCT	E-layer 2000- muf	Com- bined E- and F1-layer- 1500- muf	Com- bined E- and F1-layer- 1500- owf	Median <i>fEs</i>	<i>Es</i> -owf	F2- layer- zero- muf, W zone	F2- layer- 4000- muf, W zone	F2- layer- 1500- muf	F2- layer- 1500- owf	Com- bined muf, all layers	Com- bined owf, all layers
00-----	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
02-----	-----	-----	-----	<2	<6	5.2	15.9	9.5	8.1	9.5	8.1
04-----	-----	-----	-----	<2	<6	4.2	11.4	7.1	6.0	7.1	6.0
06-----	-----	-----	-----	<2	<6	4.1	10.5	6.6	5.6	6.6	5.6
08-----	-----	-----	-----	<2	<6	4.0	11.6	7.0	6.0	7.0	6.0
10-----	-----	-----	-----	<2	<6	3.6	10.2	6.2	5.3	6.2	5.3
12-----	8.7	8.0	7.8	<2	<6	3.2	7.4	4.9	4.2	4.9	4.2
14-----	13.7	12.5	12.1	2.0	6.0	5.5	16.6	10.0	8.5	10.0	8.5
16-----	15.3	14.1	13.7	3.1	11.5	6.7	19.5	11.8	10.0	12.5	12.1
18-----	15.4	14.2	13.8	3.3	12.5	7.4	21.9	13.1	11.1	14.1	13.7
20-----	14.1	13.0	12.6	2.9	10.5	7.9	23.6	14.1	12.0	14.2	13.8
22-----	10.5	9.7	9.4	<2	<6	7.8	23.0	13.9	11.8	13.9	12.6
						7.2	21.8	13.0	11.0	13.0	11.0

TABLE 2.—*Solution of long-path transmission problem*

[Manila, P. I., to San Francisco, Calif., March 1945]

Time, GCT	E-layer- 2000-muf, control point <i>A'</i>	E-layer- 2000-owf, control point <i>A'</i>	Median <i>fEs</i> , control point <i>A'</i>	<i>Es</i> -owf, control point <i>A'</i>	F2-4000- muf, <i>E</i> zone control point <i>A</i>	F2-4000- owf, <i>E</i> zone control point <i>A'</i>	Com- bined muf, control points <i>A</i> and <i>A'</i>	Com- bined owf, control points <i>A</i> and <i>A'</i>	E-layer 2000- muf, control point <i>B'</i>	E-layer 2000- owf, control point <i>B'</i>
00-----	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
02-----	13.7	13.3	3.1	11.5	26.8	22.8	26.8	22.8	13.3	12.9
04-----	16.0	15.5	3.6	14.0	32.0	27.2	32.0	27.2	9.2	8.9
06-----	16.1	15.6	3.8	15.0	36.2	30.8	36.2	30.8	-----	-----
08-----	15.0	14.6	3.6	14.0	34.0	29.0	34.0	29.0	-----	-----
10-----	11.2	10.9	3.2	12.0	31.7	26.9	31.7	26.9	-----	-----
12-----	-----	-----	2.4	8.0	18.0	15.3	18.0	15.3	-----	-----
14-----	-----	-----	<2	<6	11.4	9.7	11.4	9.7	-----	-----
16-----	-----	-----	<2	<6	10.7	9.1	10.7	9.1	-----	-----
18-----	-----	-----	<2	<6	10.9	9.3	10.9	9.3	9.4	9.1
20-----	-----	-----	<2	<6	10.0	8.5	10.0	8.5	13.4	13.0
22-----	8.3	8.1	<2	<6	9.6	8.2	9.6	8.2	14.7	14.3
			<2	<6	20.5	17.4	20.5	17.4	14.6	14.2

Time, GCT	Median <i>fEs</i> , control point <i>B'</i>	<i>Es</i> -owf, control point <i>B'</i>	F2-4000- muf, <i>I</i> zone, control point <i>B</i>	F2-4000- owf, <i>I</i> zone, control point <i>B</i>	Com- bined muf, control points <i>B</i> and <i>B'</i>	Com- bined owf, control points <i>B</i> and <i>B'</i>	Muf, for trans- mission path	Owf, for trans- mission path
00-----	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
02-----	2.4	8.0	19.7	16.7	19.7	16.7	19.7	16.7
04-----	1.9	5.5	17.9	15.2	17.9	15.2	17.9	15.2
06-----	1.9	5.5	15.0	12.8	15.0	12.8	15.0	12.8
08-----	2.1	6.5	11.3	9.6	11.3	9.6	11.3	9.6
10-----	2.1	6.5	9.6	8.2	9.6	8.2	9.6	8.2
12-----	2.1	6.5	8.7	7.4	8.7	7.4	8.7	7.4
14-----	2.2	7.0	7.6	6.5	7.6	7.0	7.6	7.0
16-----	2.3	7.5	6.6	5.6	7.5	7.5	7.5	7.5
18-----	2.6	9.0	11.6	9.9	11.6	9.9	10.9	9.3
20-----	2.9	10.5	18.0	15.3	18.0	15.3	10.0	8.5
22-----	3.1	11.5	20.3	17.2	20.3	17.2	9.6	8.2
	3.1	11.5	20.0	17.0	20.0	17.0	20.0	17.0

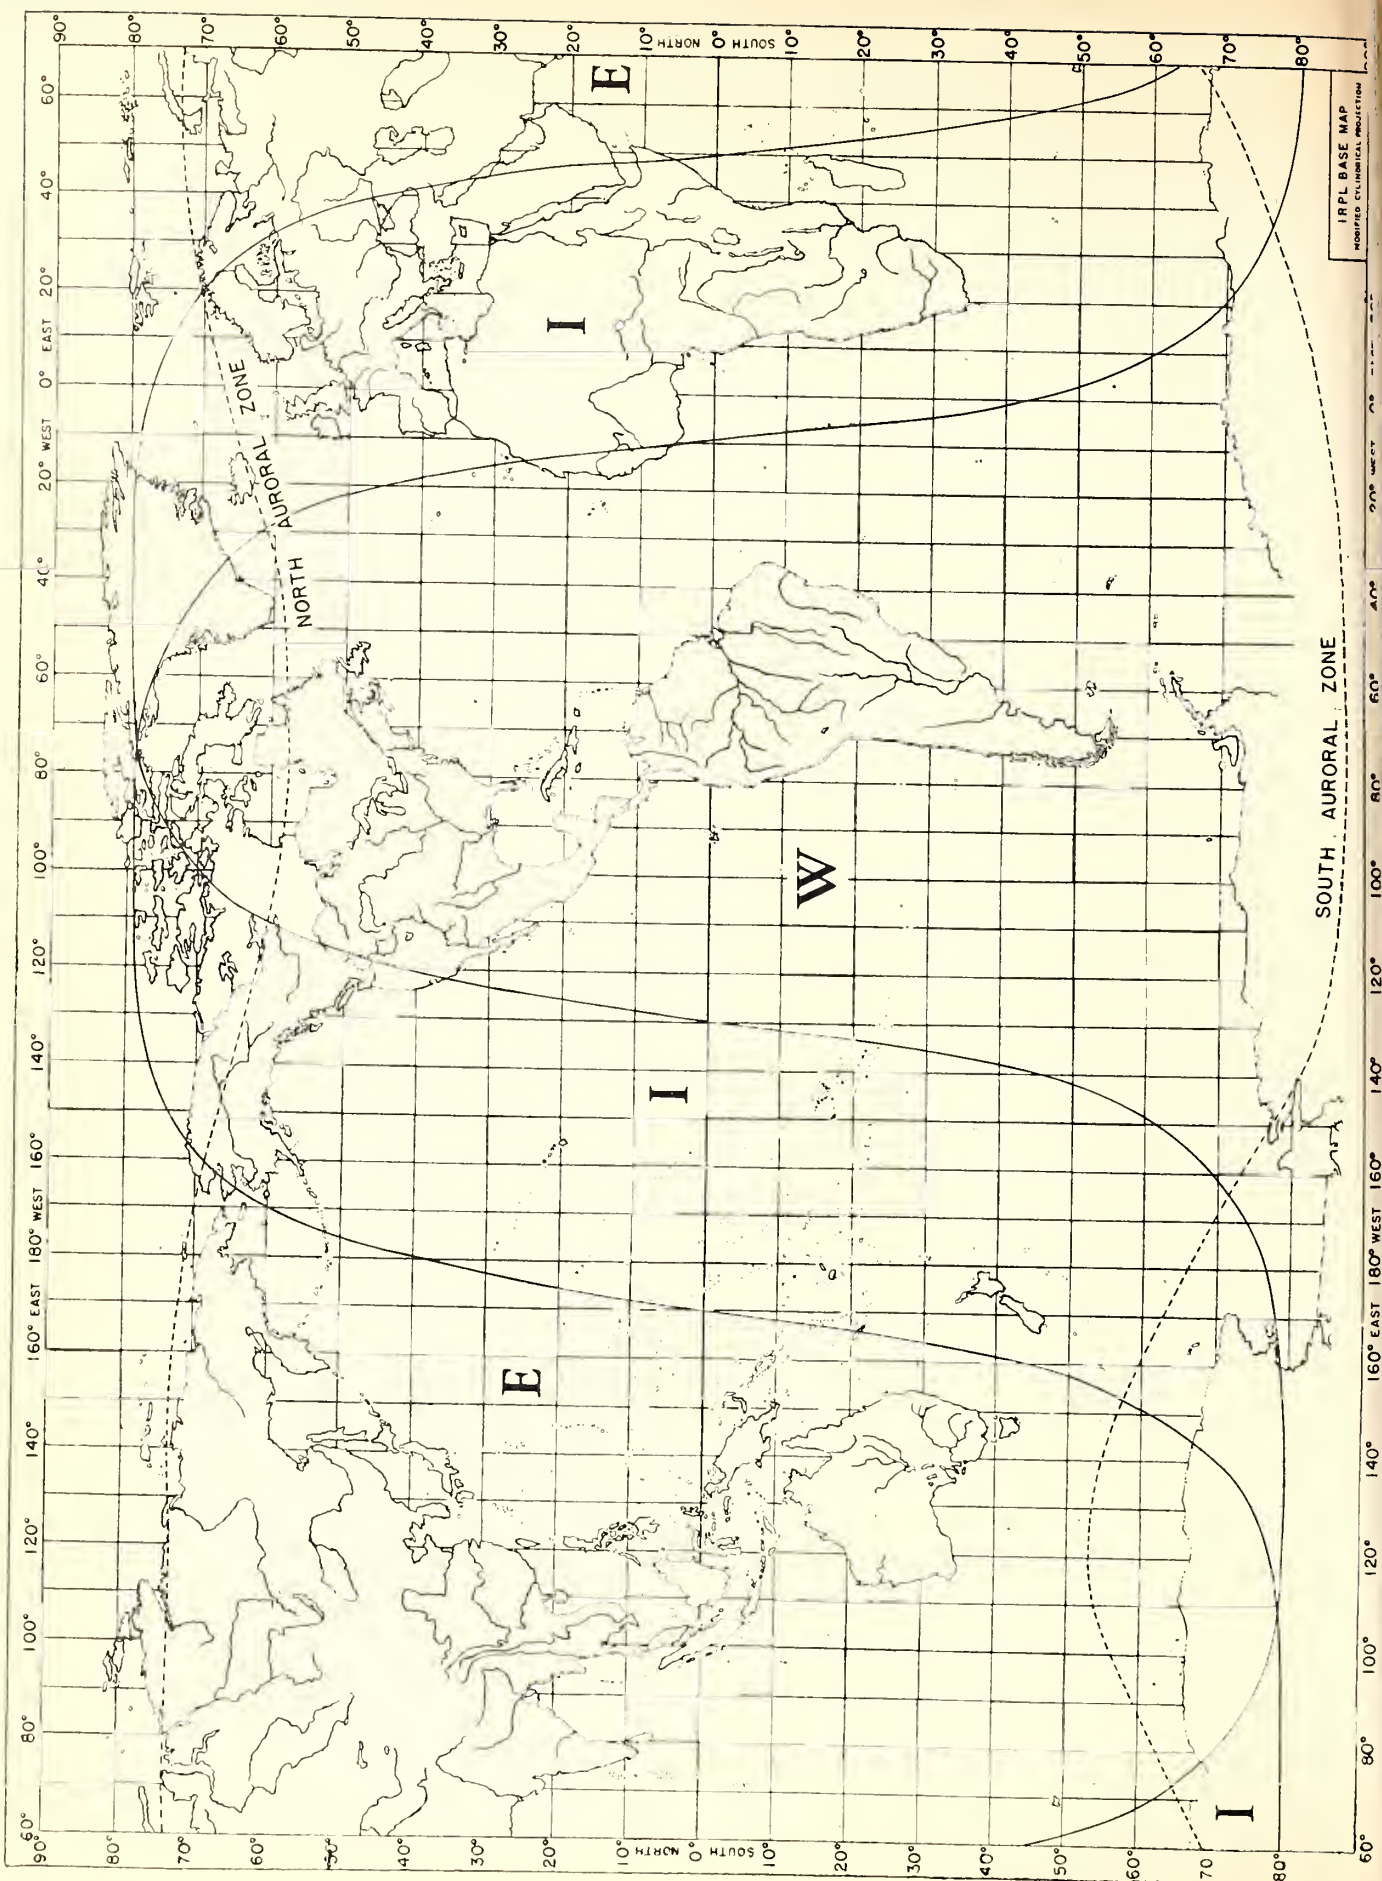

NORTH AURORAL ZONE

SOUTH AURORAL ZONE

IRPL BASE MAP
MODIFIED CYLINDRICAL PROJECTION

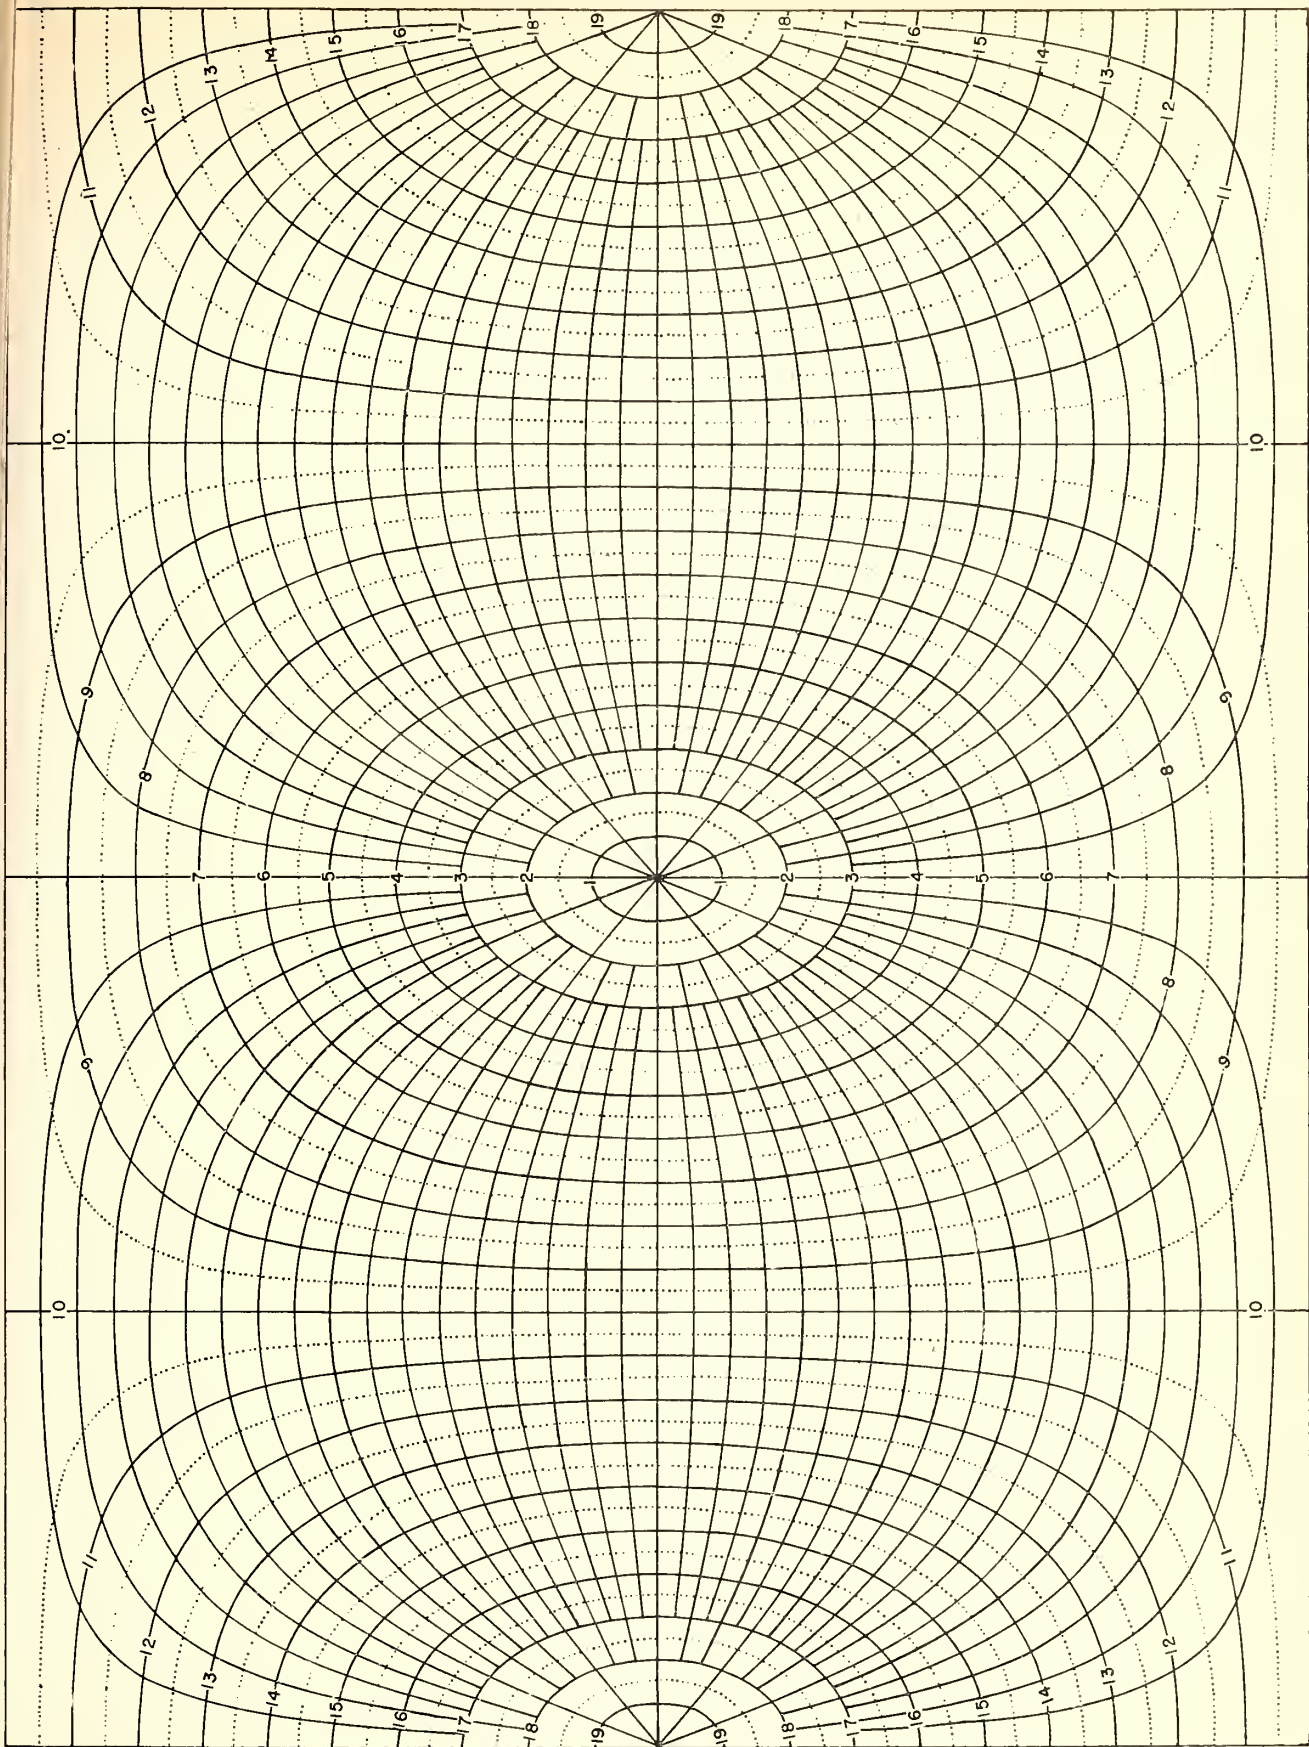


FIG. 2. GREAT CIRCLE CHART, CENTERED ON EQUATOR, WITH SMALL CIRCLES INDICATING DISTANCES IN KILOMETERS.

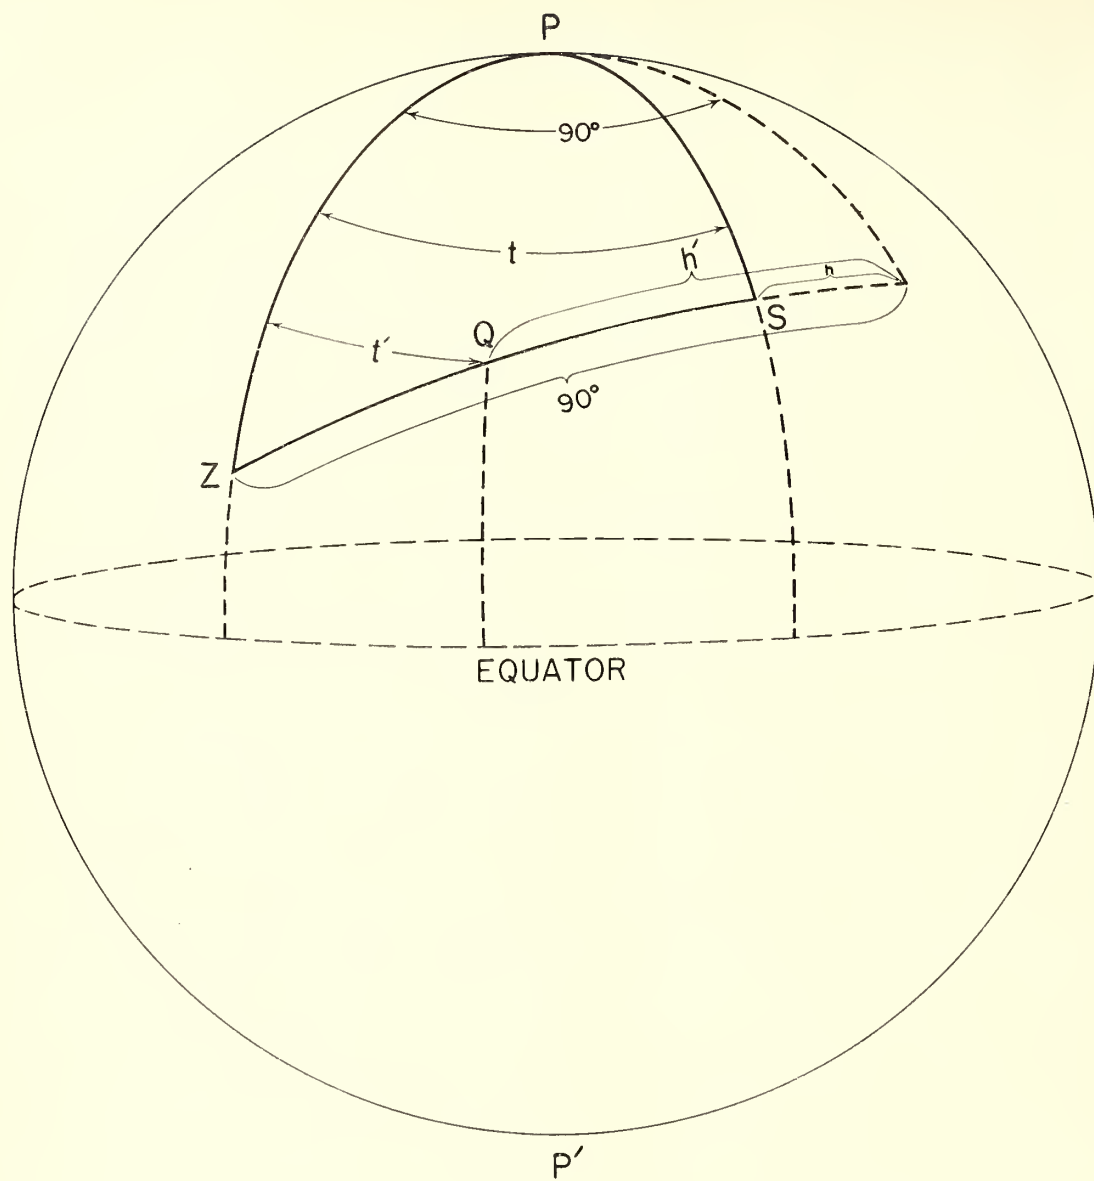


Fig. 3.

DIAGRAM OF TRANSMISSION PATH AUXILIARY TO EXPLANATION OF USE OF DISTANCE — BEARING NOMOGRAM, FIG. 4.

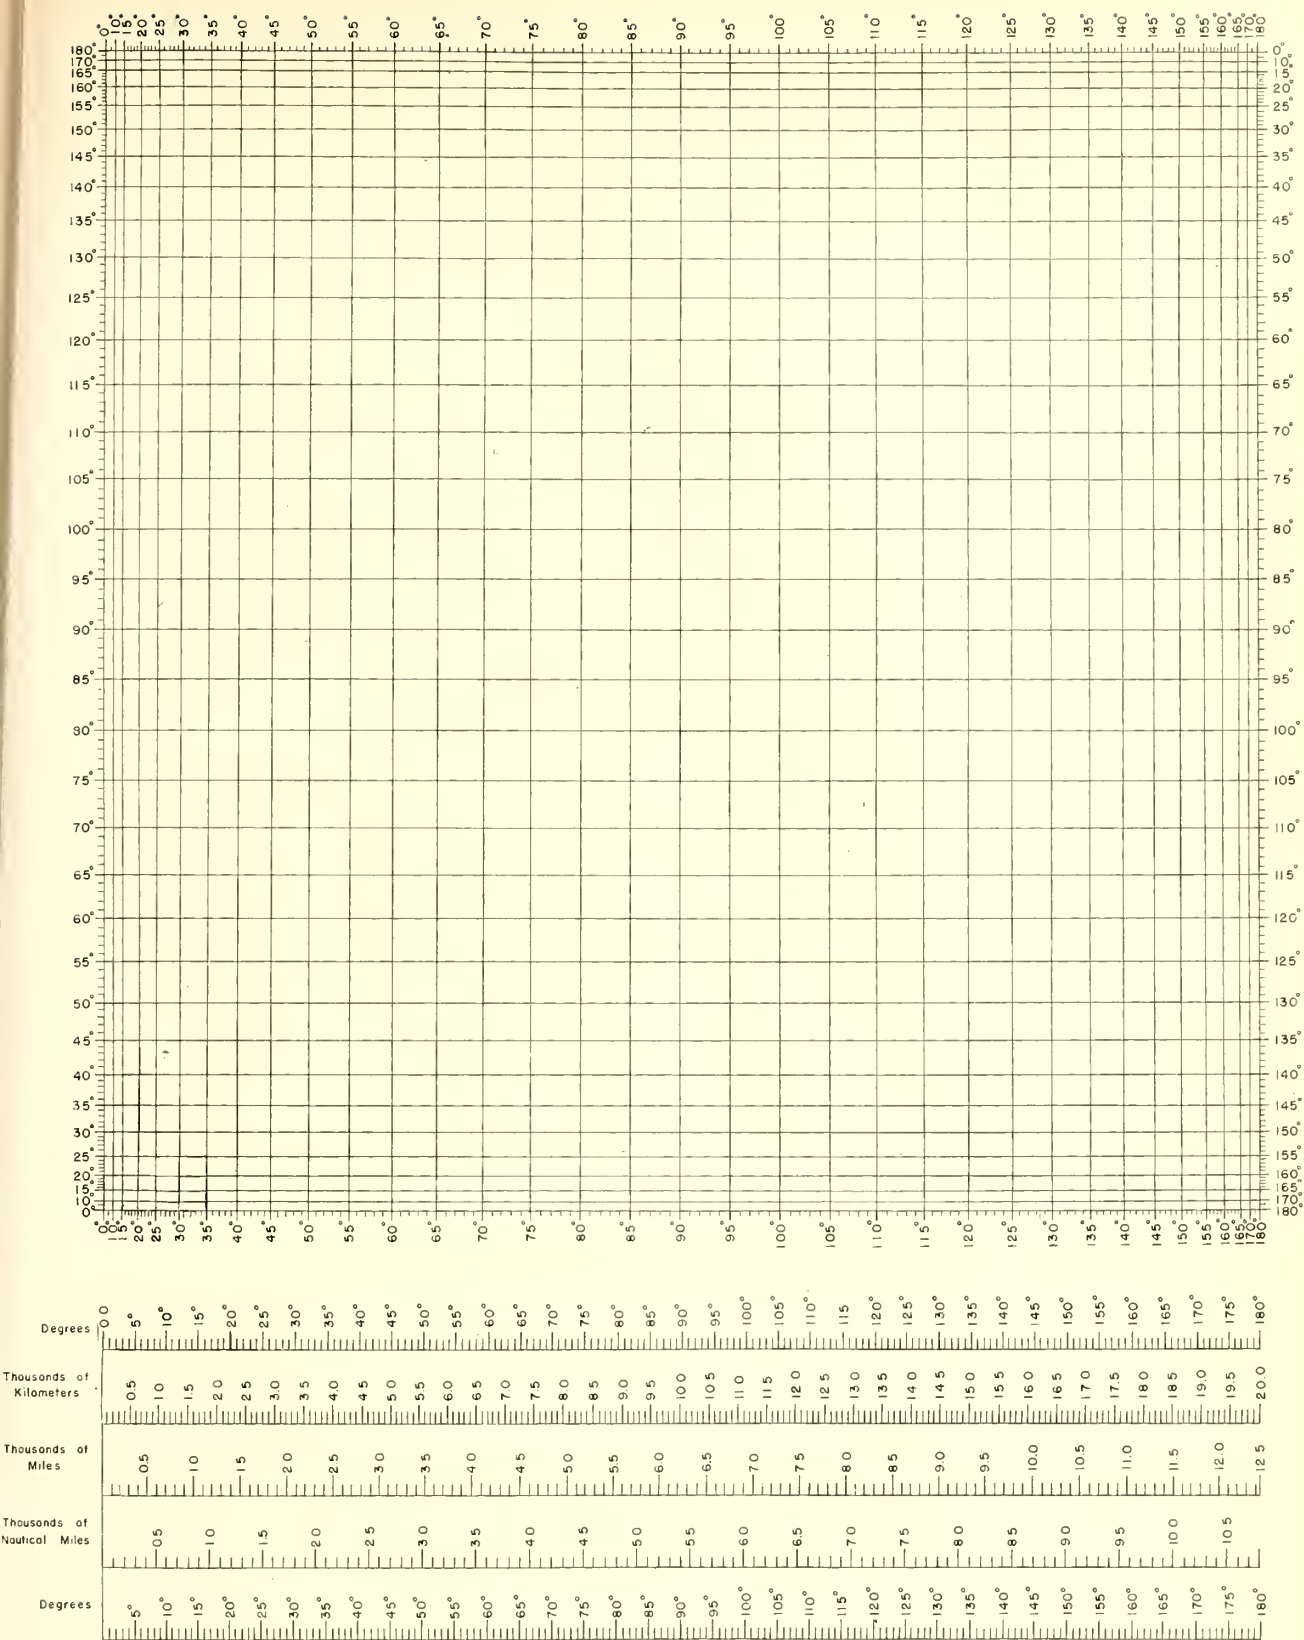


Fig 4. NOMOGRAM (AFTER D'OCAGNE) FOR OBTAINING GREAT-CIRCLE DISTANCES, BEARINGS, LATITUDE AND LONGITUDE OF TRANSMISSION CONTROL POINTS, SOLAR ZENITH ANGLES.
CONVERSION SCALE FOR VARIOUS DISTANCE UNITS.

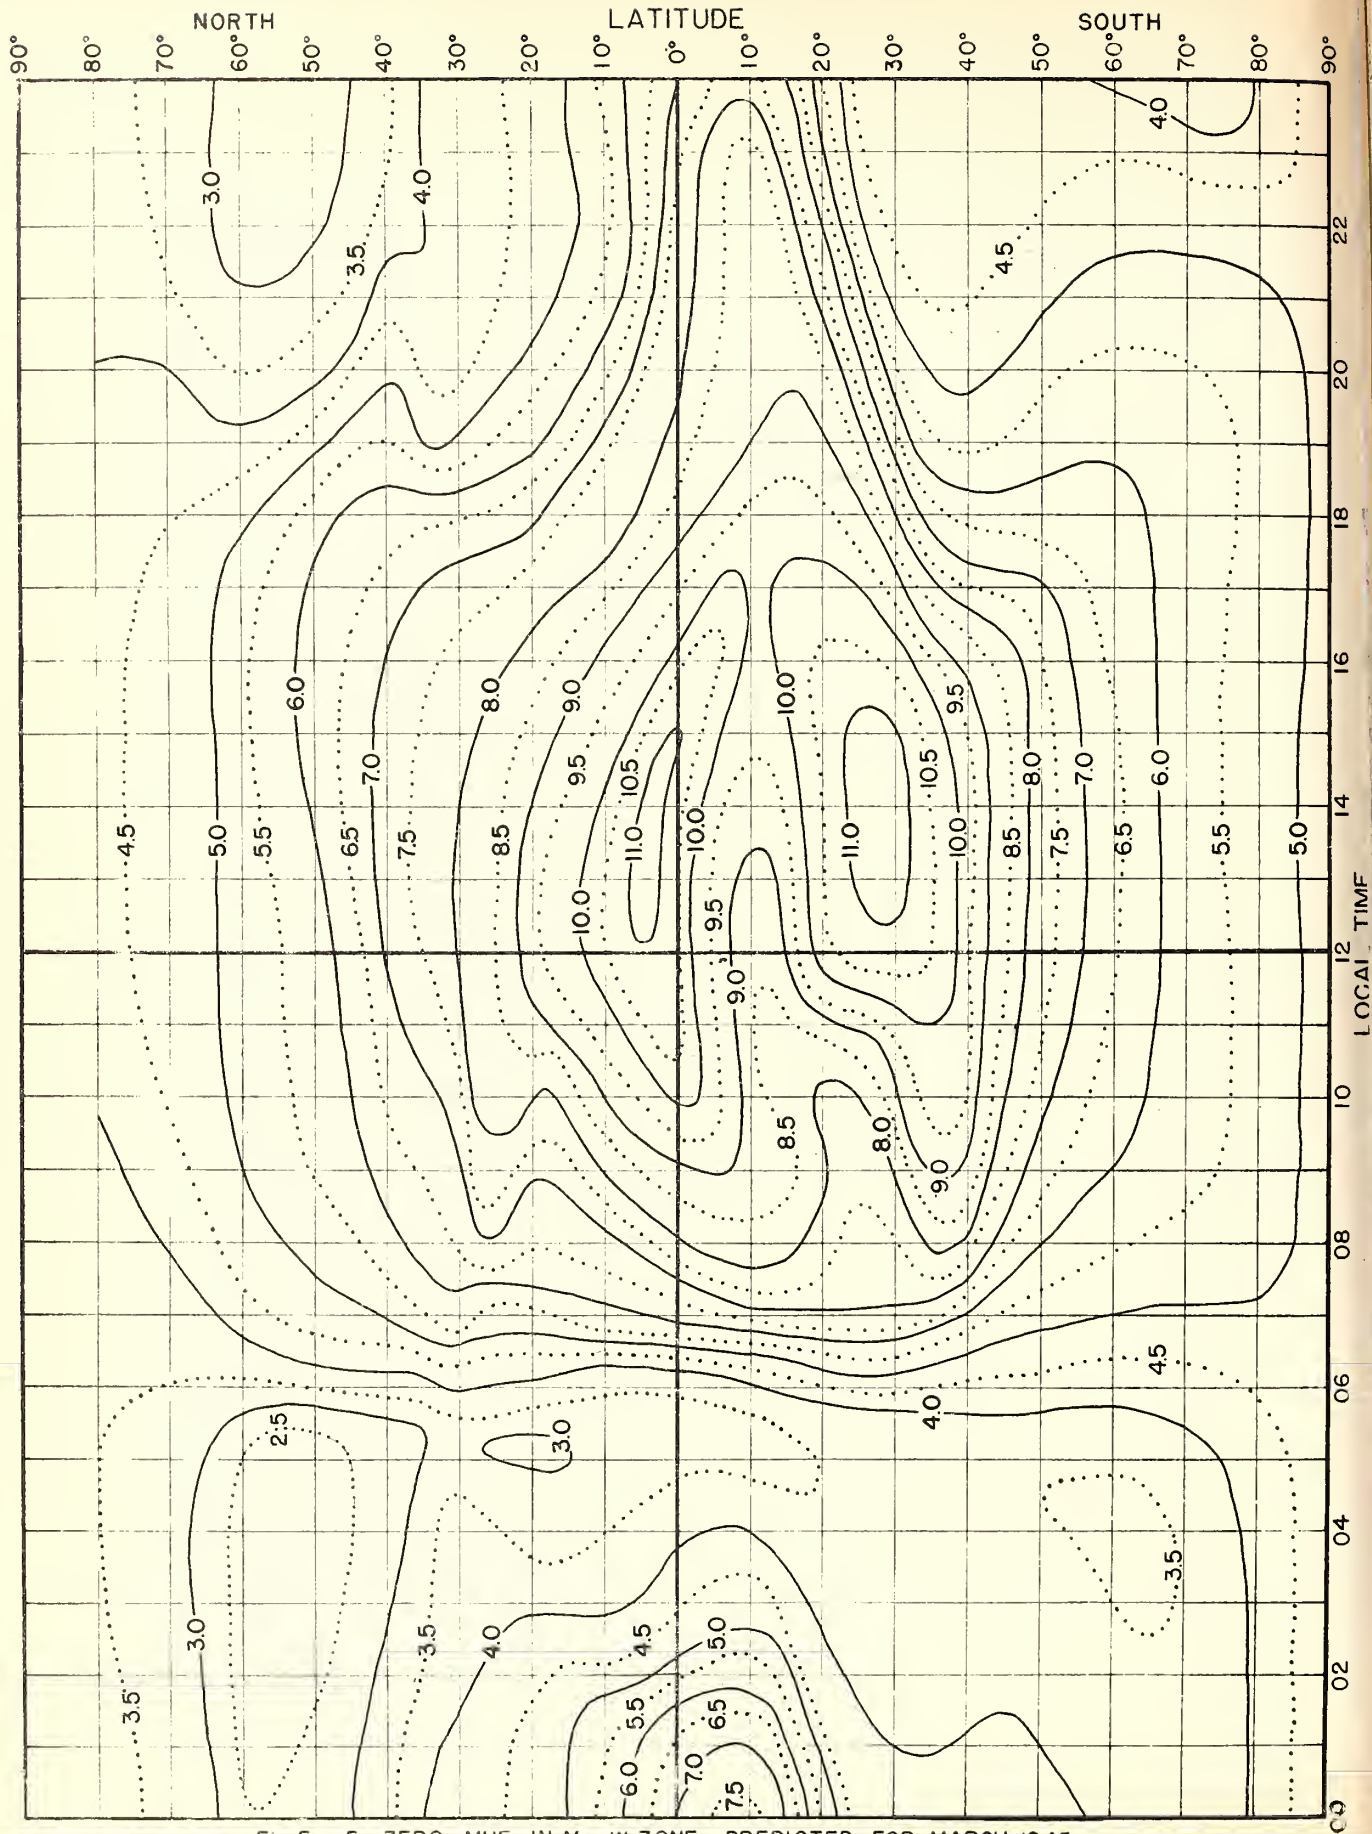


Fig-5. F_2 ZERO-MUF, IN Mc, W ZONE, PREDICTED FOR MARCH 1945

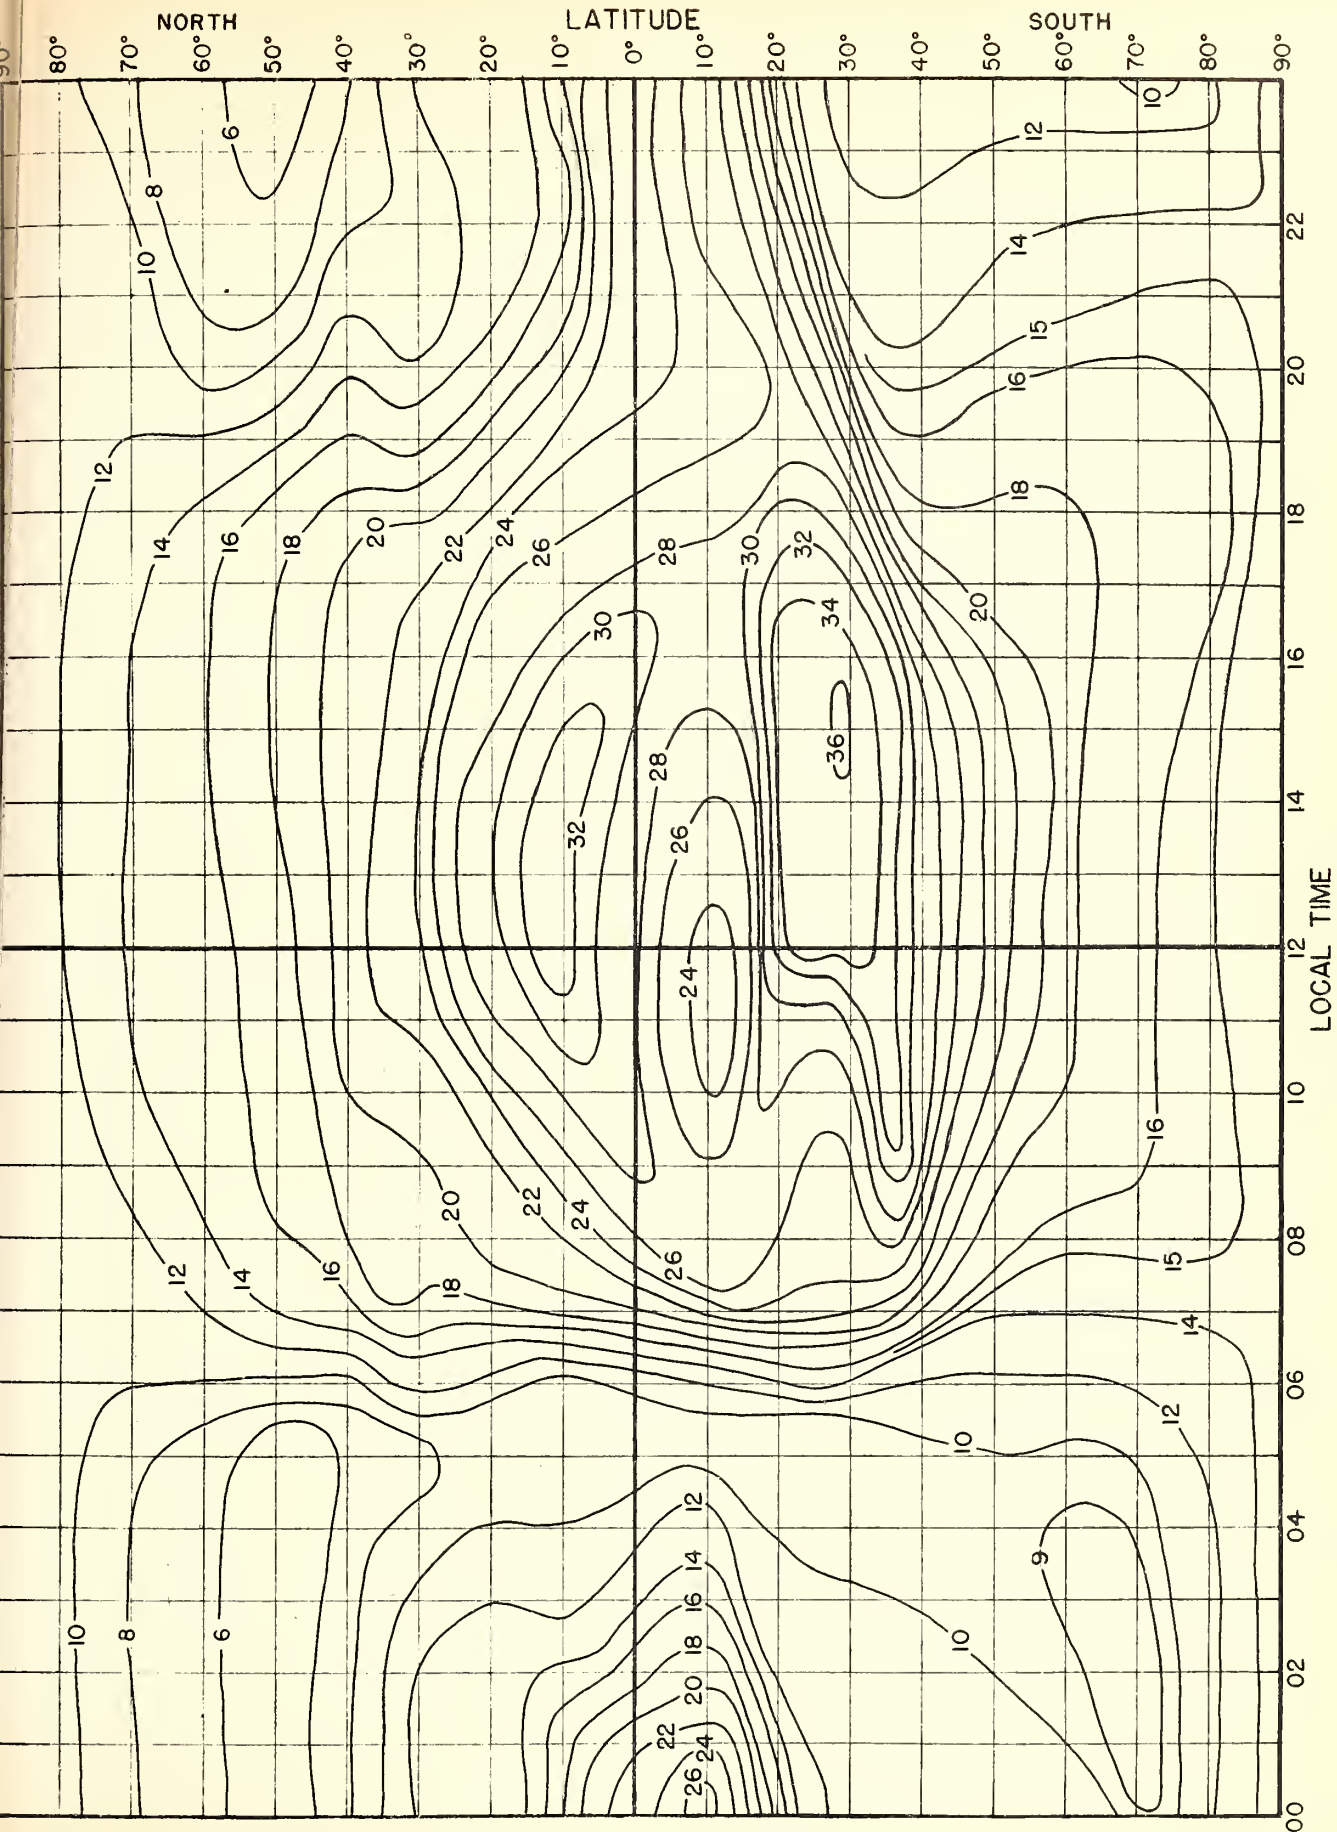


Fig.6. F₂ 4000-MUF, IN Mc, W ZONE, PREDICTED FOR MARCH 1945.

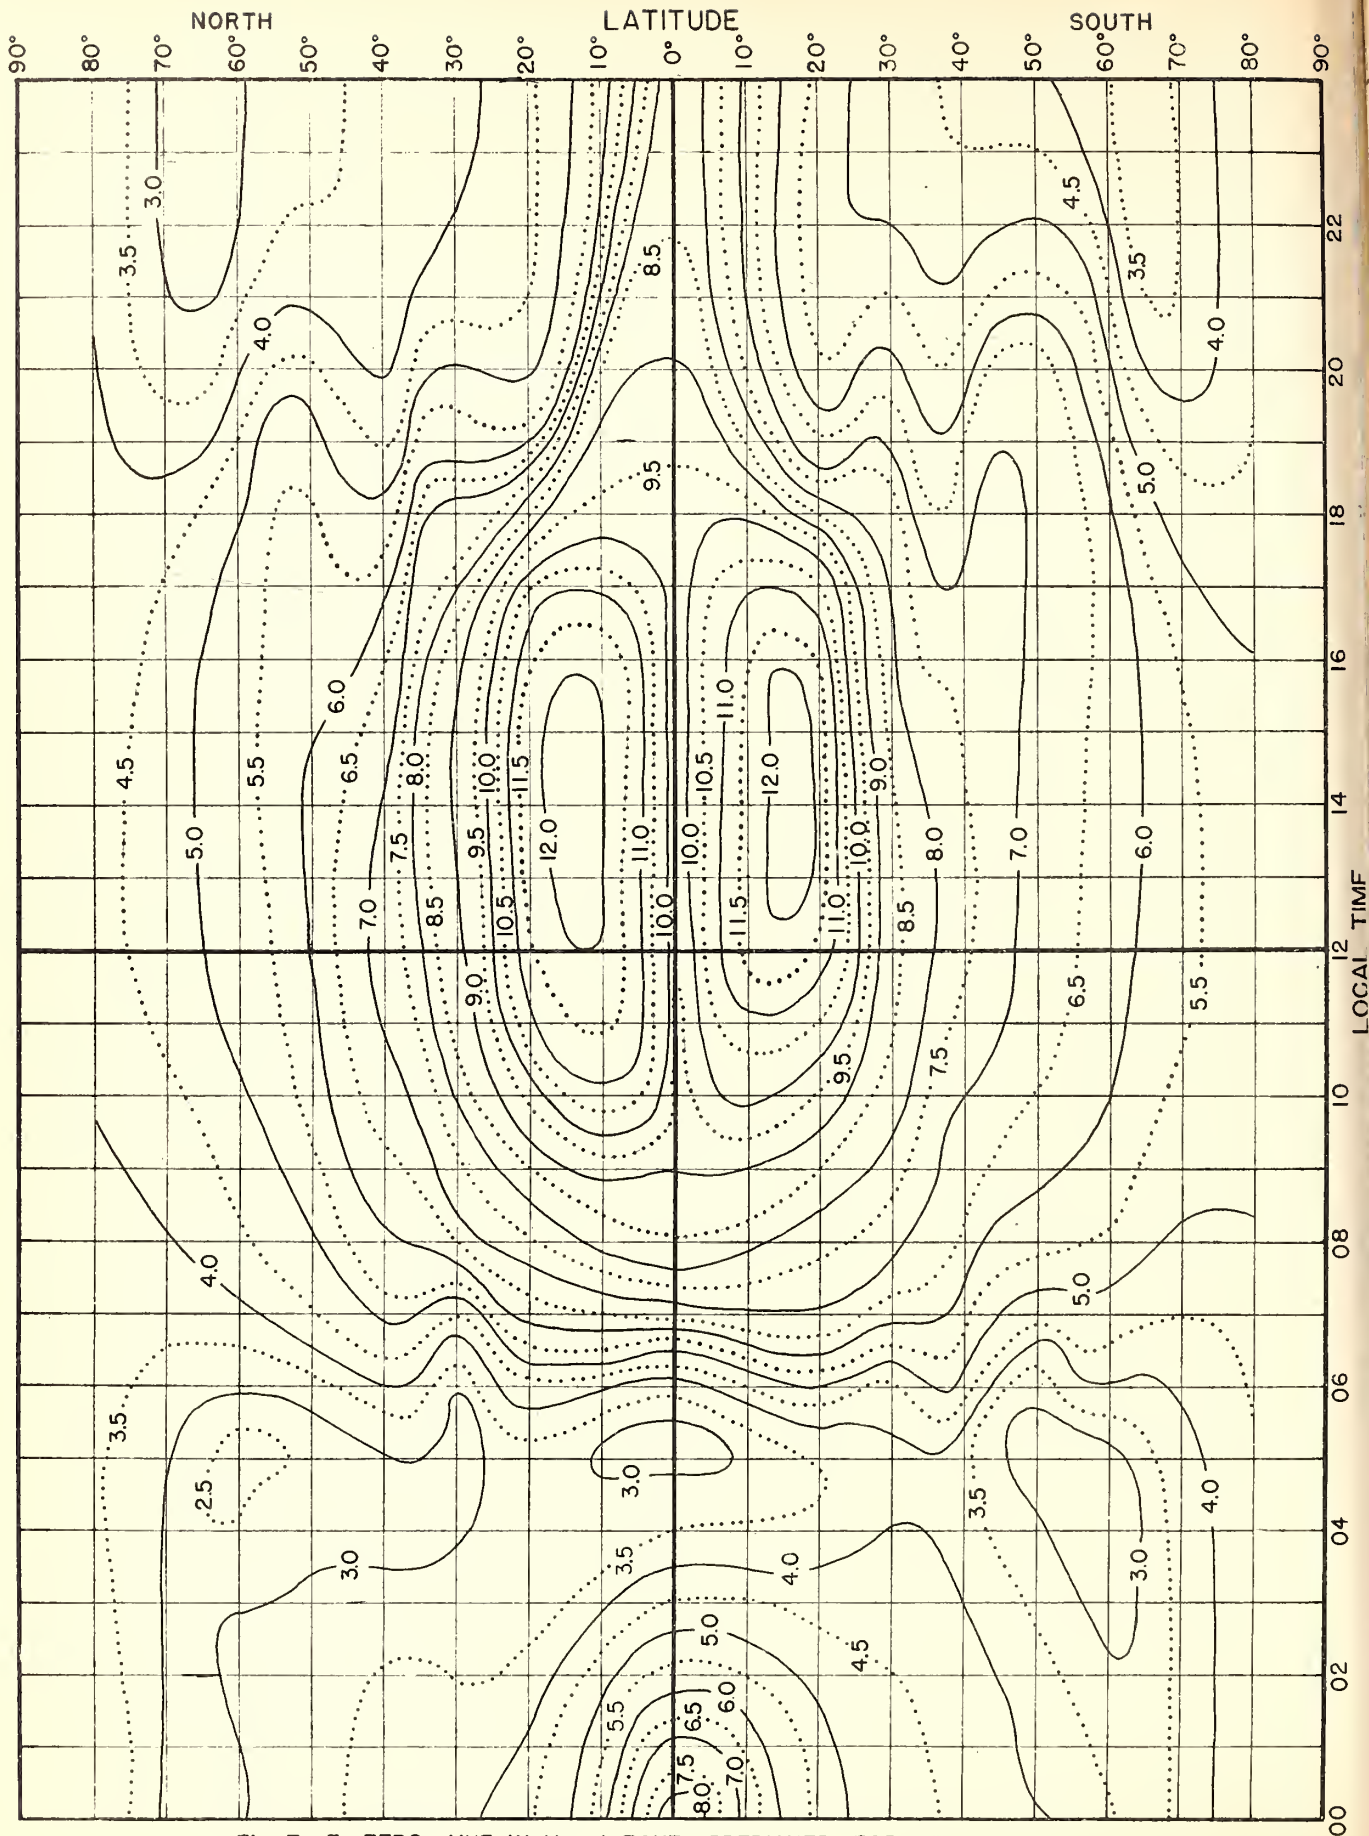


Fig. 7. F_2 ZERO-MUF, IN Mc, I ZONE, PREDICTED FOR MARCH 1945.

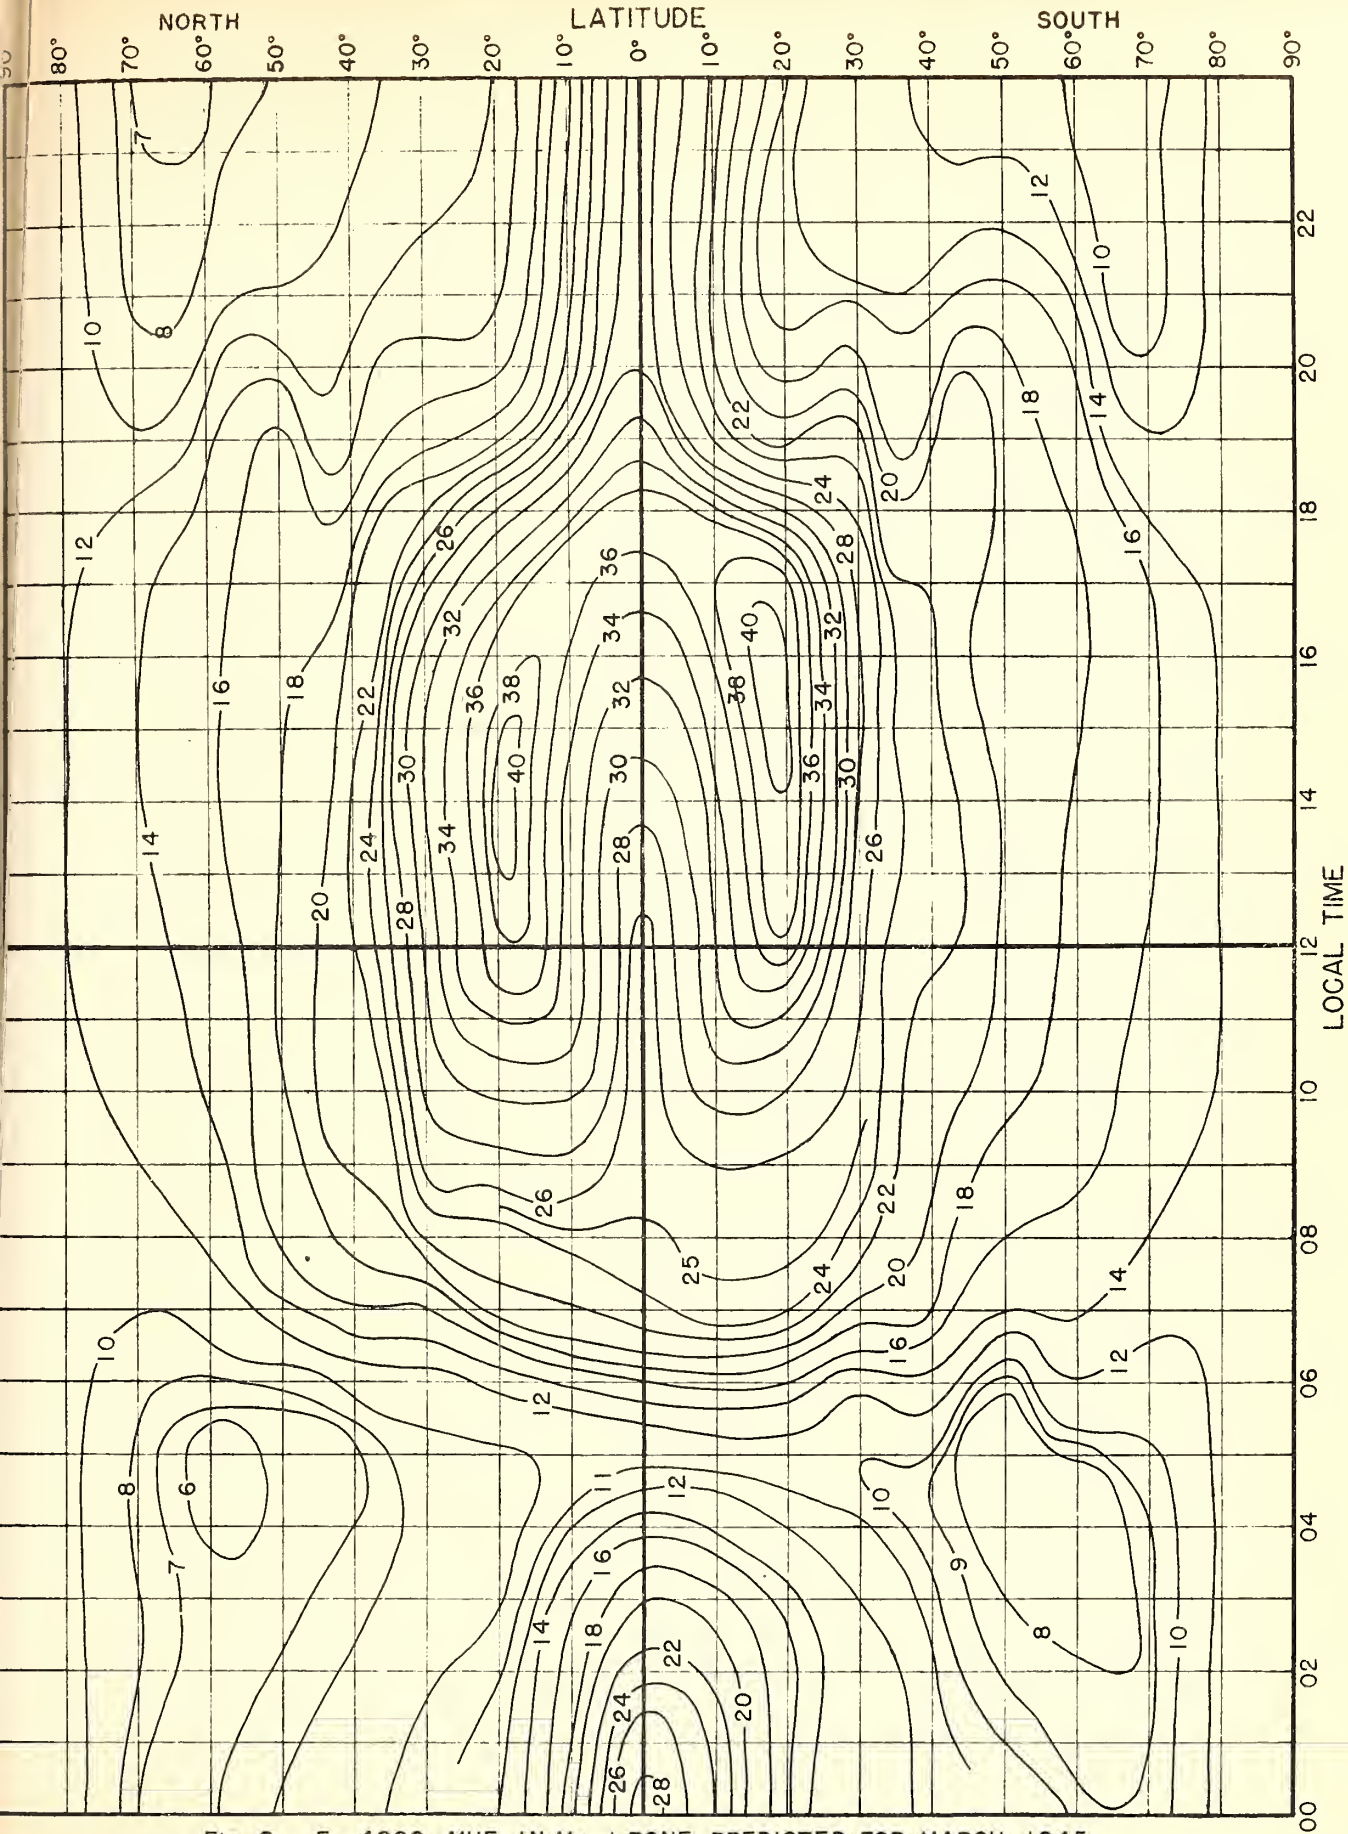


Fig. 8. F_2 4000-MUF, IN Mc, I ZONE, PREDICTED FOR MARCH 1945.

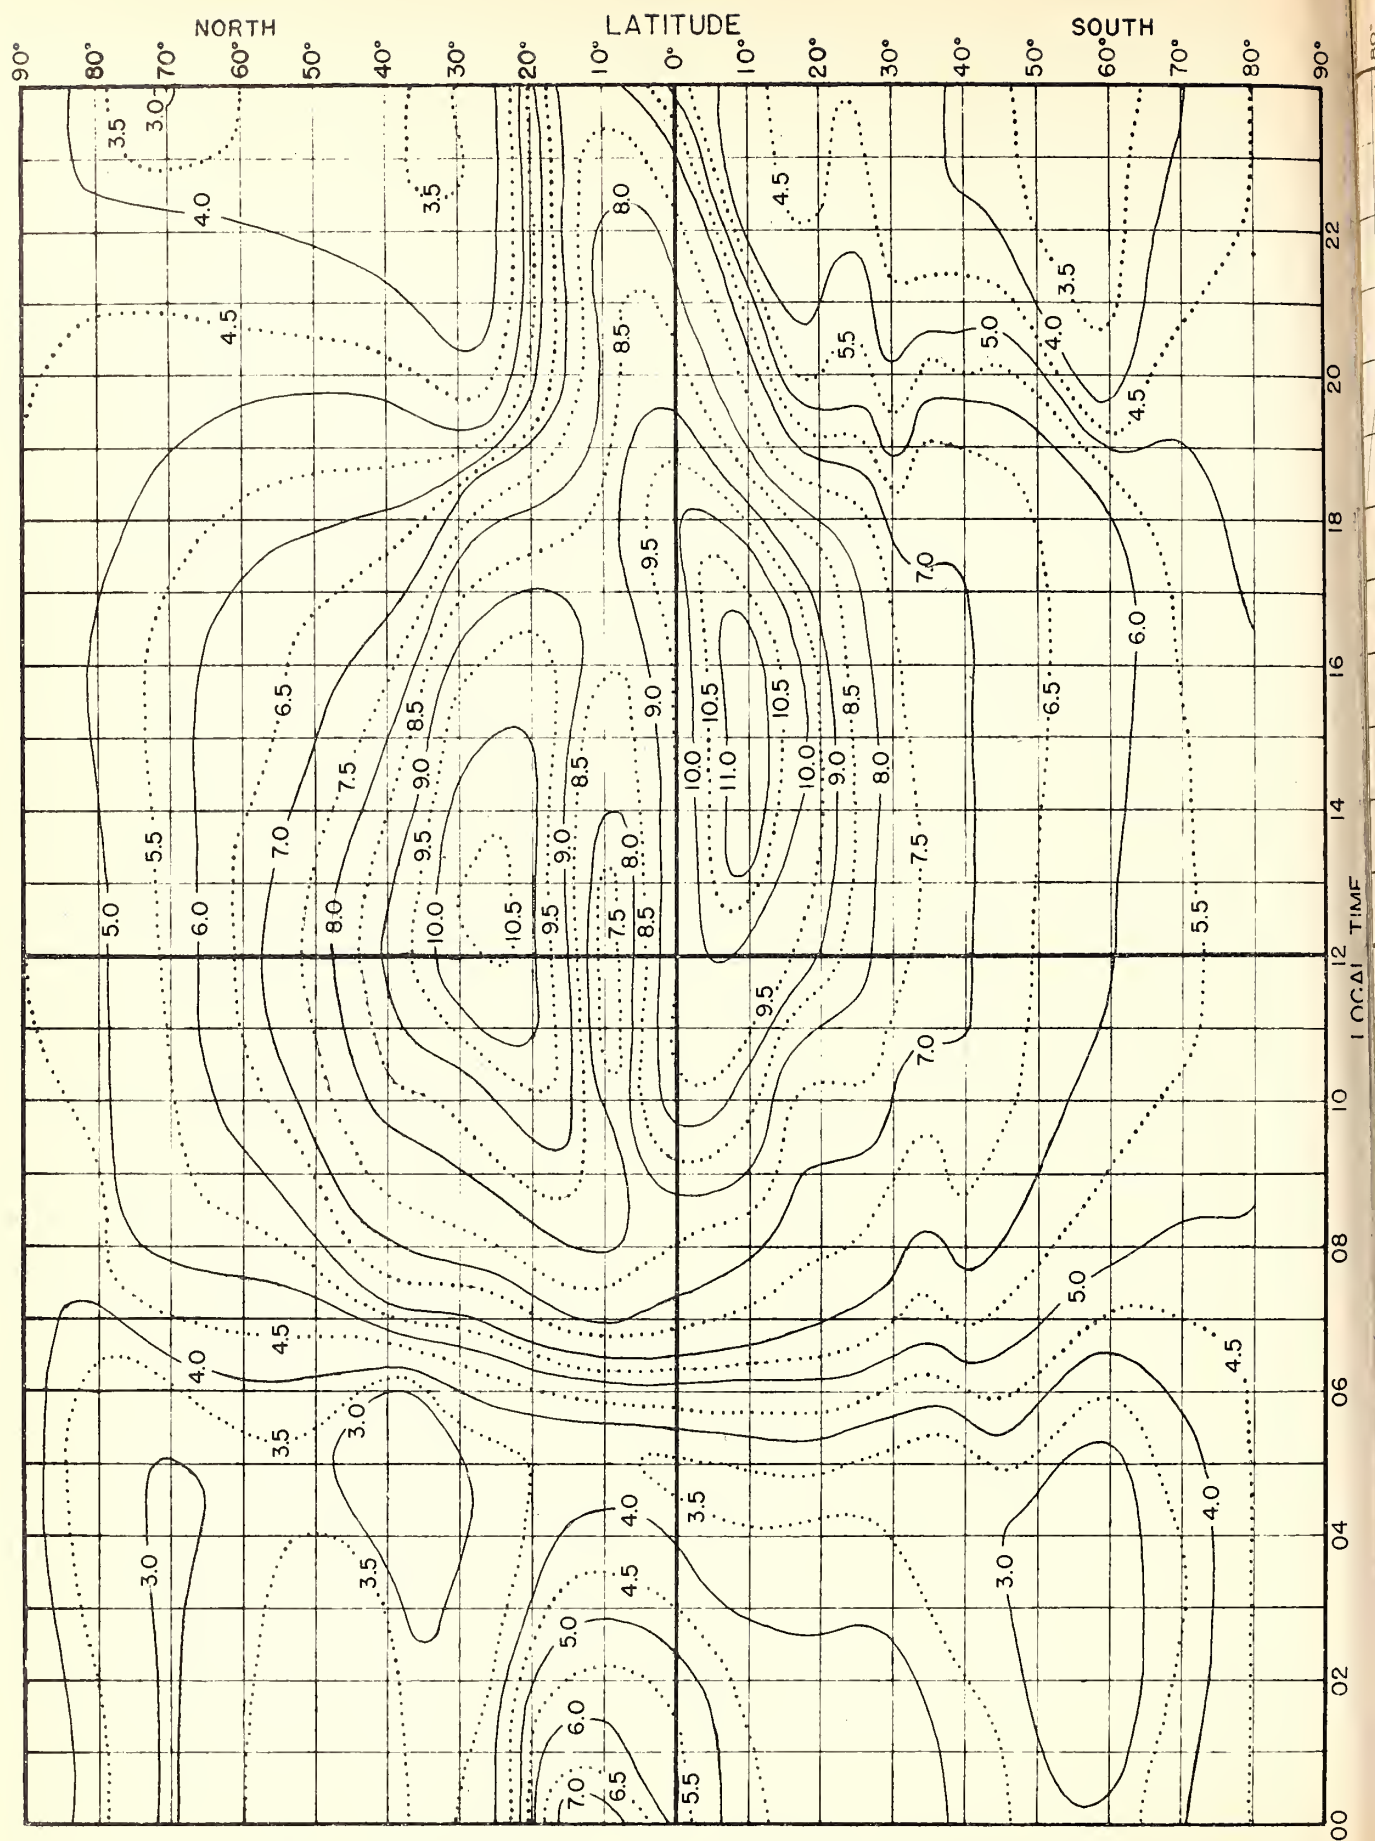


Fig. 9. F₂ ZERO-MUF, IN Mc, E ZONE, PREDICTED FOR MARCH 1945.

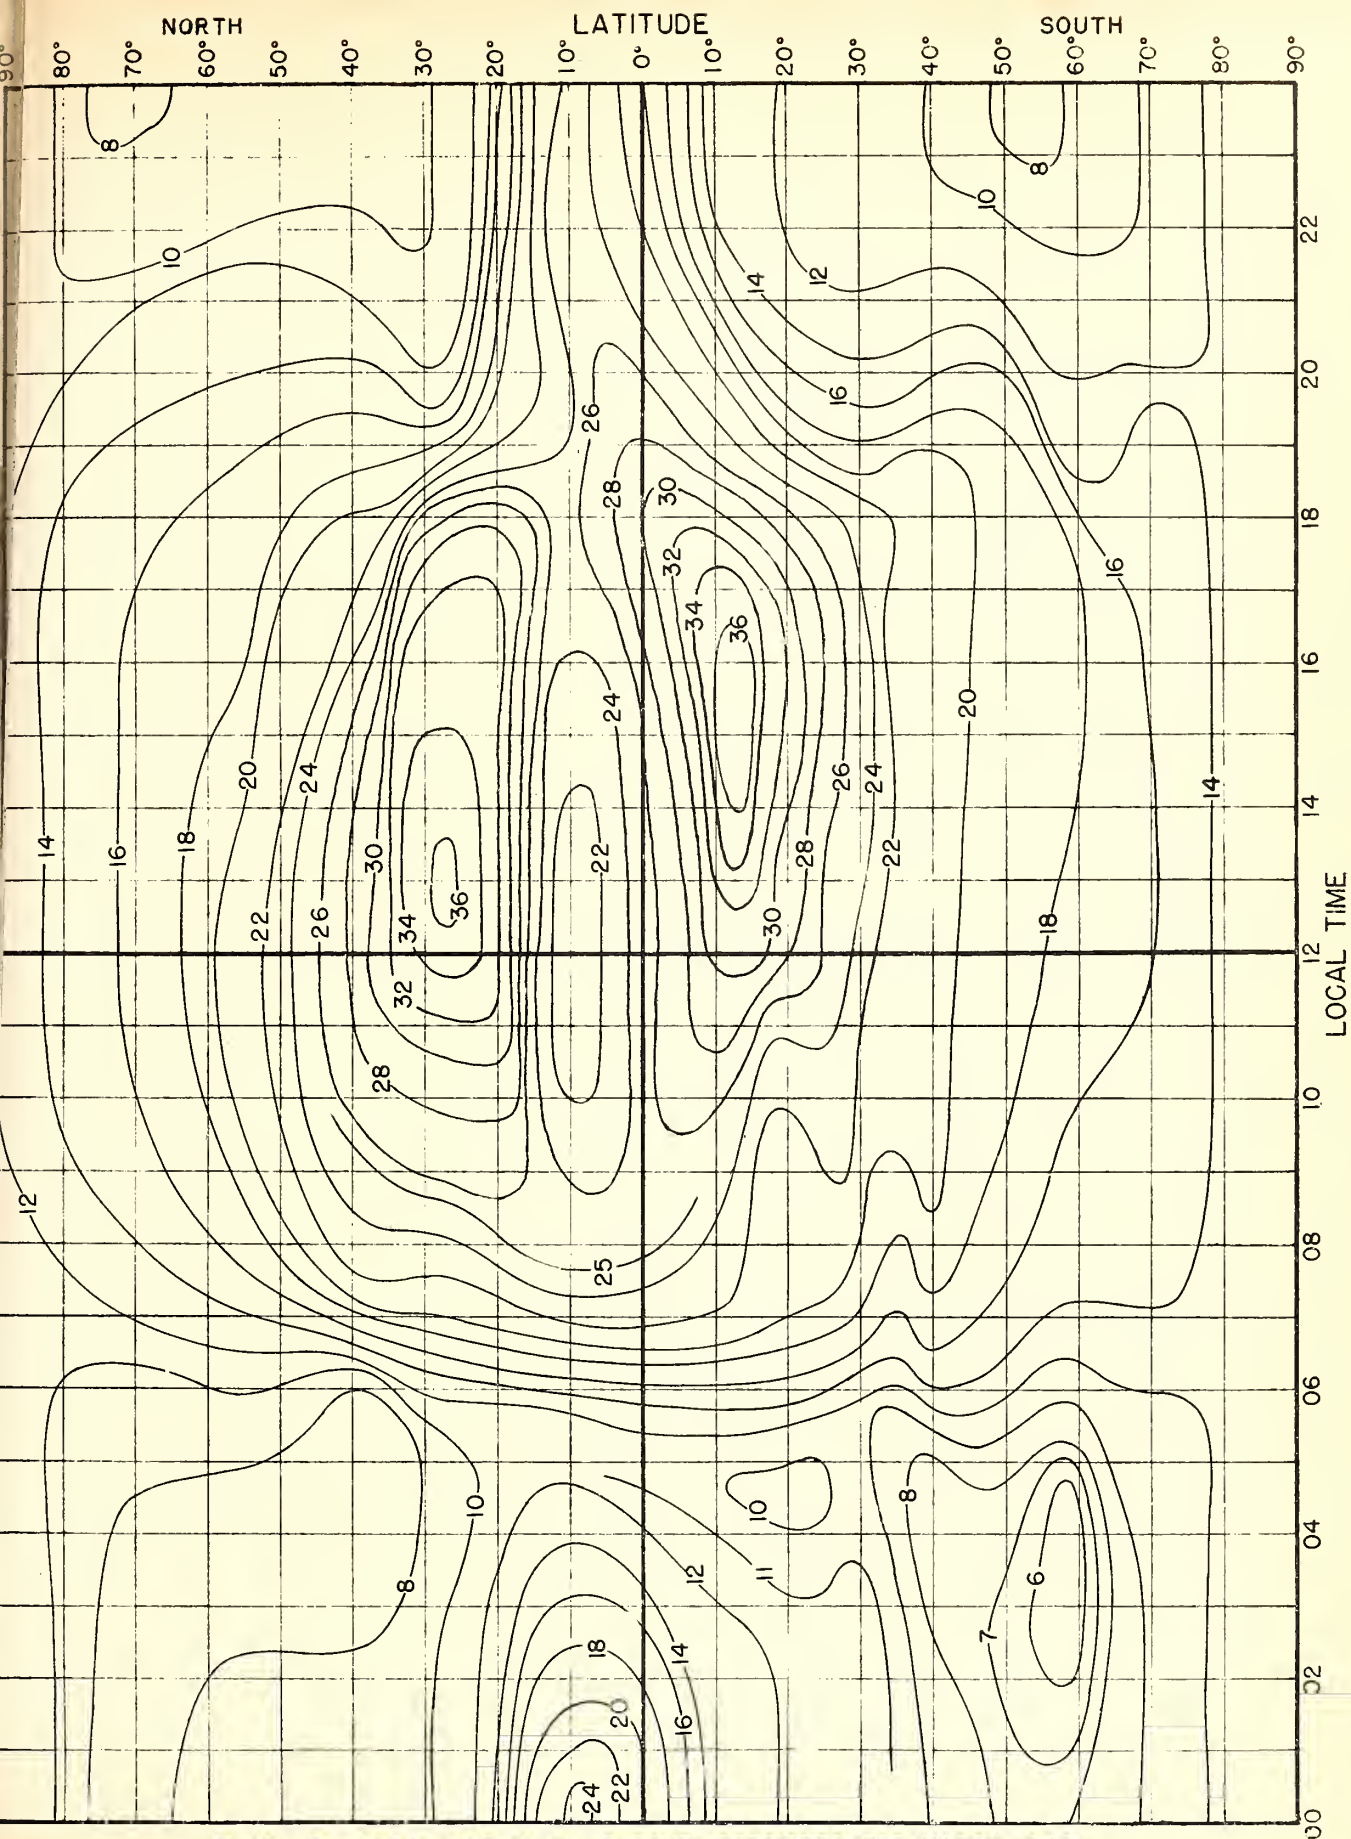


Fig. 10. F_2 4000-MUF, IN Mc, E ZONE, PREDICTED FOR MARCH 1945.

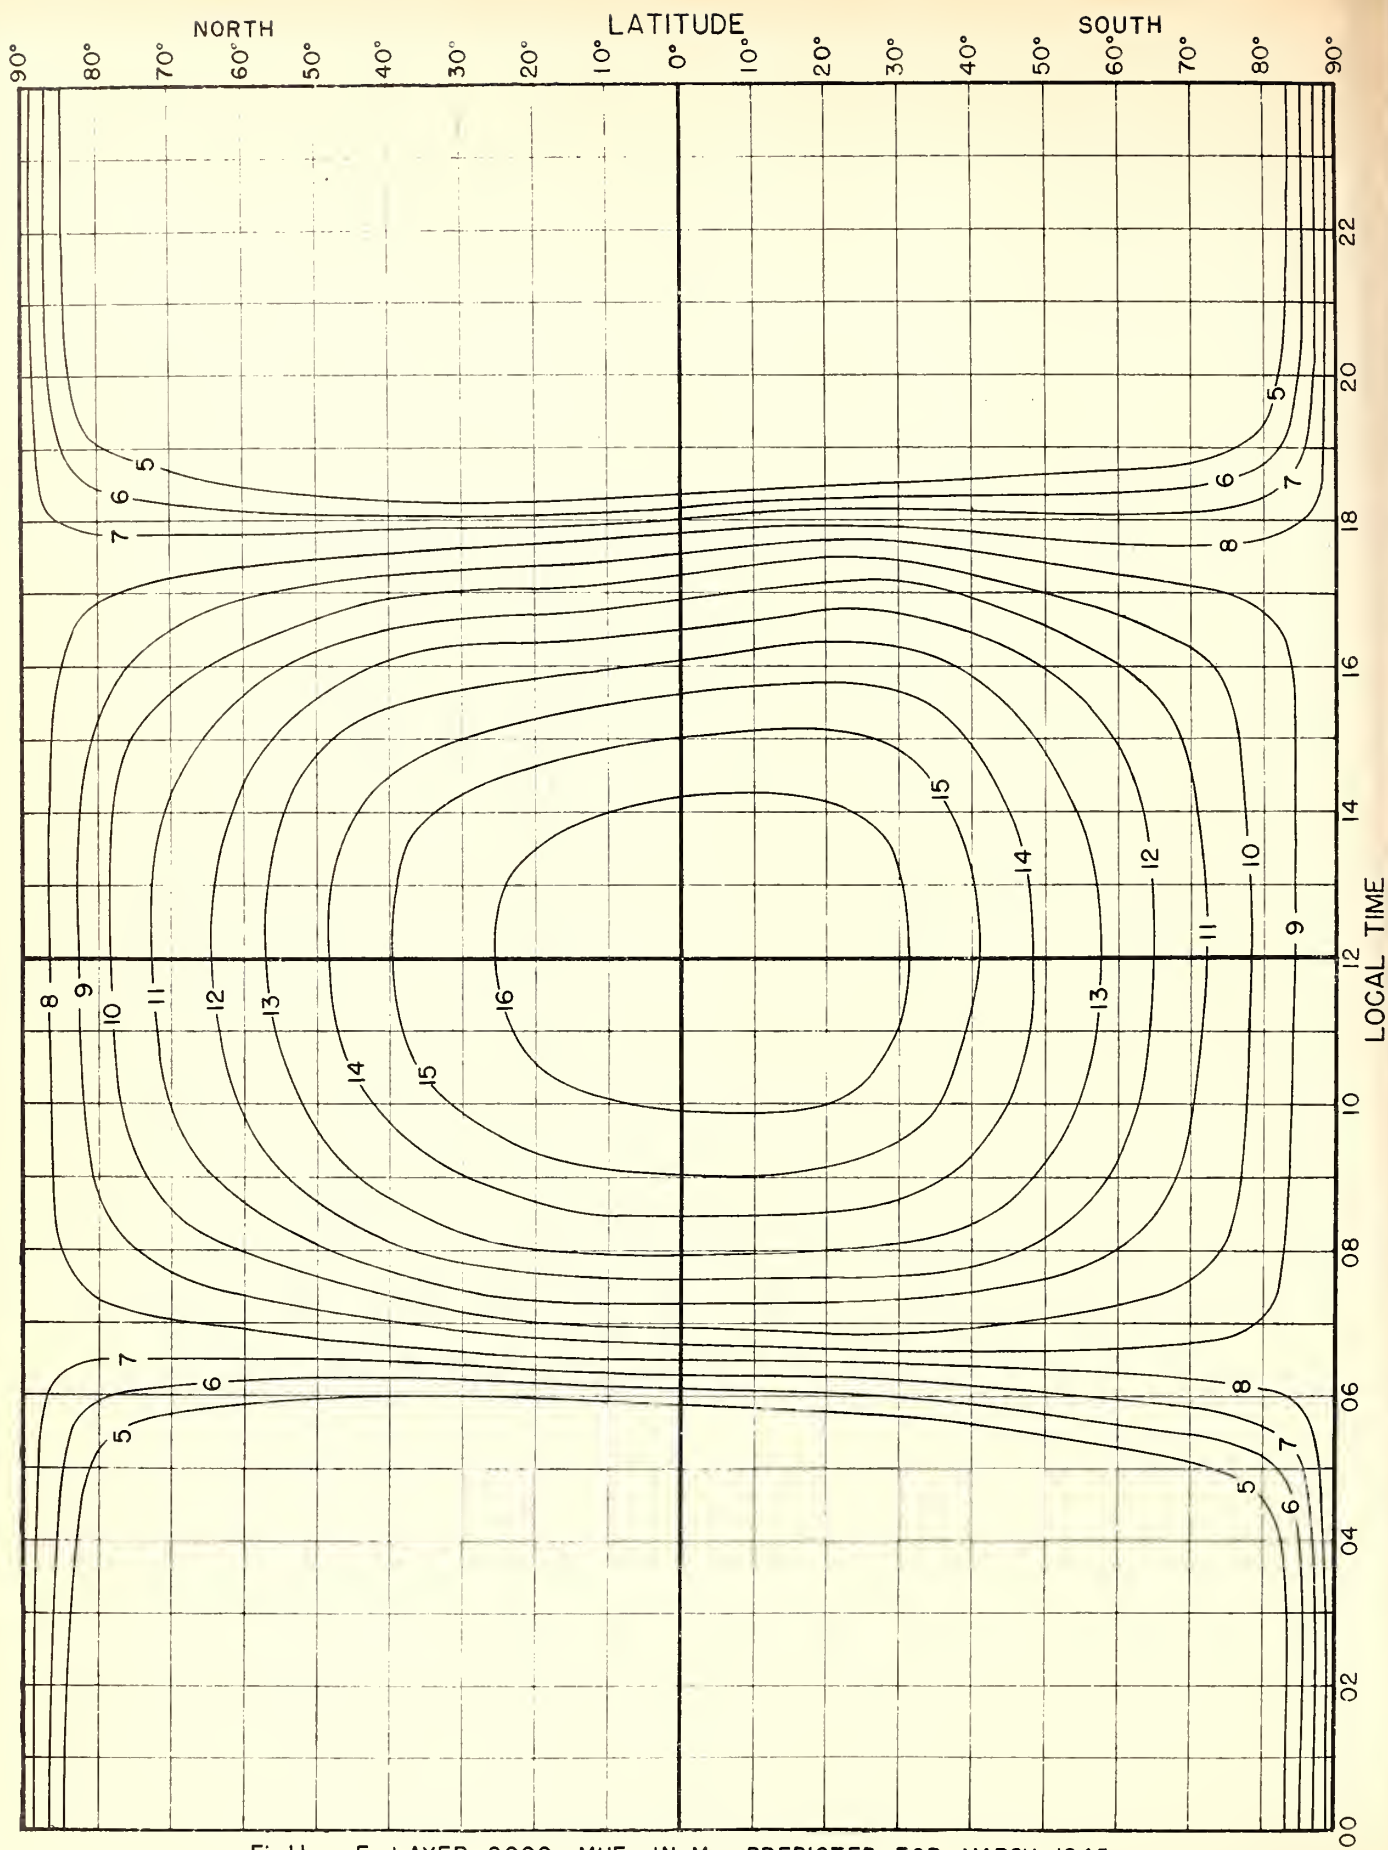


Fig.11. E-LAYER 2000-MUF, IN Mc, PREDICTED FOR MARCH 1945.

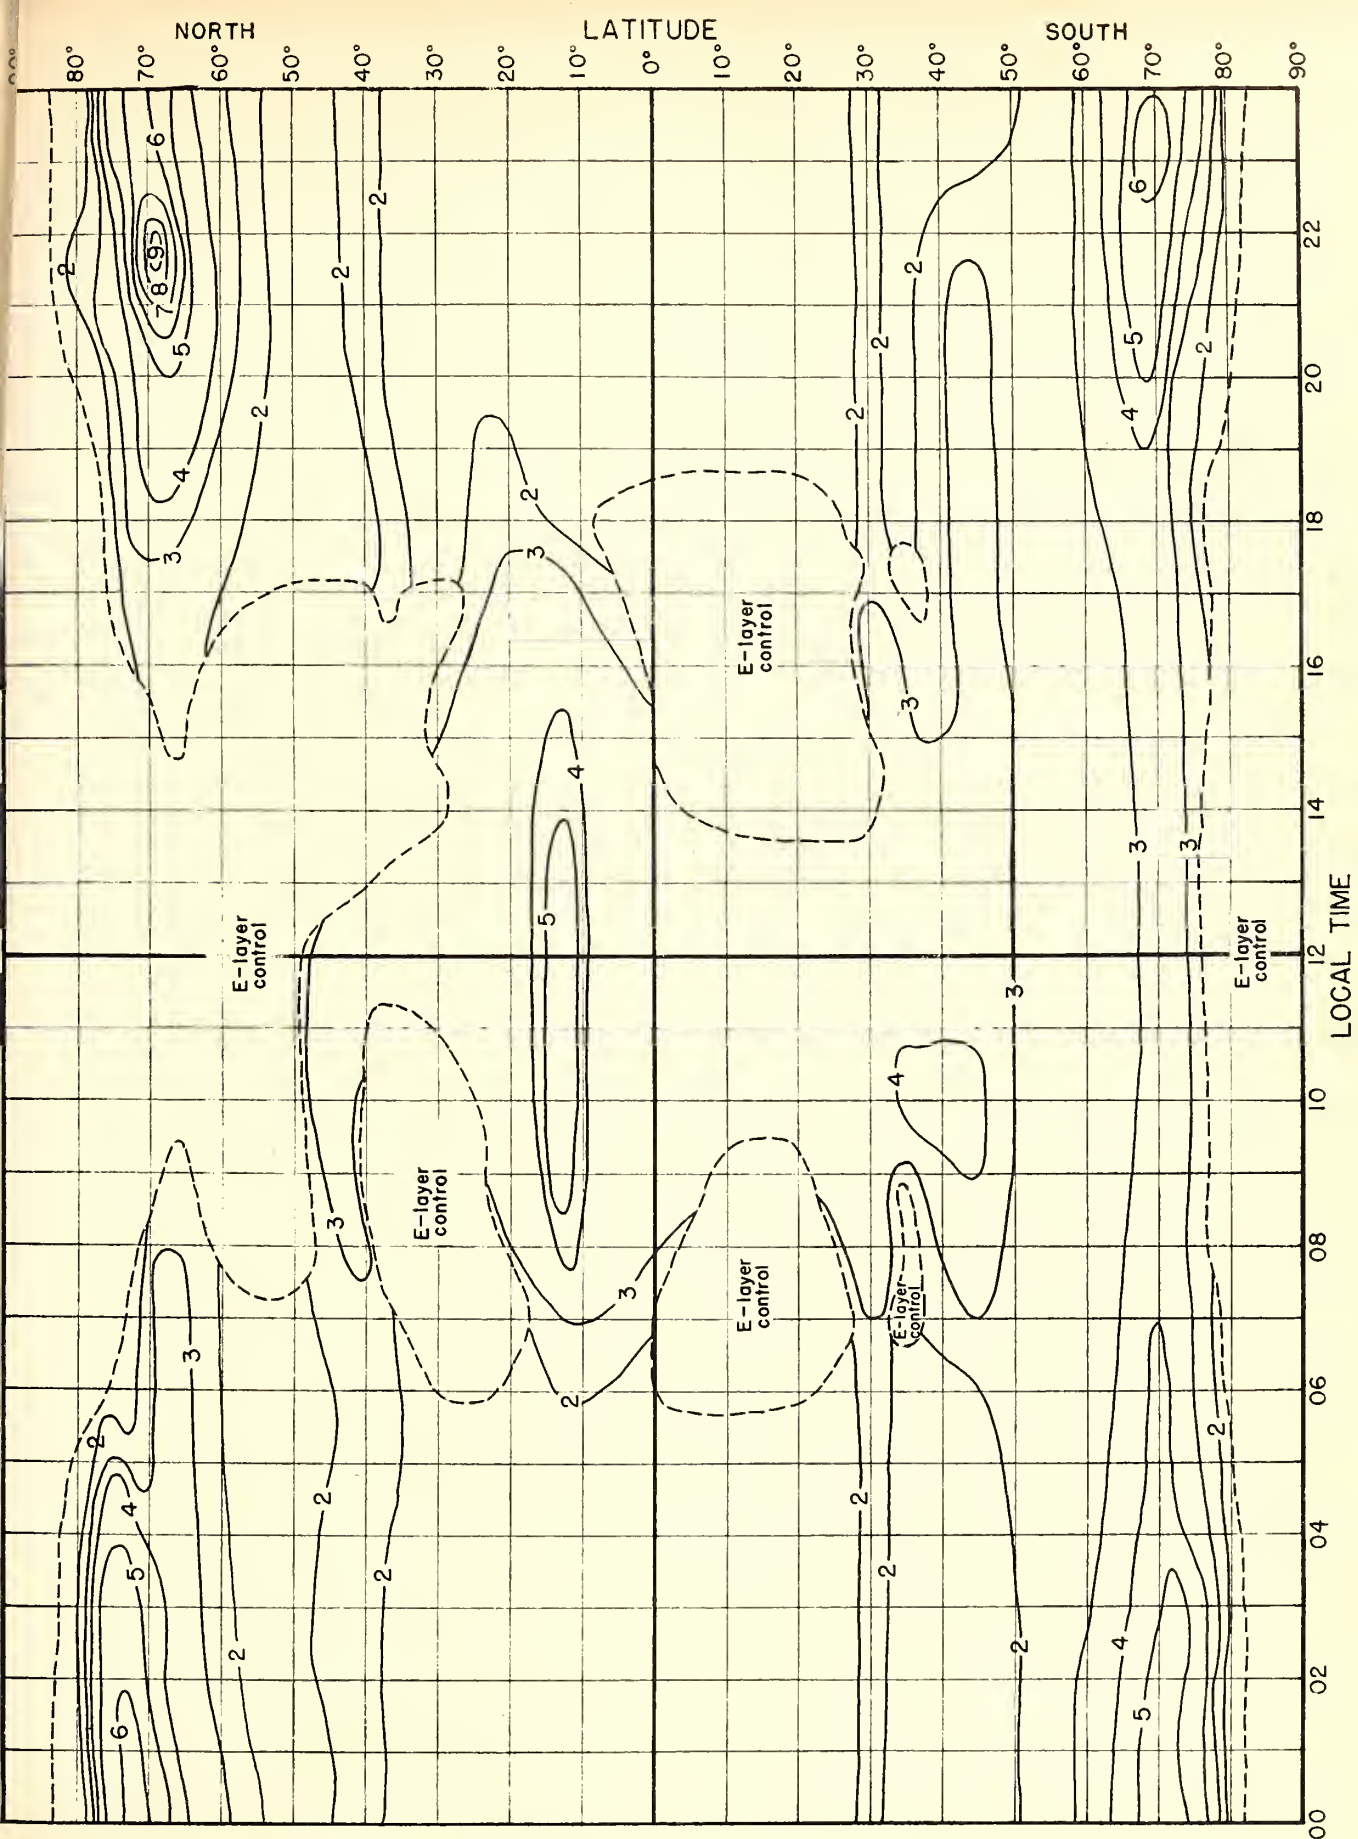


Fig.12. MEDIAN fE_s , IN Mc, PREDICTED FOR MARCH 1945

1 km = 0.62137 mile = 0.53961 naut. mi.
 1 mile = 1.60935 km = 0.86836 naut. mi.
 1 naut. mi. = 1.85325 km = 1.1516 mi.

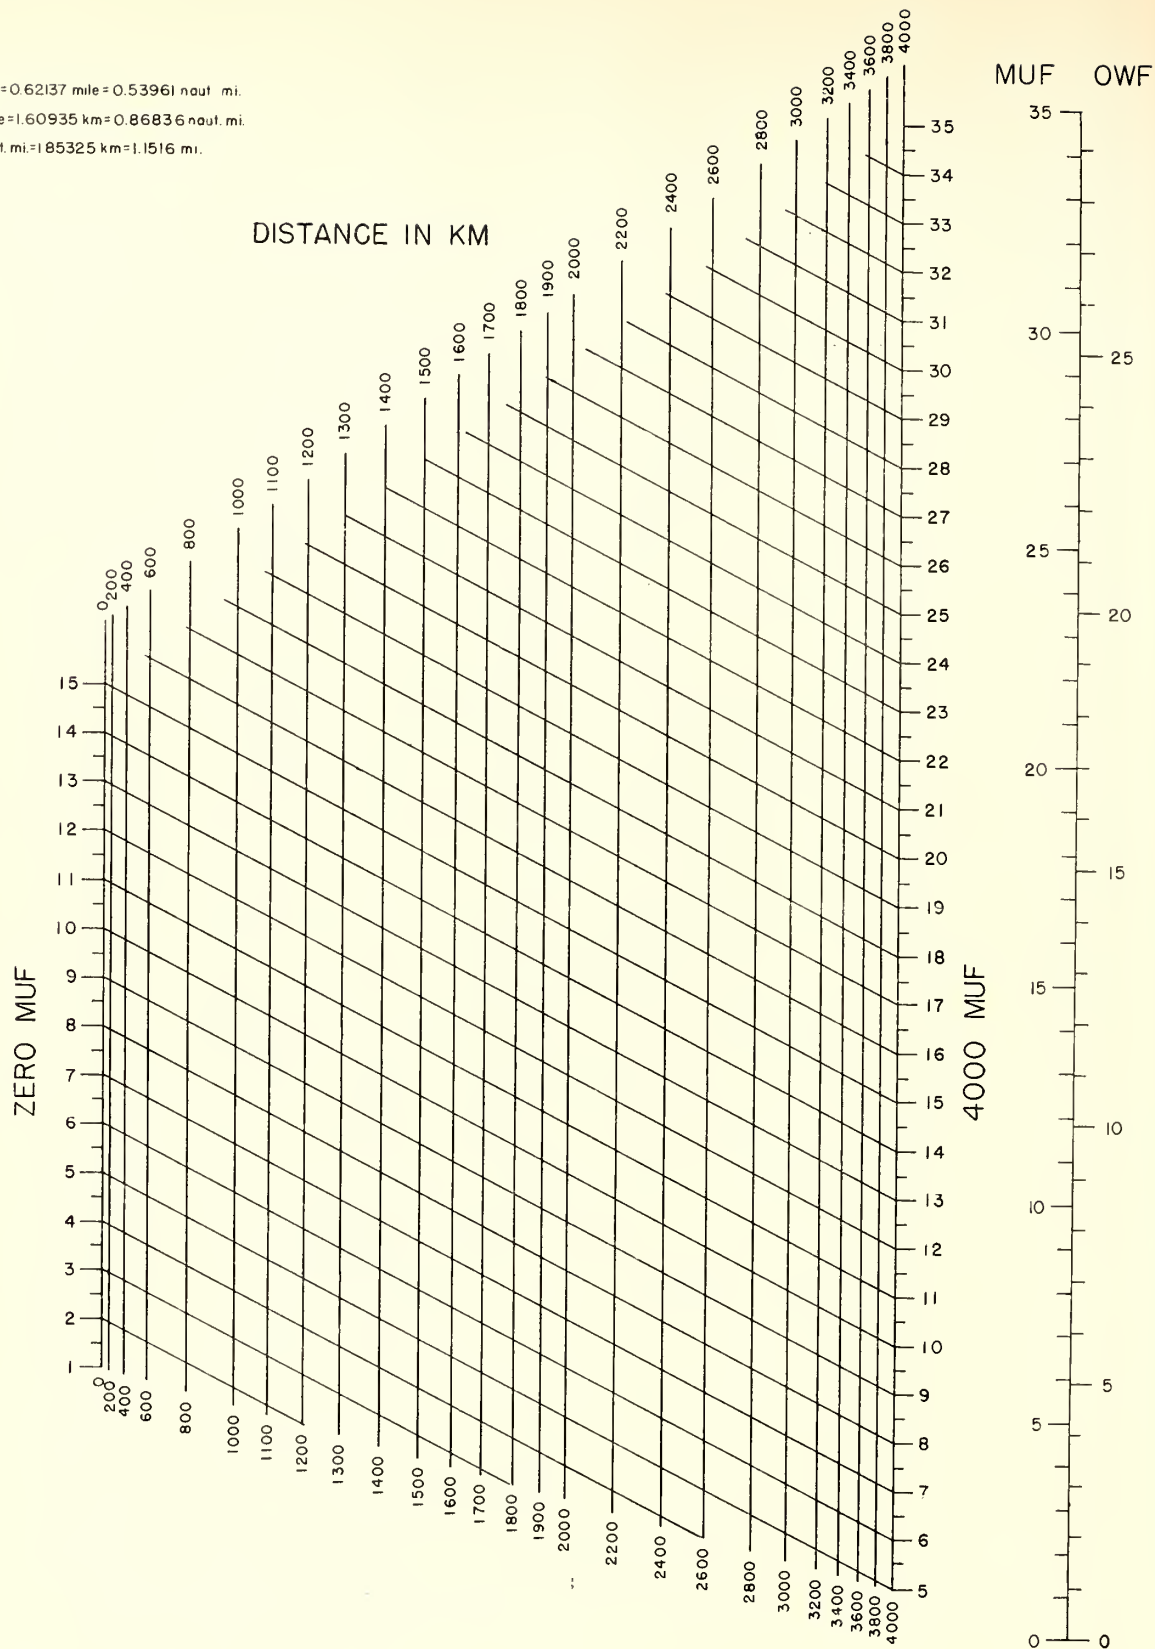


FIG. 13. NOMOGRAM FOR TRANSFORMING F_2 -ZERO-MUF AND F_2 -4000-MUF TO EQUIVALENT MAXIMUM USABLE FREQUENCIES AT INTERMEDIATE TRANSMISSION DISTANCES; CONVERSION SCALE FOR OBTAINING OPTIMUM WORKING FREQUENCIES.

2000-Km E muf,
Mc

1 km = 0.62137 mile = 0.53961 naut. mi.
1 mile = 1.60935 km = 0.86836 naut. mi.
1 naut. mi. = 1.85325 km = 1.1516 mi.

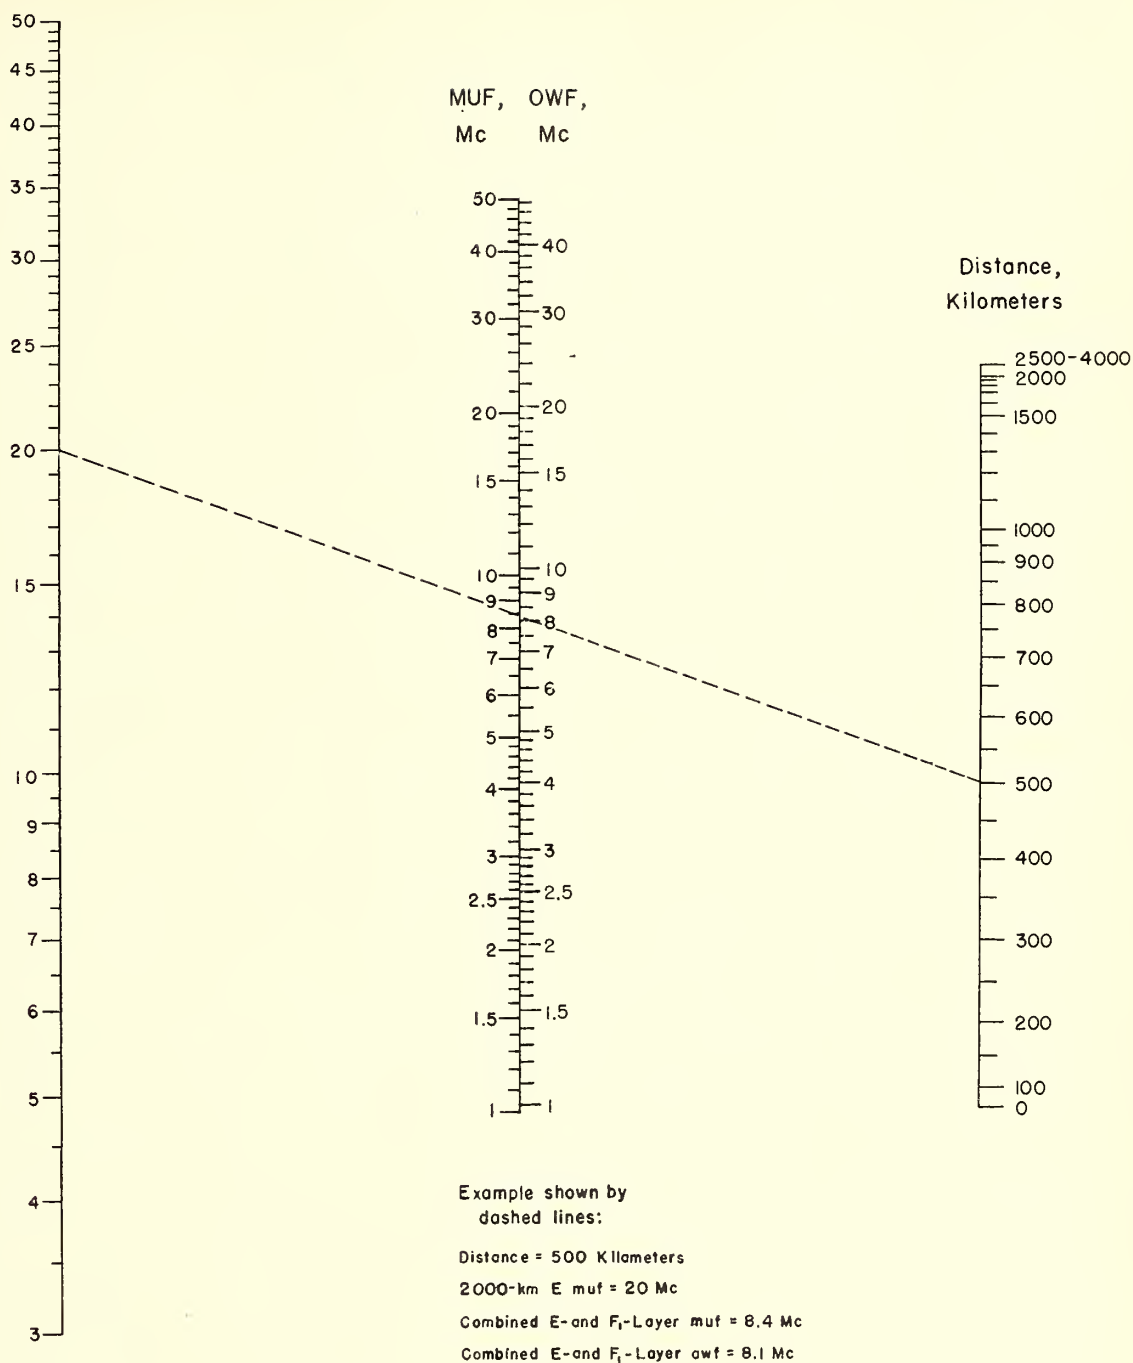


FIG. 14. NOMOGRAM FOR TRANSFORMING E-LAYER 2000-MUF TO EQUIVALENT MAXIMUM USABLE FREQUENCIES AND OPTIMUM WORKING FREQUENCIES DUE TO COMBINED EFFECT OF E LAYER AND F_1 LAYER AT OTHER TRANSMISSION DISTANCES.

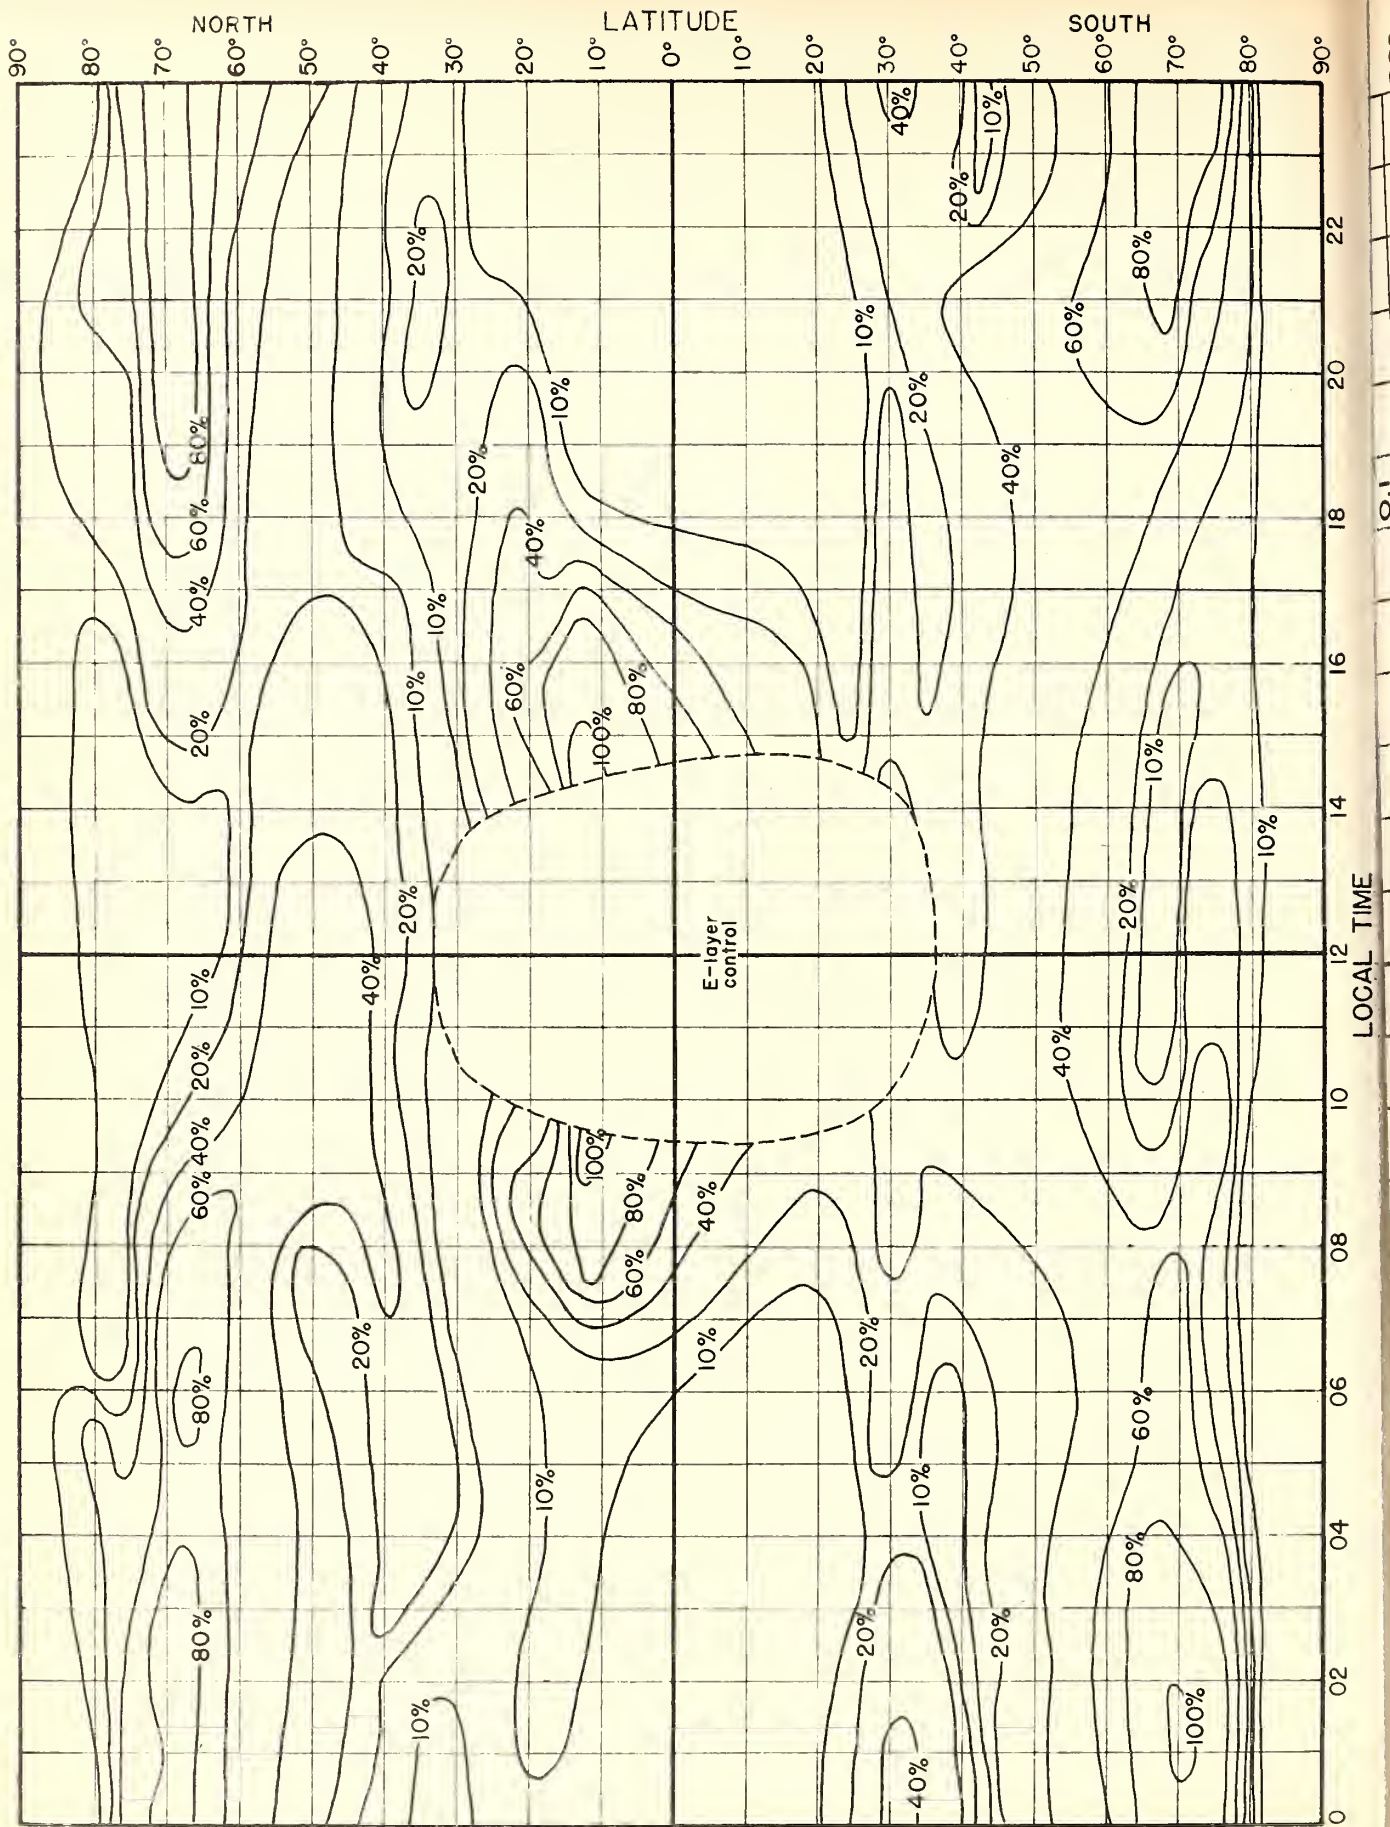


Fig. 15. PERCENTAGE OF TIME OCCURRENCE FOR E_s IN EXCESS OF 15 Mc, PREDICTED FOR MARCH, 1945.

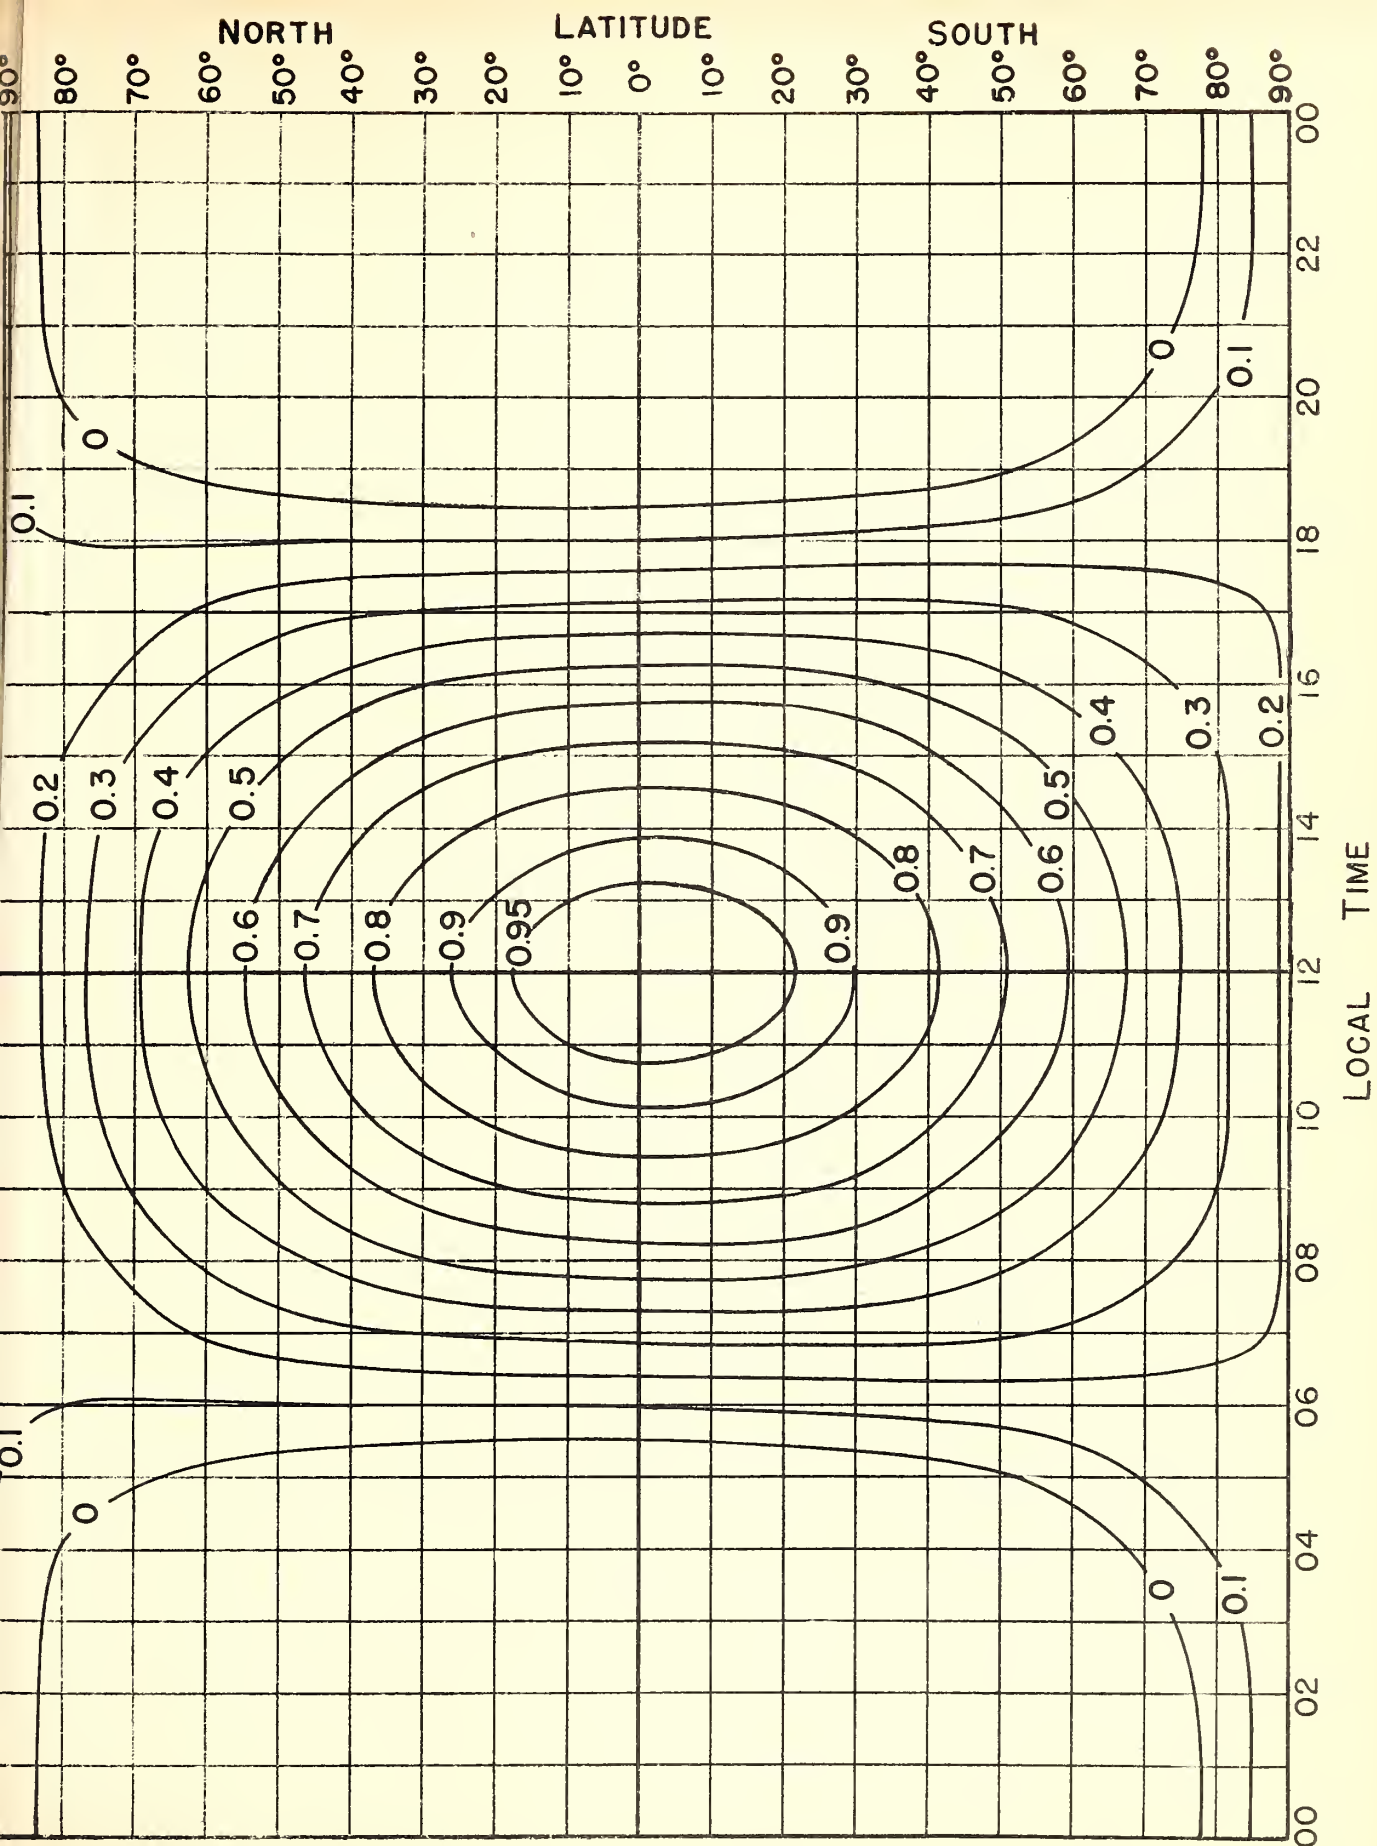


Fig.16 ABSORPTION INDEX CHART (EXCLUDING AURORAL ABSORPTION) FOR MARCH.

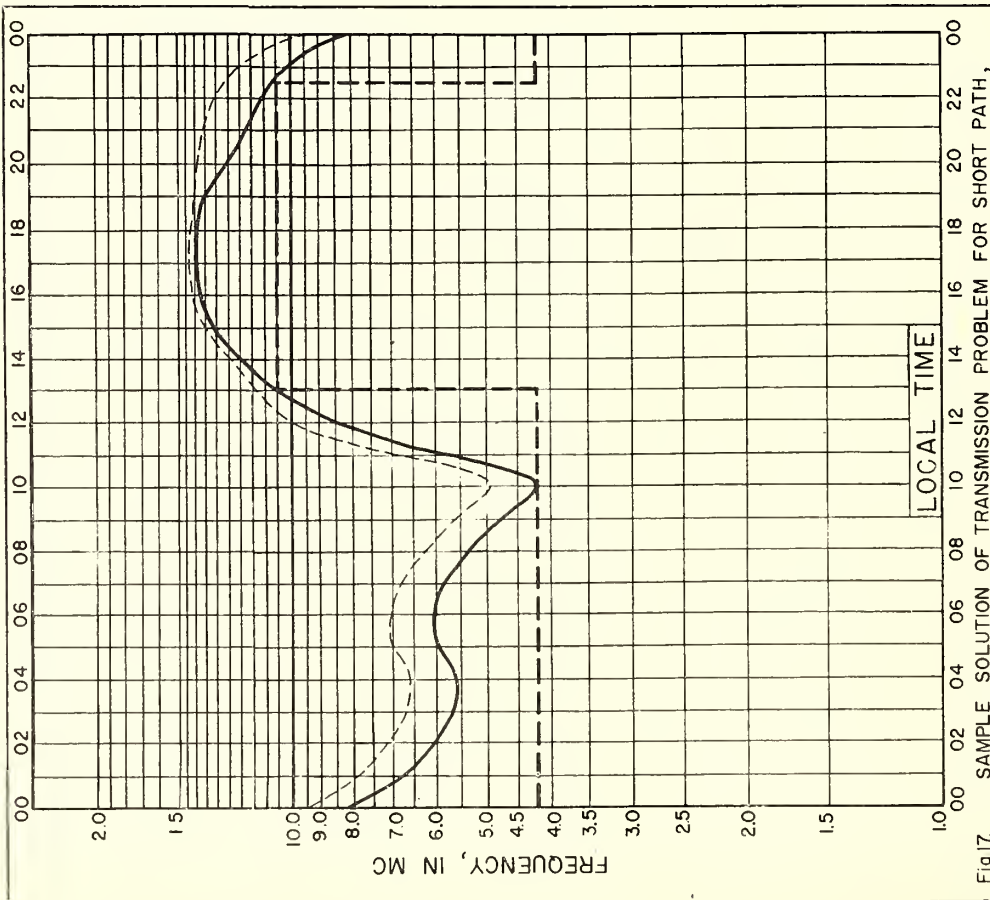


Fig 17. SAMPLE SOLUTION OF TRANSMISSION PROBLEM FOR SHORT PATH, MARCH 1945.

TRANSMISSION PATH: WASHINGTON, D.C. (39.0°N, 77.5°W) TO MIAMI, FLORIDA (25.7°N, 80.5°W)

---MUF — OWF ----SUGGESTED FREQUENCY USAGE

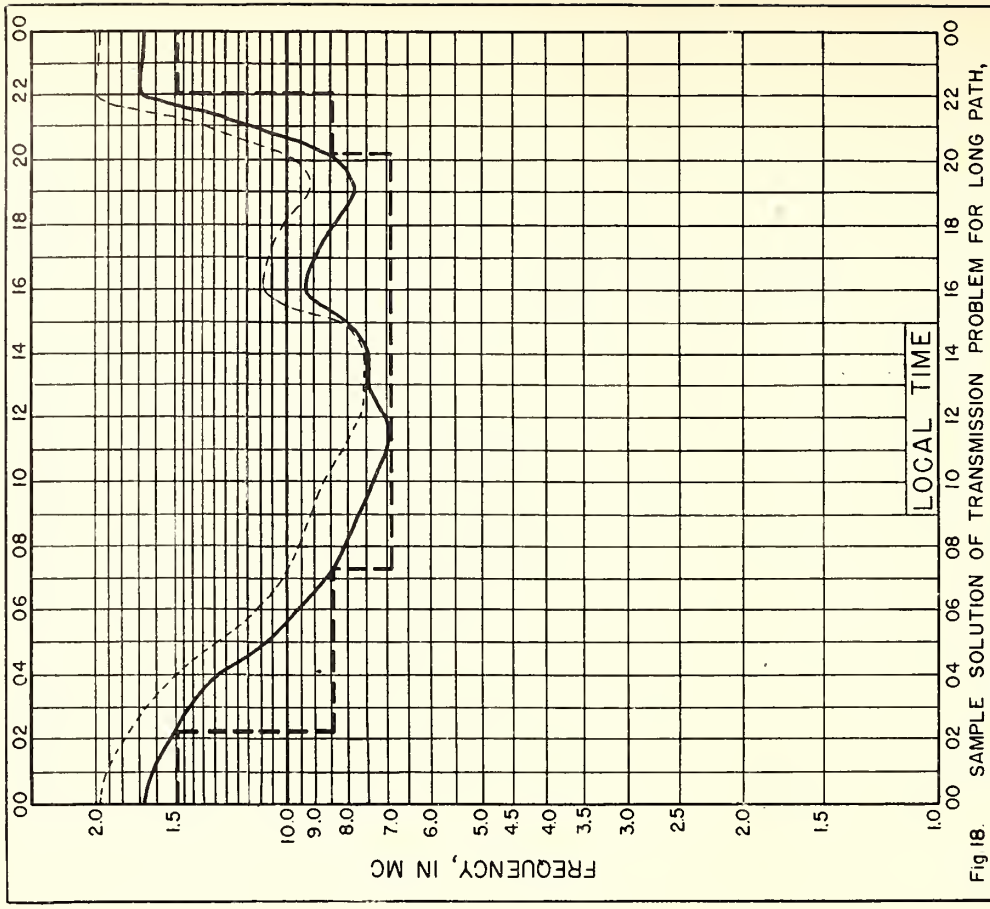


Fig 18. SAMPLE SOLUTION OF TRANSMISSION PROBLEM FOR LONG PATH, MARCH 1945.

TRANSMISSION PATH: MANILA, P.I., (14.6°N, 121.0°E) TO SAN FRANCISCO, CALIF. (37.8°N, 122.4°W)

---MUF — OWF ----SUGGESTED FREQUENCY USAGE

IRPL REPORTS

Daily:

Telephoned and telegraphed reports of ionospheric, solar, geomagnetic, and radio propagation data from various places.
Radio disturbance warnings.

Weekly:

IRPL-J. Radio Propagation Forecast.

Monthly:

IRPL-D. Basic Radio Propagation Conditions—Three months in advance.

IRPL-E. Radio Propagation Predictions—One month in advance.

IRPL-F. Ionospheric Data.

Bimonthly:

IRPL-G. Correlation of D. F. Errors with Ionospheric Conditions.

Quarterly:

IRPL-A. Recommended Frequency Bands for Ships and Aircraft in the Atlantic and Pacific.

IRPL-B. Recommended Frequency Bands for Submarines in the Pacific.

IRPL-K. Best Radio Frequencies for Aircraft and Ground Stations in the Atlantic.

IRPL-M. (WIMS APPENDIX N) Frequency Guide for Merchant Ships.

Semiannual:

IRPL-H. Frequency Guide for Operating Personnel.

Special Reports, etc.:

IRPL Radio Propagation Handbook, Part 1.

IRPL-C1 through C61. Reports and papers of the International Radio Propagation Conference, 17 April to 5 May 1944.

IRPL-R. Unscheduled reports:

R1. Maximum Usable Frequency Graph Paper.

R2 and R3. Obsolete.

R4. Methods Used by IRPL for the Prediction of Ionosphere Characteristics and Maximum Usable Frequencies.

R5. Criteria for Ionospheric Storminess.

R6. Experimental studies of ionospheric propagation as applied to a navigation system.

R7. Further studies of ionospheric propagation as applied to a navigation system.

R8. The Prediction of Usable Frequencies over a Path of Short or Medium Length, Including the Effects of Es.

IRPL-T. Reports on Tropospheric Propagation.

T1. Radar Operation and Weather. (Superseded by JANP 101.)

T2. Radio coverage and weather. (Superseded by JANP 102.)

