


U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
WASHINGTON

JHD:ANK
I-6

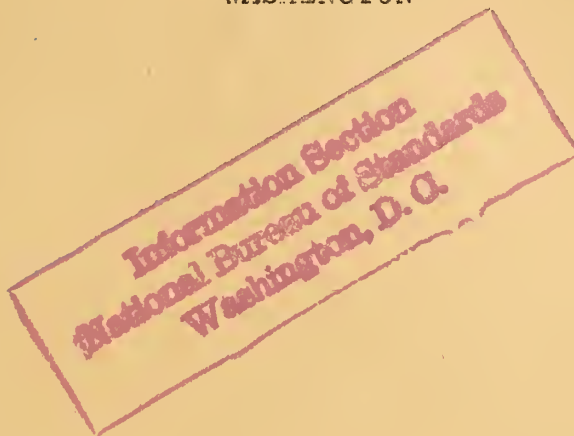

Letter
Circular
LC658

RADIO DISTANCE RANGES,
SUMMER 1941 AND WINTER 1941-42.

*LC 658 withdrawn
from circulation
Jan. 2, 1942. LC 658
now confidential:
Per E. C. Crittender
Jan. 0-7, 1/2/42*

August 5, 1941.

August 5, 1941.

RADIO DISTANCE RANGES,
SUMMER 1941 AND WINTER 1941-42.

The distances over which practical radio transmission is possible are very different at different times of day, seasons, etc., and for different frequencies of the radio waves. This Letter Circular presents the results of experience in radio communication, by means of the four graph sheets attached, at frequencies up to 30 megacycles.

Radio wave transmission takes place principally by the propagation of a "ground wave" along the ground and a "sky wave" reflected from the ionosphere. The ionosphere is the electrically conducting (ionized) region in the upper atmosphere, more than 30 miles above the earth's surface. As the radio waves travel out along the ground or in the atmosphere, their energy is reduced below what it would be if no causes of energy absorption existed. The absorption is due to the electrical resistance of materials in the earth and to ionized particles in the atmosphere. The amount of the absorption determines the maximum distances at which waves of various frequencies can be received, for given reception conditions at the receiver.

The Ground Wave

The distance range of the ground wave is in general great at low frequencies (below about 500 kilocycles per second), and decreases as the frequency is increased, because the ground-wave absorption increases with frequency. The distance range of the ground wave is different for earth of different conductivities and dielectric constants, but is fairly constant with time over a given transmission path at a given frequency.

The Sky Wave

The distance range of the sky wave is not constant with time, frequency, or path. As the graphs show, it is a minimum in approximately the broadcast band of frequencies (550 to 1600 kc), increasing with change of frequency in either direction. In the daytime the absorption of the sky wave is so great that there is almost no sky wave at frequencies from somewhat below to somewhat above the broadcast frequency band, particularly in

(over)

the summer. Hence sky-wave propagation in the daytime (particularly in the summer), is only appreciable in the lower and higher frequency ranges. During the night, however, sky-wave propagation takes place throughout the entire range of frequencies.

The large variations of sky-wave propagation result from conditions and changes in the ionization of the ionosphere. Besides daily variation of daylight and darkness, factors such as latitude, season, magnetic storms, and solar disturbances, have been found to have effects upon this ionization. These changes in ionization result in variations in the distance range of radio waves from hour to hour, day to day, season to season, and year to year.

Detailed information about sky waves and the ionosphere is given in another Letter Circular of the Bureau, "Radio transmission and the ionosphere".

Distance-Range Graphs

Distance range can be calculated under specified conditions, but such calculations are difficult and complex, particularly for the sky waves. Thus in practice we usually must use the accumulated results of experience. The attached graphs summarize experience and give average distance ranges as determined by numerous experimenters. There are considerable variations from the average for particular paths and times. The land ground-wave graphs are for land of average conductivity. For such land the distance range for a given frequency is roughly the same as the distance range over sea-water for ten times that frequency.

Above a certain frequency (which this year is about 4000 kc/s at night and higher in the daytime; see attached graphs), there is for each frequency a distance within which none of the regular sky wave is reflected back to the earth by the ionosphere. There is a zone, with an inner and outer boundary, in which there is no regular radio reception. This is called the skip zone and its outer boundary is called the skip distance.

Thus, in the right-hand portion of each of the attached graphs, for a specified frequency (e.g., 20 Mc/s, Fig. 3) the waves are receivable at distances from 0 up to the ground-wave range (different for land and ocean), are not receivable from there up to the distance given by the line marked "skip distance", and are receivable from there up to the "distance range" lines. The skip-distance line also gives, for any distance, the maximum usable frequency except for sporadic transmission.

Sporadic Transmission

In Figs. 1 and 2, part of the right-hand portion is shaded and marked "Irregular Sporadic". This means that at the distances and frequencies indicated there is sporadic radio transmission at irregular times, even though in the skip zone. The times at which such transmission occurs are not predictable; it is most prevalent May to August, and occurs particularly in the late afternoon, the evening, and the forenoon, but may occur at any time of day or night. It is due to reflection from peculiarly ionized patches in the E layer of the ionosphere, and not the regular reflection (from the extended layers of the ionosphere) which accounts for the regular transmission. Scattered reflections from the ionosphere, which are fluttering and blurred and usually weak, are frequently receivable in the skip zone.

Basis of Graphs

The scales of abscissas and ordinates on the attached graphs are cubical (i.e., numbers shown are proportional to cube of distance along scale, or, distance along scale is proportional to cube root of numbers). This was chosen because it spaces the data satisfactorily. A linear scale would crowd the low values too much and a logarithmic scale would crowd the high values too much.

The attached graphs show the limits of distance over which practical radio communication is possible, both radio-telegraph (CW) and radio telephone (phone). They are based on the lowest field intensity which permits practical reception in the presence of average background interference or noise. For the broadcast frequencies this does not mean satisfactory program reception. Field intensities required for CW reception were taken to be about one-tenth of those required for phone reception. The limiting field intensity is different at different frequencies and times. The following table gives limiting field intensity values typical of those used in determining the distance ranges, based on data in a number of papers listed in References at end hereof. This assumes the use of a good receiving set.

Table 1. Average Field Intensities Required for
Good Radio-Telephone Reception

	0.1 Mc	1.0 Mc	5.0 Mc	10.0 Mc
Summer day	60 $\mu\text{v}/\text{m}$	10 $\mu\text{v}/\text{m}$	10 $\mu\text{v}/\text{m}$	3 $\mu\text{v}/\text{m}$
Summer night	170	90	15	1
Winter day	25	1	2	1
Winter night	100	15	4	1

Limitations of Graphs

When atmospheric ("static") or other sources of interference are great, e.g., in the tropics, larger received field intensities are required and the distance ranges are less. The graphs assume the use of one kilowatt radiated power, and non-directional antennas. For greater power the distance ranges will be somewhat greater. For transmission over a given path, received intensity is proportional to the square root of radiated power, but there is no simple relation between distance range and either radiated power or received field intensity.

The day graphs are based on noon conditions and the night graphs are based on midnight conditions. In a general way, there is progressive change from one to the other, but with some tendency for day conditions to persist through dusk, and night conditions to persist through dawn. The conditions of spring and autumn are intermediate between those of summer and winter, autumn resembling winter somewhat more than summer. Information is given for each month and for all times of day in the summaries regularly published by the Bureau in the Proceedings of the Institute of Radio Engineers and QST.

The attached graphs are based principally upon data for the latitude of Washington, but serve as a guide for transmission anywhere in the temperate zones. They are not as accurate for polar or equatorial latitudes.

In general, the distance ranges for paths which lie partly in day and partly in night portions of the globe are intermediate between those shown in the day and night graphs, for the range of frequencies which can be used both day and night. For paths which cross the sunset line in summer, the usable frequencies will be about the same as the usable summer day frequencies. For paths across the sunset line in winter, the usable frequencies will be a little higher than the night frequencies shown in graphs. For transmissions across the sunrise line, both summer and winter, the usable frequencies will be a little lower than the night frequencies shown in graphs. Frequently the conditions of the ionosphere on the light and dark sides of sunrise are widely different. Under such conditions it is often so difficult to transmit across the sunrise line that it is almost a barrier to high-frequency radio communication.

The attached graphs give distance ranges for the current year only. They change from year to year because of changes of ionization in the ionosphere. These changes are caused by the changing ultraviolet radiation from the sun in an approximate eleven-year cycle. The graphs are therefore revised each six months.

The distance ranges given in the graphs are the distances for good intelligible reception; they are not the limits of distance at which interference can be caused. A field intensity sufficient to cause troublesome interference may be produced at a much greater distance than the maximum distance of reliable reception.

Users of this pamphlet are invited to send the Bureau data that would be useful in revising or extending it. Address National Bureau of Standards, Washington, D.C.

References

A few selected references, for further information, are given here. See also the Bureau's Letter Circular, referred to above, "Radio transmission and the ionosphere".

Radio extension of the telephone system to ships at sea. H. W. Nichols and L. Espenschied. Proc.I.R.E. 11, 193 (1923).

Report on measurements made on signal strength at great distances during 1922 and 1923 by an expedition sent to Australia. H. J. Round, T. L. Eckersley, K. Tremellen and E. C. Lunnon. J.I.E.E. 63, 933 (1925).

Transatlantic radio telephone transmission. Lloyd Espenschied, C. W. Anderson, and Austin Bailey. Proc.I.R.E. 14, 7 (1926).

Some measurements of short wave transmission. R. A. Heising, J. C. Schelleng, and G. C. Southworth. Proc.I.R.E., 14, 613 (1926).

Short wave commercial long distance communication. H. E. Hallborg, L. A. Briggs, and C. W. Hansell. Proc.I.R.E. 15, 467 (1927).

The diurnal and seasonal performance of high frequency radio transmission over various long distance circuits. M. L. Prescott. Proc.I.R.E. 18, 1797 (1930).

Field strength measurements of short wave transmission. T. L. Eckersley. The Marconi Review, p.1 of May-June (1931).

The propagation of short waves over the North Atlantic. C. R. Burrows. Proc.I.R.E. 19, 1634 (1931).

High-frequency atmospheric noise. R. K. Potter. Proc. I.R.E. 19, 1731 (1931).

Contribution à l'étude des lois de propagation des ondes Hertiennes dans la gamme de 150 à 1500 kc/s. (Contribution to study of laws of Hertzian wave propagation from 150 to 1500 kilocycles). International Broadcasting Union. Document No. 198 of the 1931 meeting of the C.C.I.R. at Copenhagen.

Some studies of radio transmission over long paths, made on the Eyrð Antarctic Expedition. L. V. Berkner. Bureau of Standards Journal of Research, 8, 265 (1932); RP412.

An estimate of the frequency distribution of atmospheric noise. R. K. Potter. Proc.I.R.E. 20, 1512 (1932).

Radio field intensity measurements at frequencies from 285 to 5400 kilocycles per second. S. S. Kirby and K. A. Norton. Bureau of Standards Journal of Research 8, 463 (1932); RP429.

North Atlantic ship-shore radiotelephone transmission during 1930 and 1931. C. W. Anderson. Proc.I.R.E. 21, 81 (1933).

Short-wave transmission to South America. C. R. Burrows and E. J. Howard. Proc.I.R.E. 21, 102 (1933).

North Atlantic ship-shore radiotelephone transmission during 1932-1933. C. W. Anderson. Proc.I.R.E. 22, 1215 (1934).

An analysis of continuous records of field intensity at broadcast frequencies. K. A. Norton, S. S. Kirby, and G. H. Lester. J. Research NBS 11, 897 (1934); RP752. Proc.I.R.E. 23, 1183 (1935).

Terrestrial magnetism and its relation to worldwide short-wave communications. H. E. Hallborg. Proc.I.R.E. 24, 455 (1936).

The propagation of radio waves over the surface of the earth and in the upper atmosphere. K. A. Norton. Proc.I.R.E. 24, 1367 (1936).

Characteristics of the ionosphere and their application to radio transmission. T. D. Gilliland, S. S. Kirby, N. Smith, and S. E. Reymer. J. Research NBS 13, 645 (1937); RP1001. Proc.I.R.E. 25, 823 (1937).

The ionosphere and radio transmission, _____. National Bureau of Standards. Published each month in Proc.I.R.E., starting with the Sept. 1937 issue.

Trends of characteristics of the ionosphere for half a sunspot cycle. N. Smith, T. R. Gilliland, and S. S. Kirby. J. Research NBS 21, 835-845 (1938) (RP1159).

Report of Committee on Radio Wave Propagation. Proc.I.R.E. 26, 1193 (1938).

Application of graphs of maximum usable frequency to communication problems. N. Smith, S. S. Kirby, and T. R. Gilliland. J. Research NBS 22, 81 (1939); RP1167.

The role of the ionosphere in radio wave propagation. J. H. Dellinger. AIEE Trans. 56, 803-822 (1939).

Predictions of useful distances for amateur radio communication, _____. National Bureau of Standards. Published quarterly in QST, starting with the Sept. 1940 issue.

Attached:

- Fig. 1. Summer 1941, Day, (1 kw).
- Fig. 2. Summer 1941, Night, (1 kw).
- Fig. 3. Winter 1941-42, Day, (1 kw).
- Fig. 4. Winter 1941-42, Night, (1 kw).

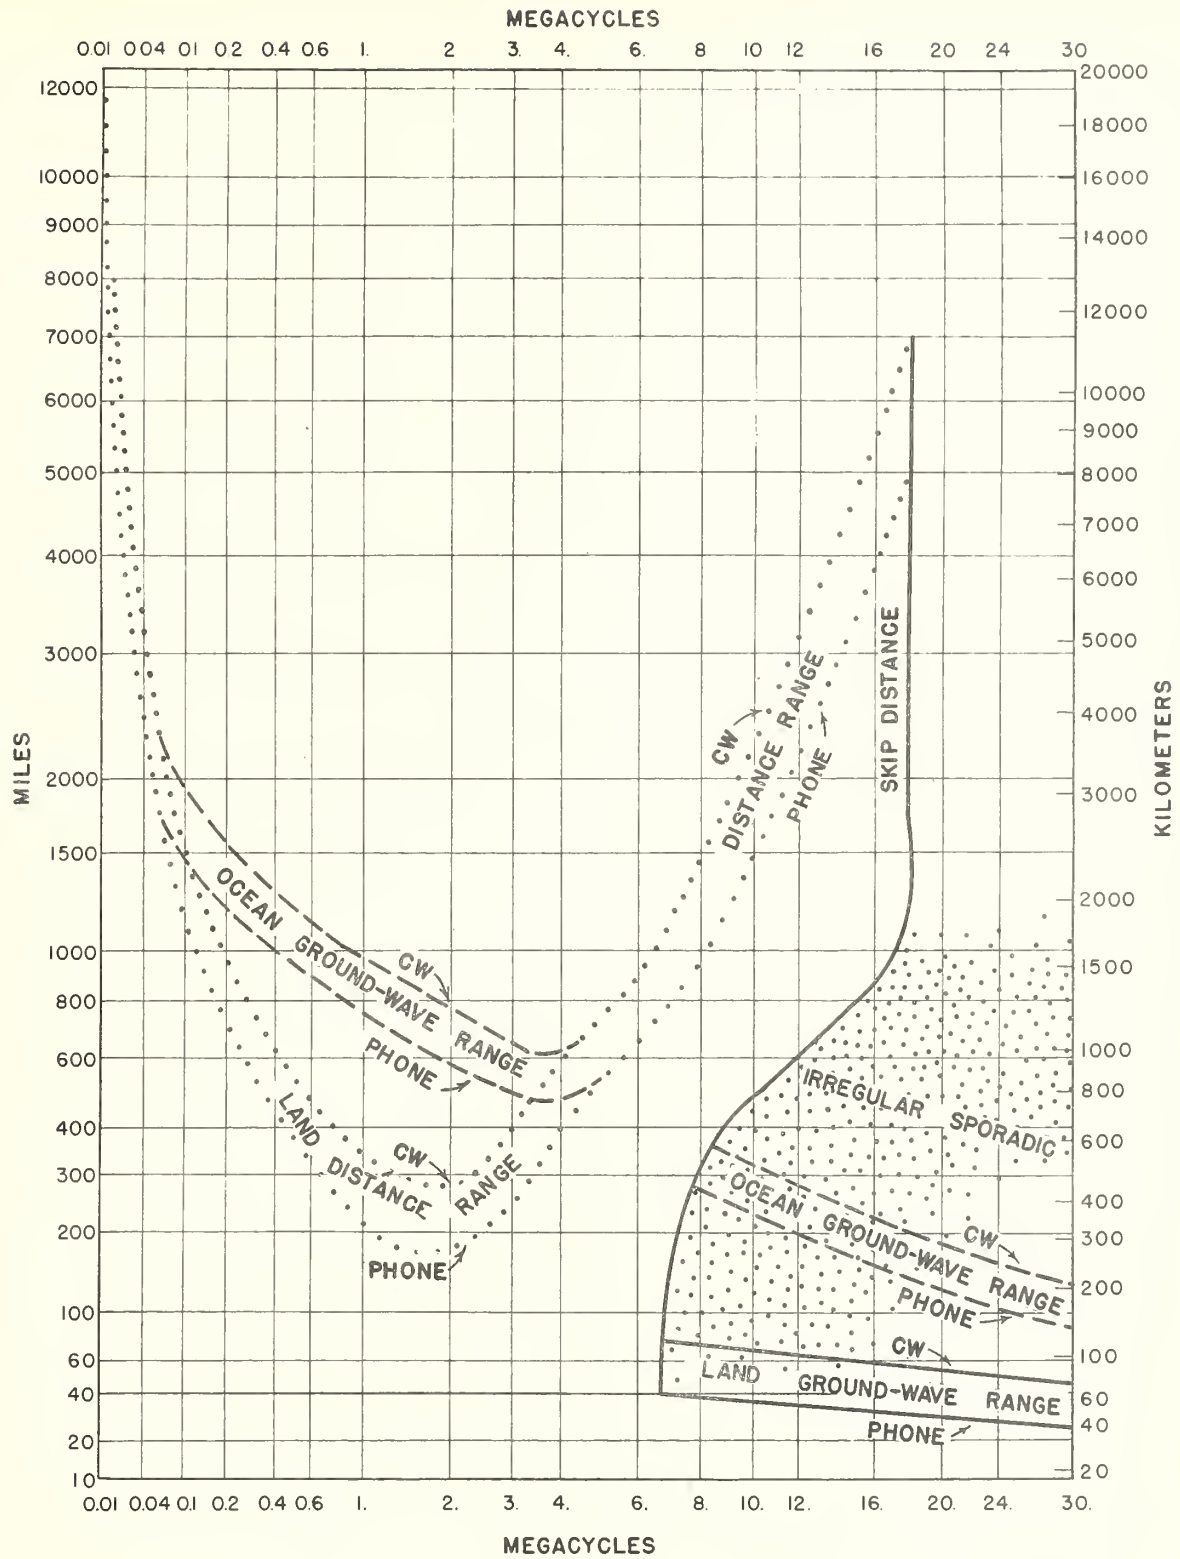


FIG. I. SUMMER 1941, DAY, (1 kw).

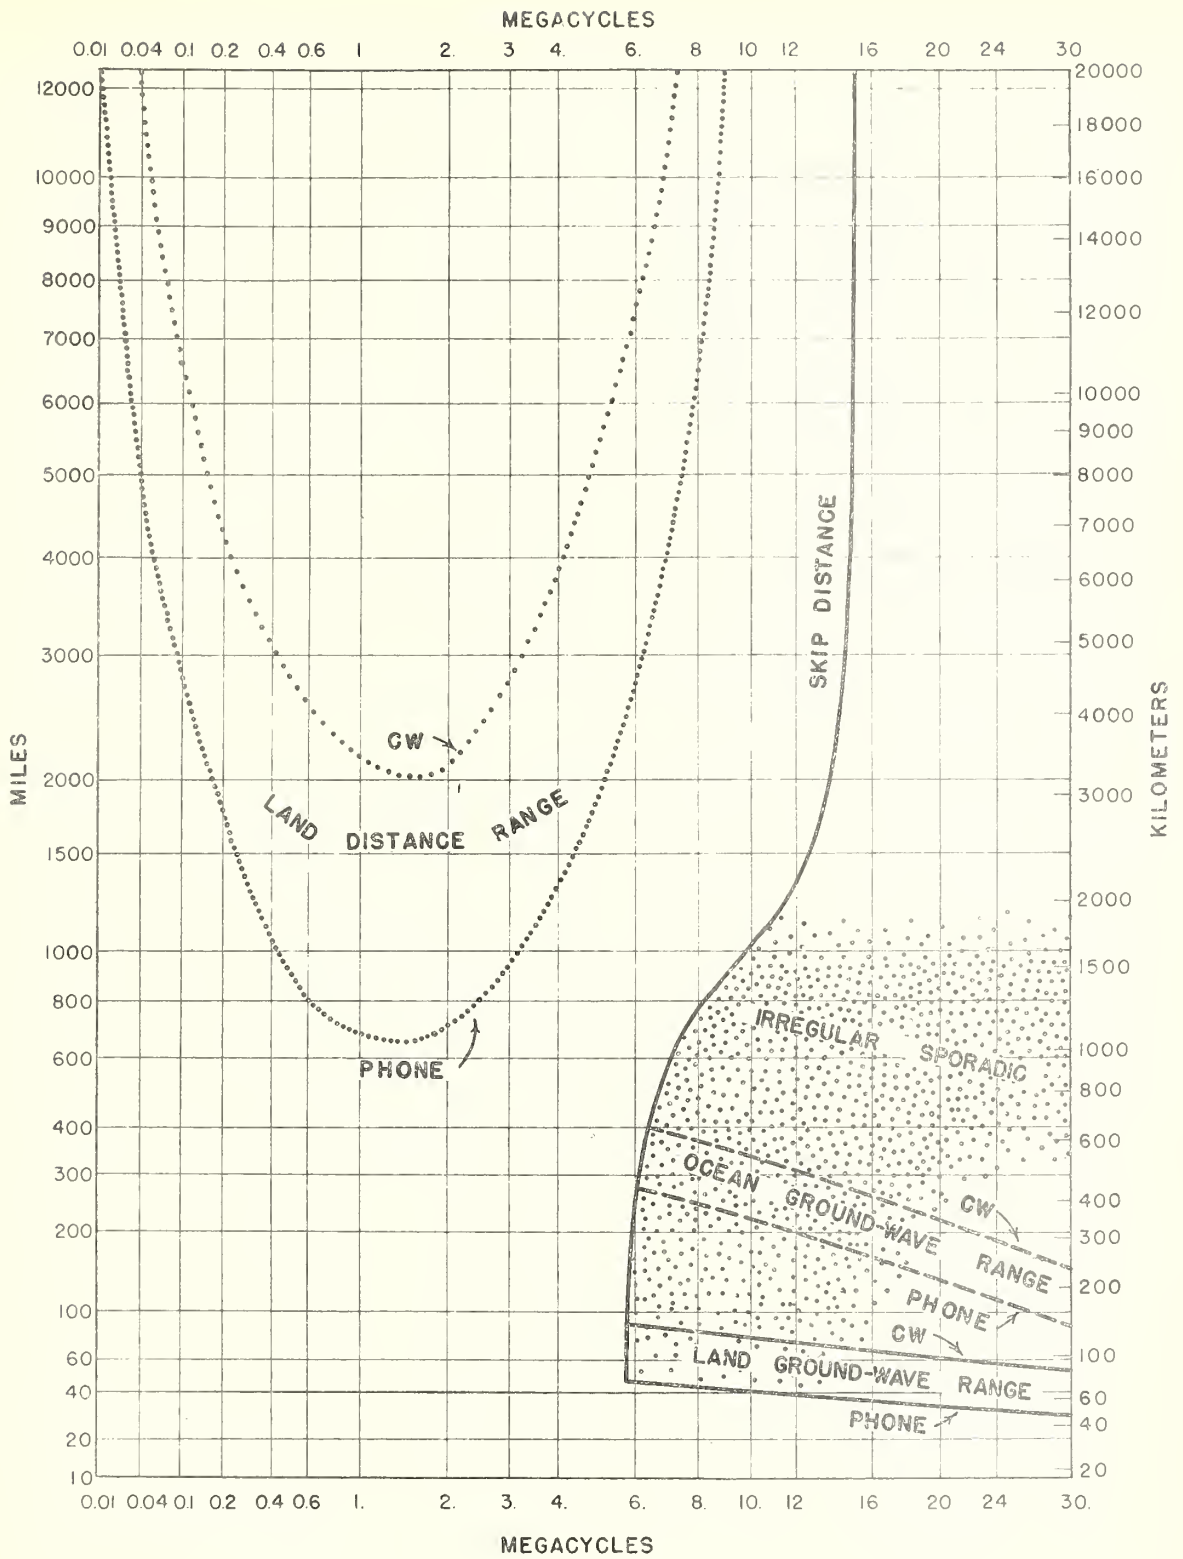


FIG. 2. SUMMER 1941, NIGHT, (1 kw).

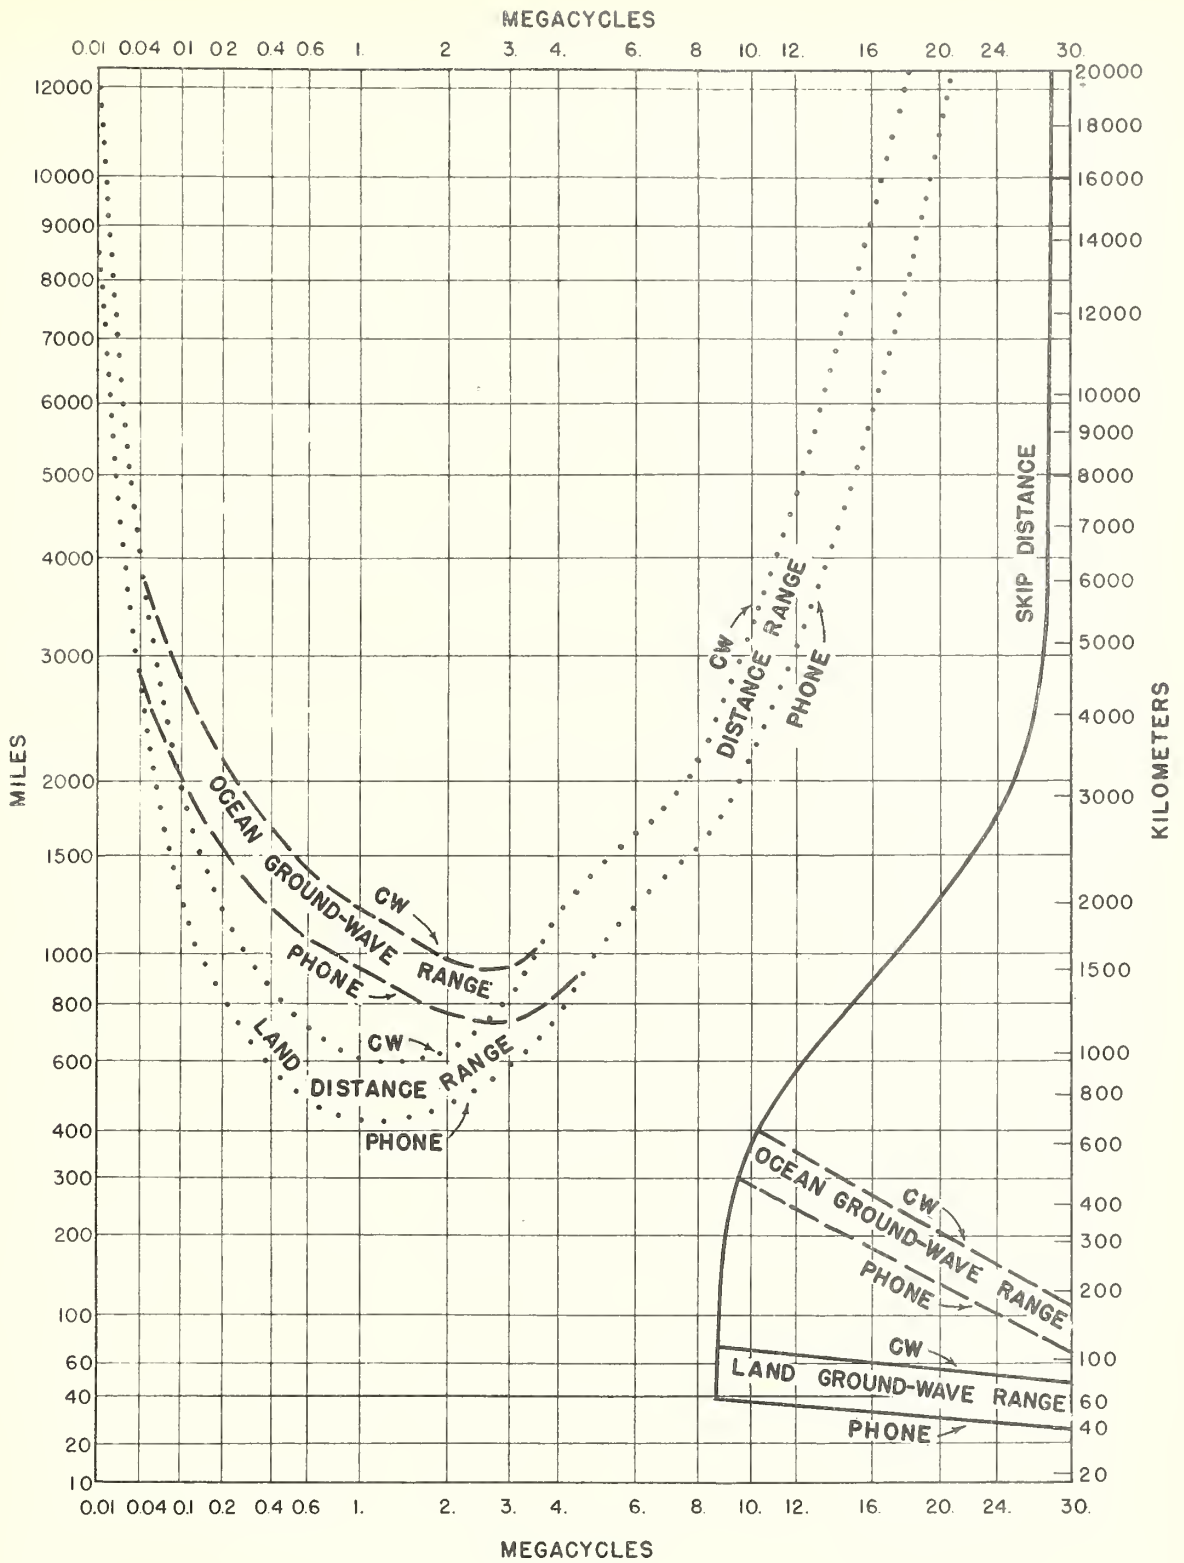


FIG. 3. WINTER 1941-42, DAY, (1 kw).

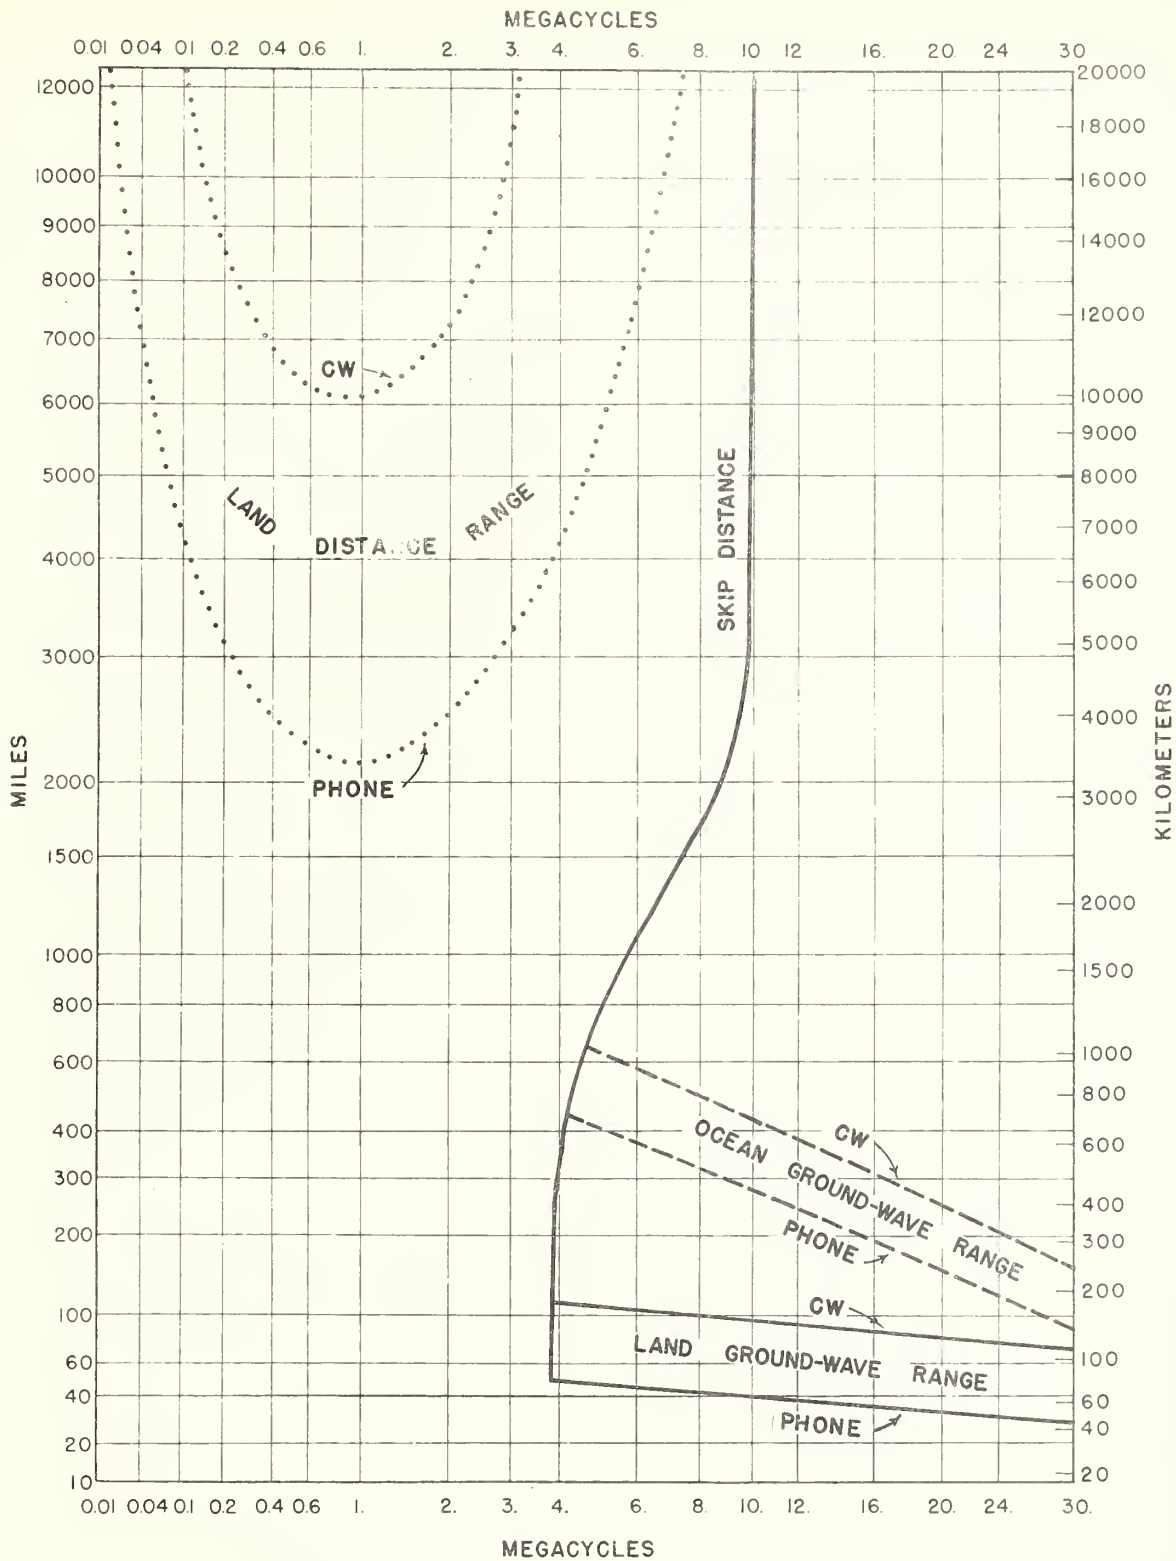


FIG. 4. WINTER 1941-42, NIGHT, (1 kw).

